




WHITE'S WELDING  
LLC

## Model PT24K

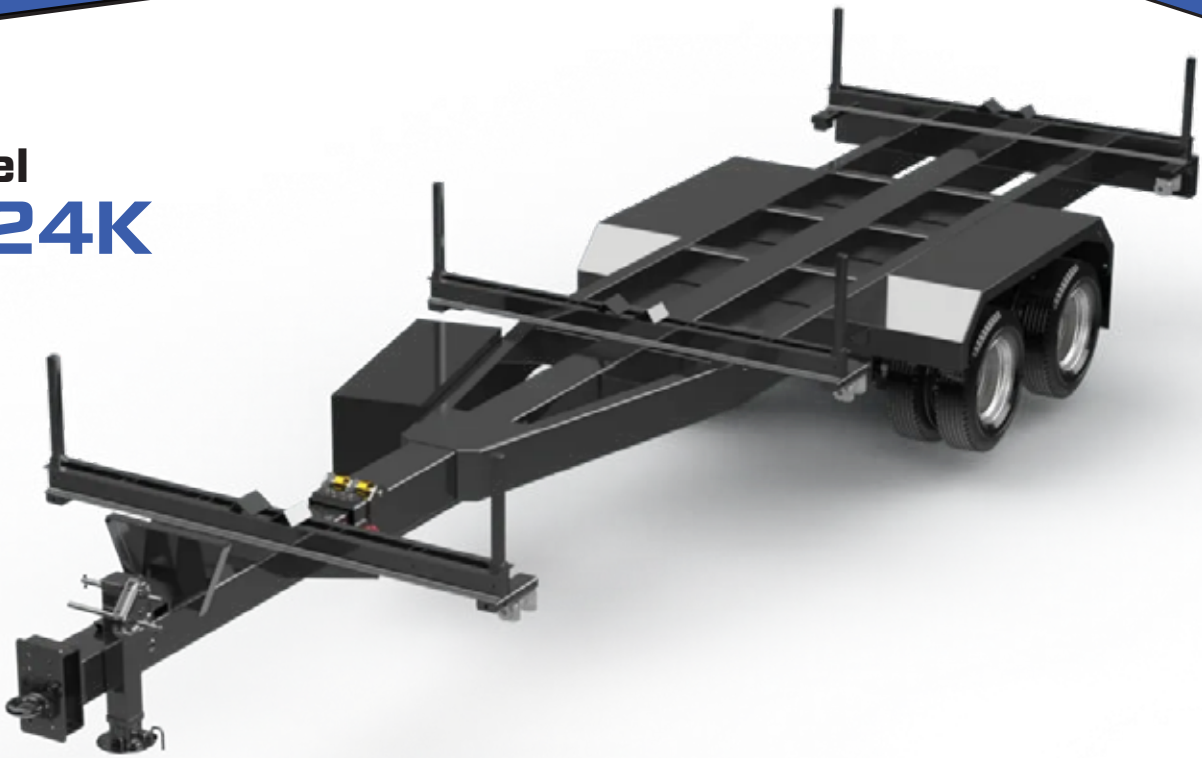

## 24K POLE TRAILER

### SPECIFICATIONS

<b>Length</b>	Extendable length from 31' to 47' (7 pinpoints with 6 equal intervals @ 32" apart)
<b>Width</b>	8' OAW, with 95" Bolsters OAW (90.5" useable width)
<b>Running Gear</b>	Two 12,000 lb. dual wheel axle with oil bath hubs
<b>Brakes</b>	12 1/4" x 5" electric with self-charging break-away system
<b>Landing Gear</b>	12,000 lb. static drop leg jack
<b>Wheels</b>	16" 8-hole Steel
<b>Tires</b>	235/80R 16" 14-Ply
<b>Tongue</b>	8" x 1/4" and 10 x 1/4" square tube; telescopes on rollers and UHMW
<b>Frame</b>	10" x 4" x 3/16" & 8" x 4" x 3/16" Rectangular Tubing
<b>Coupling System</b>	42,000 lb capacity x 2 1/2" pintle eye, adjustable in 2 1/4" increments
<b>Lights</b>	Sealed beam with waterproof wiring in nylon tubing
<b>G.V.W.R.</b>	26,000 lbs.
<b>Empty Weight</b>	6500 lbs.
<b>Payload</b>	Approximately 19,500 lbs.
<b>Misc.</b>	Tie down straps, wheel chocks, safety chains, slide intube stanchions with keeper pins

### OPTIONS

15,000 lb. axle / Additional length / Electric over hydraulic disc or drum brakes / Extended storage area  
Custom paint color / Additional Toolbox / Sliding Stanchions