



Parts Included

Tools and Components included in your package:



Top Tray



Bottom Tray




Screw Lock

Optional Cable Kit for Peripherals (TL I-MAC CABLE)




Mouse Trap



2- Loopers



3 Foot Cable



Scissor or Hook Loc - NOT Included
Can be added at an additional cost

Bolt Down Option Includes:




4- Washers

4- Wood
Screws

1/2" Carriage Bolt

1/2" Whiz
Nut

Direct Adhesive Option Includes:



Direct Adhesive Option arrives to you pre-taped with a strong double-sided tape.



Alcohol Pads



Important Warnings and Cautions


- Warning** - Failure to read, understand and follow instructions can result in serious injury, damage to equipment or voiding equipment warranty.
- Warning** - Improper installation can result in serious personal injury or death. Ensure that the mounting surface can support a weight factor of four times the combined total weight of the equipment and the mount. If not, reinforcement of the mounting surface will be necessary before installing the mount.
- Warning** - It is the installer's responsibility to make sure that the mounting surface and the subsurface is free and clear of all electrical wires, plumbing and gas pipes. Failure to provide adequate clearance of all electrical wires and pipes can result in serious personal injury or death.
- Warning** - Mount and equipment exceeding a combined weight of 50 lbs can result in damage to the support structure, the mount, the equipment and may cause personal injury.
- Warning** - Business Machine Security, Inc. does not warrant its mounts against damage caused by the end use of its mounts for any purpose other than for the purpose for which it has been designed.
- Warning** - Business Machine Security, Inc. is not responsible for damage, or injury that may result in the use of any unauthorized modifications or attachment.
- Warning** - Proper safety gear (Goggles, Glasses & Gloves) and practices should be adhered to at all times throughout the installation process.
- Warning** - Do not install the mount near any heat source or air conditioning vent which may be prone to vibration.
- Warning** - Maximum load capacity 50 lbs.
- Warning** - Do not expose to extreme temperatures.



iMac 24" Tray Loc

For TL IMAC 24 BD & TL IMAC 24 GD

Installation Guide

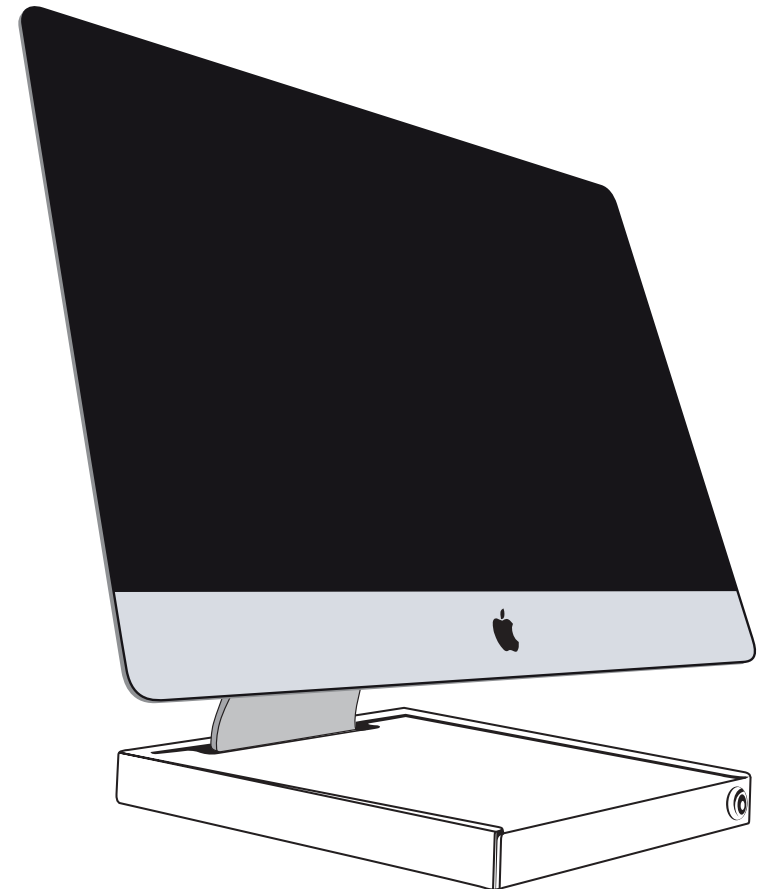


Made in USA

www.LocDown.com
www.Anchorpad.com

800.872.9562

Option 1 BD - Bolt Down Model

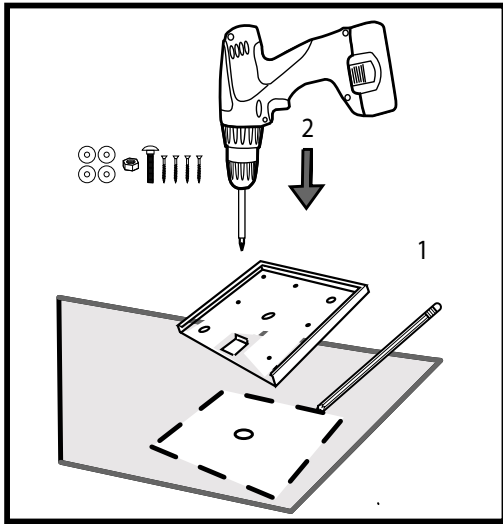

1. Position the Bottom Tray on the work surface allowing enough clearance for a keyboard if needed. With a pencil, mark the surface around the outer area of the Tray. Next mark one of the 1/2" holes and all of the 1/4" holes on the Bottom Tray, then move the tray aside.


2. At the 1/2" hole pencil mark, drill a 5/8" hole completely through the surface. Clean all debris from the area.

3. Place the Bottom Tray over the holes and line up with 1/4" holes.

4. From underneath the work surface insert the 1/2" Carriage Bolt through the surface into the Bottom Tray. Hand tighten the Whiz Nut onto the Carriage Bolt.

5. Screw in all 4 wood screws, then tighten the Carriage Bolt.

Option 2 - Direct Adhesive - AGD

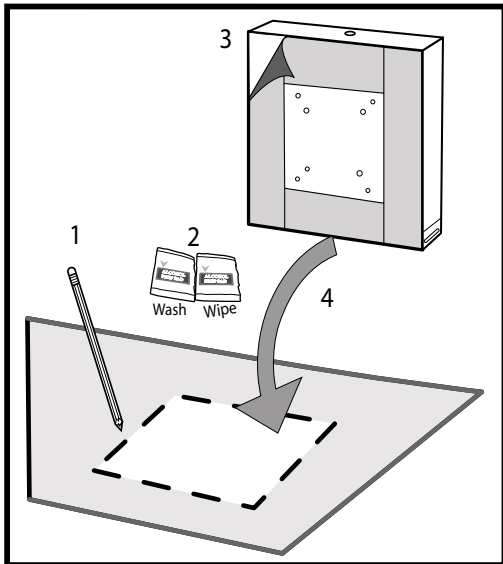

1. Clean mounting surface with the alcohol wipe. Ensure to clean an area slightly larger than the dimensions of the Bottom Tray.

2. Position the Bottom Tray on the work surface allowing enough clearance for a keyboard if needed. With a pencil, mark the surface around the outer area of the Bottom Tray.

3. Remove the protective liner from the adhesive.


4. Carefully position the Bottom Tray over the marked area and lower it down onto the surface from back to front.

5. After the Tray is down, place your hands on top of it and hold equal pressure down for approximately one minute. The adhesive will cure in approximately 24 hours.

3 GYW fY the iMac Ž' CdHjcbU 7 UV'Y? jhZf'5 WWggcfjYg



6. After the Tray has been attached to the mounting surface place the iMac on the Bottom Tray and center it.

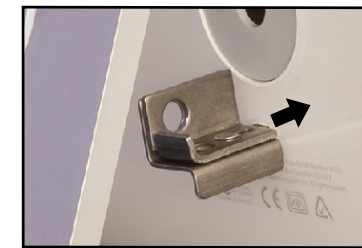

SKIP TO STEP 11 IF YOU DID NOT PURCHASE OPTIONAL CABLE KIT & OPTIONAL HOOK or SCISSOR LOC.


7. IF YOU PURCHASED THE OPTIONAL CABLE KIT AND PURCHASED THE HOOK or SCISSOR LOC: Attach the Hook or Scissor Loc to the Micro Slot on the back of the display by doing the following: FOR HOOK LOC: insert the Hook Loc's hook into the slot & slide the shim forward until the cable pass-thru holes line up. FOR SCISSOR LOC: Open the Scissor Lock so the prongs overlap. Insert the prongs into the security slot. Close the Scissor Lock so the Pass-Thru Holes line up.



8. Thread the cable through the holes in the Hook Loc then out through the hole in the stand.

9. Place the keyboard and the mouse cords in the bottom of the Mouse Trap and thread the cable through the Mouse Trap holes.

10. Insert cable through one hole of the looper, bend the cable and insert it through the other hole of the looper.

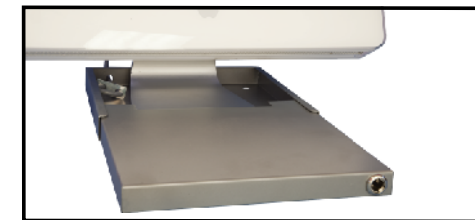

11. Slide the Top Tray all the way into the Bottom Tray so the iMac base and security cable are completely enclosed.



12. Secure the two Trays together by inserting the Screw Lock and turning clockwise until the lock is snug, **DO NOT OVERTIGHTEN**. The lock needs to be in the 12-6 or 3-9 o'clock position to remove the key.

Warning- Do not overtighten the lock. Over tightening can lead to lock failure on removal.