


STEP 1:

Apply thread adhesive to threads of the down pipe, then screw the Vibration Isolator with the adjuster knobs up to down pipe.

STEP 2:

Apply thread adhesive to the bottom threads of the Vibration Isolator, then screw the projector mount to the Vibration Isolator.

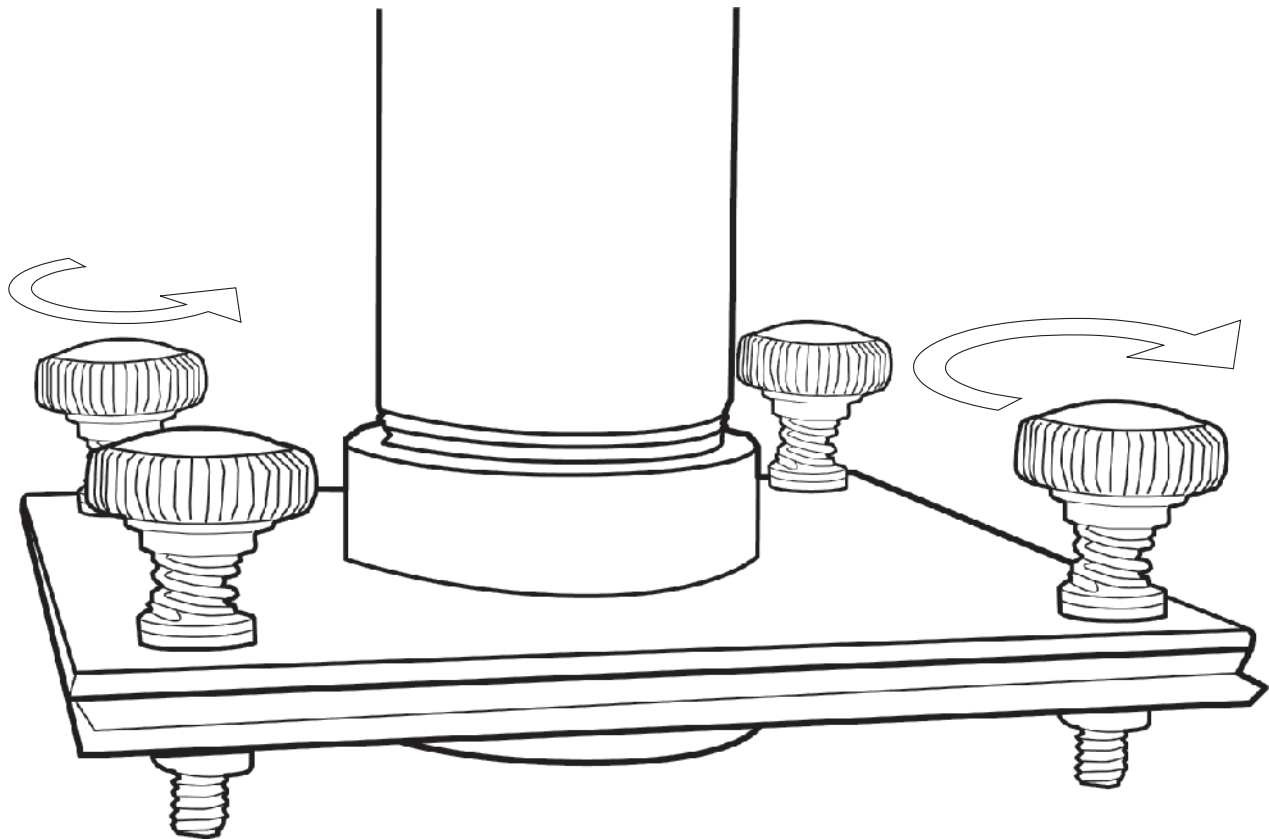

STEP 3:

Turn on the projector, then turn the adjuster knobs (tighter or looser) until the vibration is mitigated.

