


NEWHPD/HPU SERIES

HIGH PERFORMANCE HOT WATER DUCT COILS

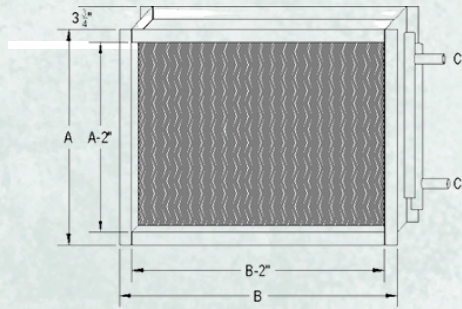

BUILT TO ARI 410 CERTIFICATION
 GALVANIZED STEEL 20 GA. FRAME
 ALUMINUM FINNS .0055 THICKNESS
 COPPER TUBING, 3/8" W/ .014 WALL
 MAX 500 PSI OPERATING PRESSURE
 MAX 2500 PSI ULTIMATE PRESSURE
 BTU OUTPUTS FROM 18,000 TO 120,000
 HORIZONTAL & VERTICAL INSTALLATION
 FULL TWO YEAR WARRANTY
 CALL FOR OTHER PERFORMANCE CRITERIA RATINGS

Part #	GPM	CFM	140 EWT	180 EWT	APD	LENGTH (A)"	WIDTH (B)"	CONNECTION (C)"
HPD-2-1215	4 WPD	400	18,928	29,383	0.09	14"	18"	7/8 OD"
		500	21,167	32,915	0.13			
		600	23,024	35,854	0.17			
		1.4	1.3					
HPD-2-1218	6 WPD	700	28,740	44,580	0.16	14"	20"	7/8 OD"
		800	30,600	47,500	0.20			
		900	32,250	50,100	0.24			
		2.9	2.8					
HPD-2-1224	6 WPD	800	34,760	53,840	0.13	14"	26"	7/8 OD"
		1000	38,610	59,885	0.18			
		1200	41,790	64,880	0.24			
		3.27	3.1					
HPU-2-1520	7 WPD	800	35,730	55,350	0.12	17"	22"	7/8 OD"
		1000	39,820	61,770	0.17			
		1200	43,200	67,000	0.22			
		3.32	3.2					
HPD-2-1524	7 WPD	1200	46,950	72,810	0.17	17"	26"	7/8 OD"
		1400	50,220	77,950	0.21			
		1600	53,060	82,410	0.25			
		3.54	3.4					
HPU-2-2020	8 WPD	1200	49,250	76,450	0.15	22"	22"	7/8 OD"
		1400	52,810	82,050	0.18			
		1600	55,900	86,900	0.22			
		3.27	3.2					
HPU-2-2025	8 WPD	1800	65,070	101,060	0.19	22"	27"	7/8 OD"
		2000	67,910	105,525	0.22			
		2200	70,450	109,550	0.25			
		3.51						

STOCK COILS

*PERFORMANCE DATA BASED ON 65° EAT

