CORPORATE AUTOMOTIVE BULLETIN

Date: January 6, 2022

To: Region Automotive Managers

Region Automotive Coordinators District Automotive Managers

Region Automotive Training Managers

Fleet Managers Fleet Supervisors

Administrative Assistants

From: Corporate Automotive Engineering – Delivery Team

Contact: Jeff Glover Phone: 404-828-7980 E-mail: jrglover@ups.com

Subject: Landi Renzo Starter Interrupt Relay Improvement Kit

Bulletin #: D22-01 OP Code # 48

The purpose of this bulletin is to inform the automotive group of an improved relay kit available for purchase at MDC under part number **4827543** for \$43.00 each. It consists of a bracketed relay, harness, and 3 heat shrink connectors.

Units applicable are 200 units from job 19-15 (196243 – 196442 : Ford 6.8 CNG)

Kit contents pictured.



1. To install locate the existing relay housing located on the left lower dash support and remove it from the support with the 2 outermost (1) Philips screws. Then remove the 4 Philips screws (2) to open the housing to expose the relay.




2. Once the relay is exposed unplug the connectors from the relay.



3. Using the new kit as a guide cut the 3 wires to length and then terminate by matching the colors together and using the provded heat shrink connectors

Yellow - Yellow, Green - Green, Black - Black.

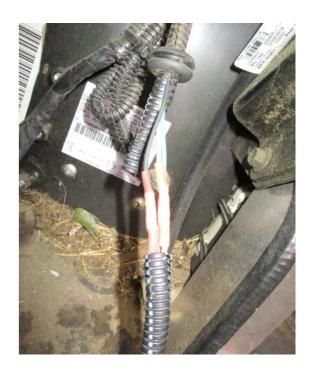

4. Lastly mount the new relay to the forward mounting hole by reusing one of the removed screws from step 1 (1) and tie up wires preventing rubs and chaffing.



Relay alone can be serviced through MDC under part number 4827828 for \$8.35 each.