

# M Series

NOTHING PERFORMS  
LIKE A HAUSCHILD SPEEDMIXER®

BLENDING RELIABILITY, EFFICIENCY,  
ACCURACY & SAFETY BEAUTIFULLY



## DAC 400.2 / 800.2 VAC-P LR

STANDARD FEATURES ON ALL DAC MACHINES

150 | 250 | 400 | 600 | 700 | 800 | 1100 | 3000 | 5000 | 10000



THE GOLD  
STANDARD  
IN BLADELESS  
MIXING

LEGENDARY  
ACCURACY &  
REPEATABILITY

UNPARALLELED  
QUALITY &  
RELIABILITY

FAST, EFFICIENT,  
VIRTUALLY  
INDESTRUCTIBLE

NO  
CLEANING  
REQUIRED

CUSTOM  
CONFIGURATIONS  
& SOLUTIONS

Hauschild GmbH & Co. KG

info@hauschild-speedmixer.com  
+49 (0)2381 48205 - 0  
hauschild-speedmixer.com

 **Hauschild**  
SpeedMixer®


THE BEAUTY OF *PRECISION*

# Technical Data

	DAC 400.2 VAC-PLR	DAC 600.2 VAC-PLR	DAC 700.2 VAC-PLR	DAC 800.2 VAC-PLR
Mixing Capacity <sup>1</sup> Min/Max:	100g ÷ 400g	200g ÷ 600g	200g ÷ 700g	400g ÷ 800g
Speed Min/Max:	800 rpm ÷ 2300 rpm	800 rpm ÷ 2100 rpm	800 rpm ÷ 1850 rpm	800 rpm ÷ 1600 rpm
Mixing Time Min/Max:	5s ÷ 600s	5s ÷ 600s	5s ÷ 600s	5s ÷ 600s
Voltage - Frequency:	230 V – 50/60 Hz	230 V – 50/60 Hz	230 V – 50/60 Hz	230 V – 50/60 Hz
Input Power:	1,2 KW	1,2 KW	1,2 KW	1,2 KW
Height – Open Lid:	1030 mm	1030 mm	1030 mm	1030 mm
Width:	440 mm	440 mm	440 mm	440 mm
Depth:	700 mm	700 mm	700 mm	700 mm
Weight:	90 kg	90 kg	90 kg	90 kg
Programmable:	20 Programs	20 Programs	20 Programs	20 Programs

<sup>1</sup> Including material, jar and holder.

## The Original Hauschild SpeedMixer® DAC Configurations at a Glance

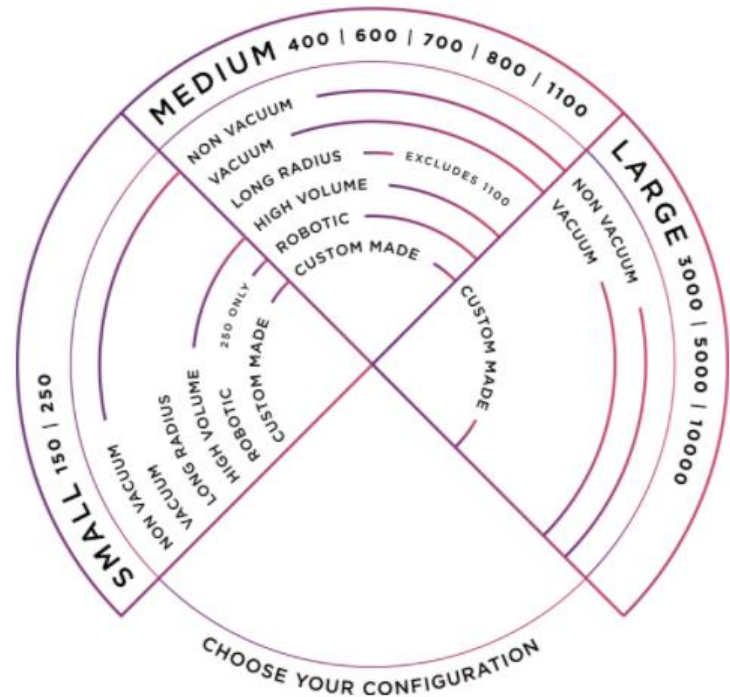

EXPERIENCE THE BEAUTY OF ACCURACY + ROI  
ENGINEERED INTO EVERY HAUSCHILD SPEEDMIXER®