



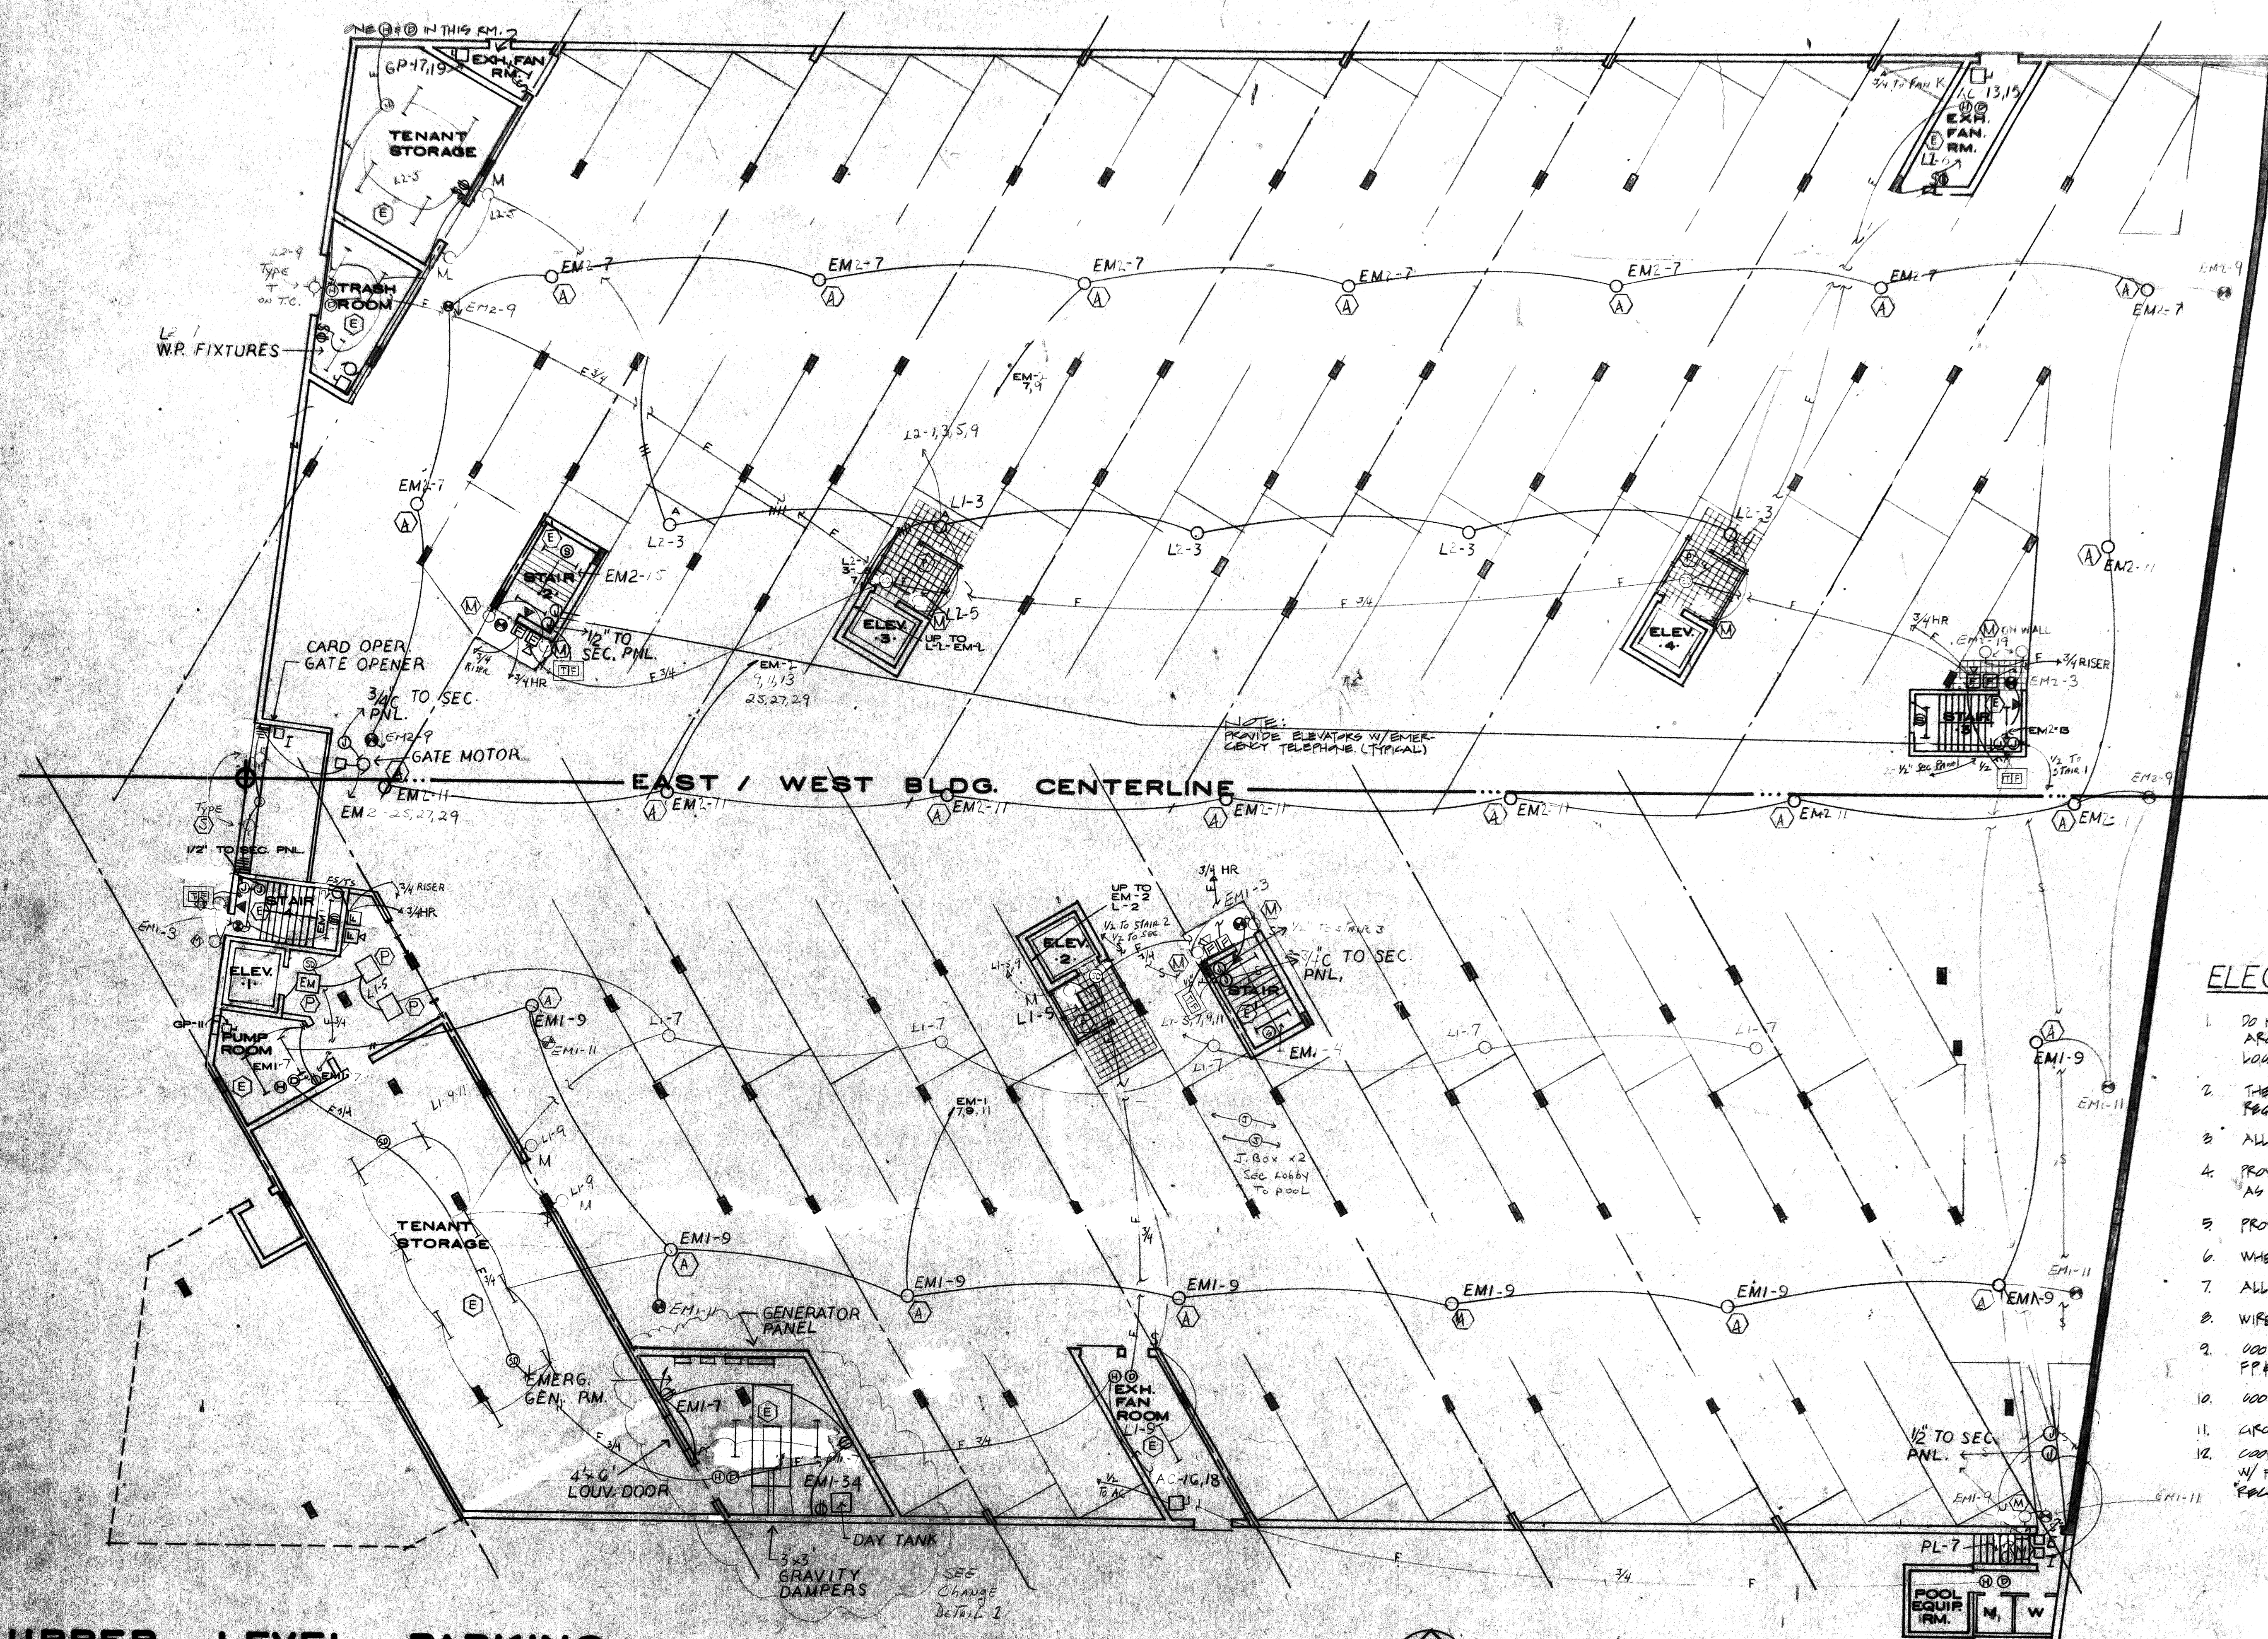

Detail 1
N.T.S.

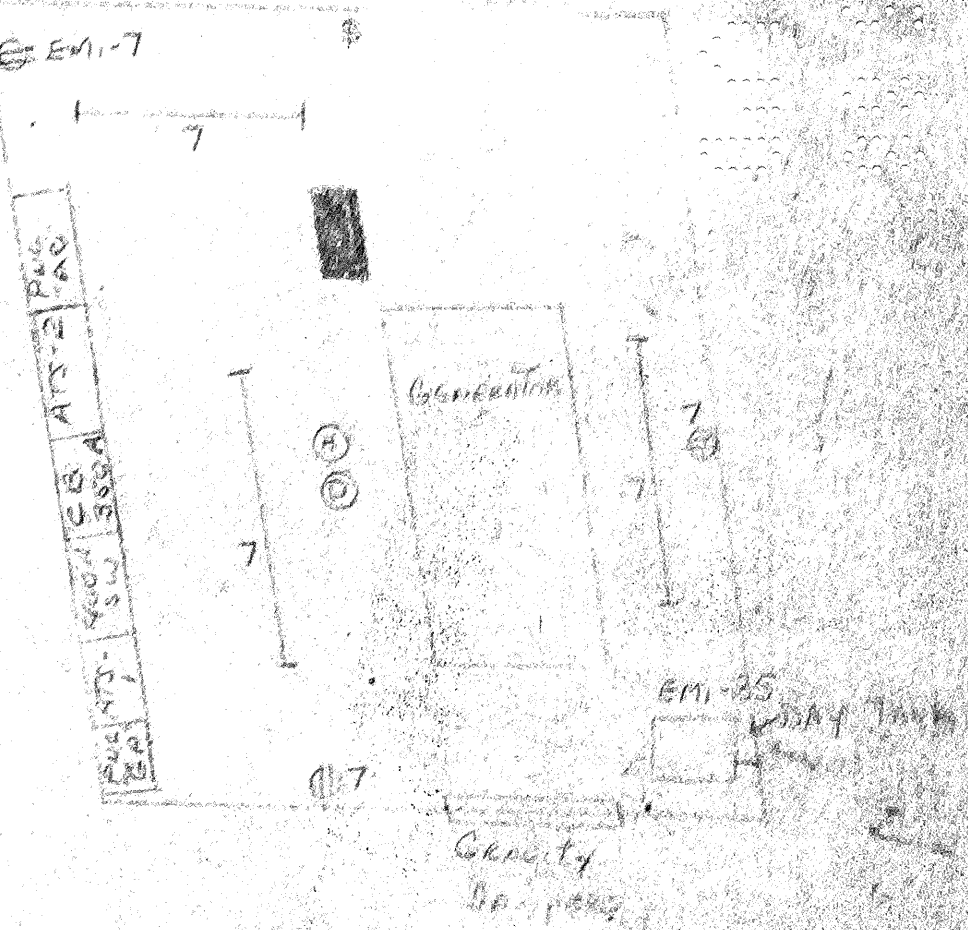


ELECTRICAL NOTES

- DO NOT SCALE THE ELECTRICAL DRAWINGS. REFER TO ARCHITECTURAL PLANS & ELEVATIONS FOR EXACT LOCATIONS FOR ALL EQUIP.
- THE ELECTRICAL INSTALLATION SHALL MEET ALL STD. REQ'TS OF THE LOCAL POWER & TEL. COMPANIES.
- ALL GROUND FL. & BATHROOM RECEPT. SHALL HAVE GFI.
- PROVIDE ADEQUATELY SIZED DISCONNECTS FOR ELECT. EQUIP. AS REQ'D BY CODE.
- PROVIDE ALL ROOF OPENINGS W/ PITCH PAN.
- WHEN OUTLETS ARE BACK TO BACK, OFFSET 12\"
- ALL OUTDOOR EQUIP. SHALL BE WATERPROOF.
- WIRE ALL HVAC & PLOG. EQUIP. FOR POWER & CONTROLS.
- COORDINATE SHORT CIRCUIT CAPACITY RATING W/ F.P. & L. AVAILABLE KVA & MFR'S SPEC'S.
- COORDINATE F.A. SYSTEM W/ LOCAL FIRE MARSHALL.
- GROUNDING AS PER N.E.C.
- COORDINATE SHORT CIRCUIT INTERRUPTING CAPACITY W/ F.P. & L. AVAILABLE KVA AND WITH MANUFACTURERS RECOMMENDATIONS.

ELECTRICAL CONTRACTOR SHALL VERIFY STRUCTURAL SYSTEM AND COORDINATE WITH AIR CONDITIONING AND PLUMBING CONTRACTOR, PRIOR TO CONSTRUCTION.

UPPER LEVEL PARKING

SCALE: 3/32\" = 1'-0"



REV. MAR. 3, 86 P.B.
Eugenio
Espinosa

R. WM. CLAYTON JR.
1995 EAST OAKLAND PARK BLVD.
E & E CONSULTING ENGINEERS
2701 EAST SUNRISE BLVD.
FT. LAUDERDALE, FLA.

OVERLOOK CONDOMINIUM

DRAWN BY: SS
JOB NO: 8101
DATE: 10-12-81
REVISIONS: 5-11-84
11-2-81 ELEV. LOBBY
2-7-84
SHEET: E1