




Intercom for Sound, Lighting and Production Professionals

High Noise Environment /Electrical Generating Facility

PS301 Power Supply

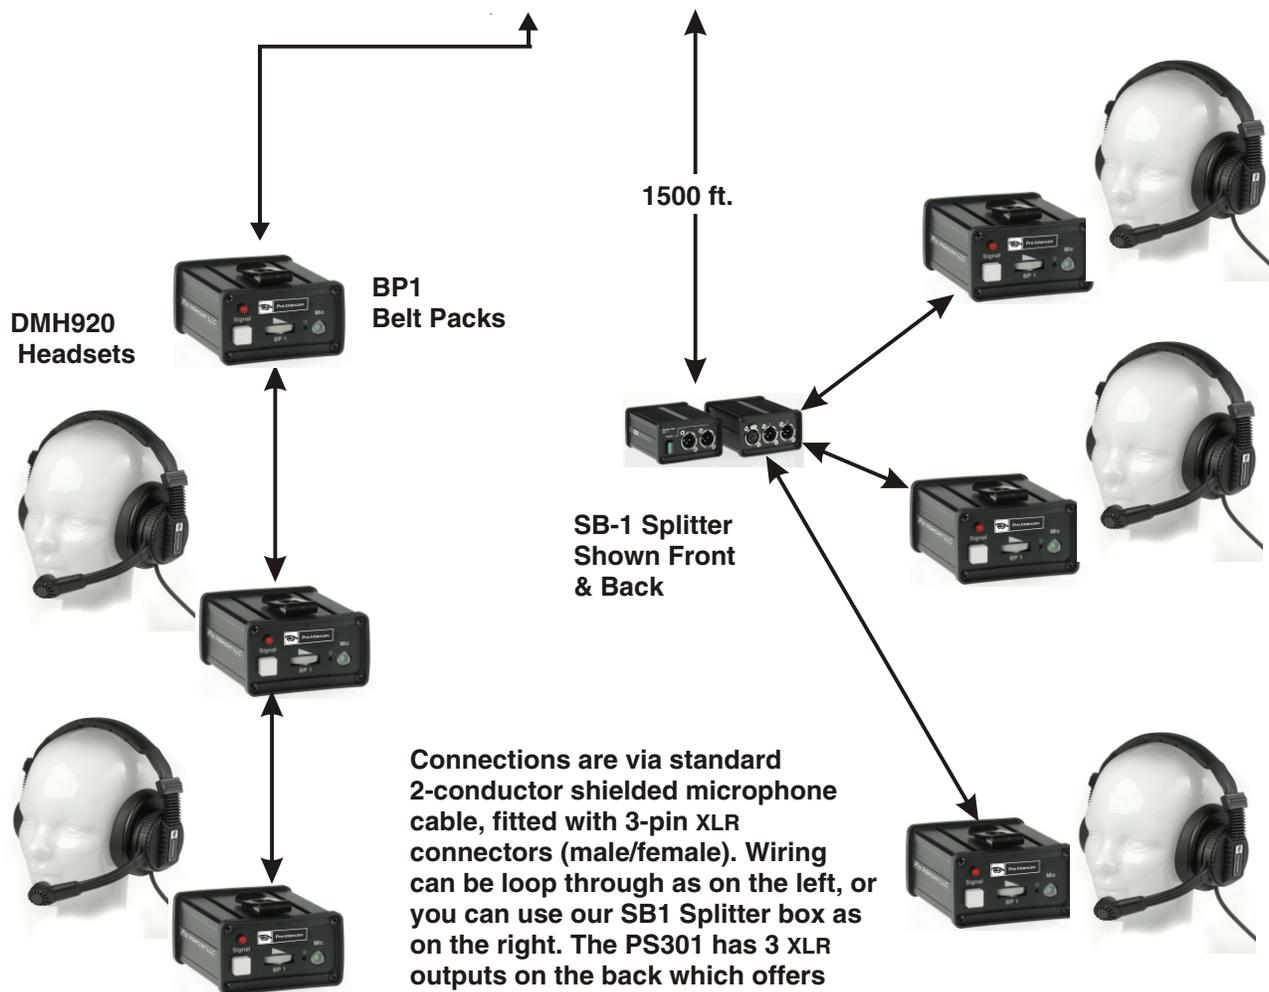

Connections are via standard 2-conductor shielded microphone cable, fitted with 3-pin XLR connectors (male/female). Wiring can be loop through as on the left, or you can use our SB1 Splitter box as on the right. The PS301 has 3 XLR outputs on the back which offers more wiring flexibility. The PS301 is capable of driving 66 belt packs and the distance being dealt with is not a problem.