


For wall Tile of Staff Toilet 145 and 146 Refer Elevations of Sheet A402

Scale Verified by 3' Door

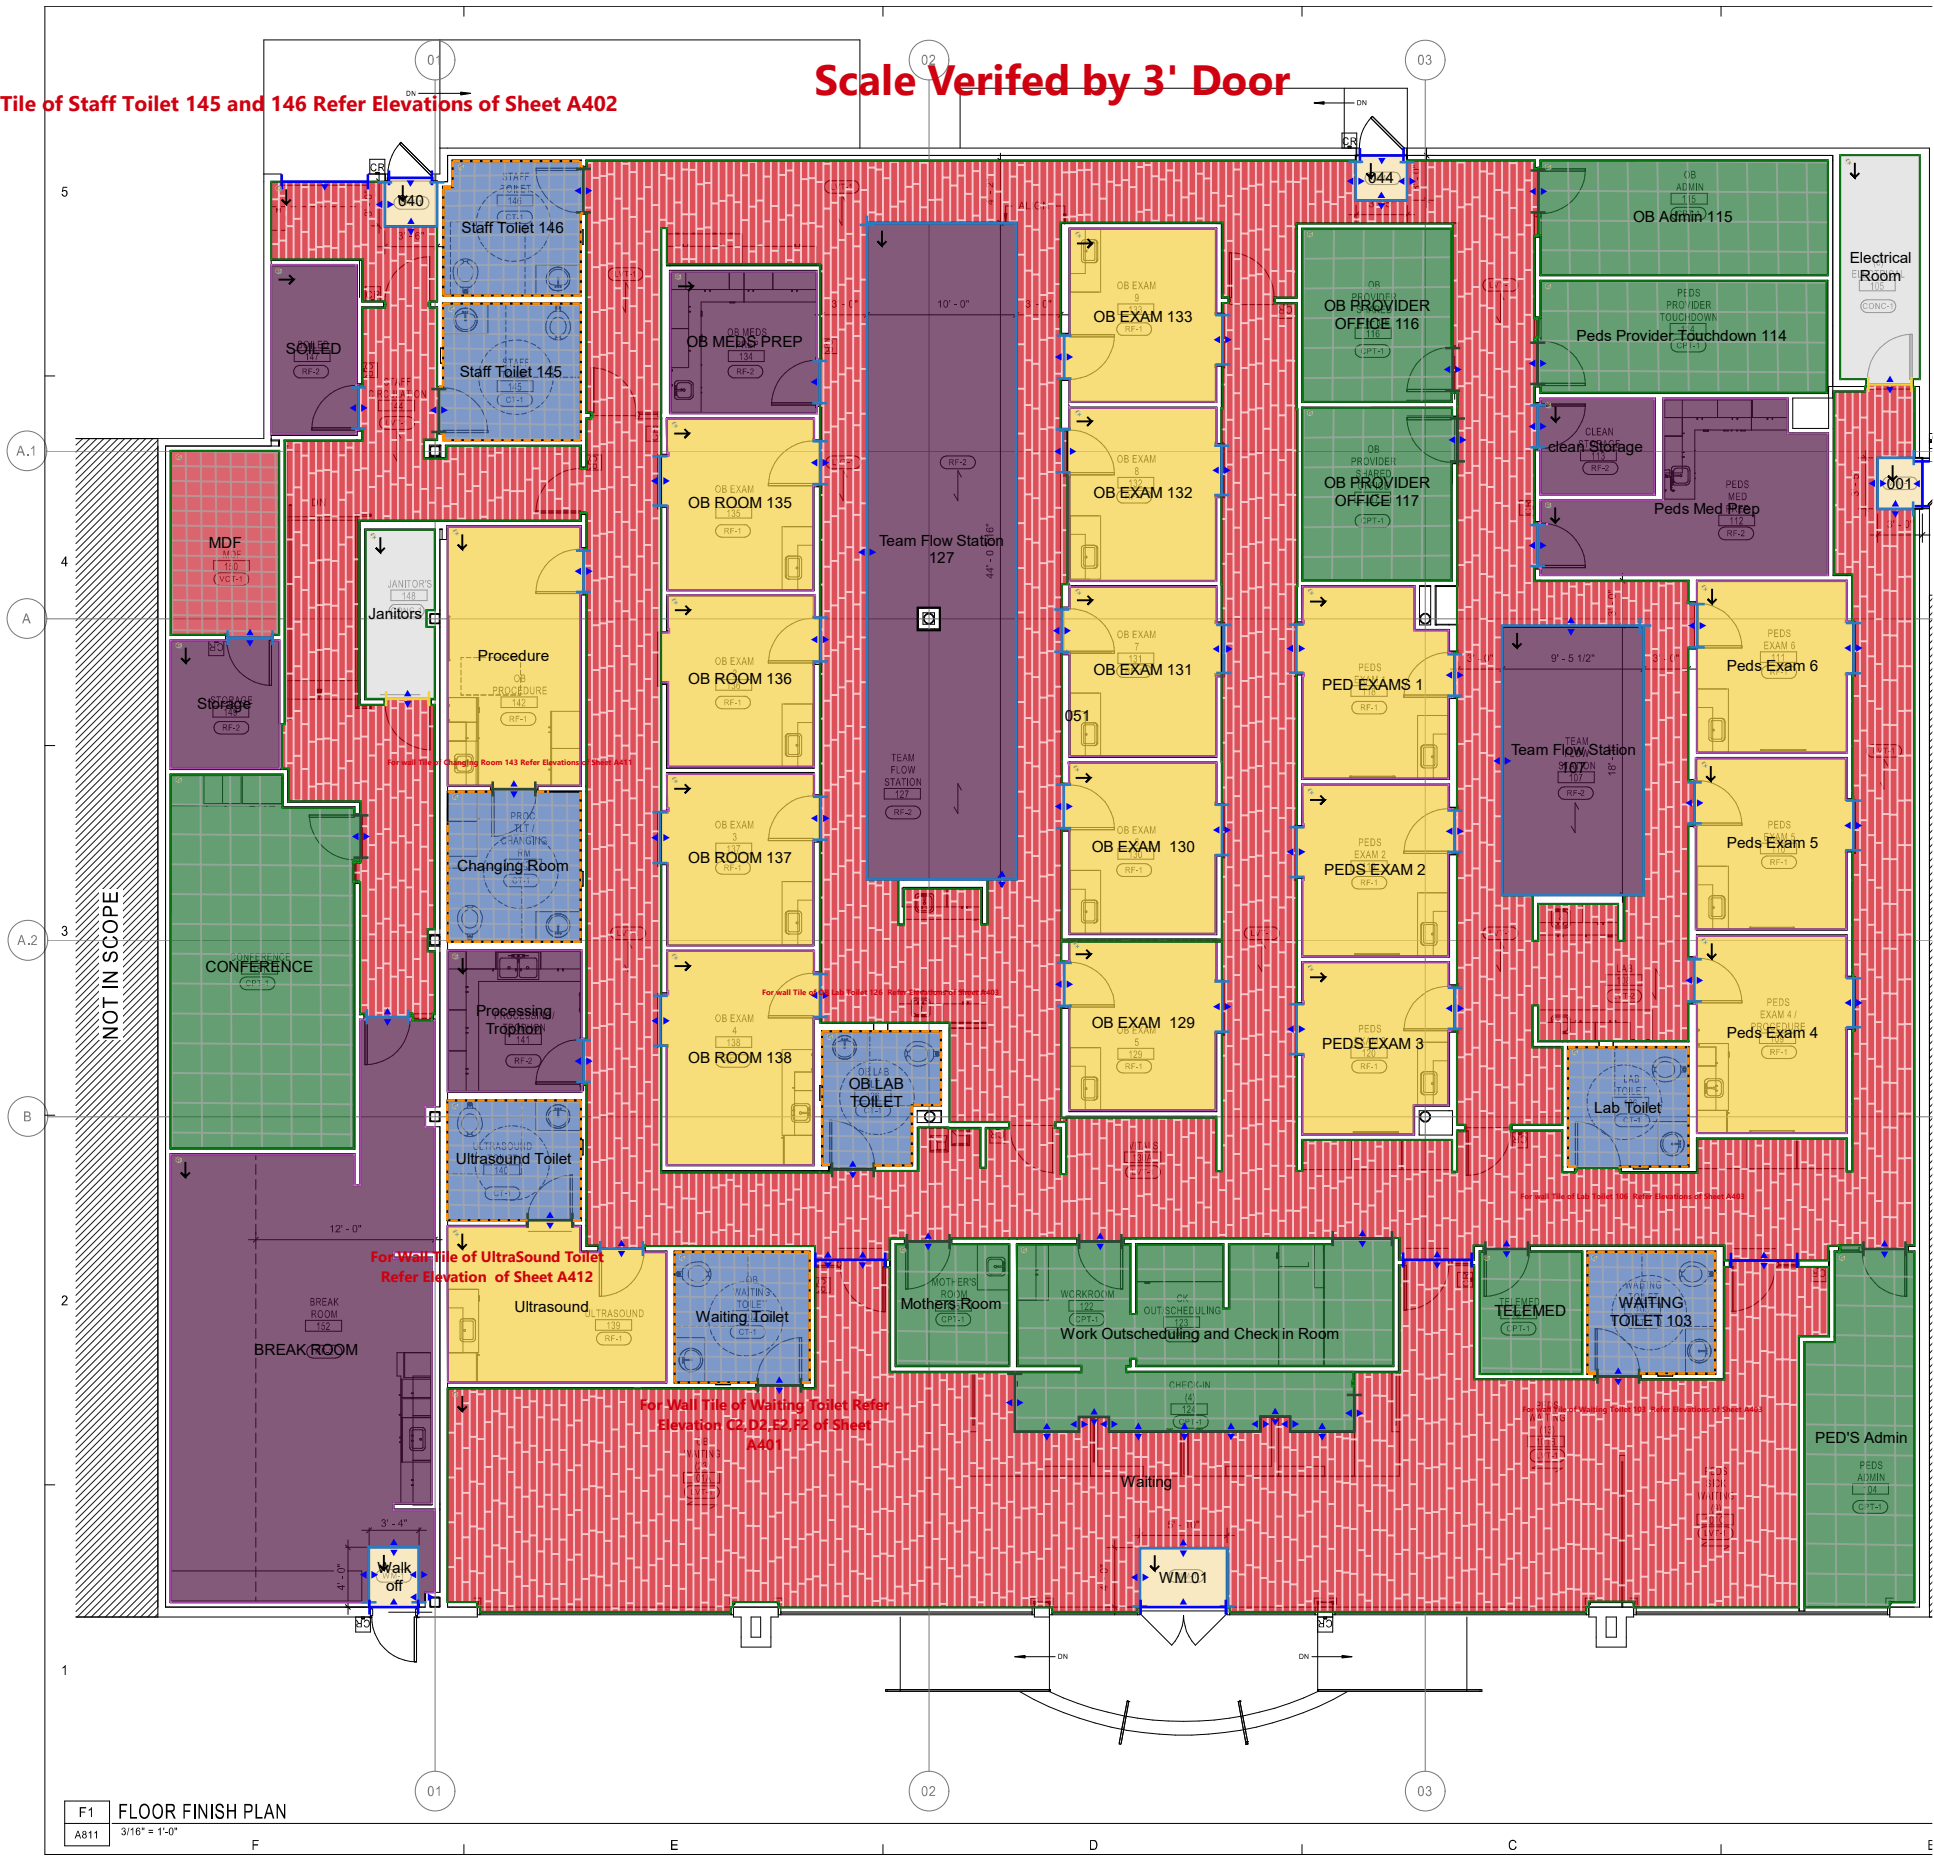

- Threshold Threshold (Pemko 2727a)
- C: CPT-1: Shaw Contract, Array, Shiny Pebble, 94761, Modular 24" X 24", Eco Solution Q Nylon, Brick Ashlar.
- Concrete
- R: LVT-1: Mannington, Amtico, Vintage Teak Arow7600, 36" X 6" X .096" Thick.
- R: RF-1: Mannington, Lino, Alfalfa Etw100, Modeled Color To Match.
- R: RF-2: Mannington, Lino, Sepia Etw101, Modeled Color To Match.
- T: CT-1: Daltile, Affinity, Beige Af02, 12" X 12", Custom Building Products Grout (Epoxy), #172 Urban Putt, 1/16" Grout Joint
- T: CWT-1: Daltile, Color Wheel Collection, Urban Putty 0161 - Semi-Gloss Finish, 4" X 12", Custom Building Products Grout (Epoxy), #...
- T:VCT 12"x12"
- Transition: T/D1/A603: RESILIENT TO TILE: Schluter - Schiene Ae100
- Transition: VT-01: (RESILIENT TO CARPET) :Mannington, Equalizer Transition
- Trim: Horizontal Trim
- Trim: Vertical Trim

 Walk off Matt

Date		Job #			
7/8/2022					
Customer		Job Site / Project Name			
	Style: Color	Net Area	Waste	Extra waste	Gross Qty
	Threshold Threshold (Pemko 2727a)	0.00		0.00%	5.78 LF
	051	0.00			2.87 LF
	Electrical Room	0.00			2.91 LF
	C: CPT-1: Shaw Contract, Array, Shiny Pebble, 94761, Modular 24" X 24", Eco Solution Q Nylon, Brick Ashlar.	1,399.32	6.2%	0.00%	1,492.00 SF
	CONFERENCE	288.65			307.77 SF
	Mothers Room	63.34			67.54 SF
	OB Admin 115	149.32			159.21 SF
	OB PROVIDER OFFICE 116	112.97			120.45 SF
	OB PROVIDER OFFICE 117	119.41			127.31 SF
	PED'S Admin	163.62			174.45 SF
	Peds Provider Touchdown 114	149.15			159.03 SF
	TELEMED	56.32			60.05 SF
	Work Outscheduling and Check in Room	296.55			316.19 SF
	Base: B: VB-1 (Straight): Burke, 4" High Vinyl Traditional Straight Base, #597 Mocha,	575.39		0.00%	474.97 LF
	CONFERENCE	88.30			72.89 LF
	Mothers Room	35.18			29.04 LF
	OB Admin 115	62.27			51.40 LF
	OB PROVIDER OFFICE 116	49.24			40.65 LF
	OB PROVIDER OFFICE 117	49.74			41.06 LF
	PED'S Admin	73.47			60.65 LF
	Peds Provider Touchdown 114	61.74			50.96 LF
	TELEMED	33.52			27.67 LF
	Work Outscheduling and Check in Room	121.94			100.66 LF
	Concrete	133.32		0.00%	133.32 SF
	Electrical Room	81.33			81.33 SF
	Janitors	51.99			51.99 SF
	Base: B: VB-1 (Straight): Burke, 4" High Vinyl Traditional Straight Base, #597 Mocha,	83.27		0.00%	68.73 LF
	Electrical Room	46.68			38.53 LF
	Janitors	36.59			30.20 LF

	Style: Color	Net Area	Waste	Extra waste	Gross Qty
	R: LVT-1: Mannington, Amtico, Vintage Teak Arow7600, 36" X 6" X .096" Thick.	4,495.34	5.5%	0.00%	4,756.50 SF
	051	3,132.99			3,315.00 SF
	Waiting	1,362.35			1,441.50 SF
	Base: B: VB-1 (Straight): Burke, 4" High Vinyl Traditional Straight Base, #597 Mocha,	1,617.07		0.00%	1,334.84 LF
	051	1,349.48			1,113.96 LF
	Waiting	267.58			220.88 LF
	R: RF-1: Mannington, Lino, Alfalfa Etw100, Modeled Color To Match.	232.10	17%	0.00%	279.77 SY
	OB EXAM 129	12.79			15.42 SY
	OB EXAM 130	12.80			15.42 SY
	OB EXAM 131	12.79			15.42 SY
	OB EXAM 132	12.99			15.66 SY
	OB EXAM 133	12.97			15.63 SY
	OB ROOM 135	12.85			15.49 SY
	OB ROOM 136	12.84			15.48 SY
	OB ROOM 137	12.86			15.51 SY
	OB ROOM 138	16.00			19.29 SY
	PED EXAMS 1	13.56			16.34 SY
	PEDS EXAM 2	12.78			15.41 SY
	PEDS EXAM 3	12.32			14.85 SY
	Peds Exam 4	14.98			18.05 SY
	Peds Exam 5	13.04			15.71 SY
	Peds Exam 6	12.99			15.66 SY
	Procedure	17.30			20.86 SY
	Ultrasound	16.24			19.58 SY
	Base: B: VB-1 (Cove Base): Burke, 4" High Vinyl Traditional Cove Base, #597 Mocha,	771.18		0.00%	683.26 LF
	OB EXAM 129	42.80			37.92 LF
	OB EXAM 130	42.79			37.91 LF
	OB EXAM 131	43.49			38.53 LF
	OB EXAM 132	43.40			38.46 LF
	OB EXAM 133	43.30			38.36 LF
	OB ROOM 135	43.43			38.48 LF
	OB ROOM 136	47.02			41.66 LF
	OB ROOM 137	43.37			38.43 LF
	OB ROOM 138	49.71			44.05 LF
	PED EXAMS 1	46.78			41.45 LF
	PEDS EXAM 2	43.47			38.52 LF
	PEDS EXAM 3	43.51			38.55 LF

	Style: Color	Net Area	Waste	Extra waste	Gross Qty
	Peds Exam 4	47.10			41.73 LF
	Peds Exam 5	43.04			38.13 LF
	Peds Exam 6	42.54			37.69 LF
	Procedure	53.91			47.77 LF
	Ultrasound	51.51			45.64 LF
	R: RF-2: Mannington, Lino, Sepia Etw101, Modeled Color To Match.	187.65	21.5%	0.00%	239.00 SY
	BREAK ROOM	61.94			78.88 SY
	clean Storage	5.49			7.00 SY
	OB MEDS PREP	10.43			13.29 SY
	Peds Med Prep	18.42			23.46 SY
	Processing Trophon	9.48			12.08 SY
	SOILED	7.22			9.19 SY
	Storage	7.00			8.92 SY
	Team Flow Station 107	19.05			24.26 SY
	Team Flow Station 127	48.61			61.91 SY
	Base: B: VB-1 (Cove Base): Burke, 4" High Vinyl Traditional Coved Base, #597 Mocha,	383.89		0.00%	340.13 LF
	BREAK ROOM	139.12			123.26 LF
	clean Storage	28.97			25.67 LF
	OB MEDS PREP	40.80			36.15 LF
	Peds Med Prep	67.73			60.01 LF
	Processing Trophon	38.73			34.32 LF
	SOILED	35.70			31.63 LF
	Storage	32.83			29.09 LF
	T: CT-1: Daltile, Affinity, Beige Af02, 12" X 12", Custom Building Products Grout (Epoxy), #172 Urban Putt, 1/16" Grout Joint	609.68	2%	0.00%	622.00 SF
	Changing Room	89.47			91.28 SF
	Lab Toilet	66.19			67.52 SF
	OB LAB TOILET	64.27			65.57 SF
	Staff Toilet 145	86.43			88.18 SF
	Staff Toilet 146	81.58			83.22 SF
	Ultrasound Toilet	70.98			72.41 SF
	Waiting Toilet	79.69			81.30 SF
	WAITING TOILET 103	71.08			72.51 SF
	Water Proofing	609.68		0.00%	267.57 SF
	Changing Room	70.10			30.77 SF
	Lab Toilet	66.91			29.36 SF
	OB LAB TOILET	76.68			33.65 SF
	Staff Toilet 145	78.63			34.51 SF
	Staff Toilet 146	83.32			36.57 SF

	Style: Color	Net Area	Waste	Extra waste	Gross Qty
	Ultrasound Toilet	77.38			33.96 SF
	Waiting Toilet	80.97			35.54 SF
	WAITING TOILET 103	75.68			33.21 SF
	T: CWT-1: Daltile, Color Wheel Collection, Urban Putty 0161 - Semi-Gloss Finish, 4" X 12", Custom Building Products Grout (Epoxy), #172 Urban Putty	1,603.36	3%	0.00%	1,653.33 SF
	Changing Room	190.35			196.28 SF
	Lab Toilet	184.99			190.75 SF
	OB LAB TOILET	193.60			199.63 SF
	Staff Toilet 145	225.59			232.62 SF
	Staff Toilet 146	217.45			224.23 SF
	Ultrasound Toilet	192.74			198.75 SF
	Waiting Toilet	205.05			211.44 SF
	WAITING TOILET 103	193.59			199.63 SF
	Wall Water-Proofing	1,603.36		0.00%	1,603.36 SF
	Changing Room	194.85			194.85 SF
	Lab Toilet	185.98			185.98 SF
	OB LAB TOILET	195.48			195.48 SF
	Staff Toilet 145	218.57			218.57 SF
	Staff Toilet 146	213.22			213.22 SF
	Ultrasound Toilet	195.97			195.97 SF
	Waiting Toilet	206.72			206.72 SF
	WAITING TOILET 103	192.57			192.57 SF
	T:VCT 12"x12"	90.07	4.2%	0.00%	94.00 SF
	MDF	90.07			94.00 SF
	Base: B: VB-1 (Straight): Burke, 4" High Vinyl Traditional Straight Base, #597 Mocha,	44.29		0.00%	36.56 LF
	MDF	44.29			36.56 LF
	Transition: T/D1/A603: RESILIENT TO TILE: Schluter - Schiene Ae100	0.00		0.00%	82.68 LF
	051	0.00			8.46 LF
	CONFERENCE	0.00			2.84 LF
	Mothers Room	0.00			2.85 LF
	OB Admin 115	0.00			2.82 LF
	OB LAB TOILET	0.00			2.79 LF
	OB PROVIDER OFFICE 116	0.00			2.85 LF
	OB PROVIDER OFFICE 117	0.00			2.88 LF
	Procedure	0.00			2.86 LF
	Staff Toilet 146	0.00			2.90 LF

	Style: Color	Net Area	Waste	Extra waste	Gross Qty
	TELEMED	0.00			2.85 LF
	Ultrasound Toilet	0.00			3.01 LF
	Waiting	0.00			33.07 LF
	Waiting Toilet	0.00			2.90 LF
	WAITING TOILET 103	0.00			2.81 LF
	Work Outscheduling and Check in Room	0.00			6.79 LF
	Transition: VT-01: (RESILIENT TO CARPET) :Mannington, Equalizer Transition	0.00		0.00%	327.87 LF
	040	0.00			9.39 LF
	051	0.00			43.62 LF
	BREAK ROOM	0.00			2.76 LF
	OB EXAM 129	0.00			3.36 LF
	OB EXAM 130	0.00			6.29 LF
	OB EXAM 131	0.00			6.04 LF
	OB EXAM 132	0.00			6.17 LF
	OB EXAM 133	0.00			3.31 LF
	OB MEDS PREP	0.00			2.84 LF
	OB ROOM 135	0.00			6.19 LF
	OB ROOM 136	0.00			2.95 LF
	OB ROOM 137	0.00			6.29 LF
	OB ROOM 138	0.00			6.22 LF
	PED EXAMS 1	0.00			2.77 LF
	PEDS EXAM 2	0.00			2.77 LF
	PEDS EXAM 3	0.00			2.76 LF
	Peds Exam 4	0.00			3.29 LF
	Peds Exam 5	0.00			3.32 LF
	Peds Exam 6	0.00			6.26 LF
	Procedure	0.00			2.77 LF
	Processing Trophon	0.00			2.82 LF
	SOILED	0.00			2.76 LF
	Storage	0.00			2.99 LF
	Team Flow Station 107	0.00			54.85 LF
	Team Flow Station 127	0.00			107.85 LF
	Ultrasound	0.00			2.85 LF
	Waiting	0.00			13.69 LF
	Walk off	0.00			10.70 LF
	Trim: Horizontal Trim	0.00		0.00%	251.54 LF
	Changing Room	0.00			30.77 LF
	Lab Toilet	0.00			29.26 LF
	OB LAB TOILET	0.00			30.86 LF
	Staff Toilet 145	0.00			33.98 LF
	Staff Toilet 146	0.00			32.68 LF

	Style: Color	Net Area	Waste	Extra waste	Gross Qty
	Ultrasound Toilet	0.00			30.94 LF
	Waiting Toilet	0.00			32.64 LF
	WAITING TOILET 103	0.00			30.41 LF
■	Trim: Vertical Trim	0.00		0.00%	126.60 LF
	Changing Room	0.00			25.33 LF
	Lab Toilet	0.00			12.67 LF
	OB LAB TOILET	0.00			19.00 LF
	Staff Toilet 145	0.00			12.67 LF
	Staff Toilet 146	0.00			19.00 LF
	Ultrasound Toilet	0.00			12.60 LF
	Waiting Toilet	0.00			12.67 LF
	WAITING TOILET 103	0.00			12.67 LF
■	Walk off Matt	68.37		0.00%	68.37 SF
	001	10.25			10.25 SF
	040	11.23			11.23 SF
	044	10.35			10.35 SF
	Walk off	13.40			13.40 SF
	WM 01	23.14			23.14 SF
Terms and Conditions					
1 For Base Refer A801 General Notes Point L. 2 For Wall Tile of Waiting Toilet Refer Elevation C2, D2, E2, F2 of Sheet A401. 3 For wall Tile of Staff Toilet 145 and 146 Refer Elevations of Sheet A402. 4 For wall Tile of Waiting Toilet 103 Refer Elevations of Sheet A403. 5 For wall Tile of Lab Toilet 106 Refer Elevations of Sheet A403. 6 For wall Tile of OB Lab Toilet 126 Refer Elevations of Sheet A403. 7 For wall Tile of Changing Room 143 Refer Elevations of Sheet A411. 8 For Wall Tile of Ultrasound Toilet Refer Elevation of Sheet A412.					
Customer Acceptance and Approval					
Name and Title		Signature		Date	