

Paint Signs



 Spray entire sign assembly with a grey or aluminum color paint.

Cut Away Sprues




- The signs are jointed together to keep the printing cost down by "sprues" which are similar to part frames of plastic model kits.
- Use a small pair of side cutters and carefully cut each sign away from the sprues at the base edges.

Paint Signs



- Use a small brush to paint the front of each sign white. (Optional)
- Then, paint the sign base the color of the surface to be mounted (i.e. sidewalk gray, asphalt black, etc.) (Optional)
- Set signs aside to dry.

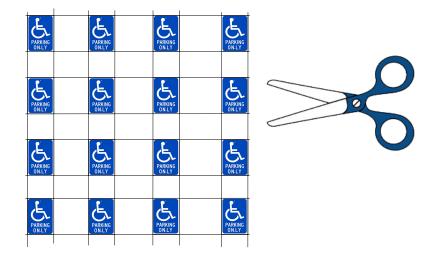

- Print this page on glossy photo paper.
- Cut out each handicapped emblem, above, with a sharp pair of scissors. Cut along the vertical and horizontal lines.
- Set cutouts aside.



• Use a small brush or swab to coat each sign face with a moderate film of white glue.



 Align and affix Handicapped emblems that you cut out on page 5 onto each sign front.