


**NEW**

# SALCO™

## *Model VTA-2S*

### **SELF CONTAINED SIREN / STROBE UNIT**

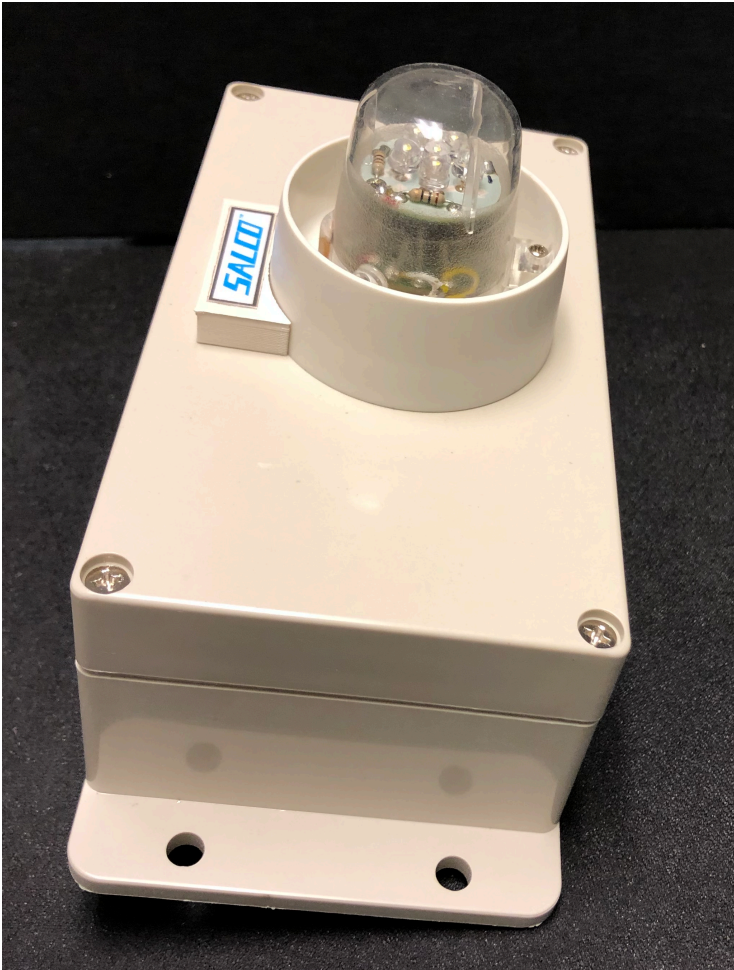

#### APPLICATIONS

- *Use when a VT-1 application requires a loud audible siren and bright strobe combination.*
- *Built in battery powered supply with up to 10 years life allows for quick and easy installation.*
- *Connects directly to VT-1 VandalTouch sensor or any normally closed contact sensor.*
- *Excellent for alarming temporary or mobile display cases due to minimal wiring.*
- *Can be used with multiple sensors*

**Introducing the NEW and innovative Self Contained , Internally powered Siren/Strobe System**

#### GENERAL DESCRIPTION

The Model VTA-2S is an ideal solution for applications requiring a high intensity audible, attention grabbing siren and strobe combination. When used in conjunction with the VandalTouch model VT-1, or any other sensor that provides a dry contact output, the VTA-2S can generate an attention getting alarm response.

The VTA-2S is uniquely powered by its own internal lithium power cell that can provide up to an incredible 10 years of operation. When the internal battery requires replacement, the unit features a low battery warning in advance to indicate a low battery condition to the end user. The VTA-2S also features a convenient user adjustable timer from 5-90 seconds for automatic siren/strobe cutoff after activations.

# Model VTA-2S

## FEATURES:

High Intensity Audible siren with flashing strobe.

User Adjustable siren/strobe cutoff time from 5-90 seconds or continuous follower mode.


Requires no external power. Powered by a self-contained, user replaceable lithium battery power

Efficient system design allows for long life battery operation with extremely high audio intensity output.

Separate Alarm output port can be used to relay alarm event conditions to external security systems or wireless transmitter.

Low battery detection audibly warns user to replace battery.

VT-1 interfaced to VTA-2S Application for complete stand

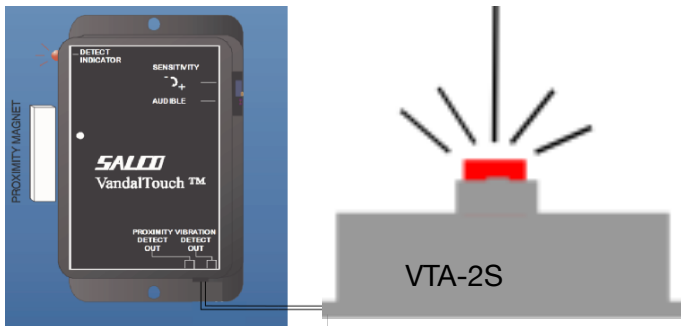

## *SPECIFICATIONS*

### ELECTRICAL SPECIFICATIONS

**Siren Audible Intensity:** 104 db @ .5 ft.

**Strobe Light Intensity:** > 10,000 mcd.

**Power Source:** 9V Lithium Battery or Duracell  
User replaceable.

**Battery Life:** Up to 10 Years with lithium power source.

\* Depending on number of activations.

**Audible Low battery replace warning**

**Color:** Bone Gray

**Operating Temperature:** 14F-149 F (-10C-65C)

**Mounting:** Wall , Ceiling or Inside Display

**Housing :** IP56 rating, Gasketed Enclosure

**Dimensions:** Length : 7.63" (193.80 mm.)

Width : 3.63" (92.20 mm.)

Height : 4.5" (114.30 mm.)

**Weight :** 13.40 ounces (380 gm.)

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**

# **SALCO™**

**263 Field End Street  
Sarasota, FL 34240**

**Telephone: 941-377-7717**

**Fax: 941-379-9680**

**Web: [www.salco.com](http://www.salco.com)**

**Email: [security@salco.com](mailto:security@salco.com)**

