


perkEpavetm

ECO friendly porous paving made with recycled tires

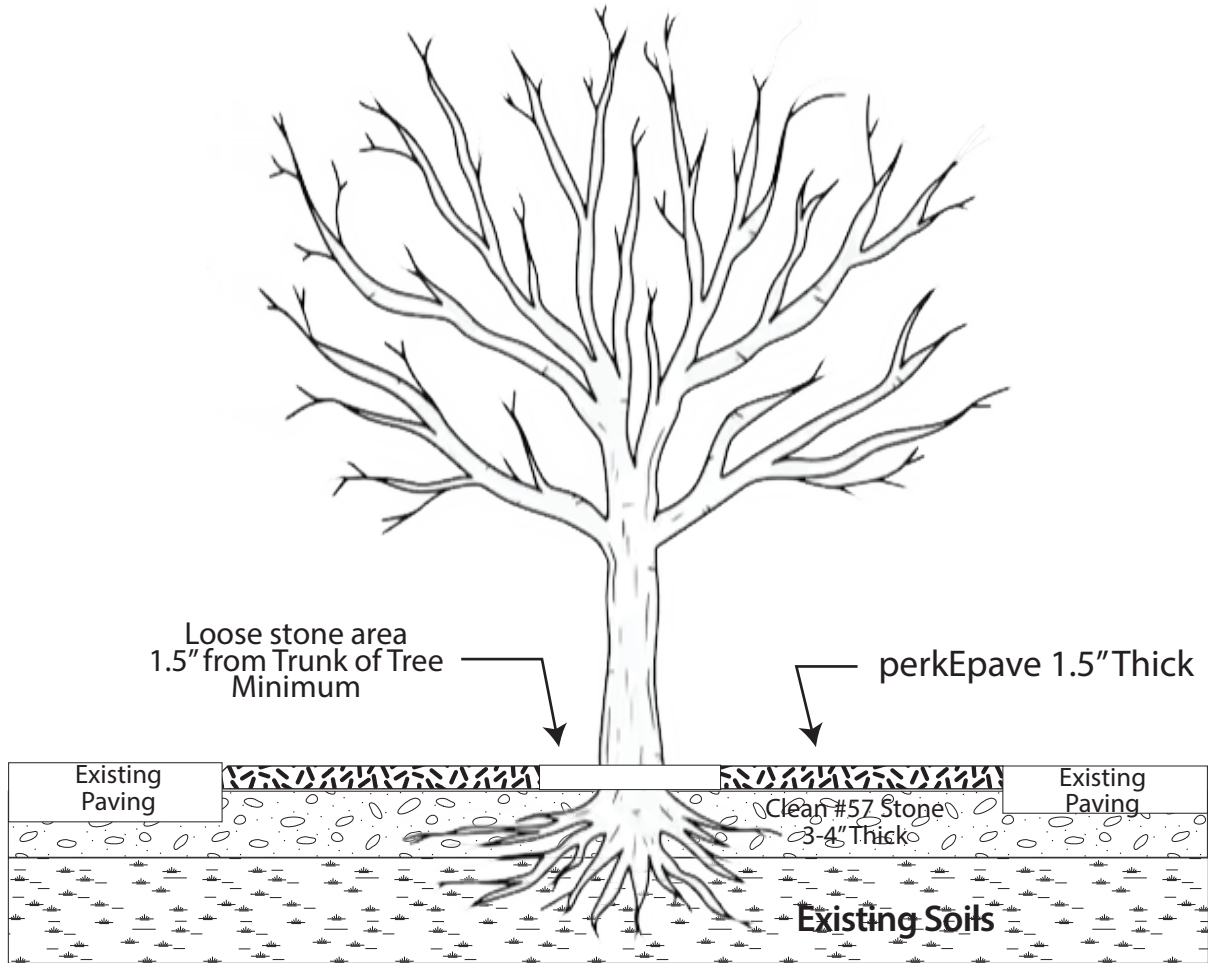

STANDARD TREE PIT DETAIL

NOTES:

1. Care should be taken when remediating tree pits as not to cut or damage tree roots.
2. perkEpave can be installed directly over tree roots at a minimum of 1" thick when surface roots exist.
3. Vertical surface of existing paving must be coated with perkEpave binder.

This drawing is the property of PerkEpave designs. The drawing is being furnished for information only. The use does not represent an engineers certification of required local building codes or regulations unless it has been approved by local authorities

perkEpavetm
ECO friendly porous paving made with recycled tires

Trails, Paths, Sidewalks, Tree
Surrounds, Erosion Control,
Trench Drains

www.perkepave.com

drw	scale	date	rev
TEC	NTS	5/14/24	0