

## DIN Hand Pallet Truck




Hydraulic pumps on these trucks help you easily raise and move pallets. The forks are rounded and have a cutout for the load wheels. The handle has a three-position hand control (raise, lower, and neutral). A relief valve prevents pressure build-up to provide overload protection.

Comes with multiple wheel options.

Nylon wheels are nonmarking, durable, and work well on smooth surfaces. Polyurethane wheels are nonmarking, abrasion resistant, and shock absorbing. Use them on all types of floors, even if there's debris.

Trucks with fixed forks have entry and exit rollers, as well as load wheels.

**Warning: Never use to lift people.**

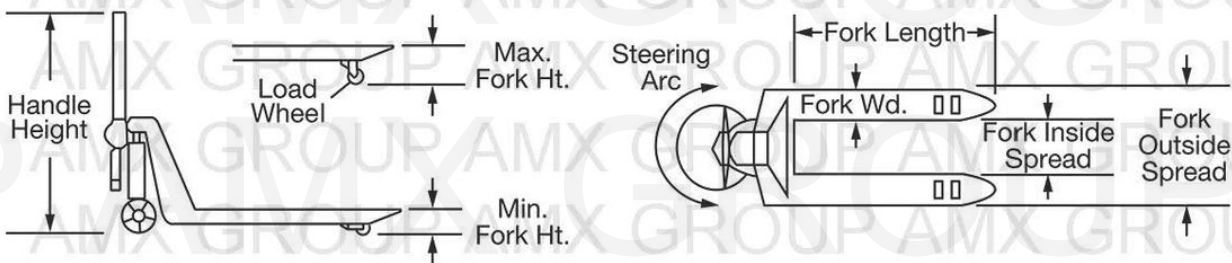

Model	DIN 2S	DIN 2B	DIN2.5S	DIN2.5B	DIN3S	DIN3B
Capacity (KG)	2000	2000	2500	2500	3000	3500
Max Fork Height (mm)	200 (or 190)					
Min Fork Height (mm)	85 (or 75)					
Fork Length (mm)	1150	1200	1150	1200	1150	1200
Width Overall Forks (mm)	540	680	540	680	540	680
Individual Fork Width (mm)	160					
Load Roller Diameter (mm)	82 (or 72) Nylon, Polyurethane					
Steering Wheel Diameter (mm)	200 (or 180) Nylon, Polyurethane, Rubber					

## DIN Low Profile Hand Pallet Truck




Hydraulic pumps on these trucks help you easily raise and move pallets. The forks are rounded and have a cutout for the load wheels. The handle has a three-position hand control (raise, lower, and neutral). A relief valve prevents pressure build-up to provide overload protection.

Nylon wheels are nonmarking, durable, and work well on smooth surfaces. Polyurethane wheels are nonmarking, abrasion resistant, and shock absorbing. Use them on all types of floors, even if there's debris.

Lower fork height allows these trucks to work with lower-clearance pallets than standard pallet trucks.

Trucks with fixed forks have entry and exit rollers, as well as load wheels.

**Warning: Never use to lift people.**

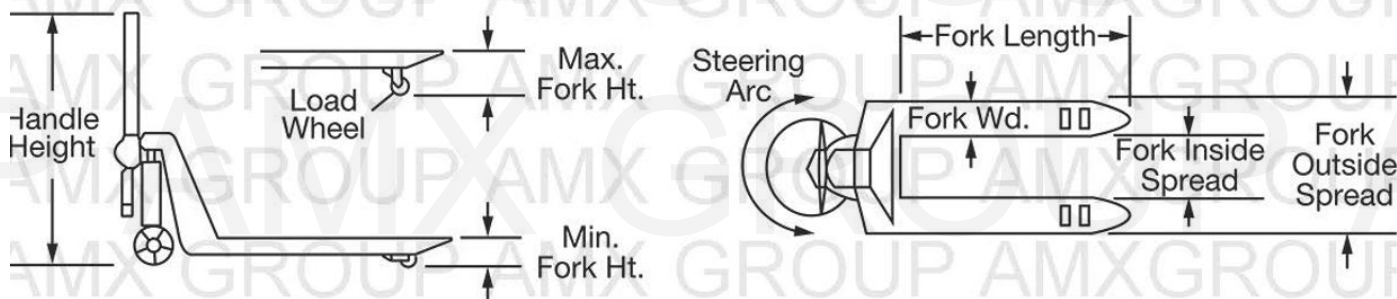

Model	DIN 2LPS	DIN 2LPB	DIN 1SLS	DIN 1SLL
Capacity (KG)	2000	2000	1000	1000
Max Fork Height (mm)	170	170	95	95
Min Fork Height (mm)	55	55	36	36
Fork Length (mm)	1150	1200	1150	1200
Width Overall Forks (mm)	540	680	540	680
Type	Low Profile		Super Low	

## DIN Hand Pallet Truck with scale




Hydraulic pumps on these trucks help you easily raise and move pallets. The forks are rounded and have a cutout for the load wheels. The handle has a three-position hand control (raise, lower, and neutral). A relief valve prevents pressure build-up to provide overload protection.

Nylon wheels are nonmarking, durable, and work well on smooth surfaces. Polyurethane wheels are nonmarking, abrasion resistant, and shock absorbing. Use them on all types of floors, even if there's debris.


Trucks with fixed forks have entry and exit rollers, as well as load wheels.

Weigh and transport pallets with one machine. These trucks have a built-in scale with a check-weight mode and alarm to signal out-of-range loads. The counting mode registers inventory while you add or remove parts from your pallet.

**Warning: Never use to lift people.**

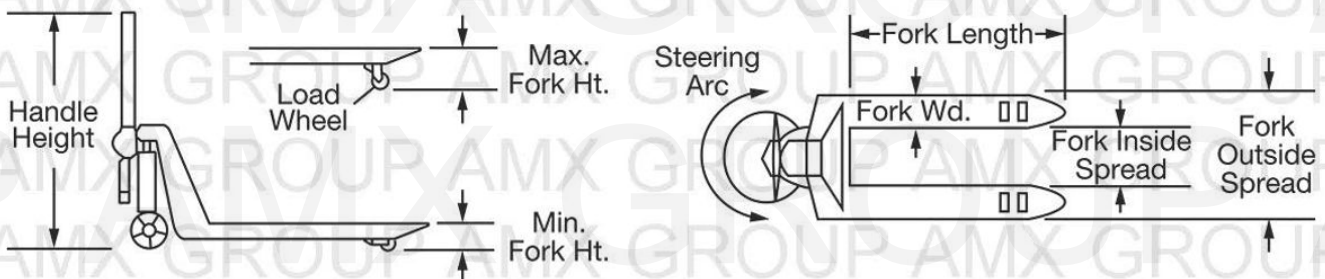

Model	DIN 2SS	DIN 2SB
Capacity (KG)	2000	2000
Min / Max Fork Height (mm)	85 / 200	85 / 200
Fork Length (mm)	1150	1150
Width Overall Forks (mm)	548	688
Individual Fork Width (mm)	168	168

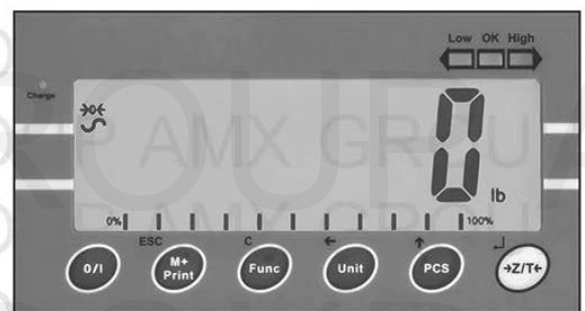



## DIN Stainless Steel Hand Pallet Truck




Hydraulic pumps on these trucks help you easily raise and move pallets. The forks are rounded and have a cutout for the load wheels. The handle has a three-position hand control (raise, lower, and neutral). A relief valve prevents pressure build-up to provide overload protection.

Nylon wheels are nonmarking, durable, and work well on smooth surfaces. Polyurethane wheels are nonmarking, abrasion resistant, and shock absorbing. Use them on all types of floors, even if there's debris.

For the most demanding environments, these all-stainless steel pallet trucks have the best corrosion resistance

Trucks with fixed forks have entry and exit rollers, as well as load wheels.

**Warning: Never use to lift people.**

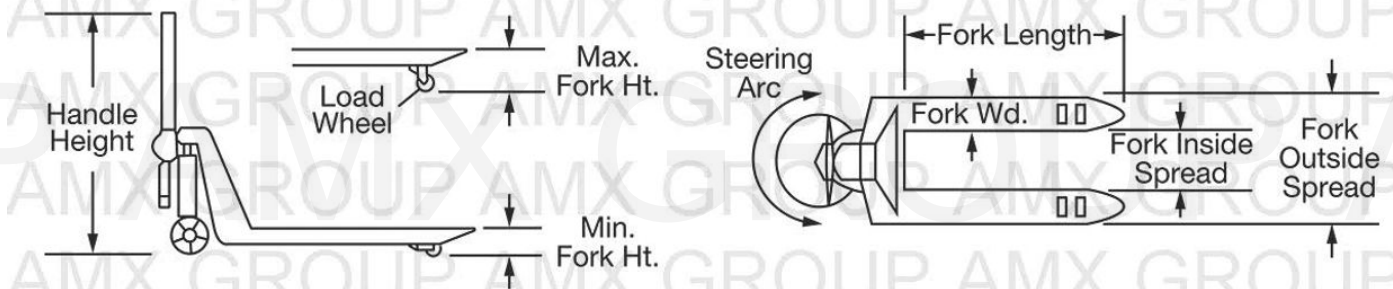

Model	DIN 2SS	DIN 2SL	DIN 2.5SS	DIN 2.5SL
Capacity (KG)	2000	2000	2500	2500
Min / Max Fork Height (mm)	85	85	85	85
Fork Length (mm)	1150	1200	1150	1200
Width Overall Forks (mm)	540	680	540	680
Individual Fork Width (mm)	160	160	160	160

## DIN High-Capacity Hand Pallet Truck




Hydraulic pumps on these trucks help you easily raise and move pallets. The forks are rounded and have a cutout for the load wheels. The handle has a three-position hand control (raise, lower, and neutral). A relief valve prevents pressure build-up to provide overload protection.

Nylon wheels are nonmarking, durable, and work well on smooth surfaces. Polyurethane wheels are nonmarking, abrasion resistant, and shock absorbing. Use them on all types of floors, even if there's debris.

Heavy duty design for moving heavy load yet easy to steer

**Warning: Never use to lift people.**

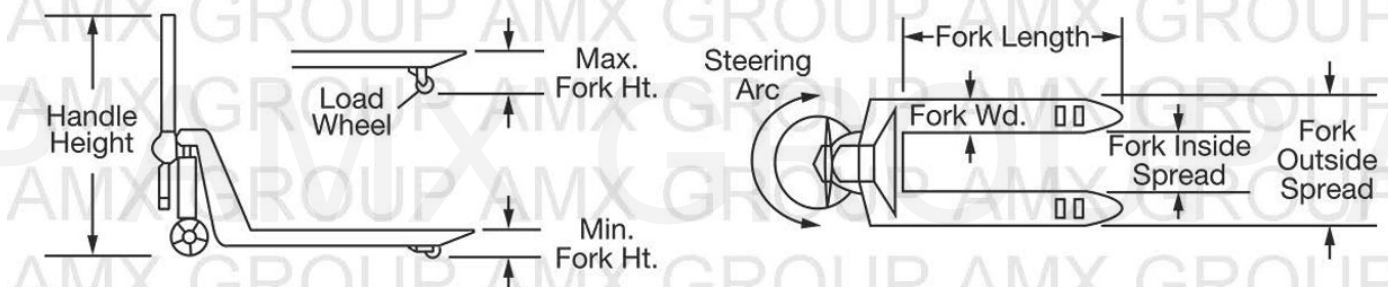

Model	DIN 5S
Capacity (KG)	5000
Min / Max Fork Height (mm)	90 / 200
Fork Length (mm)	1150
Width Overall Forks (mm)	580
Individual Fork Width (mm)	210

## DIN High-Lift Hand Pallet Truck




Hydraulic pumps on these trucks help you easily raise and move pallets. The forks are rounded and have a cutout for the load wheels. The handle has a three-position hand control (raise, lower, and neutral). A relief valve prevents pressure build-up to provide overload protection.

Nylon wheels are nonmarking, durable, and work well on smooth surfaces. Polyurethane wheels are nonmarking, abrasion resistant, and shock absorbing. Use them on all types of floors, even if there's debris.

Move loads around your facility, then use the hydraulic pump to lift them to a comfortable working height.

Use with open-bottom pallets only.

**Warning: Never use to lift people.**

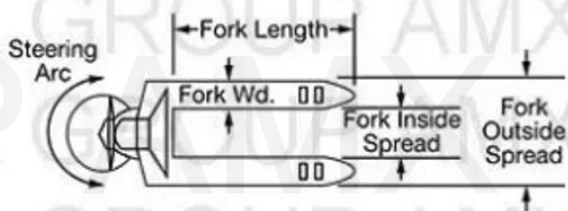

Model	DIN 1HLS	DIN 1HLB	DIN 1HLSE	DIN 1HLBE
Capacity (KG)	1000	1000	1000	1000
Max Fork Height (mm)	800	800	800	800
Fork Length (mm)	1150	1150	1150	1150
Width Overall Forks (mm)	540	680	540	680
Type	Manual		Electric	