

## Specifications



### Polymer Matrix

Resin Type	Resin Base	Description	Flame spread rating ASTM E84
<b>Type IFR</b>	Isophthalic Polyester	Industrial Grade Corrosion resistance & fire retardant	Class 1, 25 or less
<b>Type V</b>	Vinyl Ester	Superior Corrosion resistance & fire retardant	Class 1, 25 or less
<b>Type P</b>	Phenolic	Low smoke & superior fire retardant	Class 1, 5 or less

### Color Selection



Yellow




Dark Grey



Orange



Green

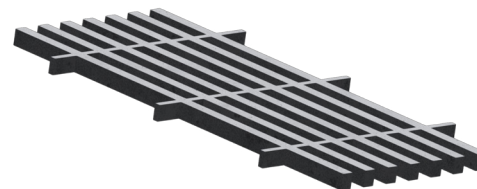

### Panel Size

Product	Thickness	Open Area	Panel Size (ft)	Color	Resin Type
<b>I6010</b>	1.0 in	60%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester
<b>I5010</b>	1.0 in	50%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester
<b>I4010</b>	1.0 in	40%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester
<b>I6015</b>	1.5 in	60%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester
<b>I5015</b>	1.5 in	50%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester
<b>I4015</b>	1.5 in	40%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester
<b>T5020</b>	2.0 in	50%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester
<b>T3320</b>	2.0 in	33%	3x10, 3x20, 4x8, 4x10	Yellow, Dark Grey, Green, Custom	Isophthalic FR Vinyl Ester