


S:\2022\2115\DWG\A-0001.dwg 05/03/2023 10:15 AM

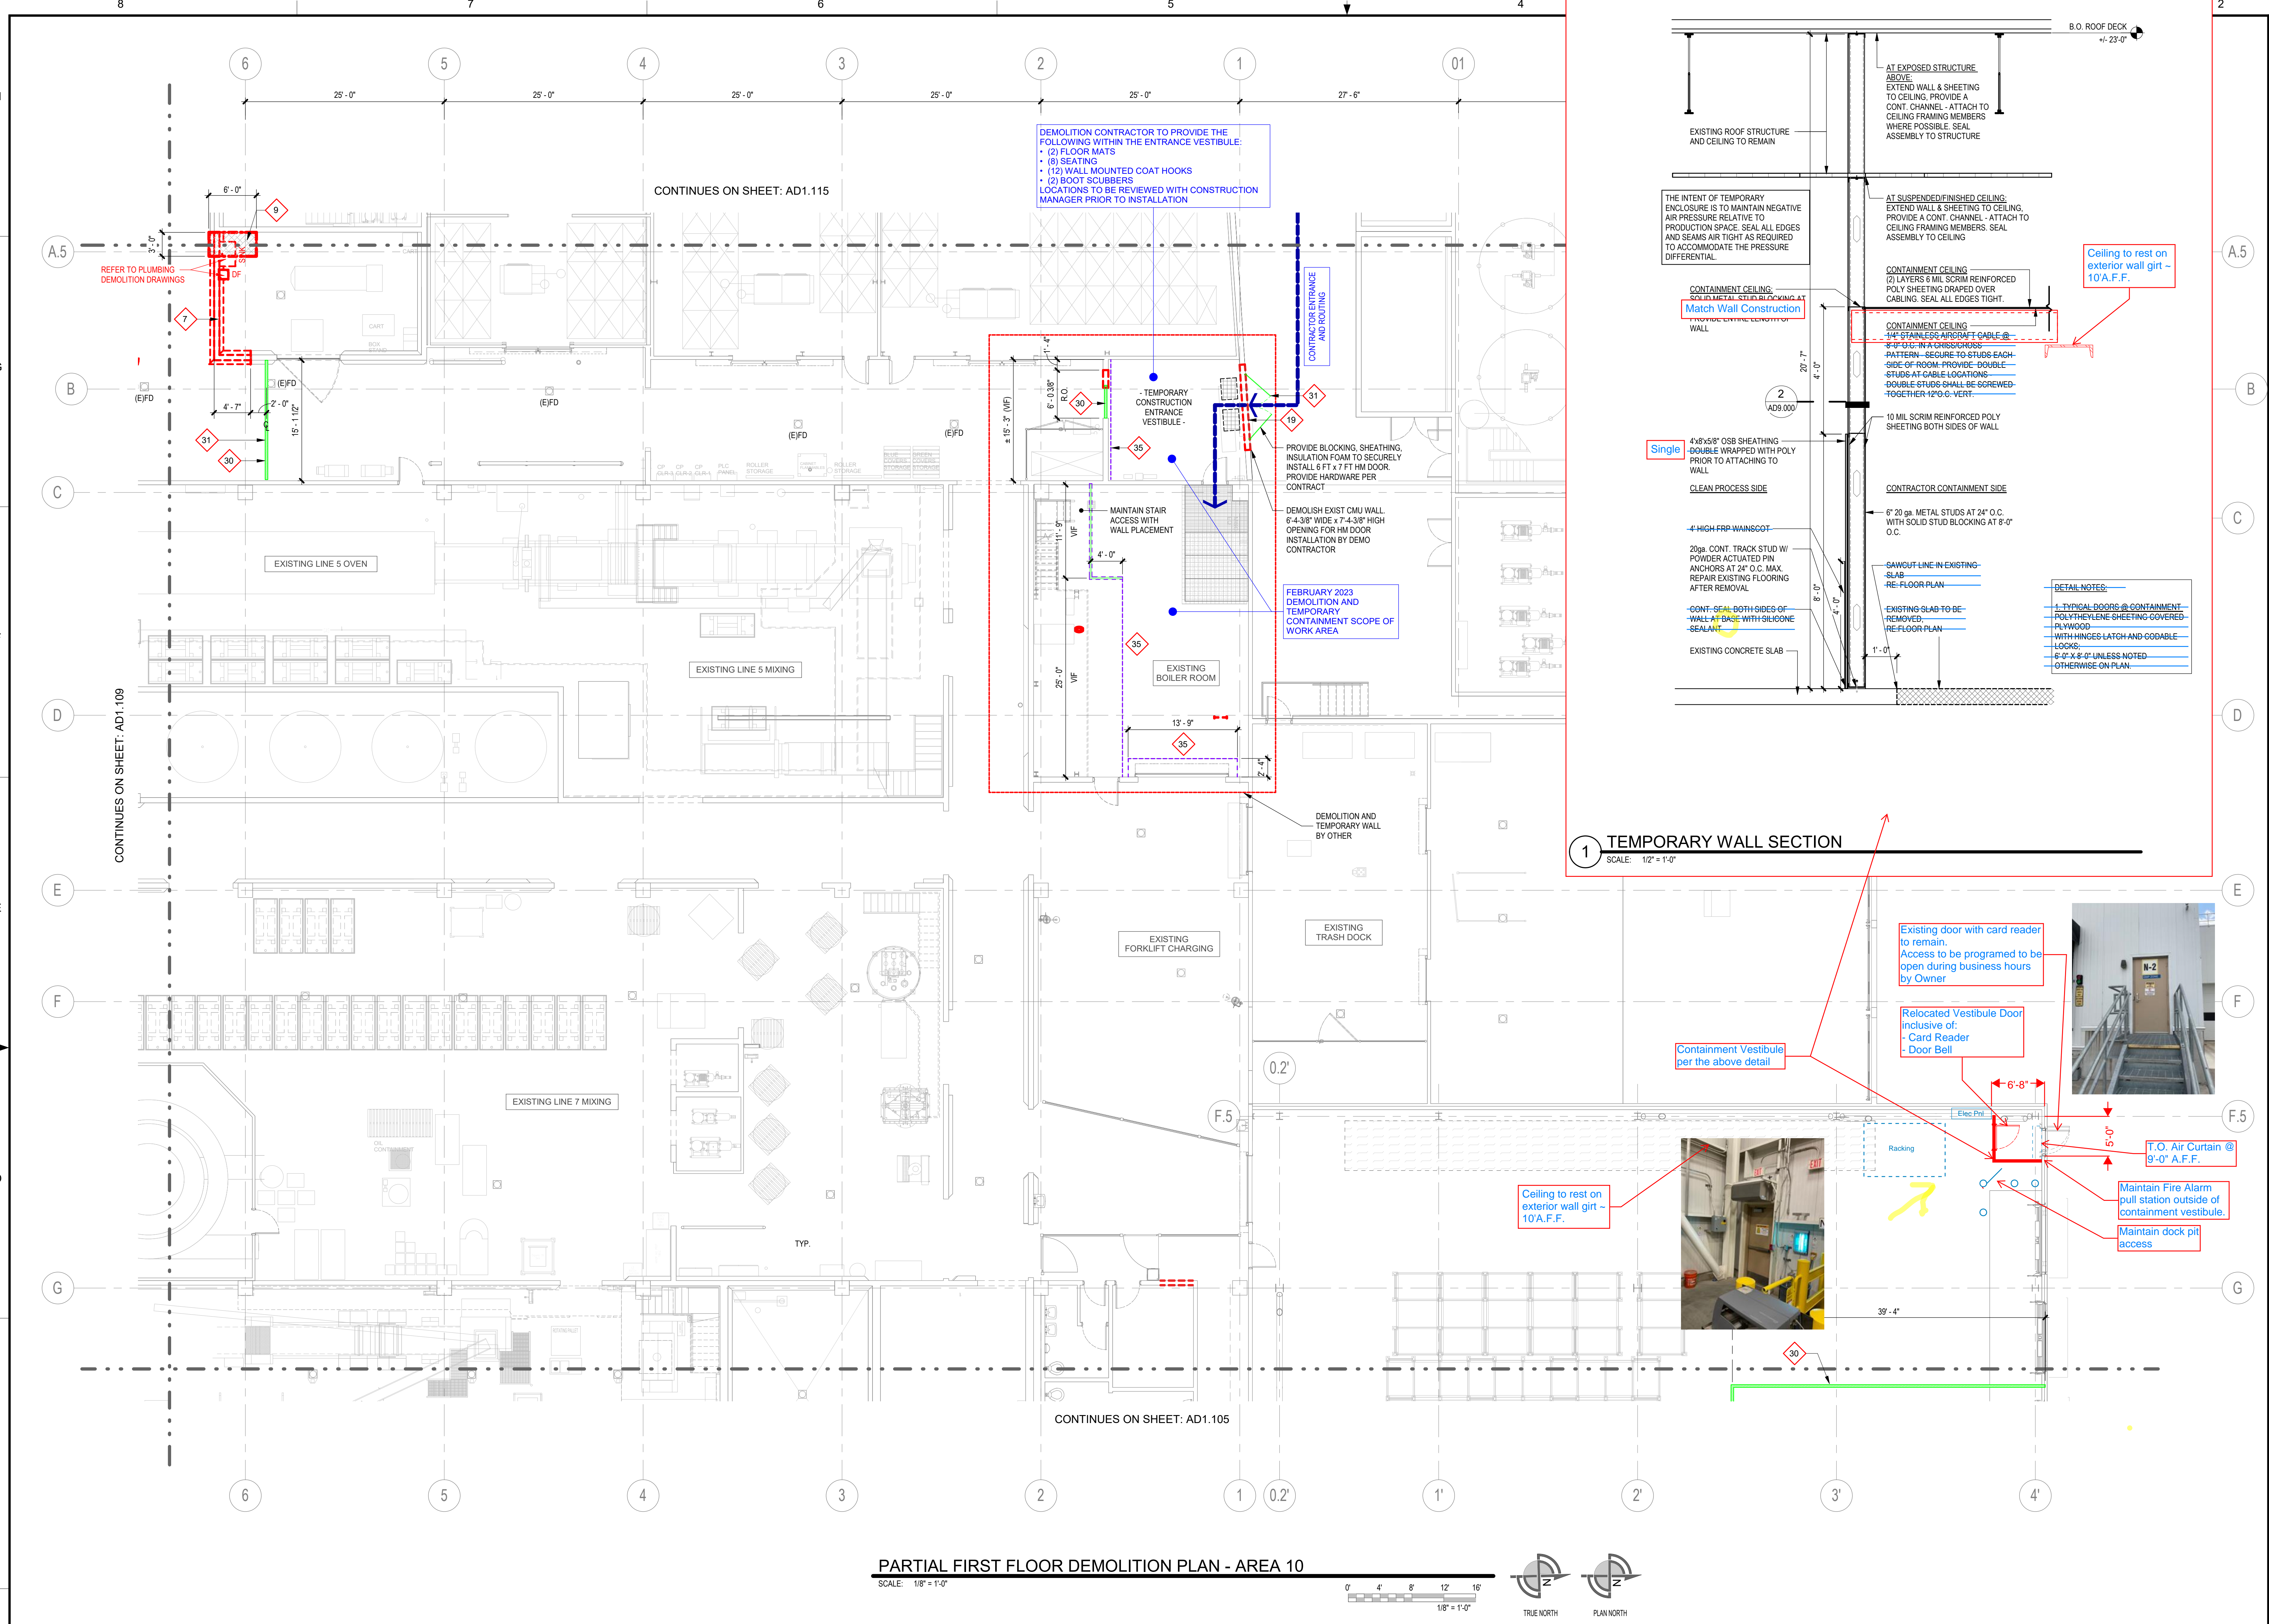


DEMOLITION KEY	
MARK	DEMOLITION DESCRIPTION
1	REMOVE METAL STAIRS TO ALLOW FOR NEW CONSTRUCTION. SAVE FOR RE-USE
2	SAWCUT OPENING IN EXISTING WALL (AND CURB WHERE OCCURS) FOR NEW 3'-0\" x 7'-0\" EGRESS DOOR. REMOVE ALL OBSTRUCTIONS (WHERE OCCURS) IN CLEAR FLOOR SPACE REQUIRED AT DOOR - BOTH SIDES
3	SAWCUT OPENING IN EXISTING WALL (AND CURB WHERE OCCURS) FOR INSTALLATION OF NEW HIGH SPEED ROLL-UP DOOR. REFER TO FLOOR PLANS AND DOOR SCHEDULE.
4	REMOVE EXISTING WALL (INCLUDING DOORS, CURBS, ETC.) UP TO EXISTING STEEL BEAM (@ ± 21'-6\" AFF). PROTECT STEEL TO REMAIN (COLUMNS, BRACINGS, ETC.). ADD SUPPORTS FOR PORTION OF WALL TO REMAIN ABOVE TO ROOF DECK. REPAIR FLOOR AND FINISHES AS NEEDED AFTER REMOVAL.
5	COORDINATE TO BE RELOCATED PER PLUMBING DRAWINGS AND SPECIFICATIONS. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION.
6	REMOVE EXISTING DOOR AND SAVE FOR RE-USE AS REQUESTED BY OWNER (VERIFY WITH ARCHITECT). REMOVE STEEL CHANNELS, GUARDS AND BOLLARDS WHERE APPLICABLE.
7	REMOVE ENTIRE EXISTING WALL UP TO ROOF STRUCTURE AS SHOWN (INCLUDING DOORS, FRAMED OPENINGS, WINDOWS, CURBS, ROOF CANOPIES, ETC. WHERE APPLICABLE). REPAIR FLOOR AND FINISHES AS NEEDED AFTER REMOVAL. REFER TO OTHER DISCIPLINE DRAWINGS FOR RELOCATION OF FIXTURES, PIPING, EQUIPMENT, ETC. (WHERE OCCURS).
8	REMOVE EXISTING STAIR AND SAVE FOR REUSE. (TO BE ALTERED FOR USE AT NEW ELECTRICAL PLATFORM) REFER TO FLOOR PLANS FOR MORE INFORMATION.
9	SAWCUT AND REMOVE EXISTING SLAB AS NEEDED FOR NEW PLUMBING INSTALLATION. LAYOUT TO BE MARKED BY PLUMBER AND CONFIRMED WITH CONSTRUCTION MANAGER. REFER TO PLUMBING DRAWINGS FOR MORE INFORMATION.
10	DEMOLISH AND REMOVE ENTIRE CONCRETE RAMP (INCLUDING CURBS, RAILING AND LANDING). REFER TO CIVIL DRAWINGS FOR MORE INFORMATION.
11	DEMOLISH AND REMOVE EXISTING CONCRETE EQUIPMENT PADS AS INDICATED ON CIVIL AND PROCESS DRAWINGS.
12	REMOVE ENTIRE STAIR TOWER INCLUDING WALLS, SLAB, STEEL, AND ETC. STAIRS TO BE REMOVED AND REINSTALLED IN NEW LOCATION. REFER TO FLOOR PLANS FOR MORE INFORMATION.
13	SAWCUT AND REMOVE CURB AS NEEDED FOR NEW WALL INSTALLATION. REPAIR WALLS AND SLAB (TO REMAIN) AS NEEDED.
14	SAWCUT AND REMOVE LOW PORTION OF REFRIGERATED STORAGE BUILDING AS SHOWN (INCLUDING WALLS, STEEL FRAMING, ROOF, ETC.) REFER TO PROCESS DRAWINGS FOR RELOCATION OF RACKING DURING CONSTRUCTION.
15	DEMOLISH DOCK: REMOVE DOCK EQUIPMENT, RAILS, BOLLARDS, DOORS, ROOF CANOPY, ETC. REPAIR REPLACE DAMAGED SLAB (MATCH EXISTING MATERIALS). DOCK PIT TO BE FILLED IN WITH CONCRETE SLAB. REFER TO FLOOR PLAN FOR MORE INFORMATION.
16	DEMOLISH (3) DOCKS: REMOVE DOCK EQUIPMENT, STANCHIONS, BOLLARDS AND DOORS. REPAIR/REPLACE DAMAGED SLAB (MATCH EXISTING MATERIALS). DOCK PIT TO BE FILLED IN WITH CONCRETE SLAB. REFER TO FLOOR PLANS AND STRUCTURAL DRAWINGS FOR RELOCATION INFORMATION.
17	SAWCUT AND REMOVE EXISTING SLAB AS SHOWN. REMOVE DRAIN CLEANOUTS, ETC. AND CAP OR REROUTE PER PLUMBING DRAWINGS. PROTECT DRAIN, SLAB, STEEL AND WALLS TO REMAIN. REFER TO PLUMBING AND STRUCTURAL DRAWINGS FOR MORE INFORMATION.
18	SAWCUT OPENING IN EXISTING WALL FOR NEW 10'-0\" x 10'-0\" FRAMED OPENING (SEE FLOOR PLANS).
19	SAWCUT EXISTING CMU WALL FOR 10'-8\" x 10'-0\" CONSTRUCTION ACCESS OPENING. PROVIDE TEMPORARY DOOR WITH LOCK.
20	SAWCUT EXISTING WALL TO INCREASE OPENING SIZE TO 11'-0\" WIDE x 10'-0\" HIGH. ALTER SS FRAME TO FIT NEW OPENING. REMOVE BOLLARD GUARD AND REINSTALL AS SHOWN ON FLOOR PLANS. REFER TO ELECTRICAL DRAWINGS FOR RELOCATION OF CONDUIT.
21	SAWCUT AND REMOVE EXISTING SLAB AS SHOWN FOR NEW STRUCTURAL FOOTING INSTALLATION. REFER TO STRUCTURAL DRAWINGS FOR MORE INFORMATION.
22	REMOVE EXISTING RAILING AS NEEDED TO ALLOW FOR NEW BUILDING CONSTRUCTION.
23	ENTIRE EXISTING INGREDIENT STORAGE OFFICE STRUCTURE TO BE REMOVED, INCLUDING WALLS, DOORS, FIXTURES, CASEWORK, AND ETC. (CASEWORK AND FURNISHINGS TO BE RELOCATED TO NEW OFFICE STRUCTURE.) PROTECT EXISTING BUILDING STEEL AND SLAB TO REMAIN. REFER TO PLUMBING AND MECHANICAL DEMOLITION DRAWINGS FOR EQUIPMENT AND FIXTURES.
24	SAWCUT EXISTING WALL AND CURB FOR NEW 19'-4 1/2\" wide x 14'-0\" high SS FRAMED OPENING. REFER TO OTHER DISCIPLINE DEMOLITION DRAWINGS FOR RELOCATION OF STRUCTURE, EQUIPMENT, PIPING, ETC. (WHERE OCCURS). REPAIR EXISTING BUILDING TO REMAIN AS NEEDED.
25	SAWCUT EXISTING CMU WALL TO WIDEN EXISTING OPENING. (MAKE CUT AT JOINT CLOSEST TO WEST END OF WALL.) ALTER EXISTING METAL FRAME TO FIT NEW OPENING.
26	ENTIRE EXISTING TRAINING AREA AND OFFICE STRUCTURE TO BE REMOVED, INCLUDING WALLS, DOORS, EQUIPMENT, FURNISHINGS, AND ETC. (FURNISHINGS AND EQUIPMENT TO BE RELOCATED TO NEW L11 OFFICE AREA.) PROTECT EXISTING BUILDING STEEL AND SLAB TO REMAIN. REFER TO ELECTRICAL AND MECHANICAL DEMOLITION FOR REMOVAL/RELOCATION OF EQUIPMENT AND FIXTURES.
27	REMOVE PENTHOUSE ABOVE. REFER TO ROOF PLANS FOR MORE INFORMATION.
28	DEMOLISH AND REMOVE SOUTH-FIELD FREEZER PENTHOUSE: REPAIR/REPLACE ROOF AT OPENINGS. MATCH EXISTING MATERIALS AND FINISHES.
29	REMOVE EXISTING PARAPET FLASHING. WALL TO BE EXTENDED WITH STACKED JOINT FLASHING AND NEW INSULATED METAL PANELS.
30	TEMPORARY CONTAINMENT WALL. TUFF WRAP CONTAINMENT SYSTEM OR TEMPORARY HARD WALL PER 1A9.000
31	PROVIDE CONSTRUCTION ACCESS SLIDING DOOR (TUFFWRAP) OR CONSTRUCTION ACCESS SWING DOOR (AD9.000)
32	PENETRATION REPAIR UP TO 8\"
33	PENETRATION REPAIR LARGER THAN 8\"
34	SAWCUT OPENING IN EXISTING WALL FOR NEW 3'-0\" x 7'-0\" FRAMED OPENING (SEE FLOOR PLANS).
35	TEMPORARY CONTAINMENT WALL BY ABATEMENT CONTRACTOR OR BY OTHERS.
36	DEMOLISH AND REMOVE DUNNAGE UNDER MECHANICAL EQUIPMENT. REFER TO MECHANICAL DRAWINGS FOR MORE INFORMATION.
37	CUT OPENING IN ROOF AND SAWCUT THROUGH EXISTING CONCRETE TEE TO ALLOW FOR NEW MECHANICAL DUCTING INSTALLATION. REFER TO MECHANICAL DRAWINGS FOR MORE INFORMATION.
38	REMOVE ROOF CANOPY OVER EXISTING DOOR. (DOOR TO REMAIN.)
39	DEMOLISH EXISTING AIR CURTAIN AND ASSOCIATED FRAME, HOUSING AND HARDWARE.
40	DEMOLISH EXISTING FREEZER DOOR AND ASSOCIATED FRAME, SUBFRAME, AND HARDWARE.
41	REMOVE EXISTING WINDOW WITH ASSOCIATED FRAME AND HARDWARE.
42	REMOVE EXISTING DAIRY BRICK FLOORING AND SLAB AS NEEDED FOR NEW PLUMBING INSTALLATION. LAYOUT TO BE MARKED BY PLUMBER AND CONFIRMED WITH CONSTRUCTION MANAGER. REFER TO PLUMBING DRAWINGS FOR MORE INFORMATION.
43	

CONTAINMENT NOTES	
<p>ALL CONTAINMENT WALLS SHALL BE METAL STUD FRAMED (24\" O.C.) WITH PLASTIC ON EACH SIDE WITH 4x8x8 OSB SHEATHING FASTENED TO BOTTOM 6\" OF WALL FOR PROTECTION. OSB SHEATHING TO BE WRAPPED WITH POLY. DOORS SHALL BE ZIPPERED OPENINGS. VESTIBULE DOOR LEADING TO PROCESS AREA TO BE CONSTRUCTED IN A WAY TO ALLOW FOR DOOR TO BE LOCKED AT THE END OF EACH SHIFT.</p> <p><b>WALL SHEETING:</b> ALL SCRIM REINFORCED POLYETHYLENE SHEETING SHALL BE RATED FIRE RETARDANT FOR USE AND AS MANUFACTURED BY: RAVEN INDUSTRIES-FLEXIBLE FILMS DEPARTMENT P.O. BOX 5107 SIOUX FALLS, SOUTH DAKOTA 57117 WALLS 036175 12L 800-635-3456</p> <p>PRODUCT NO. DURA SCRIM 2FR COLOR: WHITE</p> <p><b>HEAVY DUTY WALL ZIPPERS AS MANUFACTURED BY:</b> Zippwall LLC 37 BROADWAY ARLINGTON, MA 02474 Phone: (800) 718-2256 Fax: (781) 648-8806</p>	<p><b>SEALANT:</b> EACH SIDE OF BOTTOMS OF ALL CONTAINMENT WALLS SHALL BE CONTINUOUSLY SEALED WITH: TAP 100% SILICONE SEALANT- SEALANT SHALL MEET ASTM D3020 CLASS 25, TYPE S, GRADE NS, AND HAVE A 50 YEAR DURABILITY GUARANTEE. SEALANT SHALL MEET FDA REGULATION NO. 21 CFR 177.2600 WHEN FULLY CURED.</p>

DEMOLITION LEGEND	
	ITEMS TO BE DEMOLISHED AND REMOVED
	CONCRETE SLAB TO BE DEMOLISHED AND REMOVED
	ITEMS TO BE REMOVED AND RELOCATED
	EXISTING BUILDING TO REMAIN
	AREAS REQUIRING FLOOR SLAB REPAIR AFTER RACKING REMOVAL. REFER TO FLOOR FINISH PLANS FOR MORE INFORMATION ON SLAB REPAIR. REFER TO PM DRAWINGS FOR MORE INFORMATION ON RACKING DEMOLITION.
	TEMPORARY PLASTIC CONTAINMENT AS DESCRIBED IN CONTAINMENT NOTES. REFER TO DETAIL.
	TEMPORARY CONTAINMENT PROTECTION OVERHEAD; REFER TO APPLICABLE NOTES
	TYPICAL EXTERIOR DOORS @ CONTAINMENT POLYETHYLENE SHEETING COVERED PLYWOOD WITH LATCH AND CODABLE LOCKS. 6'-0\" x 8'-0\" UNLESS NOTED OTHERWISE ON PLAN.
	SLIDING DOOR @ CONTAINMENT POLYETHYLENE SHEETING COVERED PLYWOOD WITH LATCH AND CODABLE LOCKS. SIZE AND TYPE NOTED ON PLAN.
	TYPICAL INTERIOR DOORS @ CONTAINMENT POLYETHYLENE SHEETING WITH ZIPPERS. 6'-0\" x 8'-0\" UNLESS NOTED OTHERWISE ON PLAN.
	TEMPORARY CONTAINMENT WALLS AS DESCRIBED IN CONTAINMENT NOTES. REFER TO DETAIL.
	SANITIZING FOOT BATH MAT 24\" x 32\" WEARWELL TALL WALL.

DEMOLITION NOTES	
1.	THE INTENT OF TEMPORARY ENCLOSURE IS TO MAINTAIN NEGATIVE AIR PRESSURE RELATIVE TO PRODUCTION SPACE. SEAL ALL EDGES AND SEAMS AIR TIGHT AS REQUIRED TO ACCOMMODATE THE PRESSURE DIFFERENTIAL.
2.	DEMOLITION CONTRACTOR TO VISUALLY INSPECT ALL EXISTING CONDITIONS AND SHALL COORDINATE ANY OUTSTANDING DEMOLITION ISSUES WITH THE CONSTRUCTION MANAGER PRIOR TO COMMENCING WORK.
3.	CONTRACTOR IS RESPONSIBLE FOR THE REPLACEMENT OR REPAIR OF ALL BASE BUILDING FINISHES THAT ARE DAMAGED AS A RESULT OF DEMOLITION. CONTRACTOR TO INCLUDE IN THE PRICING A CONTINGENCY FOR ALL BASE BUILDING REPAIRS THAT MAY OCCUR.
4.	PROVIDE TEMPORARY ENCLOSURES/ CONTAINMENT PROTECTION TO WALLS, ROOFS, DOORS, ETC. WHERE DEMOLITION HAS RESULTED IN EXPOSED OPENINGS WITHIN THE OPERATIONAL BUILDING.
5.	PROTECT ALL EQUIPMENT TO REMAIN IN PLACE, FROM DAMAGE AND DUST PENETRATION.
6.	COORDINATE OPENING DIMENSIONS WITH THE CONSTRUCTION MANAGER. DOOR SCHEDULE & DOOR MANUFACTURERS PRIOR TO COMMENCING DEMOLITION WORK.
7.	EXISTING BUILDING TO REMAIN OPERATIONAL THROUGHOUT DEMOLITION AND CONSTRUCTION. CONTRACTOR SHALL NOT IMPACT DAILY BUILDING OPERATIONS AND SHALL COORDINATE SCHEDULE WITH THE CONSTRUCTION MANAGER AND OWNER SO AS TO MAINTAIN UNINTERRUPTED BUILDING OPERATIONS.
9.	THERE IS NO PRESENCE OF ASBESTOS AND/OR LEAD BASED PAINT IN THE EXISTING BUILDING AREA OF WORK TO THE BEST KNOWLEDGE OF THE OWNER AND ARCHITECT. IF A MATERIAL IS FOUND WHICH MAY BE SUSPECTED OF CONTAINING HAZARDOUS MATERIAL WORK SHALL STOP AND THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER IMMEDIATELY. IF IT IS DETERMINED THAT THE MATERIALS ARE HAZARDOUS, THE MATERIAL SHALL BE FULLY ABATED ACCORDING TO APPLICABLE LAWS.

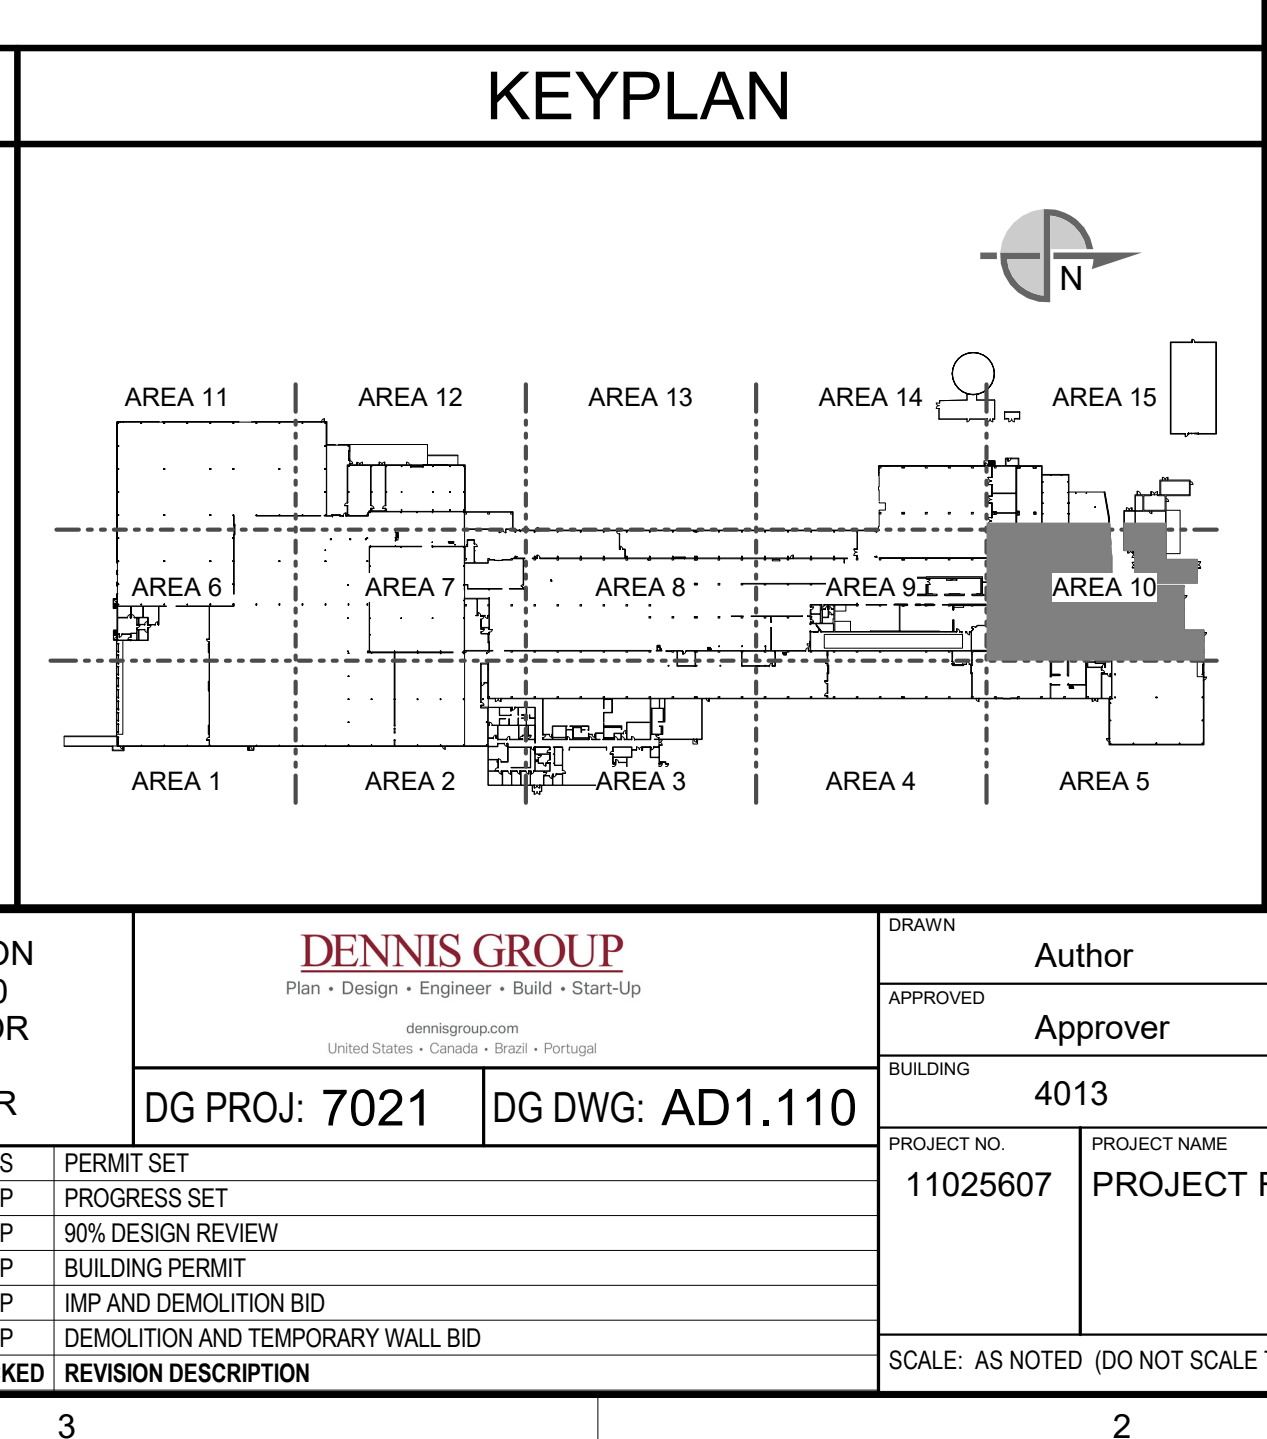

<p>SEE DRAWING LIST ON TITLE SHEET A-0.00 RIC-806832-01-A-00 FOR CORRESPONDING CSC SHEET NUMBER</p>	<p><b>DENNIS GROUP</b> Plan • Design • Engineer • Build • Start-up</p> <p>DG PROJ: 7021 DG DWG: AD1.110</p>	<p>Author: 06/06/19 Approver: 05/03/2023 BUILDING: 4013 PROJECT NO: 11025607 PROJECT NAME: PROJECT FINN</p>	<p>CAMPBELL SOUP COMPANY RICHMOND, UT ARCHITECTURE PARTIAL FIRST FLOOR DEMOLITION PLAN - AREA 10</p>
---	---	---	--

<p>SCALE: AS NOTED (DO NOT SCALE THIS DRAWING)</p> <p>DRAWING NO: RIC-806841-10-A-1</p> <p>DRAWING SIZE: ANSI E (44\" x 34\")</p> <p>SHEET 12 OF 193</p>
--