



End View

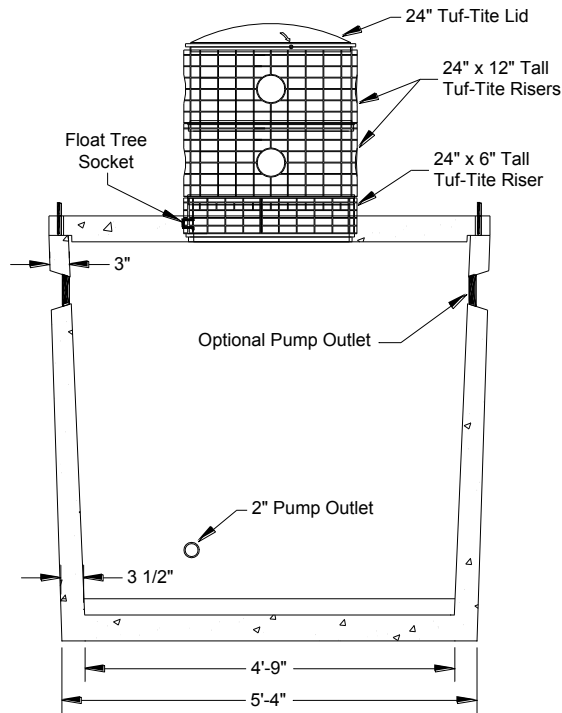

Cross Section

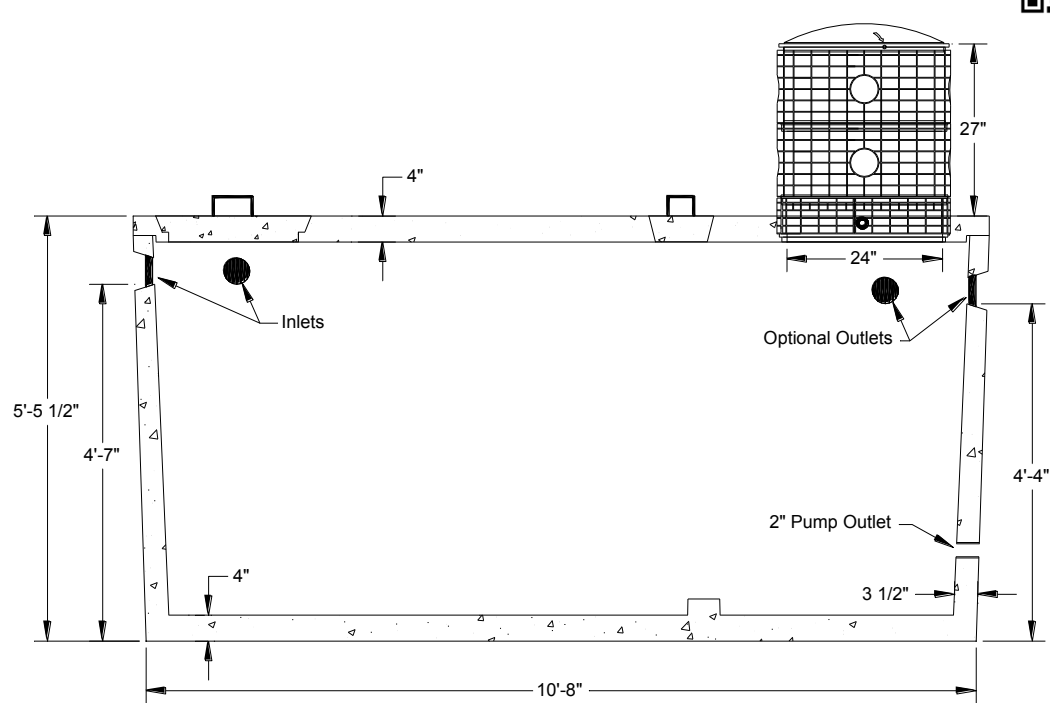


SPECIFICATIONS

Tank: Manufactured per Montana Circular DEQ-4 Chapter 7 design standards for septic tanks, 4" dia. Pipe seals for inlet pipe penetrations, 1 EA 20" cleanout lid, 1 EA 8" dia. Inspection port, 1 EA 24" dia. x 6" Tuf-Tite riser cast into tank lid for pump access, 1 EA 2" Sch40 PVC coupler cast in tank wall for pump outlet.

Standard Components: 2 EA 24" dia. x 12" tall Tuf-Tite access riser extensions, 1 EA 24" Tuf-Tite lid, SS screws, ConSeal CS-102 butyl rubber sealant to seal tank lid.

NOTE 1): Tank must be installed per Billings Precast's 'Tank Installation Guide' or warranty will be VOID.

NOTE 2): Tank shall **not** be placed in a traffic area (ie. parking lot, driveway, etc.) - Warranty will be VOID if driven on.

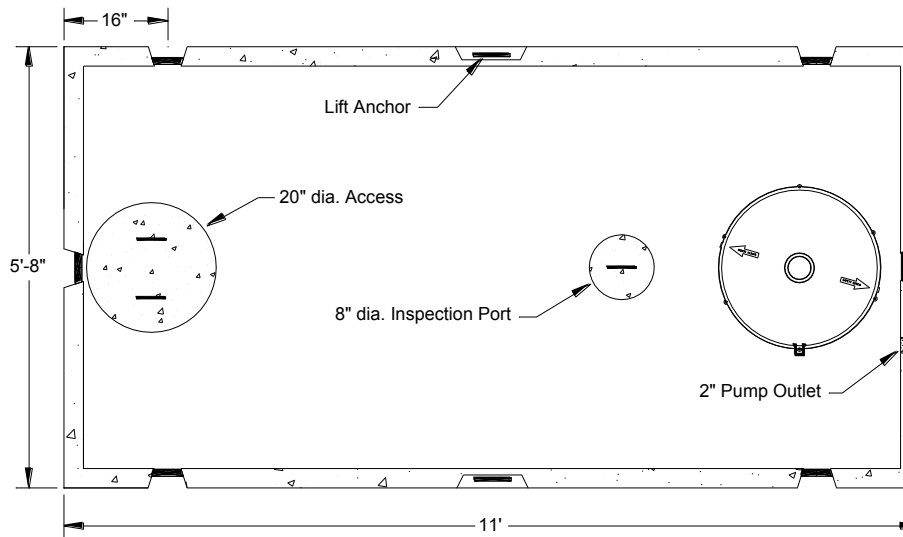

Top View

WEIGHTS: Tank - 9300lb.; Lid - 2950 lb. [Total Assembled = 12,250 lb.]

BILLINGS PRECAST
 CONCRETE RESULTS FOR HARD WORKING PEOPLE

5815 Interstate Avenue, Billings, Montana 59101
 PH (406) 656-6098 FAX (406) 656-4942
 www.billingsprecast.com

DWG. NO. **DT15S**

1500 Gallon Single Piece Dosing Tank

SCALE: NONE
 DATE: 5-21-12
 REV: DRN: WDB