

5132 Ballantrae Ct.  
Cincinnati, OH 45238

513-317-8311 (office)  
513-672-9633 (fax)

mrs@innovativeturfsolutions.com  
www.innovativeturfsolutions.com

# innovative turf solutions

Chevron Site-Hydroseeding Demo  
Shallenberger Construction-New Mix #1  
3178 Cookport Road  
Commodore, PA 15729  
August 15, 2013

100 lbs. seed  
20 lbs. lime  
12.5 lbs. 20-20-20 fertilizer  
.75 gal. tackifier  
2.5 gal. Hydro-Ultra Plus  
750 lbs. 70/30 blend hydromulch  
(Tank loaded per ITS' loading instructions)

Site was sprayed with New Mix #1 on August 15<sup>th</sup> (surrounding dirt areas were sprayed with regular company blend on August 16th)




5132 Ballantrae Ct.  
Cincinnati, OH 45238

513-317-8311 (office)  
513-672-9633 (fax)

mrs@innovativeturfsolutions.com  
www.innovativeturfsolutions.com

Site as of August 26<sup>th</sup> sprayed with New Mix #1 (surrounding dirt area in picture was sprayed the next day with the regular company hydroseeding blend).

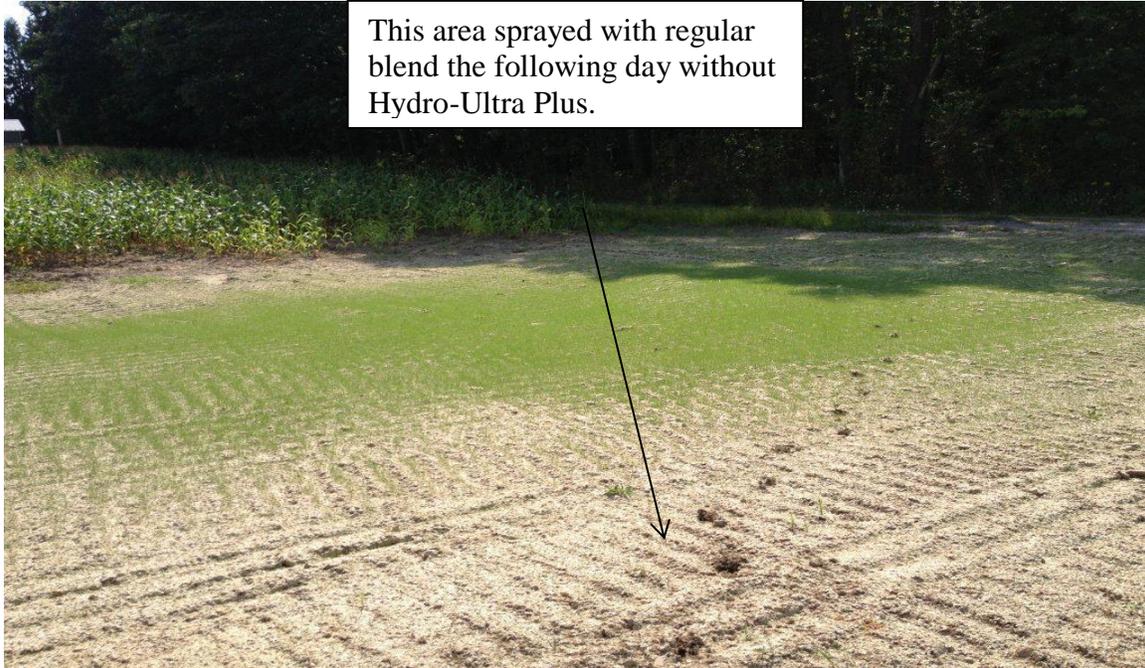

Germination began around 5 days after application on site sprayed with Hydro-Ultra Plus. Site sprayed on following day is just beginning to germinate at 1.5 weeks.