

540-550Watt

144 HALF-CELL MONO PERC MODULE

• AE14HXXXVHC10B

Special Cell Design



10B technology decreases the distance between bus bars and finger grid line which is benefit to power increase. Half-cell aims to eliminate the cell gap to increase module efficiency.

IP68 Rated Junction Box

IP68


The IP 68 rated junction box ensures an outstanding waterproofing, supports installation in all orientations with less stress on the cables. Highly reliable performance with low resistance connectors ensures maximum output for higher energy production.

Trust Anchor to Deliver Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Rigorous quality control meeting the highest international standards: ISO 9001, ISO 14001 and ISO17025
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments
- Long-term reliability tests
- 2 x 100% EL inspection ensuring defect-free modules

Industry-leading Warranty based on nominal power


- 98% in the first year; thereafter, for years two (2) through twenty five (25), 0.55% maximum decrease from MODULE'S nominal power output per year, ending with the 84.8% in the 25th year after the defined WARRANTY STARTING DATE.
- Product Warranty is of 12 Years**
- 25 year linear performance warranty**

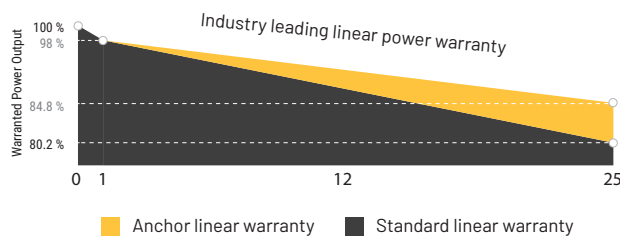

High Efficiency

High module conversion efficiency

Module efficiency up to 21.32 % achieved through advanced cell technology and manufacturing process



2%

Anchor current sorting process

Up to 2 % power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output



Weak light

Excellent weak light performance

More power output in weak light condition, such as haze, clouds, early and late sun hours



Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



2400Pa
5400Pa

Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) *



Harsh environment

Withstanding Harsh Environment




Reliable quality leads to better sustainability even in harsh environment like desert and coastal area



Certifications and standards:
IEC 61215, IEC 61730, IEC 61701,
IEC 62804, IEC 62716



* Please refer to PLSIND Standard Module Installation Manual for details. ** Please refer to PLSIND Product Warranty for details.

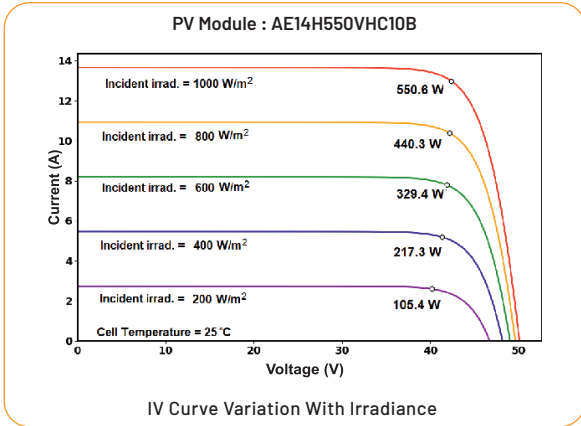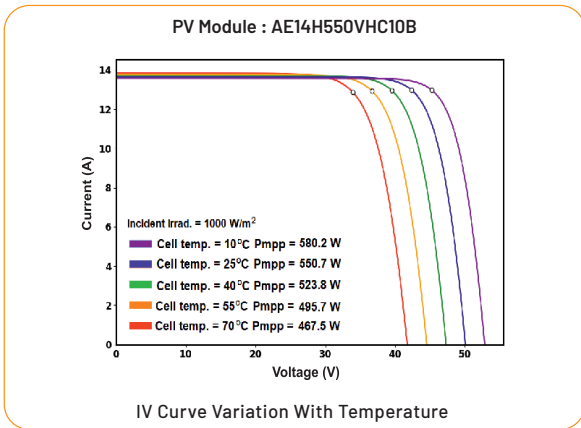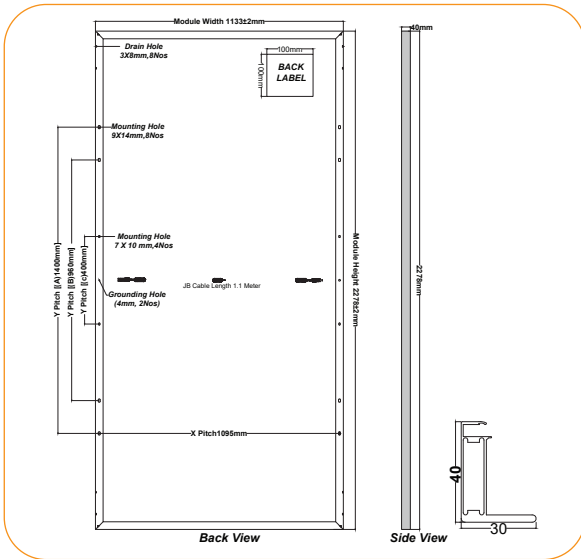

Dealer Information

• **AE14HXXXVHC10B**

Electrical Characteristics

STC	AE14HxxxVHC10B		
Wattage, Wp	540W	545W	550W
Voltage at Max Power, V _{max}	41.86V	42.01V	42.14V
Open Circuit Voltage, V _{oc}	49.78V	49.91V	50.06V
Current at Max Power, I _{max}	12.91A	12.98A	13.07A
Short Circuit Current, I _{sc}	13.53A	13.59A	13.65A
Module Efficiency	20.94%	21.13%	21.32%
Operating Temperature (°C)	-40°C ~ +85°C		
Maximum System Voltage	1500 V DC (IEC)		
Maximum Series Fuse Rating	25 A		
Power Tolerance	-0, +5Wp		

STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM=1.5
 # PLSIND reserves the right to adjust the listed parameters without notice.

NOCT	AE14HxxxVHC10B		
Maximum Power at NOCT, Wp	400W	403W	407W
Voltage at Max Power, V _{max}	38.54V	38.68V	38.80V
Open Circuit Voltage, V _{oc}	46.82V	46.94V	47.09V
Current at Max Power, I _{max}	10.37A	10.43A	10.49A
Short Circuit Current, I _{sc}	10.96A	11.01A	11.06A

NOCT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s.
 # PLSIND reserves the right to adjust the listed parameters without notice.

Temperature Characteristics

Temperature Coefficient of P _{max} (γ)	-0.3164 %/°C
Temperature Coefficient of V _{oc} (β)	-0.2355 %/°C
Temperature Coefficient of I _{sc} (α)	0.0271 %/°C
Nominal Module Operating Temperature (NMOT)	45±2°C

Mechanical Characteristics

Cell Type	Mono PERC 91mm * 182mm
No. of Cells	144 (12x6 12x6)
Dimensions	2278 x 1133 x 40 mm
Weight	28.6 kg
Front Glass	3.2mm, High Transmission, Low Iron, Tempered glass
Frame	Anodized aluminium alloy
Junction Box	3 Split, IP68 Rated
Output Cables	4.0 mm ² (-) 400 mm and (+) 400 mm in Length
Connectors	MC4 Compatible

Packing Configuration

Container	32' GP
Pieces per pallet	27
Pallets per container	16
Pieces per container	432

PLSIND stands for Panasonic Life Solutions India Pvt. Ltd.

Panasonic Life Solutions India Pvt. Ltd.

Registered Office : 12th Floor, Ambience Tower, Ambience Island, NH-48, Gurugram, Haryana - 122 002.

In case of consumer complaints contact customer care executive: 3rd Floor, B Wing, I-Think Techno Campus, Pokhran Road No 2, Thane (west) - 400607, Maharashtra. T: (9122) 42228888 | F: (9122) 42228888 | Customer care no.: (022) 41304130 | WhatsApp No: 91360 28606

Email: solar@in.panasonic.com | www.lsin.panasonic.com