




by **SonneMed**

Perfekte Verbindung!

*Perfect connection*

# CEILING SUPPLY PENDANTS

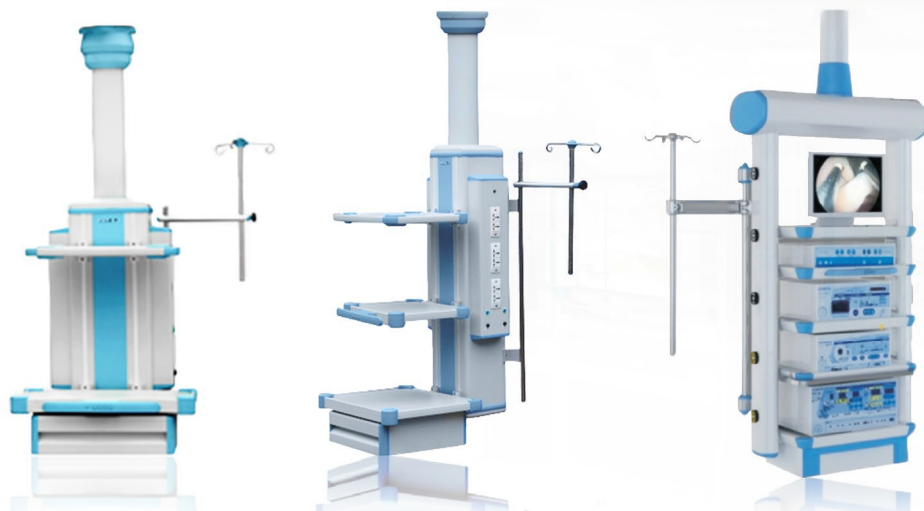

#Smart Solutions...  
...since 1953!

 **Srishty Medical Private Limited**

A 219  
Road No.6  
Mahipalpur NH-8  
New Delhi-110037 INDIA

www.sngindia.org  
customercare@sngindia.org  
Mob. : +91 98100 07700





## Sonne AC10 Drop Down Anesthesia Pendant

Made from high-strength aluminum alloy with electrostatic epoxy powder coated with channeled supply chamber for gasses & electrical individually, whole sealed design.

International Quality Directives such as ISO 9001:2008

International Medical Supply Unit EN ISO11197:2004

Applications : For ICUs, Critical Areas, ER, OT (Anesthesia)



### Technical Description

Level Degrees Rotation  
Self Leveled, Non Drifting

Net Loading capacity  
Rated Voltage  
Input Power  
Fitted with

0 ~ 340°  
No Requirement of configured pneumatic breaking system for controlling the pendant  
120-180 Kg  
220V, Rated Frequency:50HZ;  
5 Amp  
- 1 no of Working Platform (Height Adjustable), additional can be ordered, have provision to accommodate upto 2 units  
- Control Handled drawer: 1no Round Angle Design for Prevention of Collision

### Medical Gas Outlets (DIN Type)

Oxygen 2 nos  
Nitrous 1 no  
Vacuum 2 nos  
Medical Air 1 no  
Power socket 6pcs, 220V, 10A;  
Grounding terminal 2 nos

Stainless steel I.V. 1 Set  
Optional Examination light  
AGSS Outlet  
RJ45 outlet  
App. Weight 130kg

## Sonne AC20 Anesthesia Single Arm Pendant

Made from high-strength aluminum alloy with electrostatic epoxy powder coated with channeled supply chamber for gasses & electrical individually, whole sealed design

International Quality Directives such as ISO 9001:2008

International Medical Supply Unit EN ISO11197:2004

Applications: For ICUs, Critical Area, ER, OT (Anesthesia)



### Technical Description

Single Arm  
Level Degrees Rotation:  
Self Leveled, Non Drifting,

Net Loading capacity :  
Rated Voltage:  
Input Power:  
Fitted with

1500 mm  
0~340°  
No Requirement of configured pneumatic breaking system for controlling the pendant  
120- 180 Kg  
220V, Rated Frequency:50HZ;  
5 Amp  
- 1 no of Working Platform (Height Adjustable), additional can be ordered, have provision upto 2 units  
- Control Handled drawer: 1no Round Angle Design for Prevention of Collision

### Medical Gas Outlets (DIN Type)

Oxygen 2 nos  
Nitrous 2 no  
Vacuum 2 nos  
Medical Air 1 no (Optional)  
Power socket 6pcs, 220V, 10A;  
Grounding terminal 2 nos

Stainless steel I.V. 1 Set  
Optional Examination light  
AGSS Outlet  
RJ45 outlet  
Double Arm available  
App. Weight 150kg/180kg

All specifications, models, versions shown are indicative, representative & approximate, and are subject to change without any prior notice with exclusive discretion of the original equipment manufacturer.





## Sonne SC10 Surgical Drop Down Pendant

Made from high-strength aluminum alloy with electrostatic epoxy powder coated with channeled supply chamber for gasses & electrical individually, whole sealed design.

International Quality Directives such as ISO 9001:2008,

International Medical Supply Unit EN ISO11197:2004

Applications: For OT (Surgical), Endoscopy



### Technical Description

Level Degrees Rotation  
Self Leveled, Non Drifting

Net Loading capacity  
Rated Voltage  
Input Power  
Fitted with

0 ~ 340°

No Requirement of configured pneumatic breaking system for controlling the pendant

120-180 Kg  
220V, Rated Frequency:50HZ;  
5 Amp

- 4 no of Working Platform (Height Adjustable), additional can be ordered
- Control Handled drawer: 1no Round Angle Design for Prevention of Collision

### Medical Gas Outlets (DIN Type)

Oxygen	2 nos
Vacuum	2 nos
Medical Air	1 no
Power socket	10pcs, 220V, 10A;
Grounding terminal	2 nos

Stainless steel I.V.	1 Set
Optional	Examination light
	Medical Air 7 bar
	CO2 Outlet
App. Weight	130kg

## Sonne SC20 Surgical Single Arm Pendant

Made from high-strength aluminum alloy with electrostatic epoxy powder coated with channeled supply chamber for gasses & electrical individually, whole sealed design

International Quality Directives such as ISO 9001:2008,

International Medical Supply Unit EN ISO11197:2004

Applications: For OT , Endoscopy



### Technical Description

Single Arm  
Level Degrees Rotation:  
Self Leveled, Non Drifting,

Net Loading capacity :  
Rated Voltage:  
Input Power:  
Fitted with

1500 mm

0~340°

No Requirement of configured pneumatic breaking system for controlling the pendant

120- 180 Kg  
220V, Rated Frequency: 50HZ;  
5 Amp

- 4 no of Working Platform (Height Adjustable), additional can be ordered
- Control Handled drawer: 1no Round Angle Design for Prevention of Collision

### Medical Gas Outlets (DIN Type)

Oxygen	2 nos
Vacuum	2 nos
Medical Air 4 bar	1 no
Power socket	10pcs, 220V, 10A;
Grounding terminal	2 nos
Stainless steel I.V.	1 Set

Optional	Examination light
	Medical Air 7 bar; 1 no
	CO2 Outlet
	Double Arm available
App. Weight	150kg/180kg

All specifications, models, versions shown are indicative, representative & approximate, and are subject to change without any prior notice with exclusive discretion of the original equipment manufacturer.





## Sonne IC10 ICU / CRITICAL CARE PENDANT Ultra Slim Version

Made from high-strength aluminum alloy with electrostatic epoxy powder coated with channeled supply chamber for gasses & electrical individually, whole sealed design

International Quality Directives such as ISO 9001:2008

International Medical Supply Unit EN ISO11197:2004

Applications: For ICUs, Critical Area, ER, OT (Anesthesia)



### Technical Description

Level Degrees Rotation	0 ~ 340°
Self Leveled, Non Drifting	No Requirement of configured pneumatic breaking system
Net Loading capacity	60 Kg
Rated Voltage	220V, Rated Frequency:50HZ;
Input Power	5 Amp
Fitted with	1 side IV Pole

### Medical Gas Outlets (DIN Type)

Oxygen	2 nos
Vacuum	2 nos
Medical Air	1 no
Power socket	6pcs, 220V,
App. Weight	60kg
Grounding terminal	2 nos
Optional	Universal Monitor Arm Bracket


## Sonne IC20 ICU / CRITICAL CARE PENDANT Drop Down Version

Made from high-strength aluminum alloy with electrostatic epoxy powder coated with channeled supply chamber for gasses & electrical individually, whole sealed design

International Quality Directives such as ISO 9001:2008

International Medical Supply Unit EN ISO11197:2004

Applications: For ICUs, Critical Area, ER, OT (Anesthesia)

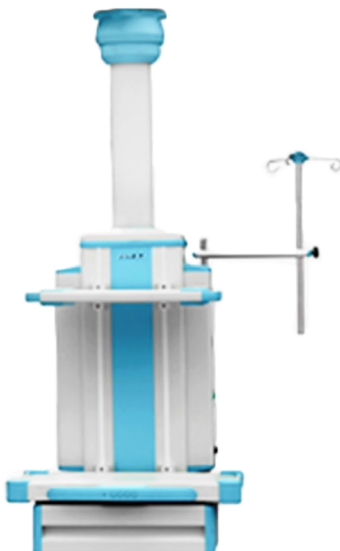

### Technical Description

Level Degrees Rotation	0 ~ 340°
Self Leveled, Non Drifting	No Requirement of configured pneumatic breaking system
Net Loading capacity	100 ~ 180Kg
Rated Voltage	220V, Rated Frequency:50HZ;
Input Power	5 Amp
Fitted with	1 no of Working Platform (Height Adjustable), Additional can be ordered, have provision upto 2

Control Handled drawer: 1no Round Angle Design for Prevention of Collision

### Medical Gas Outlets (DIN Type)


Oxygen	2 nos	Grounding terminal	2 nos
Nitrous	1 no	Optional	Examination light
Vacuum	2 nos	RJ 45	1 no
Medical Air	1 no	App. Weight	100 kg
Power socket	6pcs, 220V,		

All specifications, models, versions shown are indicative, representative & approximate, and are subject to change without any prior notice with exclusive discretion of the original equipment manufacturer.





## Sonne Bridge 60b

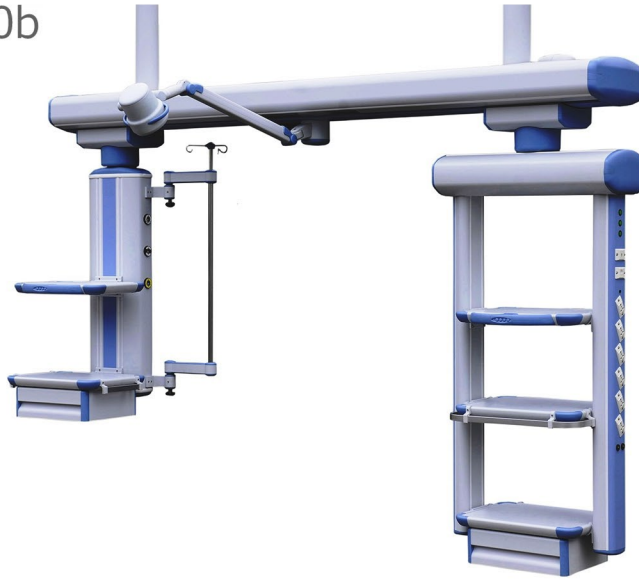

Made from high-strength aluminum alloy with electrostatic epoxy powder coated with channeled supply chamber for gasses & electrical individually, whole sealed design. International Quality Directives such as ISO 9001:2008, International Medical Supply Unit EN ISO11197:2004, Applications: For ICUs, Critical Area, ER, OT (Anesthesia)

### Technical Description

<u>Level Degrees Rotation</u>	0 ~ 340°
<u>Self Levelled, Non Drifting</u>	No Requirement of configured pneumatic breaking system for controlling the pendant
<u>Net Loading capacity</u>	120-180 Kg
<u>Rated Voltage</u>	220V, Rated Frequency:50HZ;
<u>Input Power</u>	5 Amp
<u>Fitted with</u>	- 1 no of Working Platform (Height Adjustable), additional can be ordered, have provision to accommodate upto 2 units - Control Handled drawer: 1no Round Angle Design for Prevention of Collision

### Medical Gas Outlets (DIN Type)

<u>Oxygen</u>	2nos	<u>Grounding terminal</u>	2 nos
<u>Vacuum</u>	2 nos	<u>RJ45</u>	1 no
<u>Medical Air</u>	1 no (optional)	<u>Stainless steel I.V. App. Weight</u>	1 Set 130kg
<u>Power socket</u>	6pcs, 220V, 10A		

### Technical Description

<u>Level Degrees Rotation</u>	0 ~ 340°
<u>Self Levelled, Non Drifting</u>	No Requirement of configured pneumatic breaking system for controlling the pendant
<u>Net Loading capacity</u>	120-180 Kg
<u>Rated Voltage</u>	220V, Rated Frequency:50HZ;
<u>Input Power</u>	5 Amp
<u>Fitted with</u>	- 4 no of Working Platform (Height Adjustable), additional can be ordered. - Control Handled drawer: 1no Round Angle Design for Prevention of Collision

### Medical Gas Outlets (DIN Type)

<u>Oxygen</u>	2nos	<u>RJ45</u>	1 no
<u>Vacuum</u>	2 nos	<u>Stainless steel I.V. Optional</u>	1 Set Examinaiton
<u>Medical Air</u>	1 no		Light Medical
<u>Power socket</u>	10pcs, 220V, 10A		Air 7 bar CO2 outlet
<u>Grounding terminal</u>	2 nos	<u>App. Weight</u>	130kg






# by SonneMed

Perfekte Verbindung!

*Perfect connection*

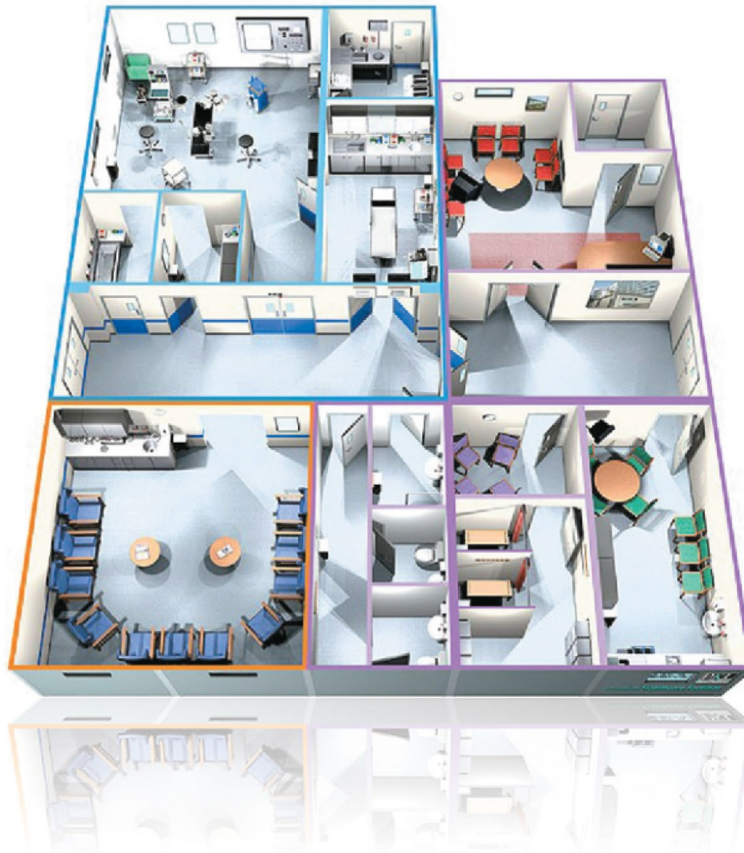

All specifications, models, versions shown are indicative, representative & approximate, and are subject to change without any prior notice with exclusive discretion of the original equipment manufacturer.



#Smart Solutions...  
...since 1953!

 **Srishty Medical Private Limited**

A 219  
Road No.6  
Mahipalpur NH-8  
New Delhi-110037 INDIA

www.sngindia.org  
customercare@sngindia.org  
Mob. : +91 98100 07700

