



13MRI UNDER CABINET SPECIFICATION SHEET

OVERVIEW

KEY FEATURES

- **BABAA Compliant**
Hand crafted in California
- **L70>72,000 hours**
High quality electrical components
- **90+ CRI Standard**
High definition color rendering
- **<3SDMC consistency**
Uniform color consistency
- **123 Lumens per watt**
Efficient performance delivered



Architectural luminaires proudly built in America since 1935. The 13MRI series is a spec grade non ferrous under cabinet/task light luminaire available in lengths from 1'-8' in single fixture or joinable for continuous row runs. Three standard lumen packages available with custom capabilities as well up to 1200 lumens per foot. Standard finish options include powdercoat white or black or satin anodized with custom options available upon request.

DETAILS

01 Housing

Extruded aluminum body powder coated or anodized finish. Extruded high diffusion acrylic lens. Aluminum driver box remote mounting, must be mounted outside of MRI room.

02 Electrical

Remote 120/277V, 50/60HZ driver standard. 10% and 1% 0-10v dimming options. RF filter provided by others. All non-ferrous components in luminaire.

03

LED Array

High quality Samsung chips, delivering 123 lumens per watt on the system level, mounted on an aluminum heatsink for thermal management.

04

Mounting options

Two mounting slots. Remote mount driver must be mounted outside of MRI room. Installer must provide appropriate non-ferrous connection between driver can and luminaire. Driver must be mounted within 112' of fixture if using 18ga wire.

BUILD A PART NUMBER

• SERIES	• LIGHT OUTPUT	• CCT	• LENGTH IN INCHES	• HOUSING COLOR	• OPTIONS
• 13MRI					
• 13MRI	• N NORMAL • H HIGH • V VERY HIGH	• 27K • 30K • 35K • 40K • 50K	• 12 • 18 • 24 • 36 • 48 • 72 • 96	• 0 SATIN • 3 WHITE • 5 BLACK • CUSTOM	• SW ROCKER SWITCH (120V ONLY) • AM ANTI-MICROBIAL FINISH • DIM PHASE DIMMABLE DRIVER • D10 10% 0-10V DIMMING • D11 1% 0-10V DIMMING


CERTIFICATION / WARRANTY



ETL Listed for dry or damp locations




PHOTOMETRIC PERFORMANCE

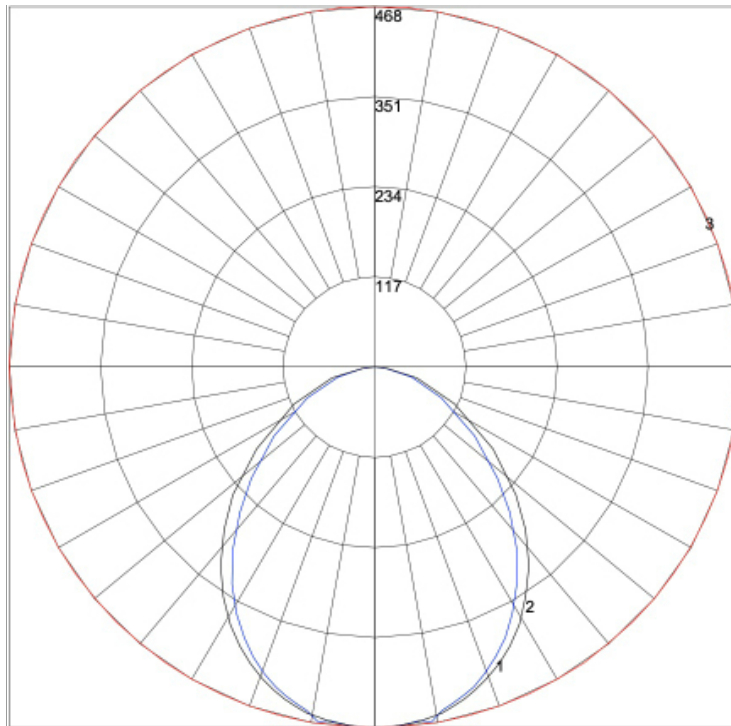

• [IES File link](#)

• LENGTH • WATTAGE • LUMENS

• 24" NORMAL	• 8.8	• 1090
• 36" NORMAL	• 13.2	• 1635
• 48" NORMAL	• 17.6	• 2180
• 24" HIGH	• 12.6	• 1562
• 36" HIGH	• 18.9	• 2343
• 48" HIGH	• 25.2	• 3124
• 24" VERY HIGH	• 17.6	• 2180
• 36" VERY HIGH	• 26.4	• 3270
• 48" VERY HIGH	• 35.2	• 4360

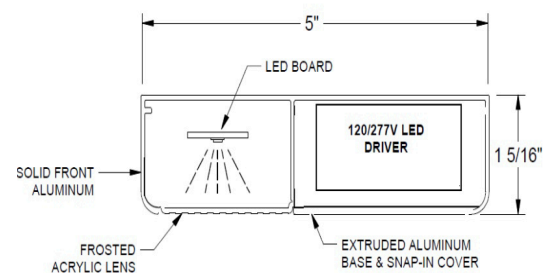

CONTACT US!

www.airey-thompson.com

Phone: 800.421.6196

E-mail: contactus@aireythompson.com



• 13MRI-CUT-24A