


Types of Metal Roofs


1" Standing Seam Snap Lock

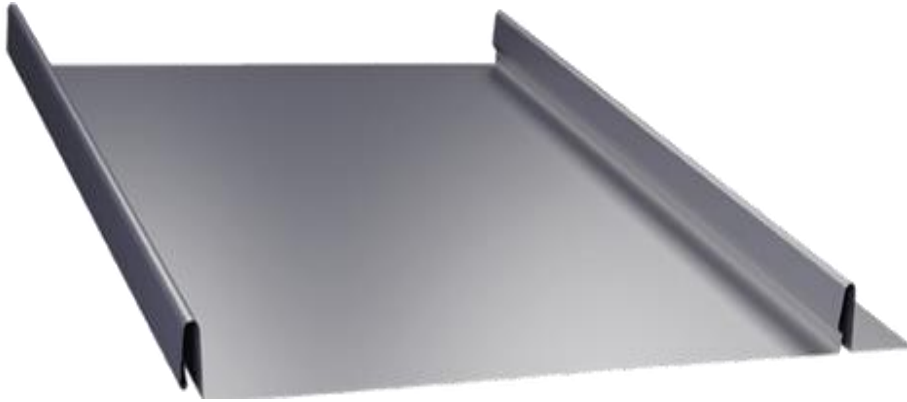


Fasteners: Hidden
Material: 24-, 26-gauge steel, .032, .040 aluminum
Slope: 2:12 or greater
Support: 15/32-inch or greater plywood
Panel Width: 16 inches
Finish: 70% PVDF (Kynar 500®), Tedlar® PVF film, mill-finished MaxAlúme
Approval: FBC and Miami-Dade, HVHZ

5V Crimp

Fasteners: Exposed
Material: 24-, 26-gauge steel, .032, .040 aluminum
Slope: 3:12 or greater
Support: 15/32-inch or greater plywood or wood plank
Panel Width: 21 inches or 24 inches
Rib Height and Spacing: 3/8 inch, 10-1/2 or 12 inches on center
Finish: 70% PVDF (Kynar 500®), mill-finished MaxAlúme
Approval: FBC and Miami-Dade, HVHZ

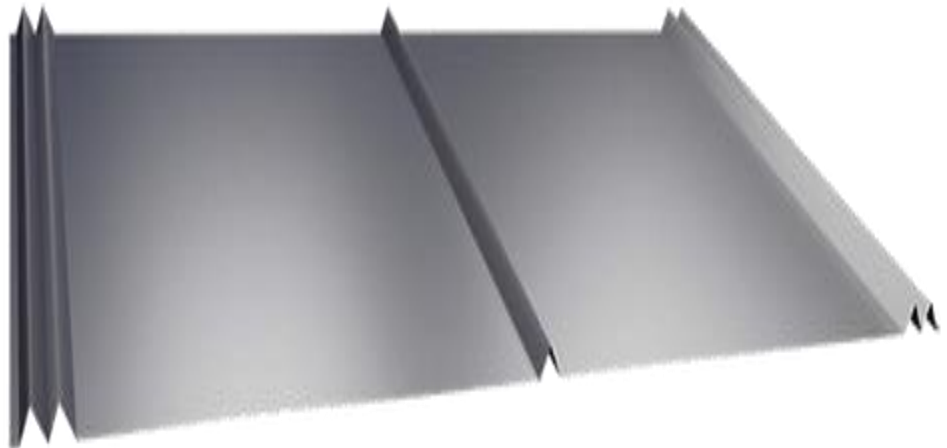

PBR Ribbed

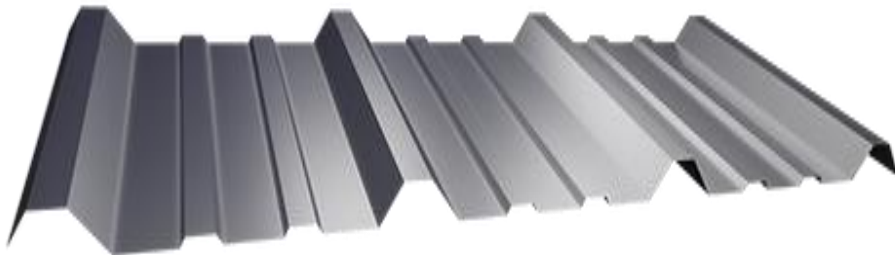

Fasteners: Exposed
Material: 24-, 26-gauge steel
Slope: 3:12 or greater
Support: 15/32-inch or greater plywood or wood plank, steel deck, or open framing
Panel Width: 36 inches
Rib Height and Spacing: 1-1/4 inch, 12 inches on center
Finish: SMP (Standard), 70% PVDF (Kynar 500®), mill-finished MaxAlúme
Approval: FBC and Miami-Dade



LynnAlan Roofing

(561) 868-0089

CCC1331900

Exposed Fasteners vs Non-Exposed Fasteners

Non-Exposed Fasteners



Exposed Fasteners



LynnAlan Roofing

(561) 868-0089

CCC1331900