


TECHNICAL DATA		F5 Class A
Input power (W)		700
Water lift (mm/H ₂ O)		2300 (90)
Air volume (l/sec)		49 (103.8)
Motor protection		Termo/amp.
Paper bag (lit.)		3
Filter bag top filling		Standard
Active carbon filter/Microfilter		Optional
Hepa filter H11		Optional
Noise level db (A)		69
Total weight (kg)		4,4
Cord length mt. (ft.)		10 (32)
POWER NOZZLE		M30E
Brush motor (W)		150
Cogged drive belt		Standard
Electronic overload control		Standard
Center convergent bristle brush (RPM)		5000
Vacuum width (in.)		11.81"
Brush width (in.)		12"

DOMESTIC LINE

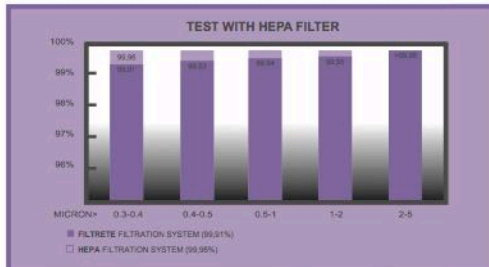

NET EFFICIENCY FILTRATION

The filtration efficiency tests done on Lindhaus machines by the independent laboratory SLG (Germany), show the result of its sophisticated construction technology. Thanks to the brush rolls with convergent bristles to the center that rotate at 5000 RPM/min and the powerful suction, the Lindhaus carpet cleaners are able to remove and deeply suction dust and debris in order to provide a healthier and cleaner environment.


CRI (Carpet & Rug Institute U.S.A.) and SLG (Test and Certification) has certified all Lindhaus carpet cleaners for their superior ability to remove dust that is fully retained.

F5 and HF6

Standard filters: two layers paper bag (3 layers on HF6), washable motor protection filter, sound absorbent motor filter, Filtrete exhaust microfilter with Total antiseptic treatment.

Optional filters: motor protection filter Carbon active / microfilter, Sound absorbent motor filter, S-Class Hepa filter H11 treated with Total antiseptic treatment.

TECHNICAL DATA		HF6
Input power (W)		1050
Water lift (mm/H ₂ O)		2600 (102)
Air volume (l/sec)		52 (131.3)
Motor protection		Termo/amp.
3 layer paper bag (lit.)		14
Filtrete exhaust microfilter		Standard
Accessories on board		Standard
Blowing function		Standard
Hepa filter H11		Optional
Total weight Kg (lb)		6 (13.2)
Cord length mt. (ft.)		10 (32)
POWER NOZZLE		PB12/PB14
Brush motor (W)		150
Cogged drive belt		Standard
Electronic overload control		Standard
Center convergent bristle brush (RPM)		5000
Dry Cleaning System DCS		Standard
Vacuum width (in.)		11.81"
Brush width (in.)		12"+14"

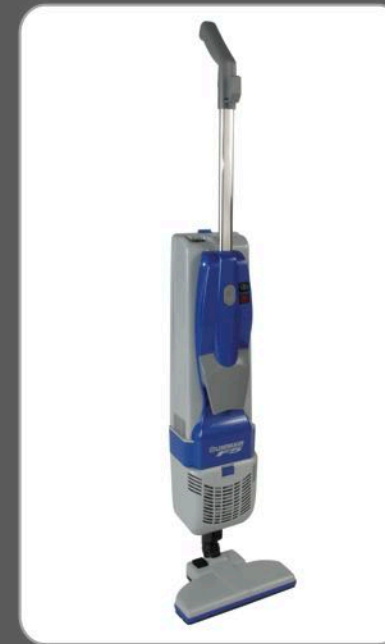

F5 Class A



HF6



HEADQUARTERS LINDHAUS SRL
 Via Belgio, 22 Z.I. 35127 - Padova, ITALY
 tel. +39 0498700307 - fax +39 049 8700605
 vacuum@lindhaus.it - www.lindhaus.it

LINDHAUS USA
 Minneapolis - Minnesota USA
 info@lindhaus.com - www.lindhaus.com

DEALER STAMP

A CLEAN HOUSE FOR A HEALTHIER LIFE

F5 Class A and HF6
 For maximum performance and durability
 Certified filtration



F5 Class A

**Multifunction electric broom
for domestic use**

STRENGTHS

- > Special patented nozzle M29R
- > Felt base (optional)
- > High efficiency Rotafil vacuum motor 700W
- > Light and maneuverable
- > Top filling bag system for maximum performance
- > Full set of accessories (optional)
- > Electronic power nozzle (optional) turns it into a carpet cleaner and a dry cleaning system
- > Back pack vacuum cleaner (optional)
- > 5-stage filtration (standard)
- > 7 stage Hepa filtration (optional)



HF6

**Multifunction canister vacuum
cleaner / carpet cleaner for
domestic use**

STRENGTHS

- > Compact and light
- > 4 Swivel wheels
- > Soft rubber bumper all around the machine
- > High efficiency Rotafil vacuum motor 1050W
- > On board accessories
- > 3 layer paper bag 14 lt.
- > 6-stage filtration
- > Hepa exhaust air filter (Optional)
- > Powerful blowing function (standard)
- > Quick connection of electrified wand for carpet cleaner
- > Power nozzle / Dry Cleaning System (optional)



Optional accessories



Standard filters




Optional filters



Accessories on board



Standard filters

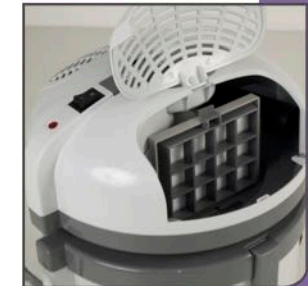

Exhaust filter



1. The patented M29R Lindhaus universal nozzle with 4 rubber wheels and all around suction can be equipped with a felt plate to vacuum and polish delicate floors such as wood and marble.
2. The machine lays down completely horizontally for easy access under low furniture and beds.
3. The electronic overload control switches off the motor of the power nozzle in case of excessive overload and provides guidelines for the proper base adjustment.
The "Dry Cleaning System" DCS is integrated.
4. The flex hose for the above the floor cleaning is mounted on top of the machine without removing the nozzle and without carrying the whole weight of the machine.

1. EXCELLENT MANEUVERABILITY

The front low connection point of the connector and the four swivel rubber wheels allow to pull the machine easily also around obstacles. The soft bumper all around the machine, protects the machine, doors and furniture from scratches and bumps.

2. PATENTED NOZZLES

Thanks to the use of a special stainless steel telescopic wand and the patented Lindhaus nozzles you obtain excellent versatility.

3. CARPET CLEANER AND DRY CLEANING SYSTEM

The carpet cleaning and dry cleaning functions are obtainable by getting a special kit (optional). The electrified hose with the brush motor switch on the handle and the handy electrified telescopic wand in stainless steel which is attached to the neck of the power nozzle without external cables. A pedal on the neck allows the quick release of the wand for the above the floor cleaning.

