

# ARMSTRONG



## Vertical Multistage Pump

File no.:	47.11IN
Date:	AUGUST 16, 2012
Supersedes:	NEW
Date:	NEW

## Vertical non-self priming centrifugal pump

### Features:

- Vertical multistage non-self priming pumps are designed for various media, ranging from tap water to industrial liquids at different temperatures, flow rates and pressures.
- vms units are suitable for non-corrosive liquids while vms-s units are suitable for slightly corrosive liquids.

### Applications:


- Pressure boosting.
- Municipal water supply.
- Water treatment plants.
- RO systems.
- Irrigation.
- Fire fighting applications.

### Technical data:

- Flow: 0.5 to 110 m<sup>3</sup>/hr
- Head: up to 225 meters
- Rated voltage: 230V/400V
- Liquid temperature: -15°C to 110°C
- Material of construction: All wetted parts stainless steel 1.4301 / AISI 304



### vms performance range:

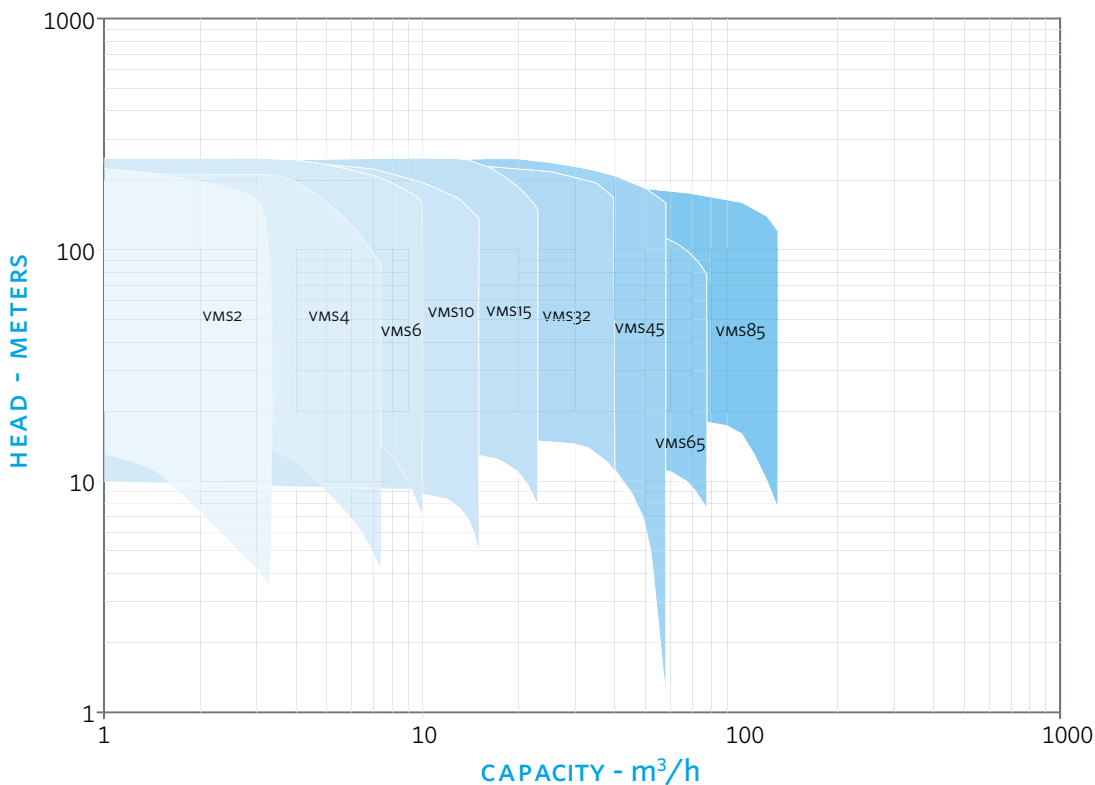

**S. A. ARMSTRONG LIMITED**  
23 Bertrand Avenue  
Toronto, Ontario  
Canada, M1L 2P3  
T 416 755 2291  
F 416 759 9101

**ARMSTRONG INTEGRATED LIMITED**  
Wenlock Way  
Manchester  
United Kingdom, M12 5JL  
T +44 (0) 8444 145 145  
F +44 (0) 8444 145 146

**ARMSTRONG DESIGN PRIVATE LIMITED**  
(Unit 1- Armstrong Manufacturing Center)  
490-L, 4<sup>th</sup> Phase, Peenya Industrial  
Area, Bangalore, India 560 058  
T +91 (80) 4906 3555  
F +91 (80) 2334 3535



© S. A. ARMSTRONG LIMITED 2012