

**Description:**

Pendant Light - Interior / Exterior

**Applications:**

Tree Lighting, Arbors, Cabanas, Pergolas, Gazebos,  
Residential/Commercial

**Codification:**

FF Pendant Light

**Fixture Lengths**

- 8** 8 in.
- 12** 12 in.
- 18** 18 in.
- 24** 24 in.
- 30** 30 in.

**Material**

- C** Natural Copper
- S** Stainless Steel (Contact KFi for price and availability)
- P** Powder Coated Steel (Contact KFi for price and availability)

**Lamp**

- I** 8.0 watt DC Base Incandescent
- L4** 0.4 watt DC Base LED
  - 23 2300 (K) Kelvin
- L9** 0.9 watt DC Base LED
  - 30 3000 (K)
  - 50 5000 (K)

**Optional Prewiring**

**18-2 Cord**

- N** None
- 10** 10 ft.
- 20** 20 ft.
- 30** 30 ft.
- 40** 40 ft.
- 50** 50 ft.

**Voltage:**

12 Volt AC  
Requires LV Transformer

**Notes:**


Firefly pendant lights suspend from the low voltage cord that powers the fixtures. The cord must be 18 AWG 2/C PVC/NYLON TYPE TC DIRECT BURIAL, SUNLIGHT RESISTANT 600V.

**Attention:**

The above listed "TC" (Tray Cable) MUST BE ROUND in order to function properly with rubber grommet/seal/strain relief.

**Notes Regarding Transformers:**

When using incandescent lamps (origin of the magic behind Firefly) we welcome voltage drop. This is the reason we offer multi-volt (8, 10, 12 volt) transformers, to extend lamp life. In many cases they can outlast LED lamps.

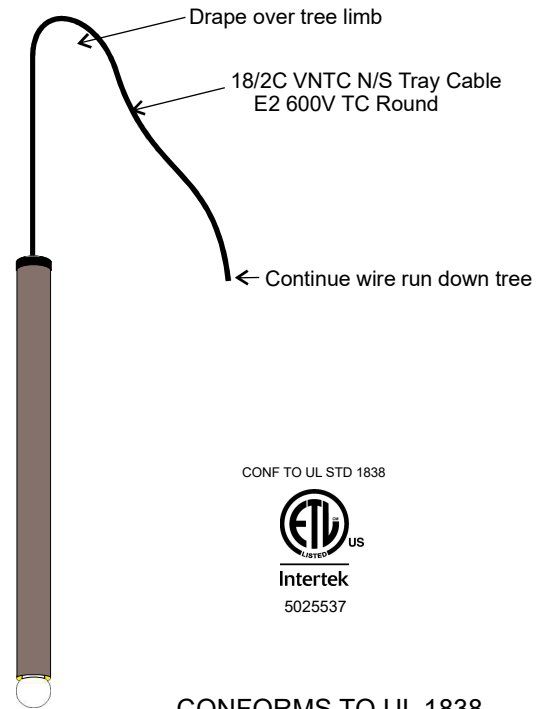

CONFORMS TO UL 1838  
WET LISTED

**Available Transformers:**

- T-50-S 50 Watt 12 Volt
  - T-100-S 100 Watt 12 Volt
  - T-175-M 175 Watt Multi-volt 8/10/12 Taps
  - T-300-M 300 Watt Multi-volt 8/10/12 Taps
- Enclosures are Stainless Steel Outdoor Rated  
\*Below Grade Enclosures are Available

Order Specification	FF	-	24	-	C	-	N	-	8
	FIXTURE		LENGTH		MATERIAL		CORD LENGTH		LAMP

PROJECT:	FIREFLY BY KFi 3 E. FABRA LN., BOERNE, TEXAS 78006 210 828 7645 WEB: <a href="http://WWW.FIREFLYPENDANTLIGHT.COM">WWW.FIREFLYPENDANTLIGHT.COM</a> Email: <a href="mailto:www.fireflybykfi@gmail.com">www.fireflybykfi@gmail.com</a>
APPROVED:	
NOTE:	
TYPE:	
SPECIFIED	