

## Installation Instructions

Before installing the Riggs Shield™ in your vehicle please review all of the **Terms and Conditions**. By installing the Riggs Shield™ you are agreeing to all of the **Terms and Conditions**.

1. Inspect the shield to make sure it was not damaged during shipping.
2. Install the shield to it's mount by aligning the four mounting tabs with the four holes in the mount.
3. Position the shield and mount on the vehicle's door. Make sure the shield does not interfere with the door handle or any other vehicle controls.
4. Make sure the door will open and close properly with the shield installed in this position before affixing the Velcro® to the door.
5. Mark the door with tape so you can reinstall the mount in the same location after removing the backing from the Velcro®.



6. Hold the mount in place and remove the shield from the mount. Mark where the Velcro® will stick to the door using tape.



7. Remove the mount from the door.
8. **Clean** the door in the area that the Velcro® will be adhered to.
9. Pull the backing off the self-adhering Velcro®. Stick the Velcro to the door in the locations you marked with the tape.

**NOTE:** You may want to save the backing from the Velcro® to aid in installing the mount later.



10. Place the mount back on the door and press hard against the face of the mount to stick the Velcro® to the door.

**NOTE:** On some vehicles you may want to prevent the Velcro® from grabbing until the mount is completely in place. To do this use the backing from the Velcro® and it put between the contact surfaces of the Velcro®. Once the mount is in place, pull the backing out from between the Velcro®.



11. Reinstall the shield on the mount by holding it with the handle and applying pressure to the shield with the back of your forearm. Once all four mounting tabs are aligned press down and back on the shield. Tap down on the top of the shield to make sure it is seated firmly in the mount.



12. Practice "Drawing" the shield off the mount with a quick forward and upward motion.

### **Installing screws for a permanent mount.**

1. If you are installing the shield in a fleet vehicle and you want to make a permanent mount you can install countersunk screws through the mount into the door panel. Make sure to stay at least one inch away from the tab holes in the mount and make sure the surface of the mount remains flat after the screws are installed.




**Remember to practice "Drawing" the shield often to develop muscle memory.**

**Thank you for your purchase and,**

**Please be safe out there.**

## Special Mounting Tips

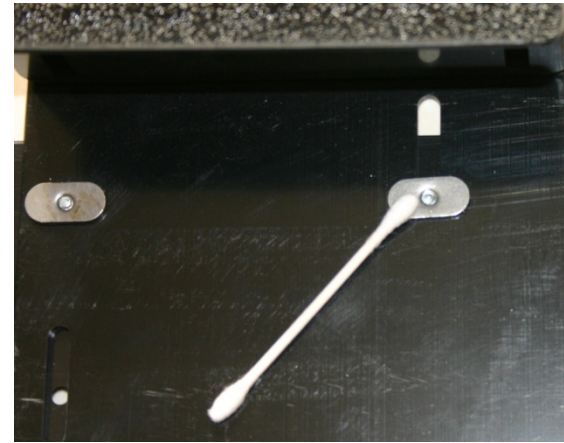

**After you have adjusted the mounting plate to your vehicle, degrease the back side of the tabs shown above with alcohol and allow to dry. Apply a dab of Loctite Blue Thread Locker.**

**Cleaning the Velcro areas with alcohol will assure a tight seal.**