



Dimensions A Width 64" **B** Depth 40" C Height 34" Weight 1.640 lbs 19.000 lbs - 35.000 lbs For excavators For skid loaders 8,000 - 12,000 lbs* **Hydraulic Flow** 20 gpm Volume ISO/SAE .7 / 1.0 Screening area 1.0 yd² Number of axles Blade thickness 10 mm **Blade material** Hardox **Blade spacing** 20 mm Chassis material 100% Hardox construction Optional bolt on spill shield Working pressure 1,740 - 2320 Psi, max. pressure 3045 Psi

-The unique center twin spiral (off-set to center) rotor blade design reduce hydraulic motor load requirment - reducing load to entire tractor system

* Please note when used with combination machines where back and front attachments are possible the reccomended base machine weights can be higher

Main applications

*topsoil screening
*producing quality soil and mixed materials
*pipe back filling
*screening demolition worksite waste materials
*foundation back filling
*asphalt pot hole filling

*recycling materials
*composting
*aerating biomaterials
*screening stones
*peat
*curb & gutter back filling

- Viper VPH 2-1500 screening bucket is lightweight and compact in tight spaces like greenhouses and gardens

- Back fill foundation - dig line

VPH 2-1500

- A universal tool for landscaping, fits in most front and backyards
- Viper range includes buckets for 19,000 lbs 35,000 lb excavators and 8,000 -12,000 lb skid loaders

Call Ken Burns Inc (563) 927-2307 kbiwdc@gmail.com







Plumbed / remote hydraulic located relief valve




Bolt on sectional scraper frame

KBI - Chicago (563) 927-2307 kbiwdc@gmail.com






www.KENBURNSINC.com

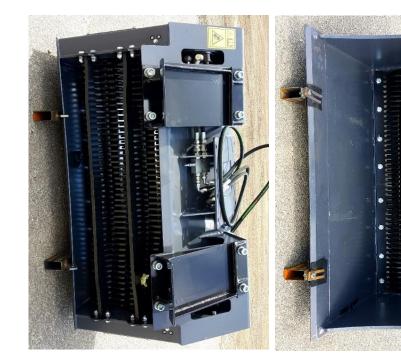







A STATE OF DEPENDING TO A STATE OF STATE

