

# VPH 3-1500HD

10.1.2020



**KBI Website**

## Dimensions

- A Width 68"
- B Depth 47"
- C Height 39"

## Weight

2,160 lbs

## For excavators

22,000 - 30,000 lbs

## For loaders

8,500 - 22,000 lbs

## Hydraulic Flow

20 GPM

## Volume ISO/SAE

.91 yd<sup>3</sup> / 1.05 yd<sup>3</sup>

## Screening area

10.76 ft<sup>2</sup>

## Number of axles

3

## Blade thickness

16 mm

## Blade material

Hardox

## Blade spacing


25 mm

## Chassis material

100% Hardox construction

## Working pressure


2900 PSI, max. pressure 3045 PSI

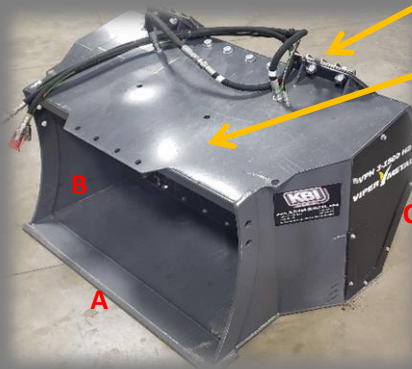

Bolt plate for loader mount  
Bolt plate for excavator mount



Plumbed / remote hydraulic located relief valve

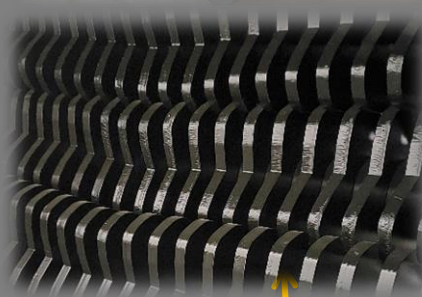

U-Placement of shafts

-The unique center twin spiral (off-set to center) rotor blade design reduce hydraulic motor load requirement - reducing load to entire tractor system

\* Please note when used with combination machines where back and front attachments are possible the recommended base machine weights can be higher

### Main applications

- \*topsoil screening / black dirt reclamation
- \*producing quality soil and mixed materials
- \*pipe back filling
- \*screening demolition worksite waste materials
- \*foundation back filling
- \*asphalt pot hole filling

- \*recycling materials
- \*composting
- \*aerating biomaterials
- \*screening stones
- \*peat
- \*curb & gutter back filling

- Back fill foundation - dig line

- Viper VPH 3-1500HD range includes buckets for 22,000 - 30,000 lb excavators and 8,500 - 22,000 lb loaders



Call Ken Burns Inc  
(563) 927-2307  
kbiwdc@gmail.com

[www.KENBURNSINC.com](http://www.KENBURNSINC.com)

WATCH VIDEOS ON OUR WEBSITE



# VPH 3-1500HD Pictures

