
# **S4740E** ELECTRIC SLAB SCISSOR LIFT





- Self-propelled electric scissor lift
- Choice of electric or hydraulic drive
- Roll-out deck extension for extra reach
- Suitable for indoor and outdoor use
- Ideal for construction & maintenance applications

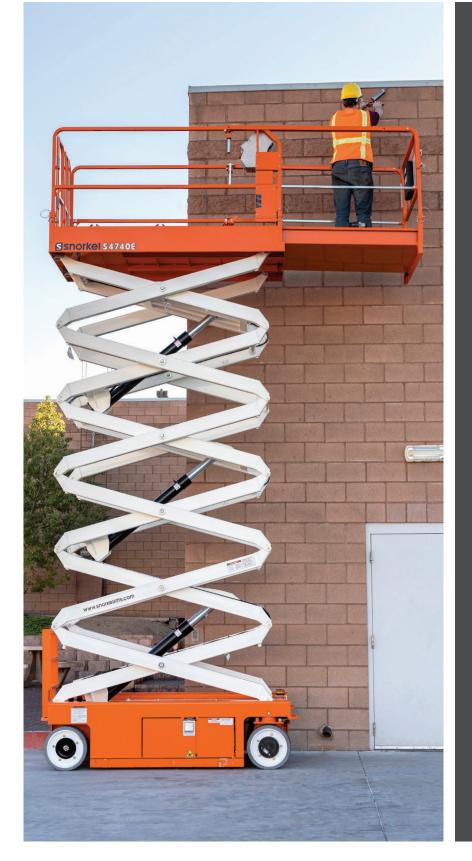

Boland Equipment Rentals www.berequipment.com 201-342-8020

# **ELECTRIC SLAB SCISSOR LIFT**

DIMENSIONS	\$4740E*
Max. working height	45 ft 5 in
Max. platform height ( <b>A</b> )	39 ft 5 in
Platform size (stowed)	43 in x 84 in
Platform size (extended)	43 in x 132 in
Deck extension length ( <b>B</b> )	48 in
Overall length ( <b>D</b> ) (with step)	90.6 in
Overall length ( <b>D</b> ) (step removed)	89 in
Overall width ( <b>C</b> )	47 in
Stowed height ( <b>E</b> )	101 in
Min. height (guardrails folded)	76 in
Ground clearance (stowed)	2.63 in
Ground clearance (elevated)	0.75 in

#### PERFORMANCE


Platform capacity	550 lbs
Max. wind speed	28 mph
Max. drive height	39 ft 5 in
Max. drive speed (stowed)	2.0 mph
Max. drive speed (elevated)	0.4 mph
Raise/lower time	68/72 sec
Gradeability	25%
Inside turning radius	21 in
Outside turning radius	95 in
Tires	15 x 5 non-marking rubber
Controls	proportional
Drive system	2 wheel drive


POWER	
Power source	24V DC battery electric
Charger	90 - 240V, 25amp


#### WEIGHT

Weight

#### TURNING RADIUS







**S4740E** 

### STANDARD FEATURES

- Hydraulic drive
- Roll-out deck extension with dual locks
- Non-marking tires
- Swing-out service trays
- Saloon-door style entry gates
- Descent alarm
- All motion alarm
- 2 persons indoor
- 1 person outdoor
- Proportional controls, including descent
- Power line to platform
- Loading pendant
- Hour meter & onboard diagnostics display
- Integrated battery charger
- Battery condition indicator
- Crane & forklift points
- Dual lanyard attachment points
- Scissor stack roller slide plates (set of 2)
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

## OPTIONS

6,825 lbs

- Special paint colors
- Electric drive
- Flashing amber light
- 110V AC 800W inverter
- Airline to platform
- Aircraft bumpguard package
- Environmental hydraulic oil
- Snorkel Guard<sup>™</sup> secondary guarding system



282 Hudson Street Hackensack, NJ 07601

O: 201-342-8020

www.berequipment.com

ANSI Specification ©Snorkel 2020 Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance. \* Preliminary specifications – confirm at time of ordering.