

Thin-Line Square LED Down Lights

The Thin-line Square Down Lights are rated for wet locations and designed for new construction and retrofit installations. They are ideal for shallow ceiling plenums since no IC can or box is required above the fixture.



DIMMABLE

UL2108 Certified



Features

- Low profile, perfect for shallow ceiling plenums
- No IC can required, for direct contact with insulation and combustible materials
- 80+ CRI
- Two spring loaded clips to attach to any ceiling material
- 120 degrees beam spread
- Edge lit technology eliminates hot spots
- 50,000 hours life
- Dimmable with most standard dimmers
- cETLus listed for wet locations
- 5 year limited warranty

Residential Applications

- Kitchens
- Pantries
- Laundry rooms
- Bathrooms
- In showers
- Under soffits (outdoor)

Commercial Applications


- Lobbies
- Hallways
- Banquet halls
- Elevators
- Stairways
- Retail
- Restaurants
- Office lighting
- Under cabinet
- In cabinet
- Wall mount for egress lighting
- Under soffits (outdoor)

Specifications


Electrical	Input: AC 100 – 120V 4" = 9W, 21V DC, 320mA constant current 6" = 12W, 30V DC, 320mA constant current
Power Factor	0.95
LEDs	Epistar
LED Life	50,000 hours
Lumen Output WW = Warm White NW = Neutral White	4" = 575 WW, 600 NW 6" = 800 WW, 900 NW
Lumen Efficacy (LPW) WW = Warm White NW = Neutral White	4" = 64 WW, 67 NW 6" = 67 WW, 75 NW
Color Temperature	Warm White 3000K, Neutral White 4000K
CRI	≥ 80
Appearance Size (L x W x H)	4" = 5.08" x 5.08" x 0.5" (129mm x 129mm x 13mm) 6" = 7.16" x 7.16" x 0.5" (182mm x 182mm x 13mm)
Dimensions (J-Box) (L x W x H)	4" = 3.31" x 3.31" x 1.14" (84mm x 84mm x 29mm) 6" = 3.31" x 3.31" x 1.14" (84mm x 84mm x 29mm)
Approvals	cETLus listed for wet locations, Energy Star rated

NOTE: Each fixture requires one constant current power supply.

Product Codes

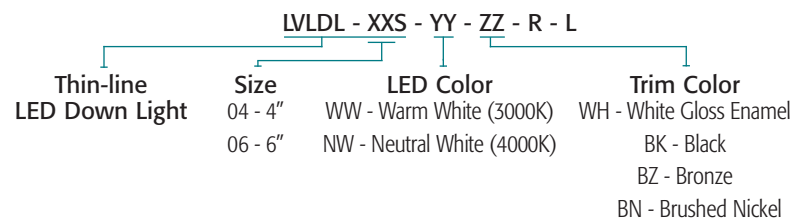


NOTE: WH, BZ, and BN are stock, BK is special order, MOQ required.

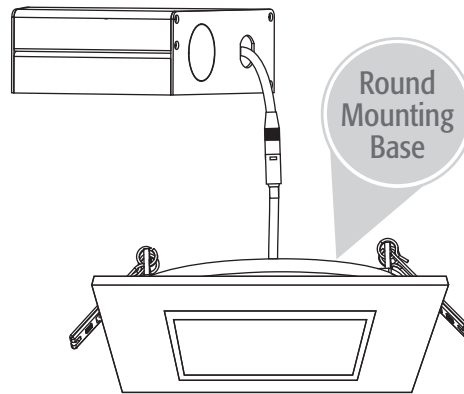

4" Thin-line Square Down Light

Installation Hole Size: 4.65" (118mm)

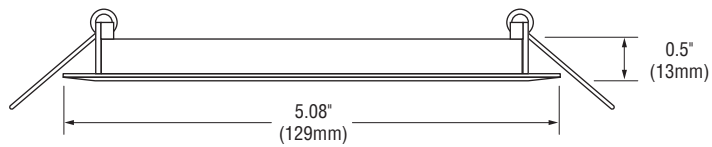

6" Thin-line Square Down Light

Installation Hole Size: 6.15" (156mm)

