


New 2 & 3 Row Hot Water Duct Coils

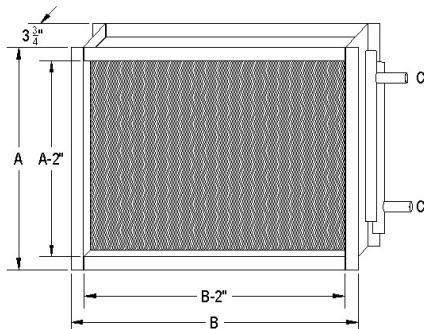

- Built to ARI 410 Certification
- Galvanized Steel 16 Ga. frame
- Aluminum Fins, .0045 thickness
- Copper Tubing, 1/2" w/ .017 wall
- Max 500 PSI Operating Pressure
- Max 2500 PSI Ultimate Pressure
- BTU outputs from 10,000 to 233,000
- Horizontal/Vertical Installation
- Full one year warranty
- Call for other performance criteria ratings

Part Number	GPM	CFM	140 EWT	180 EWT	APD	A	B	C
H2O-2-1212	4	600	19,200	30,300	.16	14.5	14	7/8 OD
		700	20,800	32,900	.20			
		800	22,300	35,200	.24			
	WPD'		2.28	2.33				
H2O-2-1515	6	900	29,100	45,000	.16	17	17	7/8 OD
		1000	30,700	47,500	.18			
		1100	32,100	49,800	.20			
	WPD'		2.6	2.2				
H2O-2-1518	6	1100	34,900	54,000	.16	17	20	7/8 OD
		1200	35,500	56,400	.18			
		1300	37,900	58,700	.20			
	WPD'		2.4	2.3				
H2O-2-1736	7	2700	75,100	117,300	.17	19.5	38	1 1/8 OD
		3000	78,500	122,600	.20			
		3300	81,500	127,400	.23			
	WPD'		1.1	1.0				
H2O-3-2030	8	2000	84,400	131,100	.17	22	32	1 1/8 OD
		2200	88,500	137,600	.20			
		2400	92,300	143,700	.24			
	WPD'		1.4	1.3				
H2O-3-2324	10	1800	77,400	120,900	.17	25 3/4	26	1 1/8?
		2000	81,700	127,800	.19			
		2200	85,600	134,100	.22			
	WPD'		1.2	1.1				

Performance data based on 65° EAT,

In STOCK

D-VAC Sales Inc.

www.dvachvac.com TEL: (516) 256-3131 e-mail: sales@dvachvac.com