



Document shall not be used for construction or to obtain building permits without stamp and signature.

Revisions

No.	Date	Revision

Drawing


Enlarged Plan

Scale: 1/4" = 1'-0"

Date: 5/1/2024

Sheet

A102

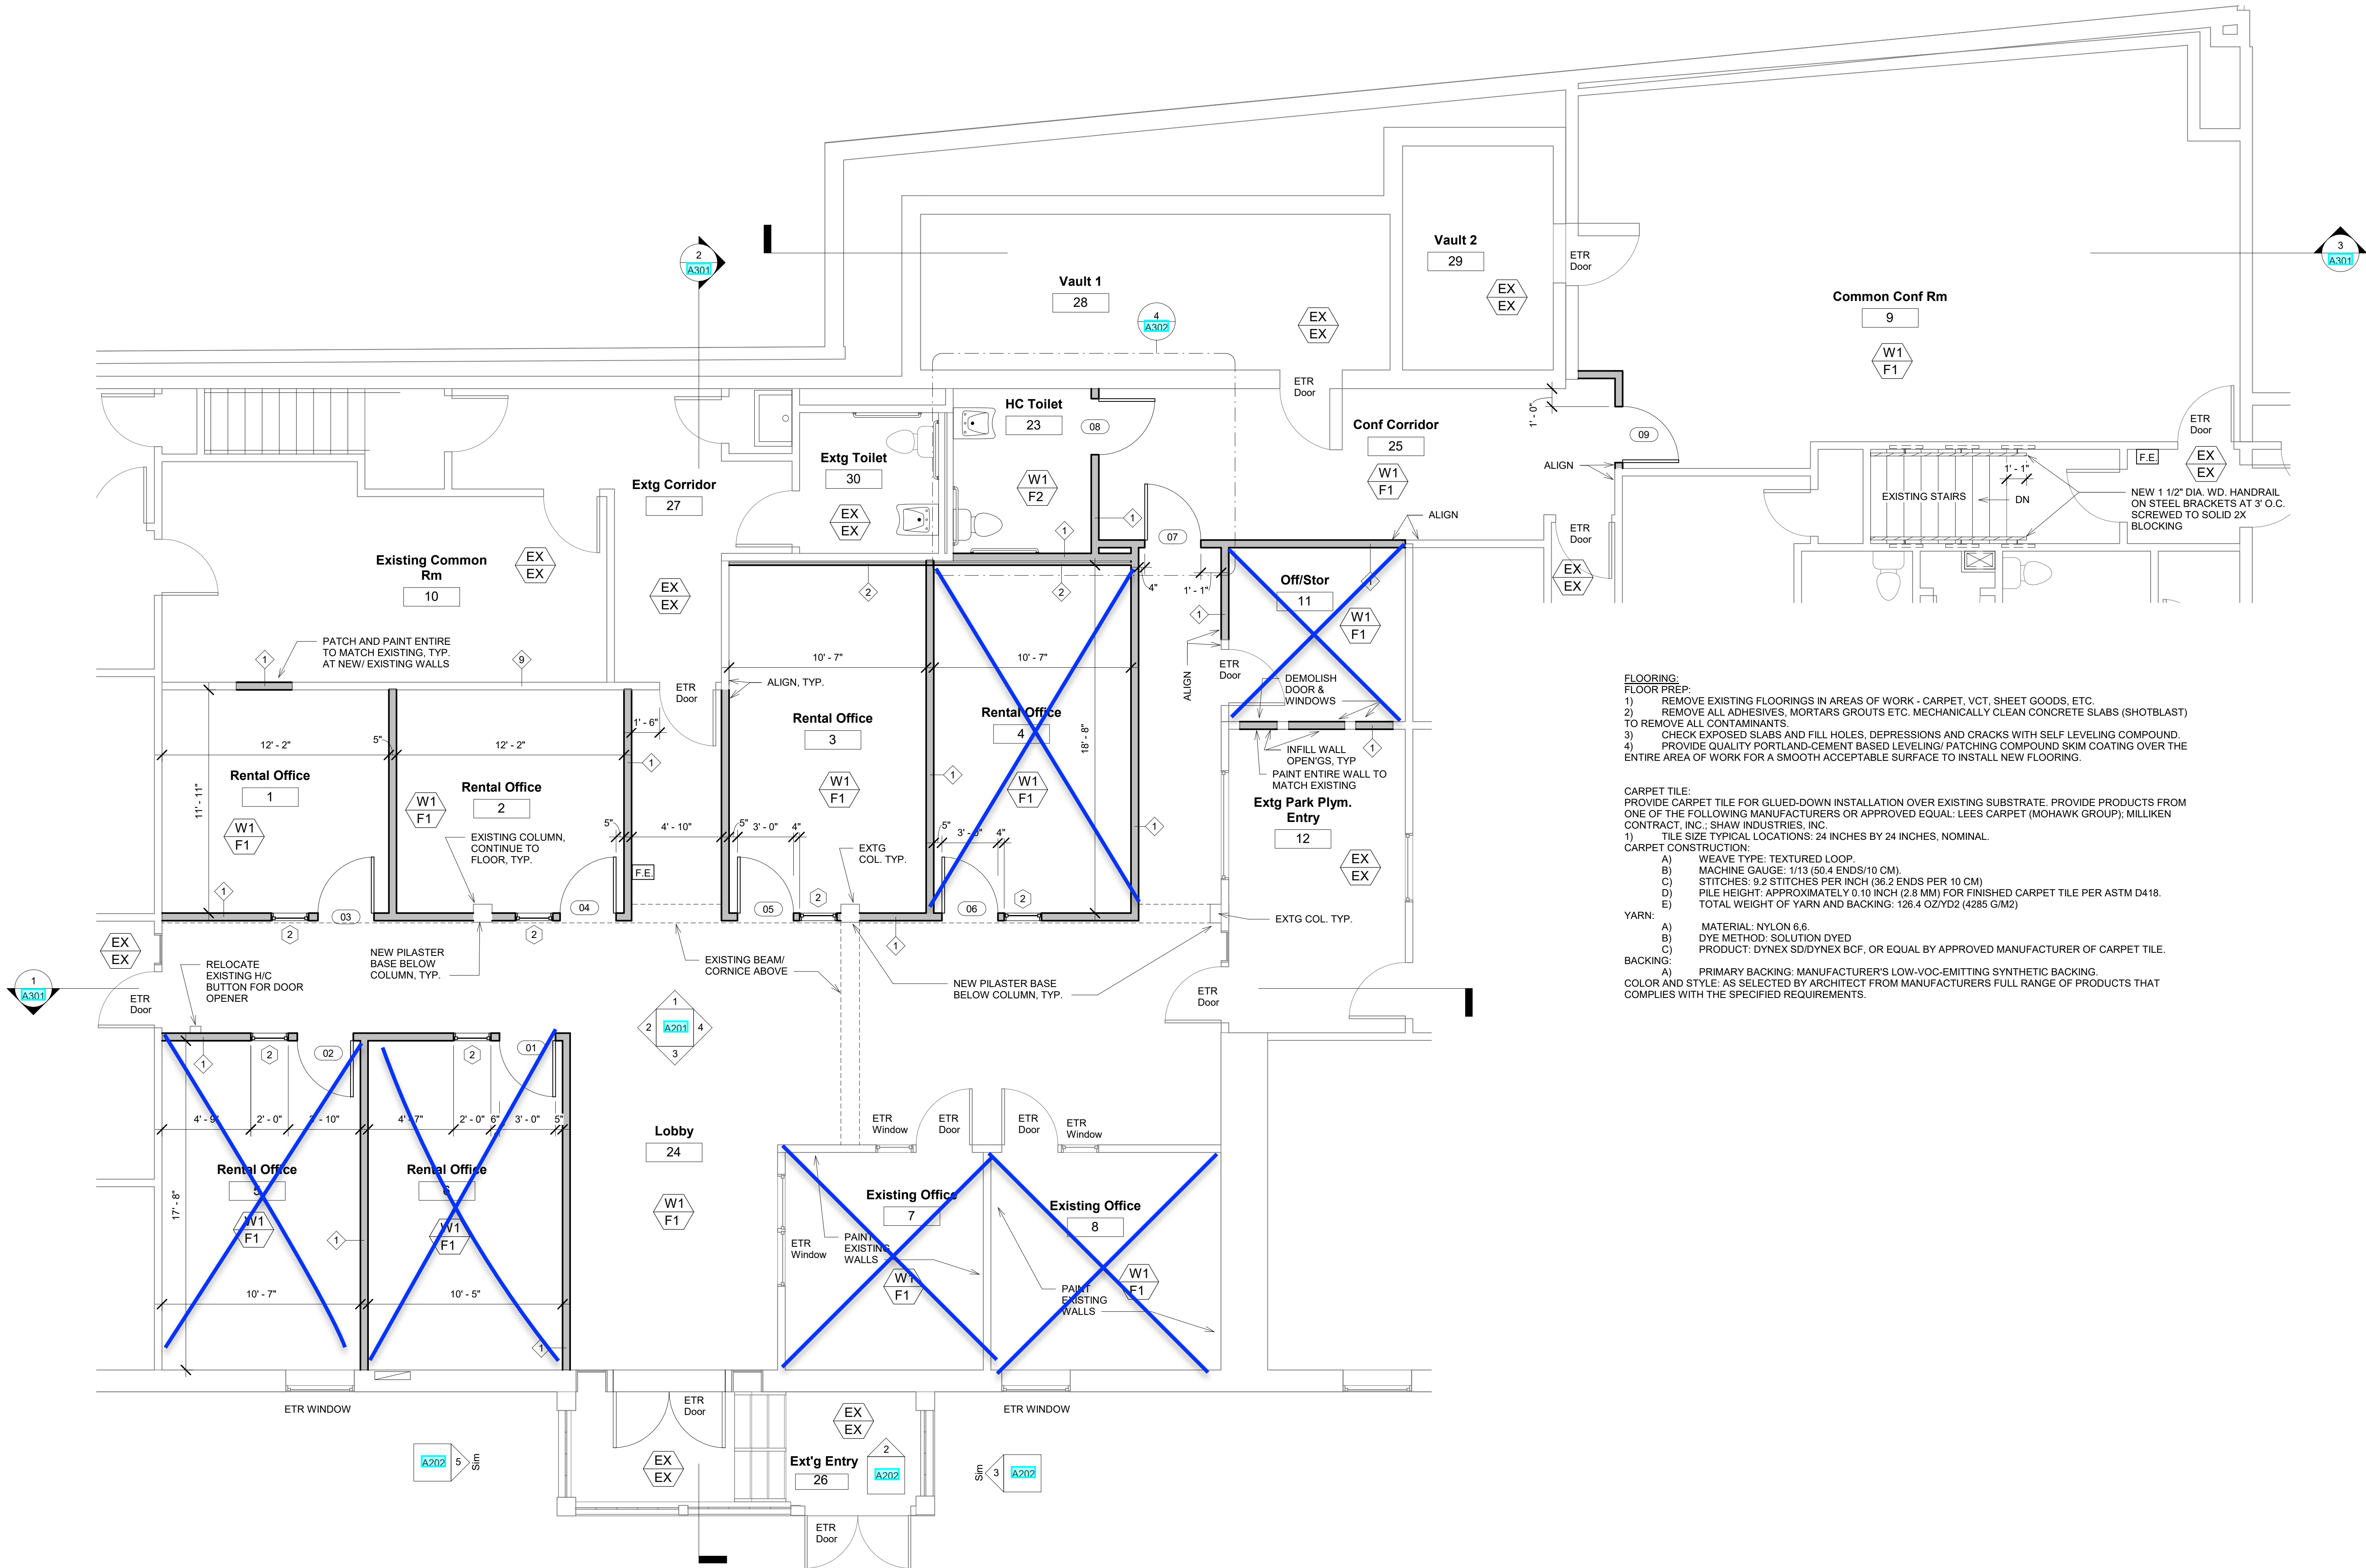

FLOORING:
FLOOR PREP:
1) REMOVE EXISTING FLOORINGS IN AREAS OF WORK - CARPET, VCT, SHEET GOODS, ETC.
2) REMOVE ALL ADHESIVES, MORTARS GROUTS ETC. MECHANICALLY CLEAN CONCRETE SLABS (SHOTBLAST) TO REMOVE ALL CONTAMINANTS.
3) CHECK EXPOSED SLABS AND FILL HOLES, DEPRESSIONS AND CRACKS WITH SELF LEVELING COMPOUND.
4) PROVIDE QUALITY PORTLAND-CEMENT BASED LEVELING/ PATCHING COMPOUND SKIM COATING OVER THE ENTIRE AREA OF WORK FOR A SMOOTH ACCEPTABLE SURFACE TO INSTALL NEW FLOORING.

CARPET TILE:
PROVIDE CARPET TILE FOR GLUED-DOWN INSTALLATION OVER EXISTING SUBSTRATE. PROVIDE PRODUCTS FROM ONE OF THE FOLLOWING MANUFACTURERS OR APPROVED EQUAL: LEES CARPET (MOHAWK GROUP); MILLIKEN CONTRACT, INC.; SHAW INDUSTRIES, INC.

1) TILE SIZE TYPICAL LOCATIONS: 24 INCHES BY 24 INCHES, NOMINAL.

CARPET CONSTRUCTION:
A) WEAVE TYPE: TEXTURED LOOP.
B) MACHINE GAUGE: 1/13 (50.4 ENDS/10 CM).
C) STITCHES: 9.2 STITCHES PER INCH (38.2 ENDS PER 10 CM).
D) PILE HEIGHT: APPROXIMATELY 0.10 INCH (2.8 MM) FOR FINISHED CARPET TILE PER ASTM D418.
E) TOTAL WEIGHT OF YARN AND BACKING: 126.4 OZ/YD2 (4285 G/M2).

YARN:
A) MATERIAL: NYLON 6.6.
B) DYE METHOD: SOLUTION DYED.
C) PRODUCT: DYNEX SD/DYNEX BCF, OR EQUAL BY APPROVED MANUFACTURER OF CARPET TILE.

BACKING:
A) PRIMARY BACKING: MANUFACTURER'S LOW-VOC-EMITTING SYNTHETIC BACKING.

COLOR AND STYLE: AS SELECTED BY ARCHITECT FROM MANUFACTURERS FULL RANGE OF PRODUCTS THAT COMPLIES WITH THE SPECIFIED REQUIREMENTS.