




### ***ECO MS 2" Standing Seam***

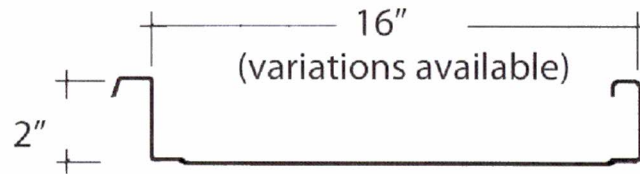

This ECO 2" MS Standing Seam is a mechanically field-seamed, high strength structural standing seam roof system. Mechanical seamers and hand crimpers are available to rent through a 3rd Party. It has a 2" tall vertical seam and is available in a 16" standard width (variations available). It can be installed directly over purlins and does not require a solid substructure for support. All ECO MS panels are mechanically seamed. We also produce the trims for this system. Seamer is available for rental through a 3rd party.

- Coverage Width - 16" Standard (variations available)
- Minimum Slope - ½:12
- Custom cut lengths 26" to ? (Sometimes we run on site, sometimes we crate)
- Panel Attachment - Low fixed or low floating clips are typical (clip varies by job)
- Gauge - 24 (standard); 22 gauge (optional)
- Pan Conditions - Flat pan is typical, Striated available, ( Oil canning is NOT a cause for panel rejection )
- Finishes - Smooth
- Coatings -Kynar 500 Paint Finish (40 yr. crack, check, peel & 30 yr. prorated fade & chalk warranty), and Galvalume 24 gauge & 22 gauge.