


NOTES TO CONTRACTOR:

- A. CONTRACTOR SHALL VERIFY, LOCATE AND STAKE IN THE FIELD ALL EXISTING UNDERGROUND WATER, SEWER, ELECTRICAL AND IRRIGATION UTILITIES PRIOR TO BEGINNING ANY WORK AND VERIFY WITH THE CITY REPRESENTATIVE THERE ARE NO DISCREPANCIES WITH NEW POST / FOOTINGS LAYOUT FOR NEW PLAYGROUND STRUCTURE SYSTEMS.
- B. CONTRACTOR SHALL RECEIVE INSTALLATION INSTRUCTIONS FOR PLAY GROUND EQUIPMENT,SEAT BENCHES, TRASH RECEPTACLES AND SIGNAGE BY INNOVATIVE PLAY COMPANY ONCE CONTRACT HAS BEEN AWARDED.

NEW CONSTRUCTION MATERIAL CALLOUTS:


- ① COORDINATE DELIVERY TO JOBSITE AND INSTALL CITY FURNISHED PLAY GROUND EQUIPMENT,SEAT BENCHES, TRASH RECEPTACLES AND SIGNAGE BY INNOVATIVE PLAYGROUNDS AND BURKE COMPANIES CONTACT: VANESSA LARIOS (562)-693-5200. NOTE: CONTRACTOR SHALL TEMPORARY MARK LOCATE AND VERIFY PLACEMENT OF ALL PLAY EQUIPMENT WITH SAFETY ZONES ONSITE WITH CITY REPRESENTATIVE PRIOR TO FINAL INSTALLATION. REFER TO INNOVATIVE PLAYGROUND LAYOUT, MATERIALS AND DETAIL DRAWINGS (ATTACHED IN PLAN SET (PG-2 SHEET))
- ② (PLAYGROUND AREA)-FURNISH AND INSTALL NEW PLAYGROUND RESILIENT SURFACING TOTTURF POURED IN PLACE (PIP) (.5 to 1.5 mm SIZE)RUBBER GRANULE SAFETY SURFACING MATERIAL LAYERS OVER COMPACTED BASE BY; ROBERTSON RECREATIONAL SURFACES COMPANY (800)-858-0519 (OR AGENCY APPROVED EQUAL) TPV SUPREME WITH ALIPHATIC. COLOR TO BE : 50% STANDARD BEIGE #RH30 AND 50% STANDARD GREEN # RH10. SEE DETAIL B SHEET LD-1.
- ③ CONSTRUCT NEW 4" THICK NATURAL GRAY CONCRETE PAVING WITH STEEL REINFORCEMENT OVER 90% COMPACTED CAB BASE. FINISH TO BE: LIGHT BROOM FINISH NOTE: FURNISH AND INSTALL GREENSTREAK SPEED DOWELS AT 2' O.C. SPACING TO ENTIRE LENGTH(S) OF ALL NEW TO EXISTING CONCRETE PAVING EDGE INTERFACE, PER MANUFACTURER SPECIFICATION. SYMBOL ON PLAN REPRESENTS BEGINNING AND END POINTS OF WHERE SPEED DOWELS ARE TO BE INSTALLED SEE DETAIL A SHEET LD-1.
- ④ FABRICATE AND INSTALL NEW 42" HIGH METAL FENCE AND (1) ONE ACCESS GATE CORE EXISTING CONCRETE MOW CURB AND EXISTING CONCRETE PAVING FOR NEW POSTS SEE DETAILS D & E SHEET LD-1.
- ⑤ ADJUST IRRIGATION HEADS AND LATERALS FOR NEW SIDEWALKS.FURNISH AND INSTALL 1 1/2" SCHEDULE 40 SLEEVE UNDER SIDEWALK PAVING FOR IRRIGATION.

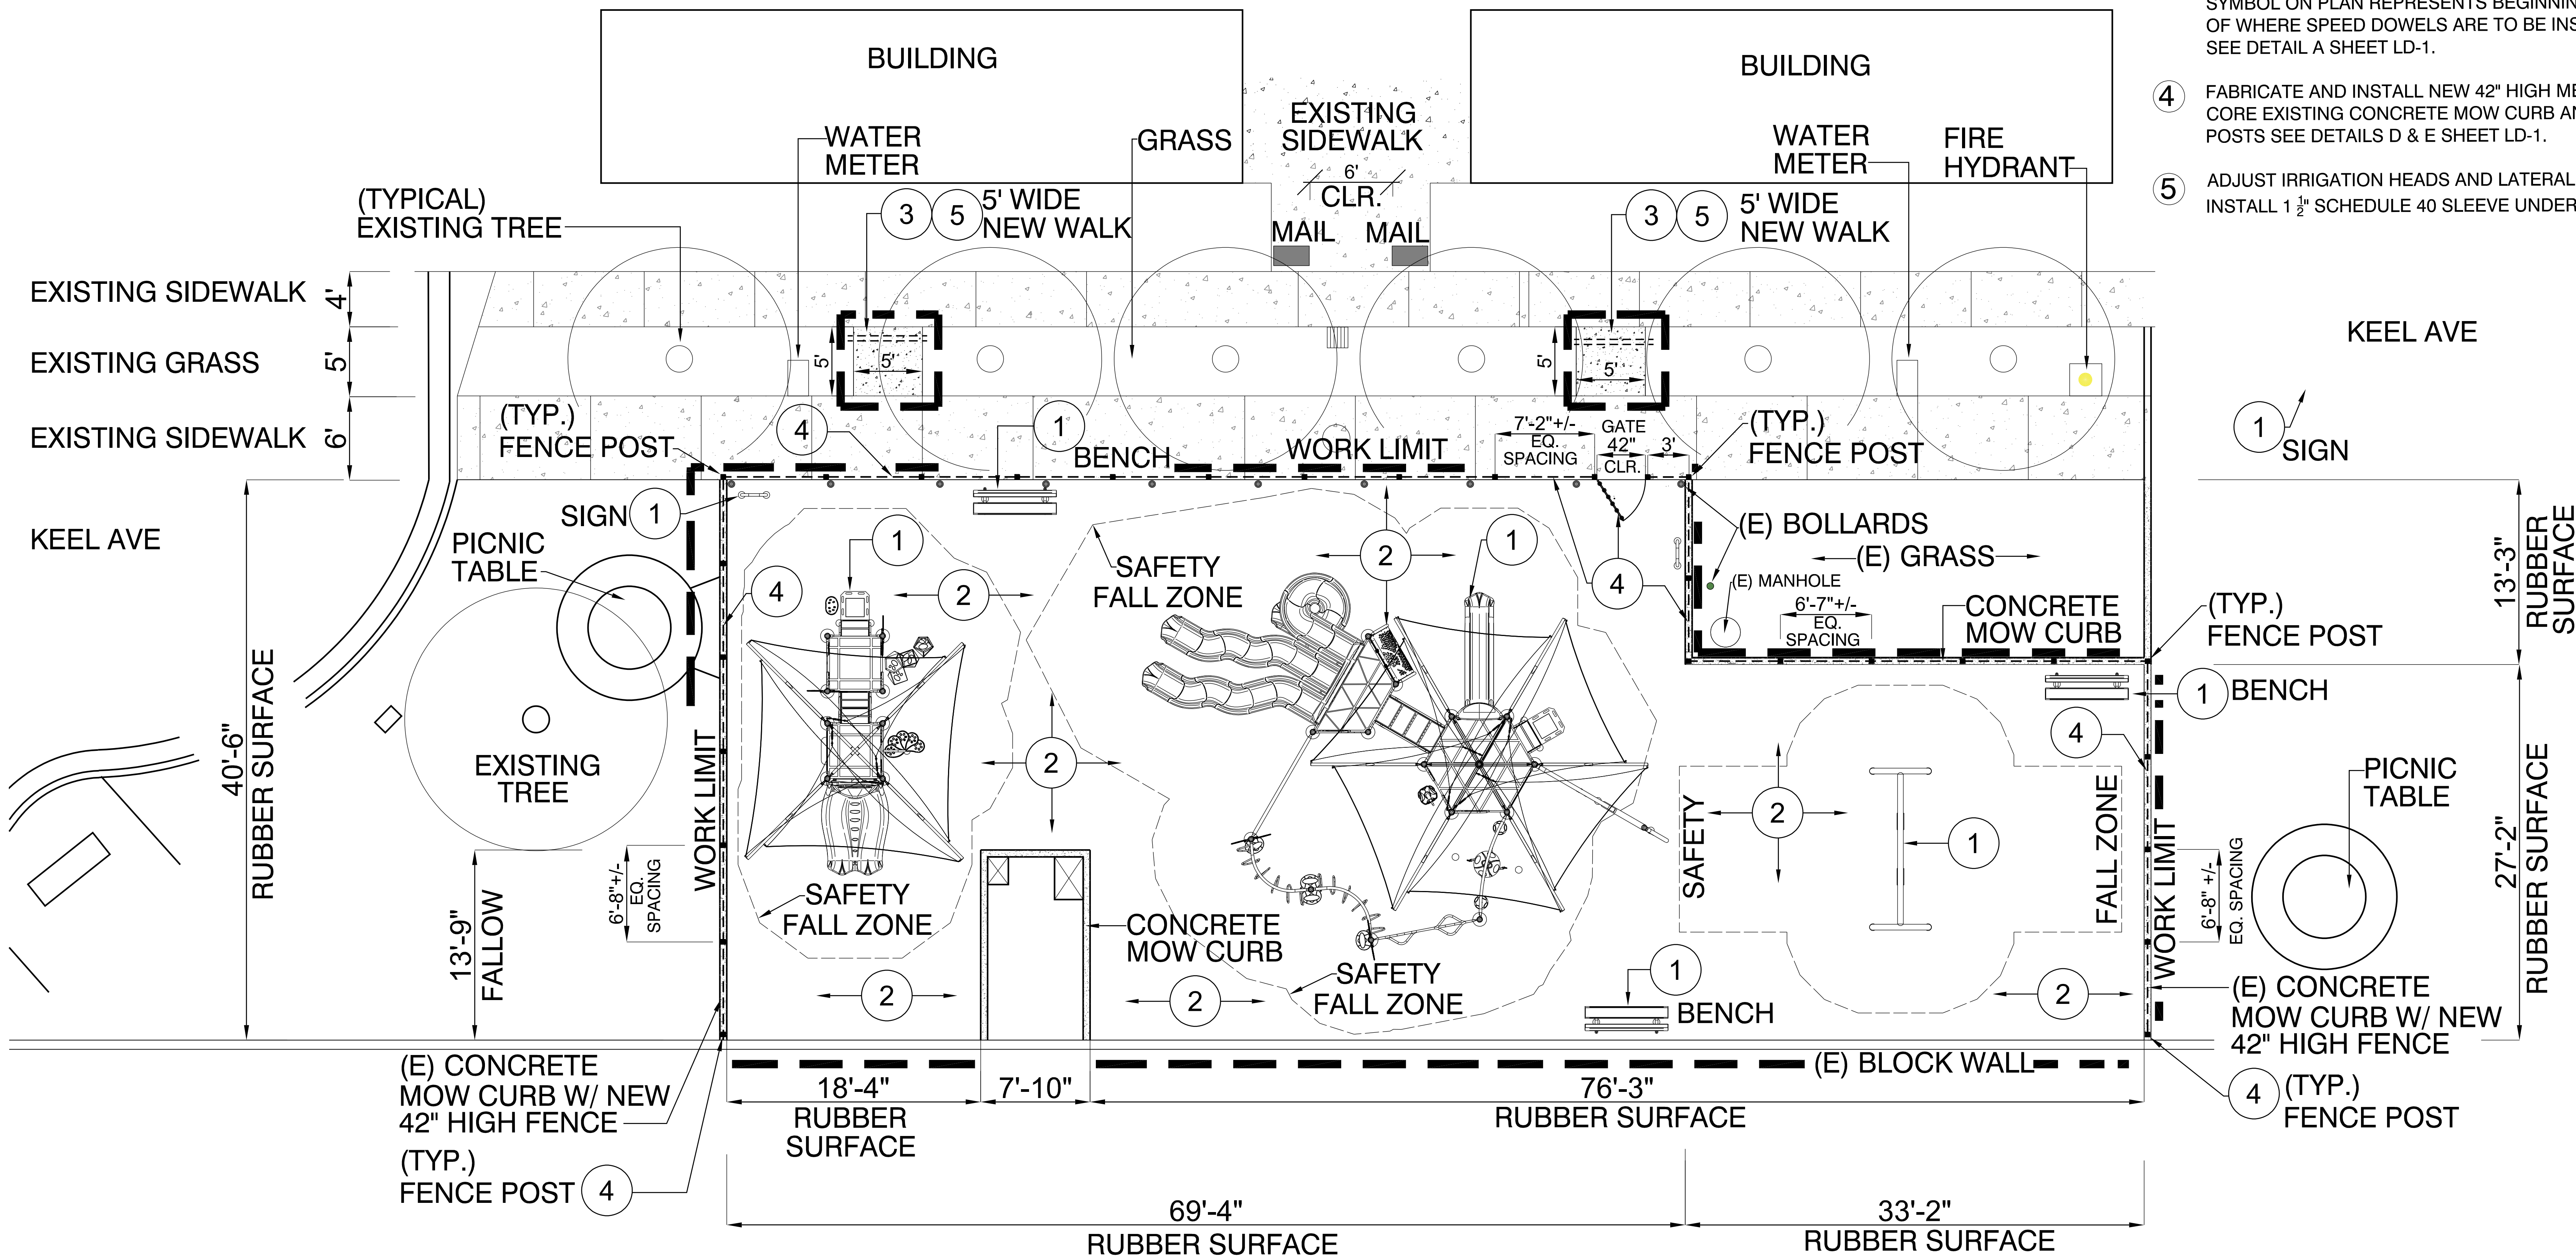

N
SCALE 3/16"=1'-0"

DRAWN:	R.J.M	RMA INTERNATIONAL LANDSCAPE ARCHITECTURE & PLANNING 315 3 RD STREET SUITE N HUNTINGTON BEACH, CA 92648 P (562) 618-9119 EMAIL: rmalandscape@gmail.com
CHECKED:	R.J.M	
APPR.:		

CITY OF GARDEN GROVE
JARDIN DE LOS NINOS PARK

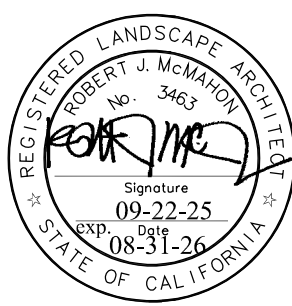

DATE		CONSTRUCTION PLAN	
09-22-25	1	ADDENDUM # 1	09-22-25
REVISION DATES			SHEET
			L-2