O.M.B. NO. 3067-0077 Expires May 31, 1996

## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION				FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME				POLICY NUMBER
STREET ADDRESS (Including Apt., Unit. Suite and/or blog. Number) OR P.O. ROUTE AND BOX NUMBER  13330 MOSS HILL DRIVE  OTHER DESCRIPTION (Lot and Block Numbers, etc.)				COMPANY NAIC NUMBER
CITY LOT 5, BLOCK !	3; RIVER C	DAKSESTATES	Cita	of BevilOaks)
- BEAUMONT SECTION		ANGE DAME	STATE	77713
Provide the following from the proper FIRM	D FLOOD INSUR	ANCE RATE MAP (FIRM)	INFORMATION	''
1. COMMUNITY NUMBER 2. PANEL NUMB 480878 0005	ER 3.SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (In AO Zones, use depth)
	<u> </u>	SEPT.4, 1987	X	1 1/1/
7. Indicate the elevation datum system used 3. For Zones A or V, where no BFE is provide the community's BFE:	eet NGVD (or other	FIRM datum-see Section	B, Item 7)	Other (describe on back) or this building site, indicate
. Using the Elevation Certificate Instruction describes the subject building's reference	CTION C BUILDI	NG ELEVATION INFORM	ATION	
2(a). FIRM Zones A1-A30, AE, AH, and A (v of 128.6 feet NGVD (or other the selected diagram, is at an elevation the selected diagram, is at an elevation (c). FIRM Zone A (without BFE). The floor below (check one) the highest grad (d). FIRM Zone AO. The floor used as the cone) the highest grade adjacent to the below elevated in accordance with the cone) the highest grade adjacent to the below elevated in accordance with the cone. Indicate the elevation datum system used under Comments on Page 2). (NOTE: If the FIRM [see Section B, Item 7], then cone equation under Comments on Page 2.)  Elevation reference mark used appears on the reference level elevation is based on: (NOTE: Use of construction drawings is or case this certificate will only be valid for the will be required once construction is complete. The elevation of the lowest grade immediate Section B, Item 7).	SFE). The bottom of of last the reference level from building. If no flood community's floodplatin determining the able elevation datum priver! the elevations of the price of the	f the lowest horizontal struction B, item 7).  If the lowest horizontal struction is the selected diagram is depth number is available in management ordinance above reference level eleving the datum system used in measuring the eleving to the datum system used in Construction on the construction of the datum of the course of construction. A	datum-see See diagram is different diagram is different diagram is different diagram is different diagram is d	of the reference level from ction B, Item 7).  J. L feet above or or ove or or below (check lowest floor (reference to Unknown or 29 Other (describe ant than that used on and show the conversion over in place, in which on Elevation Certificate
If the community of	SECTION D COM	MUNITY INFORMATION	-	
If the community official responsible for veri is not the "lowest floor" as defined in the co- floor" as defined by the ordinance is:	1 1 1 1 1 1 1001 110	VD / W TITE	erence level indic the elevation of see Section B, I	cated in Section C, Item 1 the building's "lowest Item 7).


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

L.P.C.	ammack, JR	4112	Larous Brode			
CERTIFIER'S NAME		LICENSE NUMBER (or Affix Seal)				
PRINC	IPAL L.P.	L.P. CAMMACK-SURVEYOR				
TITLE		COMPANY NAME				
7165	SWEETGUM ROAD	BEAUNIONT	TEXAS 777/3			
ADDRESS		CITY	STATE ZIP			
377	Tammachiti	12-26-94	(409) 753-2207			
SIGNATURE		DATE	PHONE			
COMMENTS:		De la				
		Po le	0:00			
		1 128	12 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			

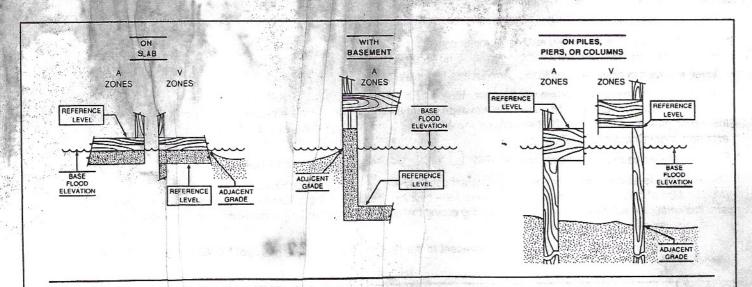

The diagrams above ilustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zoies should be measured at the top of the reference level floor.

Elevations for all V Zores should be measured at the bottom of the lowest horizontal structural member.