

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

- Control of the Cont		FOR INSURANCE COMPANY USE							
BUILDING OWNER'S NAME		POLICY NUMBER							
STREET ADDRESS (Including A)		COMPANY NAIC NUMBER							
OTHER DESCRIPTION (Lot and	TH 1/2 of	Lor 13	, Bevil Acre:	s Addition	h ·				
BEAUM	ONT			STATE	ZIP CODE 77713				
			NCE RATE MAP (FIRM)	INFORMATION	*				
Provide the following from t	he proper FIRM (See	Instructions):							
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)				
480878	0005	<u>C</u>	SEPT. 4, 1987	AE	28.5				
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate									
the community's BFE: feet NGVD (or other FIRM datum-see Section B, Item 7).									
Using the Elevation Certification the Elevation Certification Certi	SECTIO	ON C BUILDI	NG ELEVATION INFORM	ATIONO 3					
of L. L. Z. J. Tee (b), FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fone) the highest grade level) elevated in acco 3. Indicate the elevation dai under Comments on Pag	It NGVD (or other FIR VE, and V (with BFE). It is at an elevation of BFE). The floor used the highest grade ad loor used as the refer adjacent to the building the commum system used in dee 2). (NOTE: If the estimate of Page 2.)	M datum—see The bottom of the bottom of the reference level from the bottom of the bottom of the bottom of the elevation datumnent the elevation	Section B, Item 7). If the lowest horizontal strict feet NGVD (or other FIRITICE level from the selected wilding, in the selected diagram is depth number is available ain management ordinance above reference level elevel used in measuring the elevel so to the datum system us	ictural members Vidatum-see Se I diagram is if feet above, is the building to a the second continuous and the FIRM in the second continuous and the second continuous	ction B, Item 7). Left eet above or ove or below (check is lowest floor (reference) No Unknown D'29 Other (describe)				
5. The reference level eleval (NOTE: Use of construct case this certificate will or will be required once cons	ition is based on: It tion drawings is only will tily be valid for the buil struction is complete.)	actual constru valid if the build lding during the	ction construction dra ling does not yet have the e course of construction,	awings reference level i A post-constructi	on Elevation Certificate				
The elevation of the lowe Section B, Item 7).	st grade immediately	adjacent to the	building is: 1 2 9	입.feet NGVD (or other FIRM datum-see				
	SE	CTION D CO	MMUNITY INFORMATIO	N ·					
1. If the community official rais not the "lowest floor" as floor" as defined by the or 2. Date of the start of construction.	dinance is:	L. l feet N	III manacement oromance	a, ine elevation c	dicated in Section C, Item 1 fithe building's "lowest , Item 7).				


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

L.P. CAMM.	ACK, JR	A. L. S.	1 6 4 1 1 2	*	
CERTIFIER'S NAME	The late		LICENSE NUMBER (or A		1,245, 11.1
PRINCIPAL	L.P.	CAMN	ACK-SU	RVEYOR	
TITLE	· United the state of the contract of the cont	COMPANY NAM		9 11011099 FWY	1.20
7165 SWE	ETGUM ROAD	BEA	UNIONT	TEX	AS 77713
ADDRESS ()	1	CITY	THE SHOULD BE	STAT	The second secon
TI Ca	mmacky	0.1130577	4-7-95	(409)753	3-2207
SIGNATURE			DATE	PHONE	0.00
COMMENTS:	and the state of	* 121			el el
and the second s	OF TEN		ing his chai	380	
100	ALGISTERED TO	03/1030	napak nakasisa	Zumtanyan Higali	
colsection of the A	L P. CAMMACK JR. D	15 916 - SE	11. 001 0FT (2.115.11)		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	PESSION OF	Cmell, 3 nm	. 2 ské-mpat MRIP Li Joseph edit 158		50 X 1811 X
	SURVE	-17.			· 中美艺艺艺

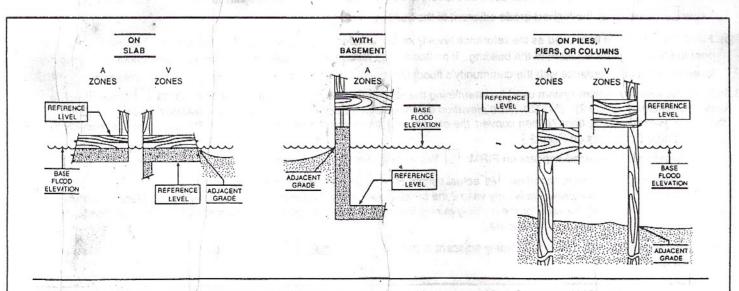

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.