




T-Class™ Split System Units
High Efficiency - R-410A - Three-Phase - 60 Hz

Bulletin No. 210837

January 2023

Supersedes September 2022

**COMMERCIAL
 PRODUCT SPECIFICATIONS**

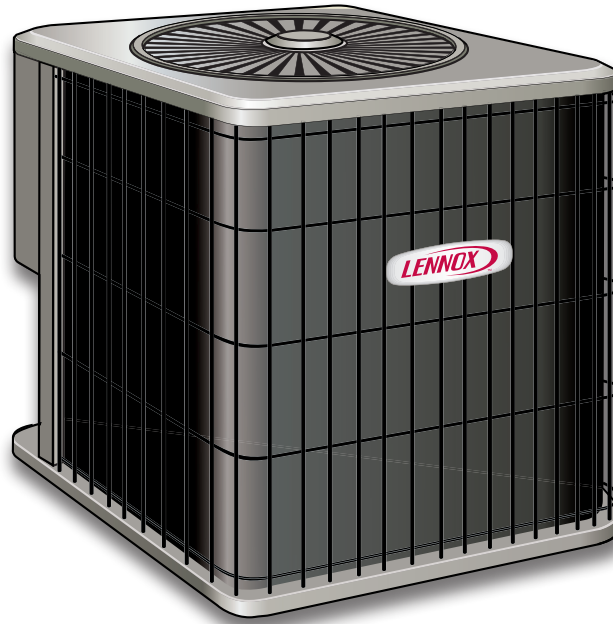


SEER up to 16.00

3 to 5 Tons


Cooling Capacity - 31,000 to 59,000 Btuh

MODEL NUMBER IDENTIFICATION

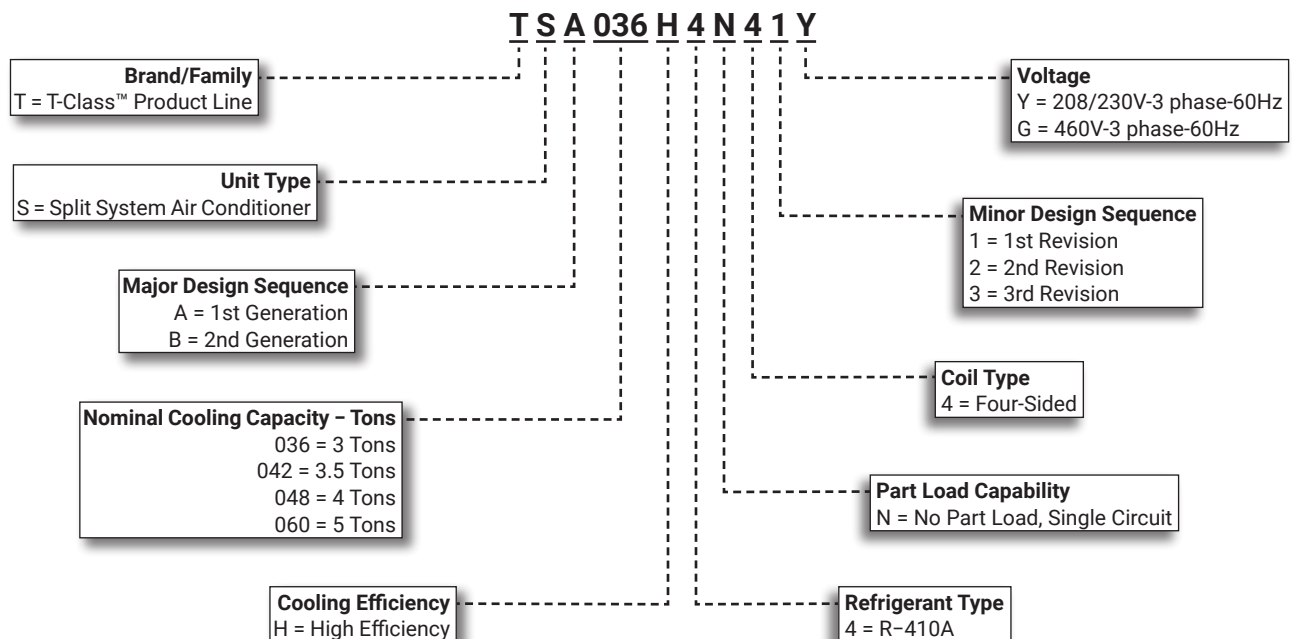

FEATURE HIGHLIGHTS

1. Outdoor Coil Fan
2. Copper Tube/Enhanced Fin Coil
3. Scroll Compressor
4. Heavy Gauge Steel Cabinet
5. PermaGuard™ Corrosion Resistant Base
6. Refrigerant Line Connections and Access

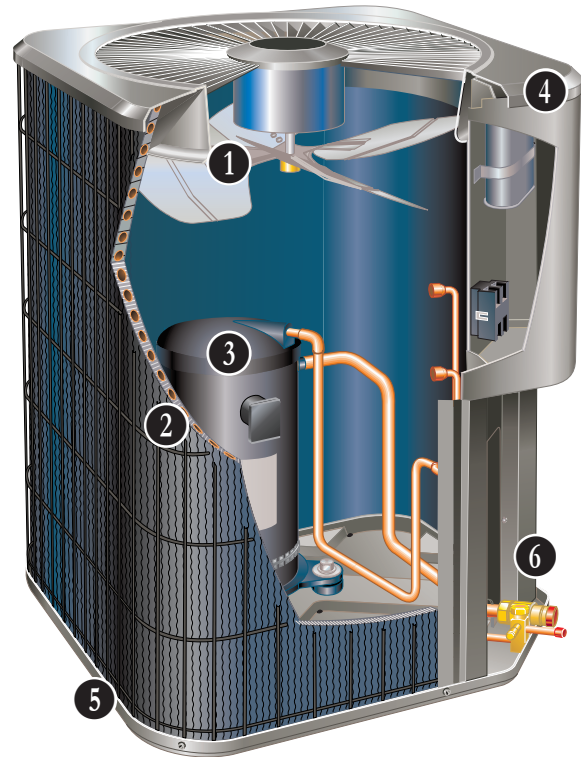

CONTENTS

Approvals And Warranty	3
Dimensions	7
Electrical Data	6
Features	3
Installation Clearances	8
Model Number Identification	1
Optional Accessories - Order Separately	6
Optional Conventional Temperature Control Systems	10
Sound Data	8
Specifications	6
TXV Substitution	9
TXV Usage	9

APPROVALS AND WARRANTY

APPROVALS

- AHRI Standard 210/240 certified
- AHRI Certified system match-ups and expanded ratings, visit www.LennoxPros.com
- Sound rated to AHRI Standard 270-2008 test conditions
- Tested in Lennox' Research Laboratory environmental test room environmental test room
- Rated According to U.S. Department of Energy (DOE) test procedures
- Unit and components ETL, NEC and CEC bonded for grounding to meet safety standards for servicing
- ETL certified (U.S. and Canada)
- ISO 9001 Registered Manufacturing Quality System

WARRANTY

- Compressor:
 - Limited five years in non-residential installations
- All other covered components:
 - Limited one year in non-residential installations

NOTE - Refer to Lennox® Basic Limited Warranty at www.Lennox.com for additional details.

FEATURES

APPLICATIONS

- 3 through 5 tons
- Three-phase power supply
- Sound levels as low as 76 dBA
- Vertical air discharge
- Applicable to indoor air handlers or gas furnaces with indoor add-on coils
- Shipped completely factory assembled, piped and wired
- Factory test operated

REFRIGERATION SYSTEM

R-410A Refrigerant

- Non-chlorine, ozone friendly
- Unit is factory pre-charged

1 Outdoor Coil Fan

- Direct drive fan
- Vertical air discharge
- Louvered steel top fan guard
- Totally enclosed fan motor
- Rain shield
- Ball bearings
- Inherently protected

High Capacity Liquid Line Drier

- Factory installed in the liquid line
- Drier traps moisture or dirt
- 100% molecular-sieve, bead type

High Pressure Switch

- Protects the system from high pressure conditions
- Automatic reset

Low Pressure Switch

- Shuts off unit if suction pressure falls below setting
- Loss of charge and freeze-up protection
- Automatic reset

2 Copper Tube/Enhanced Fin Coil

- Lennox designed and fabricated coil
- Ripple-edged aluminum fins
- Copper tube construction
- Lanced fins for maximum fin surface exposure
- Fin collars grip tubing for maximum contact area
- Flared shoulder tubing connections
- Silver soldering construction.
- Factory tested under high pressure
- Entire coil is accessible for cleaning.
- PVC coated steel wire coil guard furnished

Optional Accessories

Expansion Valve Kits

- Field installed on certain indoor units
- See TXV Usage table
- Chatleff-style fitting

Refrigerant Line Kits

- Refrigerant lines are shipped refrigeration clean
- Lines are cleaned, dried, pressurized and sealed at factory
- Suction line fully insulated
- Lines are stubbed at both ends

FEATURES

COMPRESSOR

3 Scroll Compressor

- High efficiency with uniform suction flow
- Constant discharge flow, high volumetric efficiency and quiet operation
- Low gas pulses during compression reduces operational sound levels
- Compressor motor is internally protected from excessive current and temperature
- Muffler in discharge line reduces operating sound levels
- Compressor is installed in the unit on resilient rubber mounts for vibration free operation



Scroll Compressor Operation

- Two involute spiral scrolls matched together generate a series of crescent-shaped gas pockets between them
- During compression, one scroll remains stationary while the other scroll orbits around it
- Gas is drawn into the outer pocket, the pocket is sealed as the scroll rotates
- As the spiral movement continues, gas pockets are pushed to the center of the scrolls. Volume between the pockets is simultaneously reduced
- When the pocket reaches the center, gas is now at high pressure and is forced out of a port located in the center of the fixed scrolls
- During compression, several pockets are compressed simultaneously resulting in a smooth continuous compression cycle
- Continuous flank contact, maintained by centrifugal force, minimizes gas leakage and maximizes efficiency
- Compressor is tolerant to the effects of slugging and contaminants. If this occurs, scrolls separate, allowing liquid or contaminants to be worked toward the center and discharged

Compressor Crankcase Heater

- Protects against refrigerant migration that can occur during low ambient operation

Optional Accessories

Compressor Sound Cover

- A reinforced vinyl compressor cover containing a 1-1/2 inch thick batt of fiberglass insulation.
- All open edges are sealed with a one-inch wide hook and loop fastening tape.

CABINET

4

- Heavy gauge steel cabinet
- Five station metal wash process
- Powder paint finish for superior rust and corrosion protection
- Control box is conveniently located with all controls factory wired
- Corner patch plate allows compressor access
- Drainage holes provided in base section

5

PermaGuard™ Unit Base

- Durable zinc-coated base section resists rust and corrosion

6

Refrigerant Line Connections, Electrical Inlets, Service Valves

- Sweat connection suction and liquid lines
- Located on corner of unit cabinet
- Suction valve can be fully shut off, while liquid valve may be front seated to manage refrigerant charge while servicing system
- Refrigerant line connections and field wiring inlets are located in one central area of cabinet for easy access
- See dimension drawing

Optional Accessories

Hail Guards

- Heavy-gauge steel construction
- Painted to match cabinet
- Surrounds unit on all four sides
- Prevent damage to the coil

Unit Stand-Off Kit

- Black high density polyethylene feet
- Raises unit off mounting surface
- Four feet furnished per order number

FEATURES

CONTROLS

Optional Accessories

Compressor Low Ambient Cut-Off Switch

- Non-adjustable switch (low ambient cut-out)
- Prevents compressor operation when outdoor temperature is below 35°F

Compressor Time-Off Control

- Kit prevents compressor short-cycling
- Allows time for suction and discharge pressure to equalize
- Permits compressor start-up in an unloaded condition
- Automatic reset
- Five minute delay between compressor shut-off and start-up

Indoor Blower Off Delay Relay Kit

- Delays indoor blower-off time during the cooling cycle

Low Ambient Kit

- Air conditioners can operate down to 45°F outdoor air temperature without additional controls
- Two low ambient control options are available for field installation:
 1. Low Ambient Control Kit (30°F)
 2. Low Ambient Control (0°F)
Requires Speed Control and Weatherproof Kit (ordered separately). Available for 208/230V models only.

NOTE - Freezestat should be installed on compressors equipped with a low ambient kit.

Freezestat

- Installs on or near the suction line of the indoor coil or on the suction line
- Senses suction line temperature and cycles the compressor off when suction line temperature falls below it's setpoint
- Opens at 29°F and closes at 58°F

Thermostat

- For thermostat options, see Optional Conventional Temperature Control Systems on page 10

SPECIFICATIONS

General Data			Model No.	TSA036H4	TSA042H4	TSA048H4	TSA060H4	
Nominal Tonnage				3	3.5	4	5	
Liquid line OD - in.				3/8	3/8	3/8	3/8	
Suction line OD - in.				7/8	7/8	7/8	1-1/8	
¹ Refrigerant (R-410A) furnished				6 lbs. 11 oz.	8 lbs. 10 oz.	10 lbs. 0 oz.	12 lbs. 0 oz.	
Outdoor Coil	Net face area sq. ft.	Outer coil		21.00	16.33	21.00	22.00	
		Inner coil		- - -	15.71	20.25	21.33	
Tube diameter - in.				5/16	5/16	5/16	5/16	
Number of rows				1	2	2	2	
Fins per inch				26	22	22	22	
Outdoor Fan	Diameter - in.				22	22	22	26
	Number of blades				3	4	4	4
	Motor hp				1/6	1/4	1/4	1/3
	Cfm				3160	3500	3600	4400
	Rpm				850	825	825	825
	Watts				215	310	310	310
	Shipping Data - lbs. 1 package				164	198	221	238

ELECTRICAL DATA

Line voltage data - 60 Hz - 3ph	208/230V	460V	208/230V	460V	208/230V	460V	208/230V	460V		
² Maximum overcurrent protection (MOCP) amps	20	15	30	15	30	15	35	15		
³ Minimum circuit ampacity (MCA)	12.35	7.65	18.2	8.5	18.8	8.8	21.8	10.7		
Compressor	Rated load amps		9.0	5.64	13.2	6	13.7	6.2	16	7.8
	Locked rotor amps		71	38	88	44	83	41	110	52
	Power factor		.85	.84	.83	.81	.90	.92	.90	.91
Condenser Fan Motor	Full load amps		1.1	0.6	1.7	1.0	1.7	1.0	1.8	1.0
	Locked rotor amps		2.1	1.1	3.1	2.3	3.1	2.3	2.9	2.0

OPTIONAL ACCESSORIES - ORDER SEPARATELY

Compressor Low Ambient Cut-Off Switch	45F08		•		•		•		•
Compressor Sound Cover	18J42		•		•		•		•
Compressor Time-Off Control	47J27		•		•		•		•
Freezestat	3/8 in. tubing	93G35	•		•		•		•
	5/8 in. tubing	50A93	•		•		•		•
Hail Guards	28 x 28 x 36 in.	14X14	•		•		•		•
	28 x 28 x 28 in.	14X16			•				
	32 x 32 x 32 in.	14X24							•
Indoor Blower Off Delay Relay	58M81		•		•		•		•
⁴ Low Ambient Kit (Fan Cycling) (30°F)	34M72		•		•		•		•
⁴ Low Ambient Control (0°F) 208/230V only	Speed Control	X5867	•		•		•		•
	Weatherproof Kit	56N41	•		•		•		•
Refrigerant Line Sets	3/8 x 7/8 x 3/8 - 30 ft.	89J60							
	3/8 x 7/8 x 3/8 - 40 ft.	89J61	•		•		•		
(Liq. x Suc. OD x Insulation Thickness - Length)	3/8 x 7/8 x 3/8 - 50 ft.	89J62							
	3/8 x 1-1/8 x 3/8 - 30 ft.	X0570							•
	3/8 x 1-1/8 x 3/8 - 50 ft.	73P91							•
Unit Stand-Off Kit	94J45		•		•		•		•

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.





¹ Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

² HACR type circuit breaker or fuse.

³ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.


⁴ Freezestat is recommended with Low Ambient Control.

DIMENSIONS

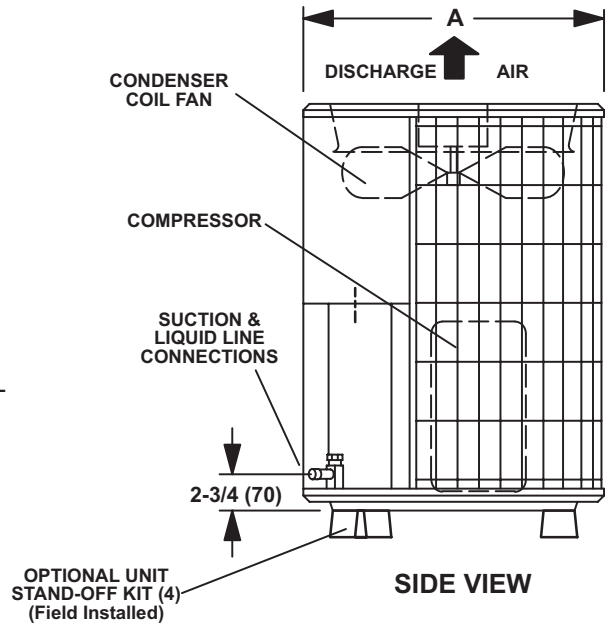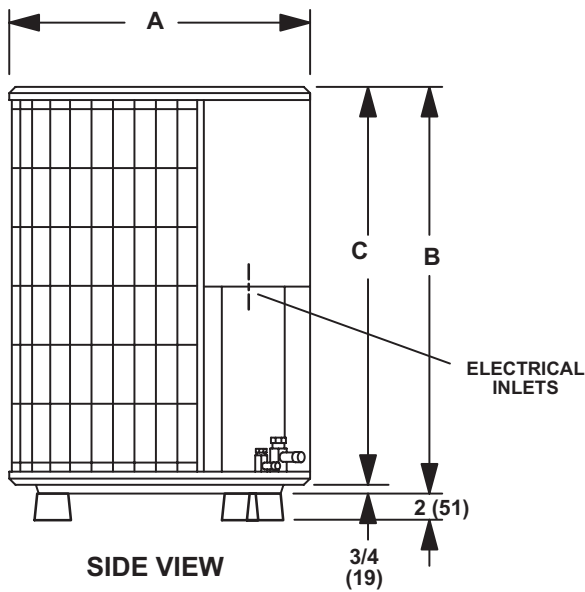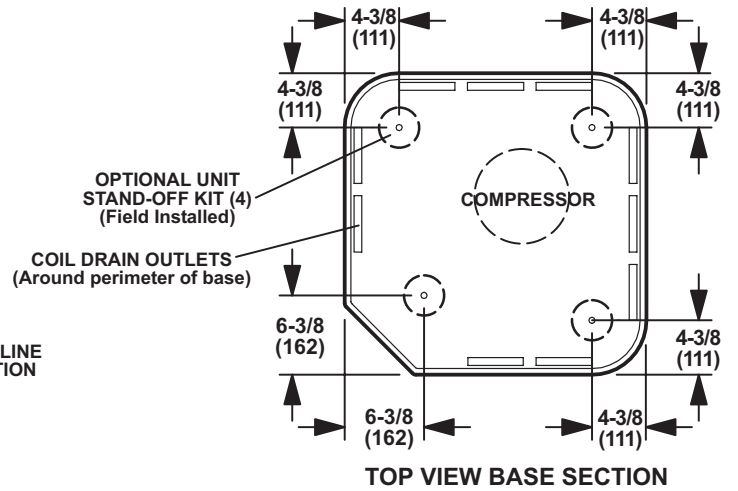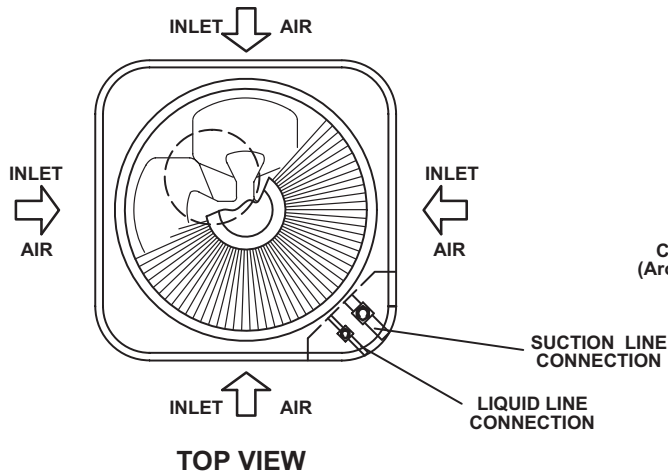

Model No.	A		B		C	
	inches	mm	inches	mm	inches	mm
TSA036H4	28-1/4	718	37-1/4	946	36-1/2	927
TSA042H4	28-1/4	718	29-1/4	743	28-1/2	724
TSA048H4	28-1/4	718	37-1/4	946	36-1/2	927
TSA060H4	32-1/4	817	33-1/4	845	32-1/2	826

INSTALLATION CLEARANCES

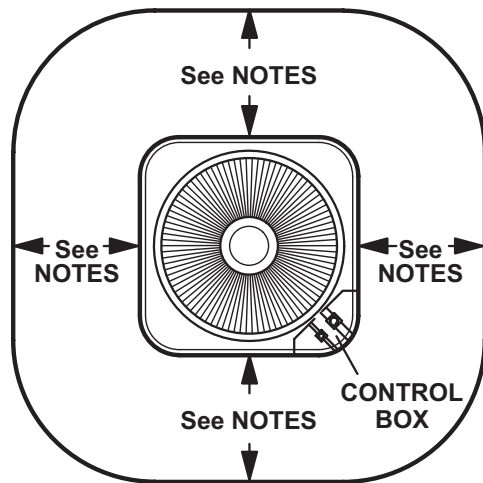

NOTES:

Service clearance of 30 in. (762 mm) must be maintained on one of the sides adjacent to the control box.

Clearance to one of the other three sides must be 36 in. (914 mm)

Clearance to one of the remaining two sides may be 12 in. (305 mm) and the final side may be 6 in. (152 mm).

A clearance of 24 in. must be maintained between two units. 48 in. (1219 mm) clearance required on top of unit.

SOUND DATA

¹ Unit Model	Octave Band Sound Power Levels dBA, re 10 ⁻¹² Watts Center Frequency - HZ							¹ Sound Rating Number (dBA)	² Estimated Sound Pressure Level at Distance From Unit (dBA at distance in ft.)				
	125	250	500	1000	2000	4000	8000		3	5	10	15	50
TSA036H4	73.5	75	74	72.5	67.5	62.5	56.5	76	69	64	58	55	44
TSA042H4	73.5	75.5	74.5	73.5	70.5	64	58.5	78	71	66	60	57	46
TSA048H4	76.5	74	73.5	73.5	70	62.5	58.5	78	71	66	60	57	46
TSA060H4	76.5	77.5	77.5	73.5	69	63.5	60.5	80	73	68	62	59	48

NOTE - the octave sound power data does not include tonal correction.

¹ Tested according to AHRI Standard 270-2008 test conditions.

² Estimated sound pressure level at distance based on AHRI Standard 275-2010 method for equipment located on the ground, roof, or on side of building wall with no adjacent reflective surface within 9.8 feet. Sound pressure levels will increase based on changes to assumptions. For other applications, refer to AHRI Standard 275.

TXV USAGE

Use this table for C35, CH23 and CR33 Field Installed TXV Match-Ups.

Model No.	Thermal Expansion Valve (TXV)
TSA036H4	12J19
TSA042H4	12J20
TSA048H4	12J20
TSA060H4	12J20

CX35 and CHX35 coils and all Lennox air handlers are shipped with a factory installed TXV

C35 coils - Replace the factory installed RFC orifice with the expansion valve listed.

CR33 and CH23 coils - Use the expansion valve listed.

AHRI STANDARD 210/240

Cooling or heating capacities are net values, including the effects of blower motor heat, and do not include supplementary heat. Power input is the total power input to the compressor(s) and fan(s), plus any controls and other items required as part of the system for normal operation.

Units which do not have an indoor air-circulating blower furnished as part of the model, i.e., split system with indoor coil only, is established by subtracting from the total cooling capacity 1250 Btu/h per 1,000 cfm, and by adding the same amount to the heating capacity. Total power input for both heating and cooling is increased by 365 W per 1,000 cfm of indoor air circulated.

TXV SUBSTITUTION

A general guide for replacing the factory installed TXV if the indoor unit (coil/air handler) is larger or smaller than the outdoor unit.

Outdoor Unit		Indoor Unit		TXV Furnished	TXV Replacement
Size	Tons	Size	Tons		
036	3	24	2	12J18	12J19
036	3	30	2.5	12J18	12J19
042	3.5	24	2	12J18	12J20
042	3.5	30	2.5	12J18	12J20
042	3.5	30/36	3	12J19	12J20
042	3.5	36	3	12J19	12J20
048	4	30/36	2.5/3	12J19	12J20
048	4	36	3	12J19	12J20

TXV Ranges:

12J18 - 1.5 to 2.5 ton systems - Use on 2.5 ton (030) and lower systems.

12J19 - 3 ton systems - Use down to 2 ton (024) systems.

12J20 - 3.5 to 5 ton systems - Use down to 3 ton (036) systems.

OPTIONAL CONVENTIONAL TEMPERATURE CONTROL SYSTEMS

CS7500 Commercial 7-Day Programmable Thermostat




- Four-Stage Heating / Three-Stage Cooling
- Universal Multi-Stage
- Intuitive Touchscreen Interface
- Automatic Changeover between Heating and Cooling
- Full Seven-Day Programming
- Four Time Periods Per Day
- Temperature and Humidity Control
- One-Touch Away Mode
- Holiday Scheduling
- Smooth Setback Recovery (SSR)
- Performance Reports
- Notifications/Reminders
- Dehumidification/Humiditrol® Control for Split Systems and Rooftop Units
- Economizer Relay Control
- Backlit Display
- Wallplate Furnished
- FDD, ASHRAE and IECC Compliant

CS3000 Commercial 5-2 Day Programmable Thermostat



- Two-Stage Heating / Two-Stage Cooling
- Conventional Systems
- Intuitive Interface
- 5-2 Day Programming
- Program Hold
- Remote Indoor Temperature Sensing
- Smooth Setback Recovery (SSR)
- Economizer Relay Control
- Maintenance/Filter/Service Reminders
- Backlit Display
- Wallplate Furnished
- Simple Up and Down Temperature Control

CS3000 Non-Programmable Thermostat



- One-Stage Heating / Cooling
- Conventional Systems
- Intuitive Interface
- Manual Changeover
- Backlit Display
- Simple Up and Down Temperature Control

OPTIONAL CONVENTIONAL TEMPERATURE CONTROL SYSTEMS

Description	Catalog No.
CS7500 Commercial 7-Day Programmable Thermostat	
CS7500 7-Day Thermostat	22K41
Sensors/Accessories	² Remote non-adjustable wall-mount 20k 47W36
	² Remote non-adjustable wall-mount 10k 47W37
	Remote non-adjustable discharge air (duct mount) 19L22
	Outdoor temperature sensor X2658
CS3000 Commercial 5-2 Day Programmable Thermostat	
CS3000 5-2 Day Thermostat	11Y05
Sensors/Accessories	Remote non-adjustable wall mount 10k averaging Thermostat wall mounting plate 47W37
	X2659
CS3000 Non-Programmable Thermostat	
CS3000 Non-Programmable Thermostat	51M32
Universal Thermostat Guard with Lock (clear)	
	Inside Dimensions (H x W) 5 7/8 x 8 3/8 in. 39P21

¹ Up to nine of the same type remote temperature sensors can be connected in parallel.

² Remote wall-mount sensors can be applied in any of the following combinations:

One Sensor - (1) 47W36, Two Sensors - (2) 47W37, Three Sensors - (2) 47W36 and (1) 47W37

Four Sensors - (4) 47W36, Five Sensors - (3) 47W36 and (2) 47W37

REVISIONS

Sections	Description of Change
Optional Accessories	Updated Line Sets available.
Optional Conventional Temperature Control Systems	Updated catalog number for CS7500 Thermostat.



Visit us at www.Lennox.com

For the latest technical information, www.LennoxCommercial.com

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2023 Lennox Industries, Inc.