


HD CCTV TWISTED PAIR TRANSMISSION SYSTEM – Passive Series
ITEM NO.: ATP11HDET HD Video Transceiver with pigtail




ATP11HDET

- To send HD-CVI, HD-TVI, AHD signal 720p at 300M, 1080p at 200M over UTP cable.
- BNC male to screw terminal with 10cm mini coax cable for easy connection.
- Compact and mini size, could mount multiple units behind multiplexer, Quad, DVR..etc
- Passive, no power required.
- Eliminate coaxial cable.
- To work with Active transmitter ATA11HD-T, Active receiver ATA11HD-R for extra long distance transmission.

Installation View

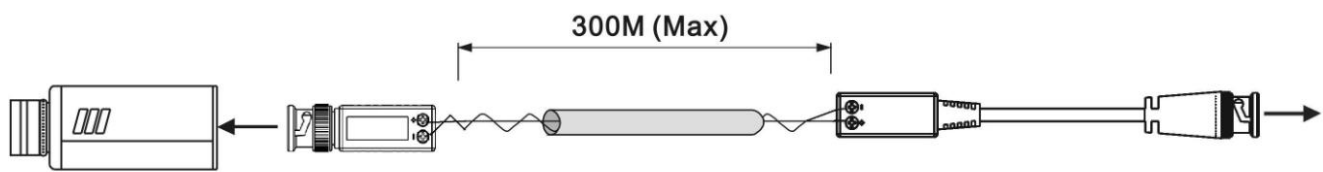

Panel View:



This installation should be made by a qualified service person and should conform to all local codes.

Specification:

ITEM NO.	ATP11HDET
Video Input / Output Terminals	BNC MALE (75Ω 、1V p-p)
Video Onput / Iutput Terminals	TERMINAL BLOCK
Bandwidth	50Hz ~ 47MHz (-3dB)
Transmission Distance	720p 300M, 1080p 200M (Max)
Temperature	Operation: 0 to 55℃, Storage: -20 TO 85℃, Humidity: up to 95%
Dimension mm	14.5 × 15.5 × 145, include 100mm mini coax cable
Weight g	25