



Project Map

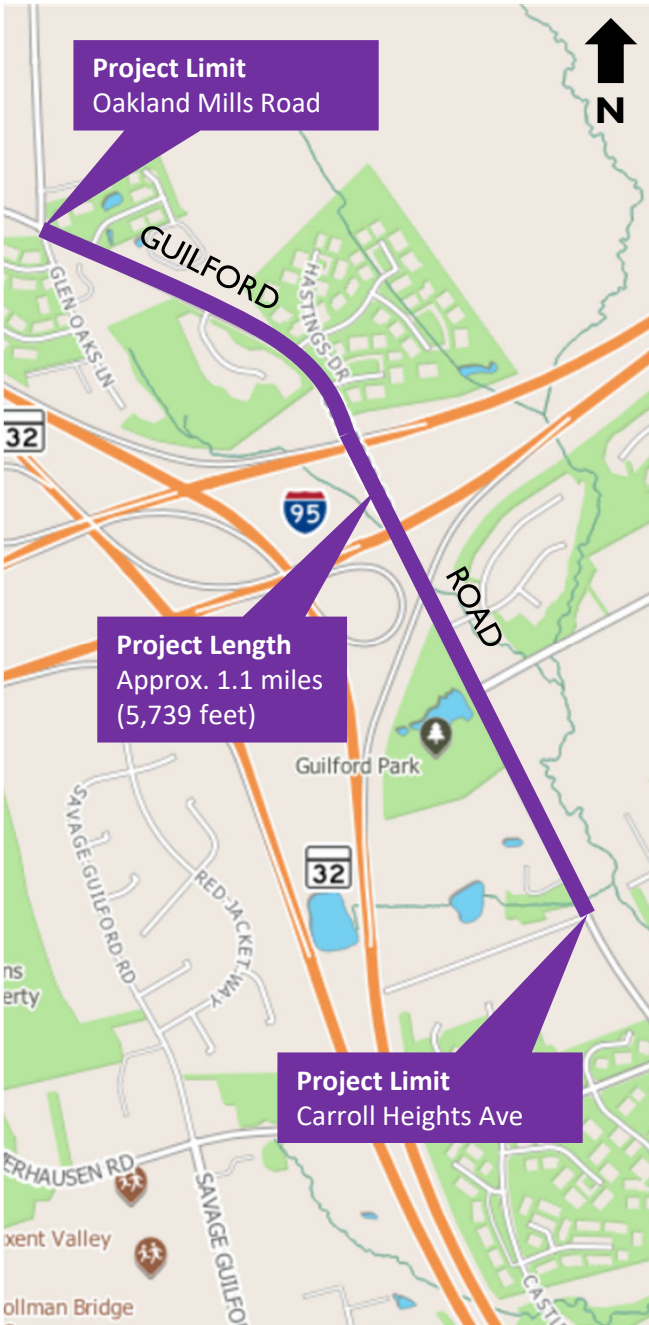

Project Limit
Oakland Mills Road

Project Length
Approx. 1.1 miles
(5,739 feet)

Project Limit
Carroll Heights Ave

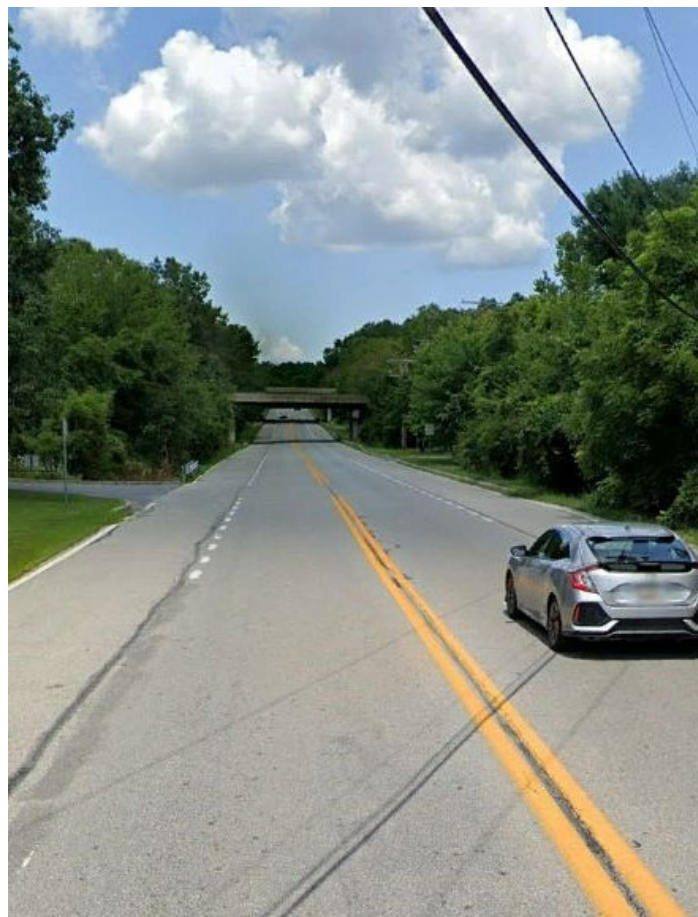

HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS

Bureau of Engineering
Transportation & Special Projects Division
7125 Riverwood Drive, Suite B
Columbia, Maryland 21046

Project Manager: Jacob Taylor, PE
Phone: 410-313-6145
Email: jataylor@howardcountymd.gov

HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS

"Engineering Great Communities"



Capital Project K5040 Guilford Road Pedestrian / Bicycle Improvements, Phase 3 Public Informational Meeting

Bollman Bridge Elementary School Cafeteria
8200 Savage-Guilford Road
Savage, MD 20763

July 11, 2024
5:00 – 6:30 PM

Project Need

- Significant pedestrian and bicycle activity observed along Guilford Road
- Housing in the area generates a substantial number of trips
- The need for improvements to Guilford Road is cited in the Howard County Comprehensive Transportation Plan
- Existing pedestrian and bicycle facilities along Guilford Road is limited

Project Purpose

- Provide multimodal connectivity between:
 - Surrounding residential areas
 - Guilford Park
 - Guilford Elementary School
 - Guilford Park High School
- Provide safer access for pedestrians, bicyclists, and other vulnerable road users along Guilford Road

Key Project Info

- Project limits are from Carroll Heights Avenue, 1.1 miles north to Oakland Mills Road
- North of Mission Road:
 - Removal of existing accel / decel lanes along the east side of Guilford Road
 - Construction of curb and gutter and shared use path along the east side of Guilford Road
 - Filling in of sidewalk gaps along west side of Guilford Road
- South of Mission Road:
 - Removal of existing accel / decel lanes along the west side of Guilford Road
 - Construction of curb and gutter and shared use path along the west side of Guilford Road
- Street lighting, signage, roadway striping, storm drainage, stormwater management facilities, and landscaping associated with shared use path
- Project is currently in the 30% preliminary design stage
- Final design is expected to be complete in spring 2025
- Construction anticipated to begin fall 2025, pending land acquisition

After the Meeting

The latest design plans and materials from tonight's meeting will be available on the Howard County website:

<https://www.howardcountymd.gov/public-works/transportation-special-projects-division>

For more information, or to submit questions and comments, please email Jacob Taylor, Project Manager, at: jataylor@howardcountymd.gov

Notes:

[illegible]