


RED LINE

Is a high quality image transfer paper designed for laser printing and transfer to dark substrates. Laser Dark Transfer is compatible for a broad range of laser printing including HP Indigo and others. This permanent fabric transfer is an excellent choice for laser image transfer applications.

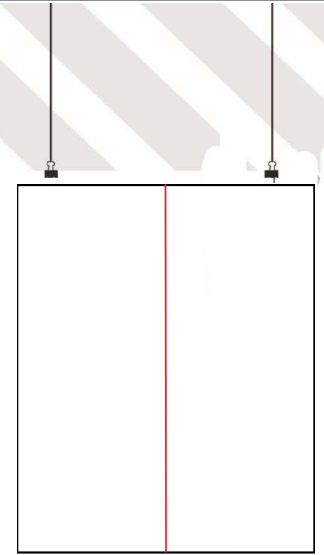

Not Mirror

CREATES
DESIGNS
IN JUST
3 STEPS

1. DESIGN



2. PRINT



3. IRON



HOW IT WORKS

- 1) Preheat press to **375° F.**
- 2) Press garment for **3-5 seconds** to release moisture and *remove wrinkles*
- 3) Trim off the white area outside of your design leaving a small tab in one corner. take the tab and bend it until the two layers separate. peel off the liner and discard, then trim the tab off so that your design shows no white background.
- 4) Place the printed transfer with the printed side up and the parchment paper on top of the transfer
- 5) Set at pressure **40 psi** for best results.
- 6) Press for **25 seconds**.
- 7) **Wait for transfer to cool, at least 2 minutes**, then *remove parchment paper* using a smooth, *even motion*.



FOR LIGHT OR DARK
COLORED SUBSTRATES



EASY TO PEEL BOTH
HOT AND COLD



FAST DRYING
RECEIVING LAYER



EXCELLENT COLOR DENSITY
AFTER TRANSFER AND WASHING



PERMANENT FABRIC
TRANSFER



EXCELLENT TONER
ADHESION



EXCELLENT QUALITY ON
LASER PRINTERS THAT DO
NOT USE FUSER OIL



PRINT QUALITY TESTED
USING OEM INKS ONLY



SCAN ME