



EASY SLIDE

ROTO PATIO INOWA


PVC PROFILES

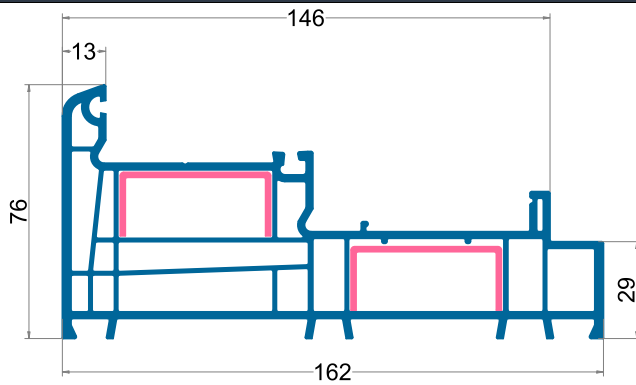


ESL 1801
Frame Profile

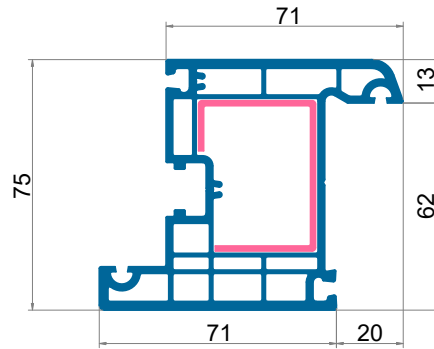


ESL 1804
Sash Profile

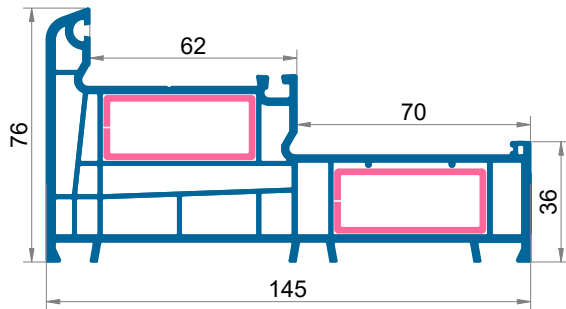


ESL 1802
Narrow Frame Profile

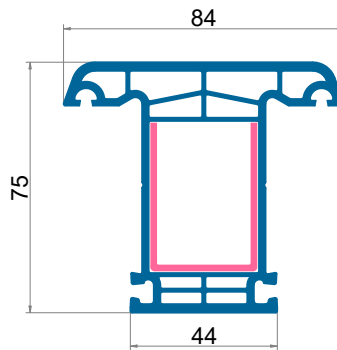


ESL 1803
Mullion Profile

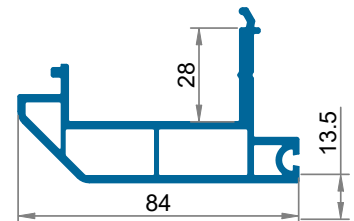


ESL 1825
Interlock Profile

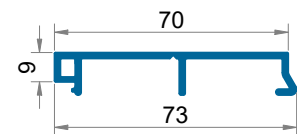


ESL 1828
Narrow Frame Channel Cover

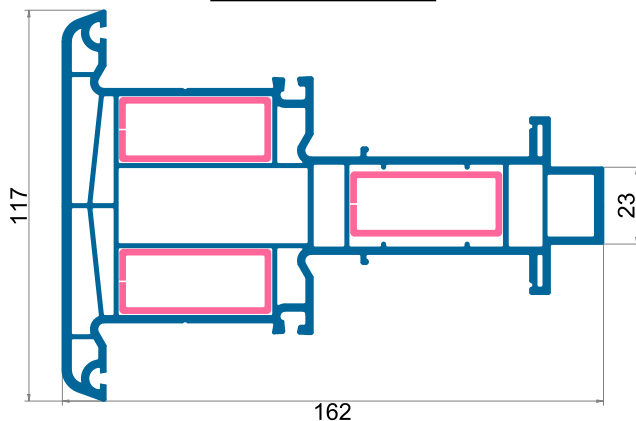

ESL 1813
In-Frame Mullion Profile

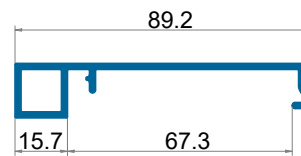


ESL 1818
Frame Channel Cover Profile

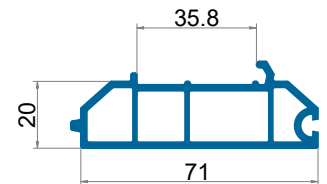


ESL 1826
Frame Threshold Cover Profile

GLAZING BEAD PROFILES




ESL 1808
24 mm Glazing Bead




ESL 1809
32 mm Glazing Bead

STEEL REINFORCEMENTS


ESL
1801
1813




ESL
1801
1813




ESL
1803



ESL
1803



ESL
1804



Reinforcement thickness
must be minimum 1.20 mm.

ALUMINIUM PROFILES



ESP-01 Top Rail White

ESP-03 Top Rail Milky Coffee

ESP-05 Top Rail Anthracite



ESP-02 Bottom Rail White

ESP-04 Bottom Rail Milky Coffee


ESP-06 Bottom Rail Anthracite



ESP-007 Keeper U-Profile White

ESP-008 Keeper U-Profile Milky Coffee

ESP-009 Keeper U-Profile Anthracite



ESS-011

False Mullion



ESS-004
Interlock
White

ESS-005
Interlock
Black


ESS-006
Interlock
Silver




ESP-10 Keeper Profile Silver

(Used with the False Mullion.)


CONNECTOR BLOCKS

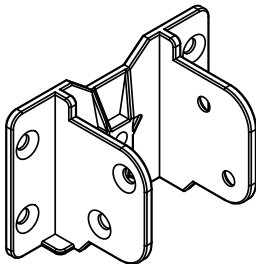

Mullion Connector Block

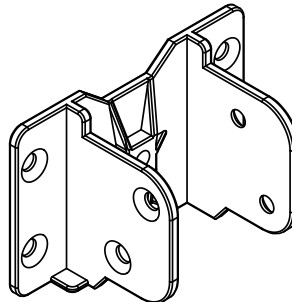


**In-Frame Mullion
Connector Block 1**



**In-Frame Mullion
Connector Block 2**

SLIDING HANDLE

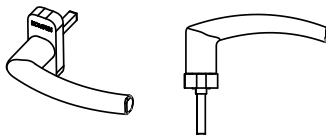


PATIO S SLIDING HANDLE WHITE 43MM

PATIO S SLIDING HANDLE MILKY COFFEE 43MM

PATIO S SLIDING HANDLE ANTHRACITE 43MM

DOUBLE-SIDED SLIDING HANDLE

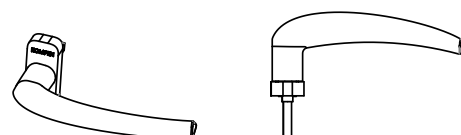


RTL ALV 100MM DOUBLE-SIDED SLIDING HANDLE R07.2 WHITE


RTL ALV 100MM DOUBLE-SIDED SLIDING HANDLE R07.2 MILKY COFFEE

RTL ALV 100MM DOUBLE-SIDED SLIDING HANDLE R07.2 ANTHRACITE


KIT



PATIO INOWA BOTTOM CARRIAGE L



PATIO INOWA TOP GUIDE L



PATIO INOWA REAR LOCKING L



INOWA KEEPER



INOWA REAR STOPPER 16.5 MM

PATIO INOWA BOTTOM CARRIAGE R

PATIO INOWA TOP GUIDE R


PATIO INOWA REAR LOCKING R

INOWA REAR LOCKING PIN 33.5X8

INOWA REAR LOCKING KEEPER

INOWA STOPPER IS A/C

ESPAGNOLETTE, 30 MM BACKSET, WITHOUT CYLINDER



INOWA ESR ESPAG. 690/263 30MM 600-800

INOWA ESR ESPAG. 890/413 30MM 801-1000

INOWA ESR ESPAG. 1090/513 30MM 1001-1200 1V


INOWA ESR ESPAG. 1290/563 30MM 1201-1600 1V

INOWA ESR ESPAG. 1690/563 30mm 1601-1800

INOWA ESR ESPAG. 1690/563 30mm 1801-2400

INOWA ESR ESPAGNOLETTE 30MM 2401-2500 2V

ESPAGNOLETTE, 30 MM BACKSET, WITH CYLINDER



INOWA Locking ESPAG. 1890/563 30mm 1801-2400

INOWA Locking ESPAGNOLETTE 30MM 2401-2500 2V


CONNECTING ELEMENTS



NT CORNER ELEMENT



NT CORNER 1V



NT MV 130 MM EXTENSION 1E

INTERMEDIATE CONNECTORS



ALVERSA KS/PS TOP HORIZONTAL 600 - 800

ALVERSA KS/PS TOP HORIZONTAL 801 - 1000 1E

ALVERSA KS/PS TOP HORIZONTAL 1001-1200 1E

ALVERSA KS/PS TOP HORIZONTAL 1201 - 1400 1E

ALVERSA KS/PS TOP HORIZONTAL 1401 - 1650 1E

ALUMINIUM PROFILE APPLICATION FOR 30 MM BACKSET ESPAGNOLETTE (WITH / WITHOUT CYLINDER)

ESP 01-03-05
Top Rail



ESP 07-08-09
Keeper U-Profile



**INOWA
KEEPER
K 12.2 MM**




ESP 01-03-05
Top Rail




ESP 02-04-06
Bottom Rail

INTERLOCK PROFILE APPLICATION

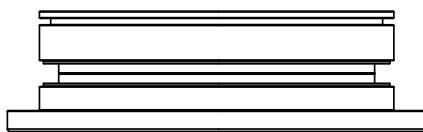


ESL 1804
Sash Profile
(Sash, Top View)




ESS-004-005-006
Interlock Profile
White-Black-Silver


FALSE MULLION APPLICATION

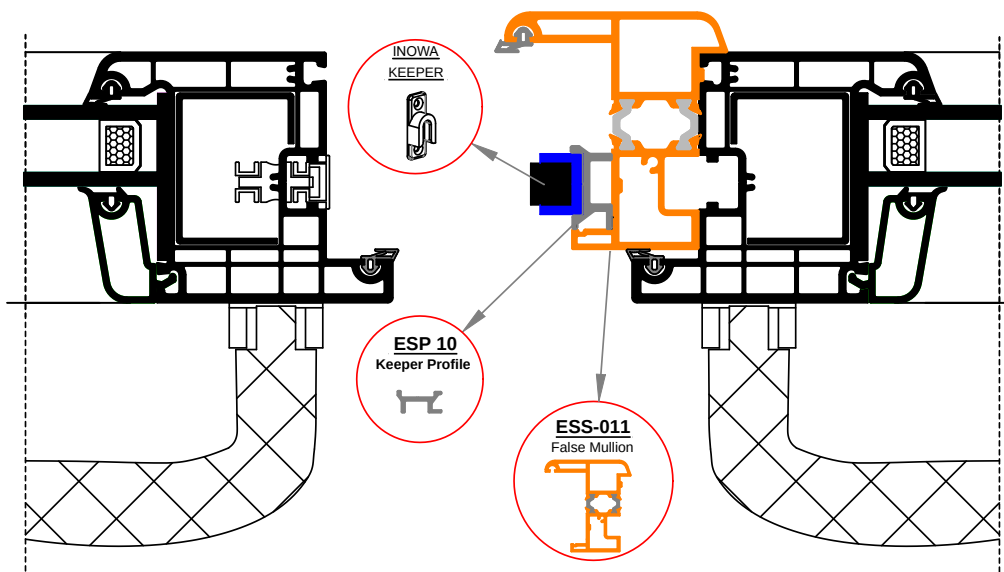


*Keeper Profile (ESS-003) is to be applied on the passive sash side.

HARDWARE APPLICATION FOR 15-30-35 MM BACKSET ESPAGNOLETTE

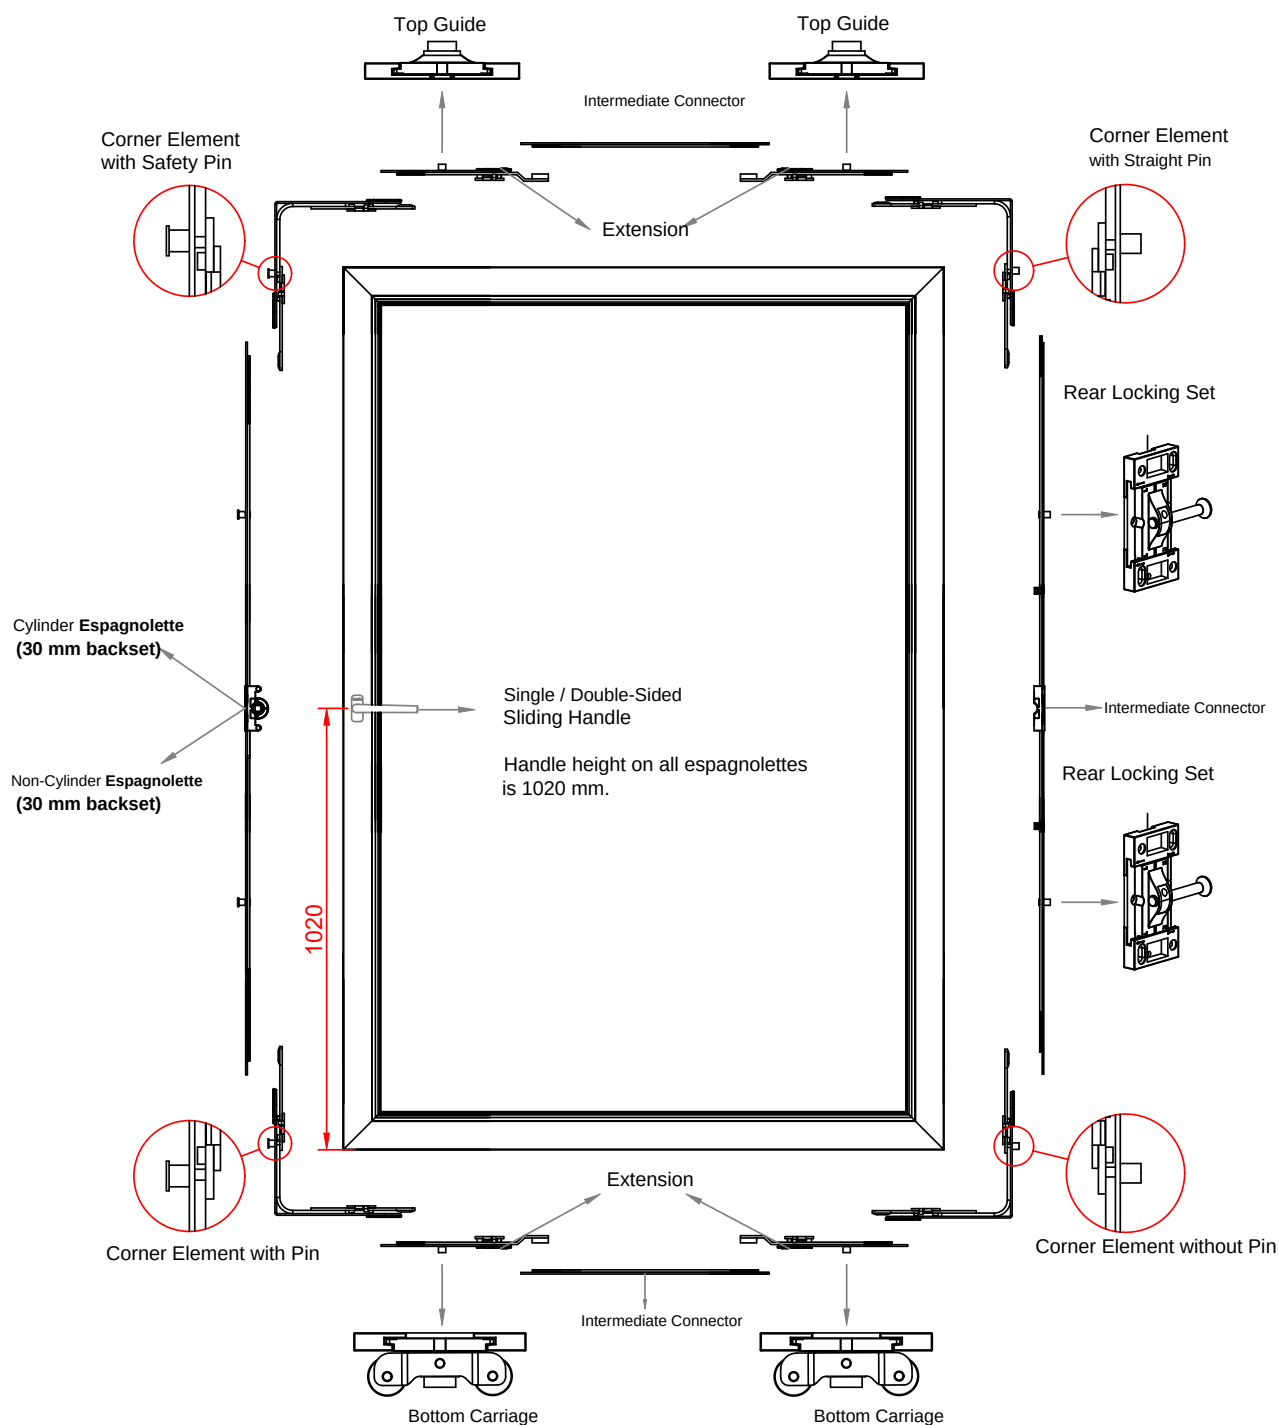


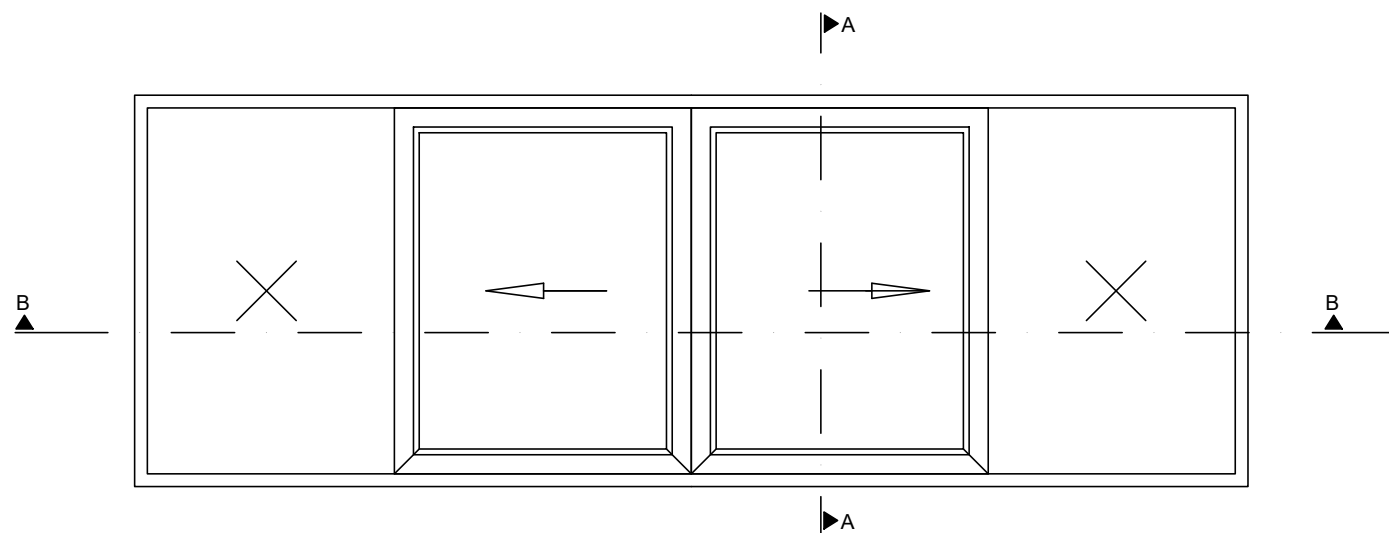

VIEW

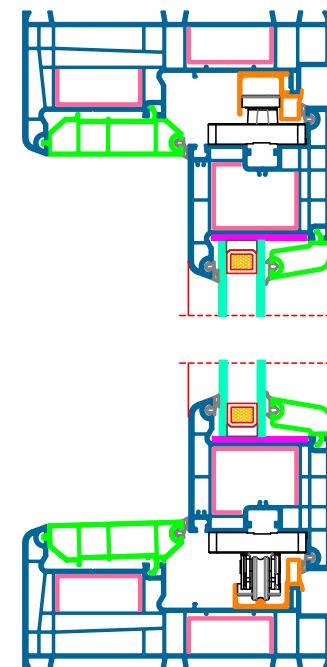

SECTION A-A

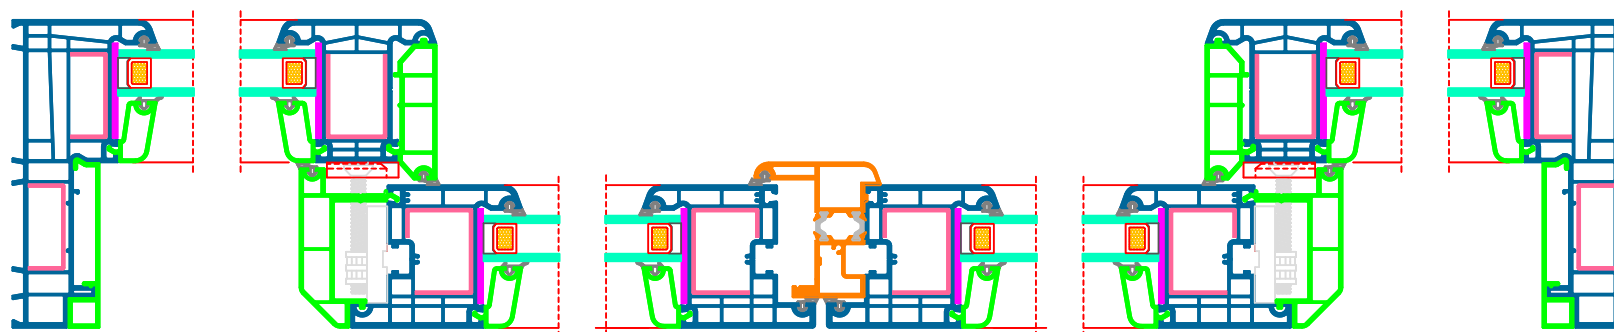

SECTION B-B

