


- KEYED NOTES:**
- 03.01 Concrete foundation wall - re: structural
 - 03.02 Concrete footing - re: structural
 - 03.03 4" concrete floor slab over vapor barrier over 4" gravel base - re: structural
 - 05.04 Steel tube beam - re: structural
 - 06.01 Wood framed partition - re: partition types
 - 06.02 Plywood floor sheathing - re: structural. Paint - re: finish schedule
 - 06.04 Plywood roof sheathing - re: structural
 - 06.05 Floor joist - re: structural
 - 06.06 Roof joist - re: structural
 - 06.07 Pre-manufactured roof truss - re: structural
 - 06.10 Wood framing - re: structural
 - 07.01 80 mil PVC membrane roofing system fully adhered over recovery board over polyisocyanurate insulation (R-30 min.) over roof vapor barrier
 - 07.02 Prefinished metal coping cap - re: 08/A1.25. Match wall panel finish
 - 07.06 24 ga. concealed fastener metal wall panel system, prefinished (MBCI Masterline 16 Panel or equivalent) - install as per manufacturer's recommendations
 - 07.08 2" rigid foundation insulation - extend insulation 24" below slab at perimeter. Continue insulation between concrete floor slab and foundation to create 1/2" separation joint - re: exterior details.
 - 07.09 Unfaced batt insulation
 - 07.19 20 ga. stainless steel flashing - re: exterior details
 - 08.03 Scheduled aluminum storefront system - re: window elevations
 - 08.04 Aluminum sunshade system - re: details
 - 09.02 Scheduled ceiling system
 - 09.03 (1) layer 5/8" gypsum board (paint)
 - 09.04 (1) layer 5/8" exterior gypsum sheathing
 - 09.08 Metal stud framed soffit system - re: ceiling details
 - 23.01 Mechanical roof top unit on curb - re: mechanical and detail 06/A1.25
 - 26.01 Light fixture - re: electrical
 - 31.02 Geo piers where occurs - re: Structural and Geotechnical Report

09 WALL SECTION 09 1/2" = 1'-0"
 10 WALL SECTION 10 1/2" = 1'-0"
 11 WALL SECTION 11 1/2" = 1'-0"
 12 WALL SECTION 12 1/2" = 1'-0"

STUDIO 333 ARCHITECTS
 333 24TH STREET
 OGDEN, UT 84401
 801.394.3033

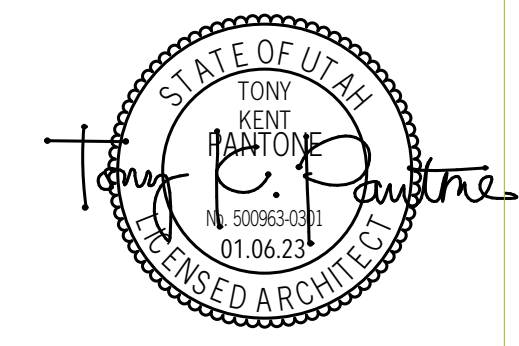

WEST FIELD SR SEMINARY
 2200 S STREET, TAYLOR, UT

| NO. | DATE | DESCRIPTION |
|-----|------|-------------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

PERMIT SET
 DATE: 01.25.23
 PROJECT NUMBER: 2154

