

ADDENDUM

Project: Camp Ben Lomond Eating Shelters

Project No.: 533-4012-24020101

Addendum No.: 01

Project Address: 2635 East 5100 North, Liberty, Utah

Date: October 17, 2025

Owner: The Church of Jesus Christ of Latter-day Saints, a Utah corporation sole

From (Architect): Evans & Associates Architecture

Instructions to Prospective Bidders:

This Addendum forms a part of the Contract Documents and modifies the original Bidding Documents and/or prior Addenda as noted below. All conditions, requirements, materials and workmanship are to be as described in the Contract Documents unless specifically stated otherwise. This Addendum consists of 3 page(s) and the attached drawing(s), Sheet(s) C121, C122 dated October 17, 2025.

1. Changes to prior Addenda:

- a. None

2. Changes to Bidding Requirements:

a. Owner-Provided / Contractor Installed

- The contractor shall include in their bid the cost to drop off a trailer to Smith Steelworks for them to load the materials. The contractor is responsible for transporting the materials to the project site.
Smith Steelworks
270 West 500 South
Spanish Fork, Utah 84660
Contact: Russel Smith, 801-414-1724

b. Bid Alternate #1

The contractor shall include all costs associated with all electrical work shown on sheets C121 and C122 as Bid Alternate #1. These costs SHALL NOT be included in the base bid. The contractor shall upload a PDF on their letterhead with these costs.

c. General Conditions

The contractor shall include in their base bid all cost required for Winter Conditions to keep the project moving forward for the duration of the project.

d. Temporary Toilets

The contractor shall provide temporary toilets for the duration of the project.

3. Changes to Conditions of the Contract:

- a. None

4. Changes to Specifications:

- a. None

5. Changes to Drawings:

- a. None



Pavilion Location #1

Provide all required conduit, branch circuits, four (4) light fixtures (F1), one (1) receptacle with weatherproof cover, lockable non-fused, NEMA 3R, 30A, 2 pole disconnect and 0-60 minute timer switch with weatherproof cover for lighting controls for pavilion. See C122 for fixture requirements.

Pavilion Location #2

Provide all required conduit, branch circuits, four (4) light fixtures (F1), one (1) receptacle with weatherproof cover, lockable non-fused, NEMA 3R, 30A, 2 pole disconnect and 0-60 minute timer switch with weatherproof cover for lighting controls for pavilion. See C122 for fixture requirements.

Pavilion Location #3


Provide all required conduit, branch circuits, four (4) light fixtures (F1), one (1) receptacle with weatherproof cover, lockable non-fused, NEMA 3R, 30A, 2 pole disconnect and 0-60 minute timer switch with weatherproof cover for lighting controls for pavilion. See C122 for fixture requirements.

Pavilion Location #4

Provide all required conduit, branch circuits, four (4) light fixtures (F1), one (1) receptacle with weatherproof cover, lockable non-fused, NEMA 3R, 30A, 2 pole disconnect and 0-60 minute timer switch with weatherproof cover for lighting controls for pavilion. See C122 for fixture requirements.

General Notes

1. ALL CONDUITS THAT EXTEND THROUGH CONCRETE SHALL BE GALVANIZED RIGID CONDUIT AND SHALL BE WRAPPED WITH TWO (2) LAYERS OF PVC TAPE.
2. ALL ELBOWS THAT EXTEND THROUGH CONCRETE SHALL BE GALVANIZED RIGID CONDUIT AND WRAPPED WITH TWO (2) LAYERS OF PVC TAPE.
3. ROUTE SITE BRANCH CIRCUIT CONDUITS A MINIMUM OF 24" BELOW GRADE. CONTRACTOR SHALL REMOVE ALL LARGE ROCKS ADJACENT TO CONDUIT. BACKFILL MATERIAL SHALL BE CLEAN AND FREE OF LARGE ROCKS.
4. ALL CONDUITS AND CONNECTIONS SHALL BE WATERTIGHT REGARDLESS OF LOCATION.
5. THE CONTRACTOR SHALL VERIFY ALL CIRCUITS PRIOR TO INSTALLATION OF ANY ADDITIONAL LOAD.
6. CONTRACTOR TO ADJUST THE FEEDER CONDUCTORS AND CONDUIT SIZES BASED ON THE ACTUAL INSTALLED FEEDER LENGTH AS NECESSARY FOR A 2% MAXIMUM VOLTAGE DROP.

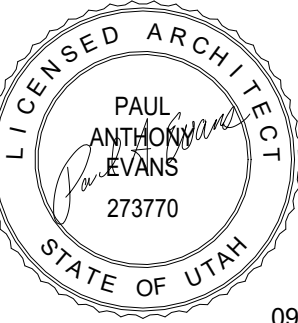

Project for:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

New Eating Shelters for:

Camp Ben Lomond

2635 East 5100 North
Liberty, Utah


#	Description	Revision Schedule	
		Date	

Project Number:	25-36
Plan Series:	
Property Number:	533-4012-24020101


September 2, 2025

Electrical Site Plan

C121

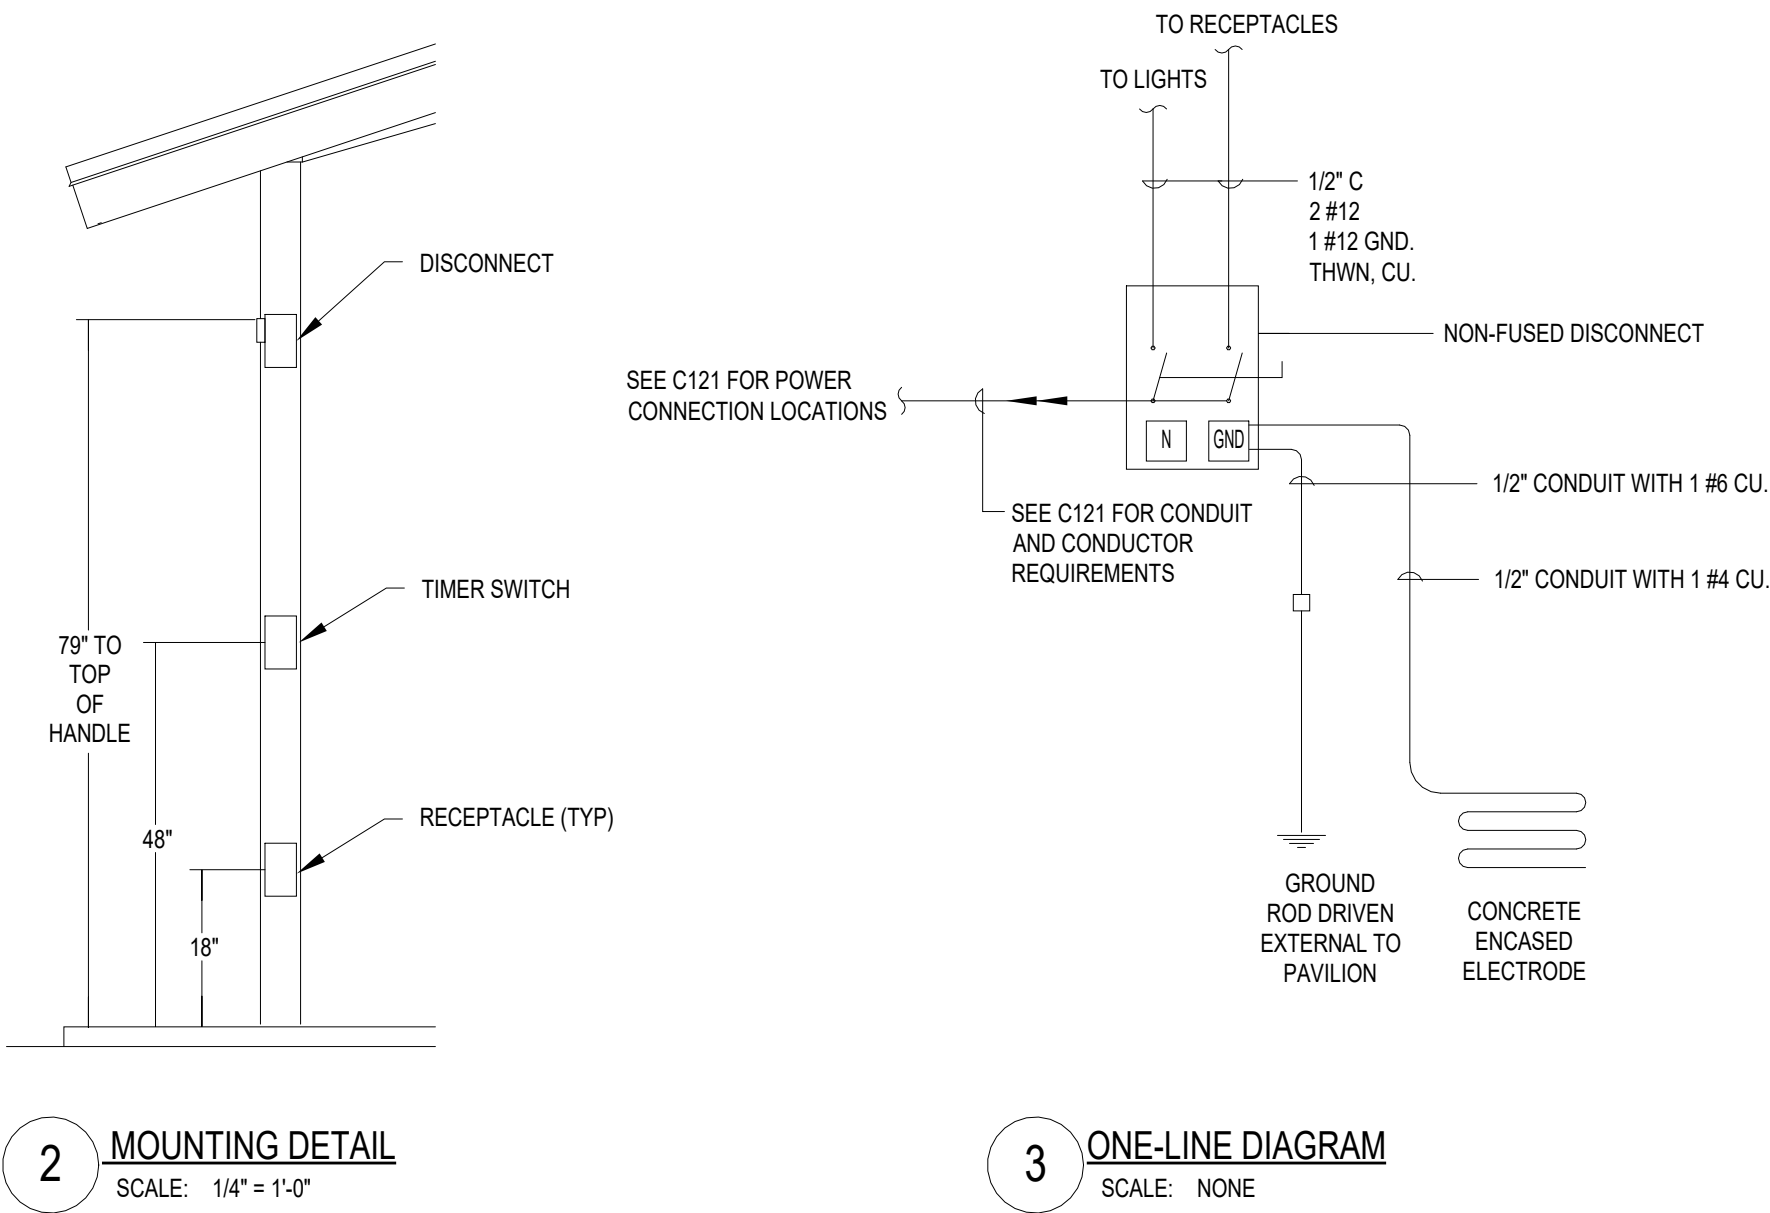

LIGHT FIXTURE SCHEDULE											
TYPE	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD (VA)	MOUNTING	LAMPS				REMARKS
							TYPE	WATTS	COLOR (KELVIN)	CRI	
F1	LITHONIA ATG ELECTRONICS DAYRITE ELITE ABOVE ALL LIGHTING	FEM L48 3000LM IMAFL MD MVOLY 30K 80CRI VPM44FT-50P-T1 VTS4285L6CST-JNS-DIM 4-CWS-LED-4000L/5000L/6000L-DIM10-MVOLT-35K/40K/50K-85 VP12D40301	SEALED AND GASKETED WET LOCATION RATED 3,000 LUMENS	120	33	SURFACE	LED	33	3000	80	

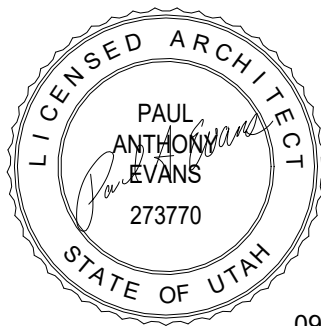

Project for:

THE CHURCH OF
JESUS CHRIST
OF LATTER-DAY SAINTS

New Eating Shelters for:

**Camp Ben
Lomond**

2635 East 5100 North
Liberty, Utah

Revision Schedule			
#	Description	Date	

Project Number:
25-36

Plan Series:

Property Number:
533-4012-24020101

September 2, 2025

Electrical Details

C122