



## 8'X12'



### \$12667

## 8'X24'




### \$21360

## 12'X12'



### \$15740

- ▶ Ready-frame 4 season construction - Build ANYWHERE
- ▶ Pre-cut insulated panels. total wall / roof configuration of around R19/R28/R36
- ▶ Interior and exterior panels are OSB
- ▶ Bottom floor panels have a protective sealant. If you prefer to use an insulated concrete slab foundation we can remove the floor panels from your kit.
- ▶ Pre-cut opening for a standard 36" pre-hung single entry door (door not included)
- ▶ Pre-cut opening for 5' doors. (doors not included)
- ▶ All sealants, tape, screws, and house wrap
- ▶ DIY assembly kits come with instructions and diagrams. It is recommended to have a lead hand with building experience.

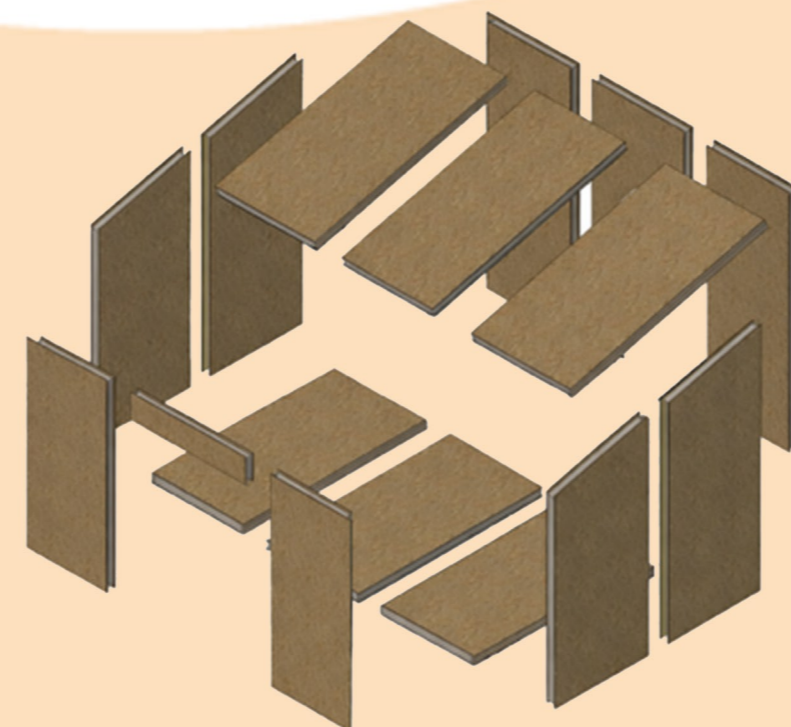

- ▶ Barn raising and community oriented - Green roof friendly
- ▶ Pre-cut - Limited tools needed and no crane required
- ▶ 10' high ceiling - Large openings for natural sunlight
- ▶ Minimal thermal bridging - Extremely air tight - Good sound insulation
- ▶ Please note these are insulated framing kits. All finishings including siding, steel roofing and interior kitchen/bathroom etc are not included.
- ▶ Delivery and tax not included.