
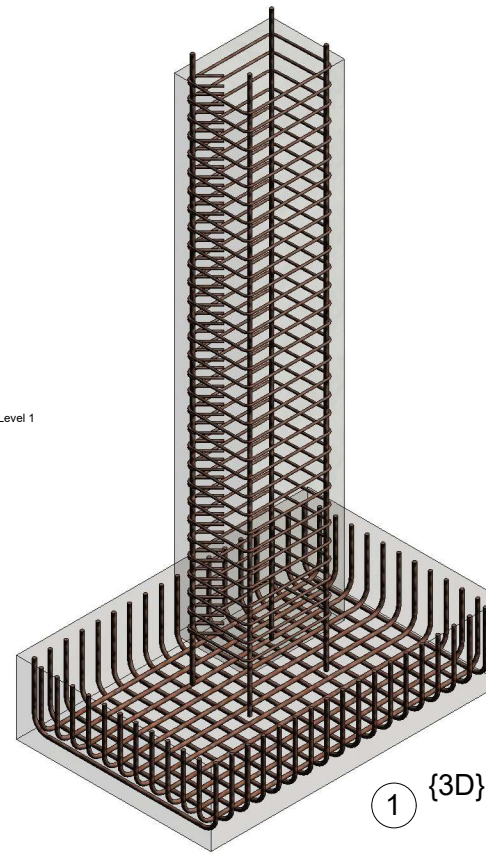
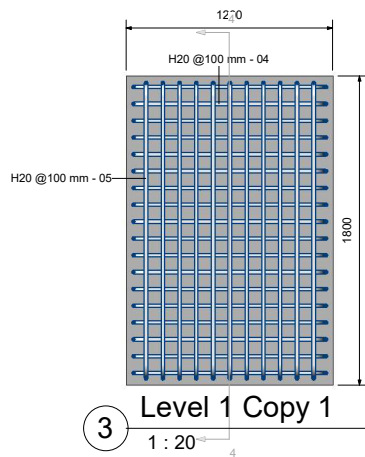
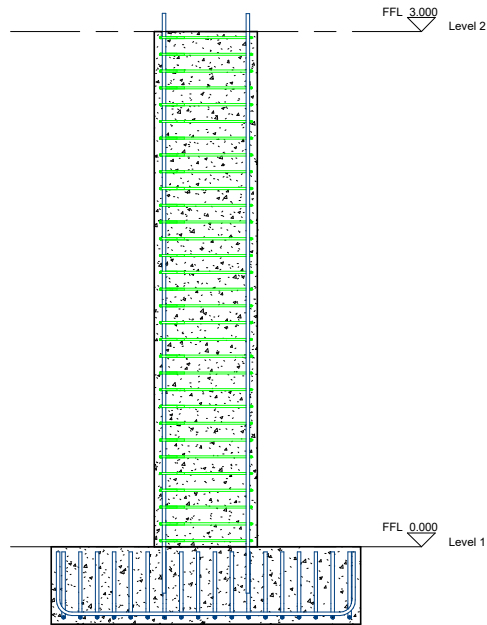


Column Footing and Rebar Schedule 001										
Schedule Mark	Bar Diameter	Bar Length	A	B	C	D	E	Quantity	Total Bar Length	Image
STR 1	12 mm	2125 mm	540 mm	390 mm	160 mm	160 mm	1180 mm	31	65875 mm	
VTC 1	20 mm	3350 mm	3345 mm	0 mm	0 mm	0 mm	0 mm	1	3350 mm	
VTC 1	20 mm	3375 mm	3370 mm	0 mm	0 mm	0 mm	0 mm	1	3375 mm	
VTC 1	20 mm	3375 mm	3370 mm	0 mm	0 mm	0 mm	0 mm	1	3375 mm	
VTC 1	20 mm	3450 mm	3430 mm	0 mm	0 mm	0 mm	0 mm	1	3450 mm	
FTG 1	20 mm	1825 mm	390 mm	1140 mm	390 mm	0 mm	0 mm	18	32850 mm	
FTG 2	20 mm	2375 mm	365 mm	1740 mm	365 mm	0 mm	0 mm	11	26125 mm	

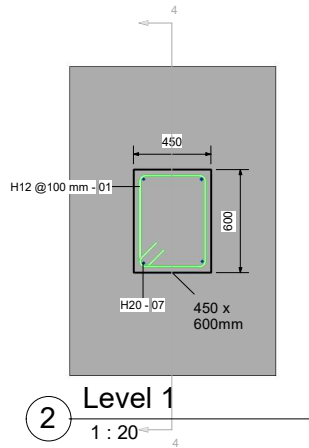

www.autodesk.com/revit

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

No.	Description	Date

DHD
CL, FT & REBARS
SCHEDULE

Project number	001
Date	2025/10/19
Drawn by	J.FONTILIUS
Checked by	Checker
Scale	1 : 20

S.2

2025-10-20 8:00:40 PM