

ASL and DRAINSCAPES

PO Box 270539
 Saint Louis, MO 63127-0539
 (314) 892-9888
 Donna@AceStLouis.com

Quote

ADDRESS
VILLAGE OF GREENTRAILS ASSOCIATION INC Attn: Tom Ladue Rd/Minitree Ct

SHIP TO
VILLAGE OF GREENTRAILS ASSOCIATION INC Attn: Tom Ladue Rd/Minitree Ct

QUOTE #	DATE	EXPIRATION DATE
E20-23352	07/02/2020	09/15/2020



TRACKING NO.

314.275.7728

ACTIVITY	AMOUNT
***** SPILLWAY EROSION REPAIR We propose to: Repair erosion and to recover a spillway area approximately 30' wide x 200' long. Includes: - Up to (200) tons of topsoil used to fill eroded areas within spillway - Compaction of added soil - Work area covered with 12 oz Heavy Duty felt non-woven liner - Up to (300) tons of 2-man rip-rap used to recover the spillway areas - All disturbed turf areas surrounding the spillway will be covered with an erosion control straw-blanket and fescue grass seed SPECIAL NOTE: During construction, up to 3,000 square feet of straw mat and 120 square feet of straw wattle will be used for BMP phase erosion control. Minitree Ct will be used as staging area for hauling, trucking and materials. We are not responsible for damage to roadway/staging area (if any). OTHER: If additional 2-man rip-rap or topsoil is needed, please add \$2,900 per tandem load of 2-man rip-rap and \$2,000 per tandem load of topsoil. ***** LICENSES and PERMITS: Permit fee(s) and acquisition are the responsibility of the customer. We estimate the cost to be \$500.00. For ACE ST LOUIS and DRAINSCAPES to provide acquisition and preparation service, please add \$100 per hour plus cost of permit.	142,000.00

TOTAL

\$142,000.00

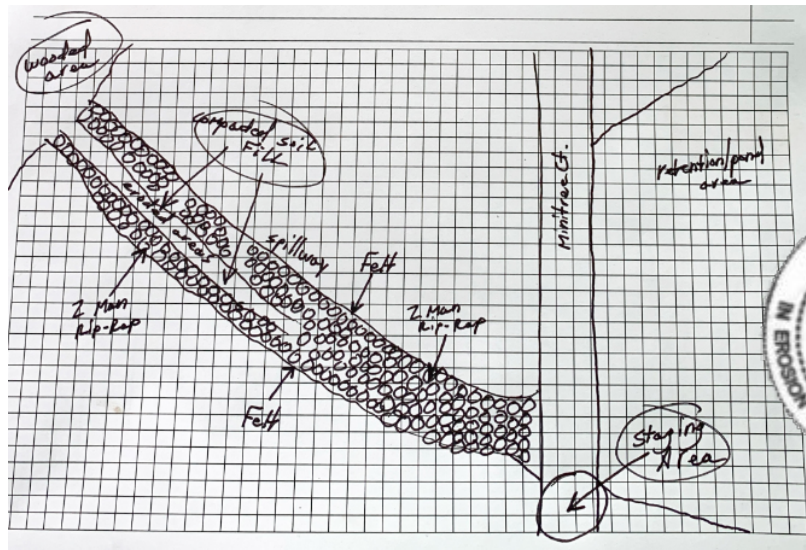

To have ACE ST LOUIS *and* DRAINSCAPES provide acquisition and preparation service, please add \$100 per hour plus cost of permit.

Any deviation from the above specifications involving extra cost will be will become an extra charge to the estimate. Unforeseen excavation circumstances/obstacles requiring additional rock, soil, hauling, or labor will be billed at a rate of \$75 per cubic yard of clean rock (labor included), \$75 per cubic yard of soil (labor included), \$300 per 5 tons of hauling (labor included), and/or a labor rate of \$65 per man hour. Optional clean-out accesses are \$75 each.

Accepted By: