

# Custom Precast Concrete Products and More

*In addition to the Retaining Wall Blocks, Material Bin Blocks and Foundation Blocks featured in our other brochures, we manufacture many other precast concrete and related products shown here.*



# Jersey Barriers

---

Conigliaro Block manufactures Precast Concrete Temporary Jersey Barriers. Our standard barriers are made with either standard concrete (3000 psi, 4000 or 5000 psi) or recycled-content Agg-Crete (approximately 2000 - 3000 psi).



Our Jersey Barriers are available for **purchase** or **rent** and Conigliaro Block will also transport and place the barriers at your jobsite or place of business.

Our Standard Jersey Barrier weighs 3,600 pounds, is 10 feet long, 32" tall and 24" wide at the base.

Conigliaro Block rents Jersey Barriers which can be delivered and installed within 24 hours throughout New England. Whether you need one or hundreds, Conigliaro Block is ready to serve you!



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Tent Ballast Blocks

---

Whether the tent is being set up for a wedding, a sporting event, or a festival, anchoring or “dead-weighting” your tent properly with Concrete Tent Ballast Blocks is critical.



Conigliaro Block provides all types of Concrete Tent Ballast Blocks, ranging in weight from 500 – 5000 pounds. We make our blocks with standard concrete. If you are seeking a “Green Alternative” we also offer blocks of similar weight made with recycled aggregates.

**The use of concrete blocks to hold down tents is considered Best Practice.**

The commercial tent rental industry has commissioned studies and is rapidly moving towards Concrete Tent Ballast Blocks as a Best Practice. There have been many serious tent accidents due to a combination of improper anchoring devices and/or methods and high winds.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG – 25  
sales@conigliaro.com

# Temporary Block Rentals

---

Conigliaro Block rents Concrete Blocks which can be delivered and installed within 24 hours throughout New England.

Why purchase these items if they are only needed short term. Our rental rates are very competitive.

Whether you need one or hundreds, Conigliaro Block is ready to serve you.



With weights ranging from 50 to 4000 pounds, we have the solution for all your temporary concrete barrier and concrete block needs.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Custom Precast Headwalls

---

Conigliaro Block manufactures all types of custom precast headwalls that are fully compatible with our block products. They can be snapped into any wall designed with our blocks!



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Driveway and Fence Line Pillars

---

Why wait months for a mason to quote and eventually do the work – all the while dealing with delays due to weather and contractor excuses.

We precast driveway and fence line pillars in our manufacturing plant. In most cases, we can cast and clad your pillars in real natural stone in less than one week. Conigliaro Block can also deliver and install your pillars.

We make pillars in many sizes and offer many different **Natural Stone Veneers**.

Our concrete pillar cores are made with recycled aggregates which helps the environment.

We manufacture, deliver, and install pillars year-round, no matter the season or week to week weather conditions!



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Precast Light Pole Foundations

---

Conigliaro Block can precast your light pole foundations and deliver them to your jobsite ready to be lowered into place.

No forming or bracing on site,  
no blowouts, no soggy  
Sonotubes and no weather  
delays!



Our Precast Concrete Light Pole Foundations are especially helpful when space is tight and concrete truck access is questionable.

Our Precast Concrete Light Pole Foundations are manufactured to order.

We will meet your specifications and timeframe. No order is too small or too big.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Precast Concrete Deck Post Footings


---

Conigliaro Block can precast your footings and deliver them to your jobsite ready to be lowered into place.

No forming or bracing on site, no blowouts, no soggy Sonotubes and no weather delays!

Our Precast Deck Post Footings are especially helpful when space is tight and concrete truck access is questionable.

Our Precast Deck Post Footings are manufactured to order. We will meet your jobsite specifications and timeframe. No order is too small or too big.

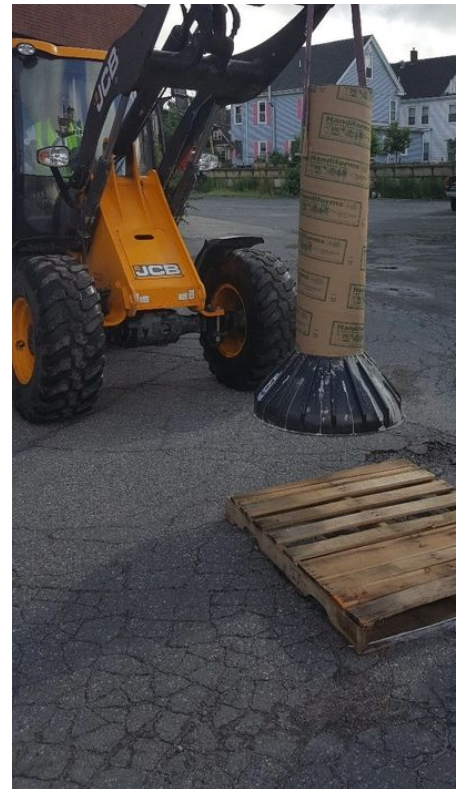

Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com



# Precast Concrete Fence Post Footings

---

Conigliaro Block manufactures precast concrete footings in many different sizes for fence installers. Each footing comes with a vertical galvanized metal sleeve ready to receive your fence post as well as two horizontal side sleeves to use as pick points.

The footings can be placed in your auger holes using either a piece of equipment or a heavy-duty dolly.

We pour footings in many different lengths and diameters – perfect for any project. We can also change the size of the imbedded post sleeve to meet your specifications.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Property Markers and Bounds

---

Conigliaro Block manufactures and installs permanent Concrete Property and Survey Markers along property lines and at property corners in Massachusetts.

Also known as Property Bounds, our survey markers/bounds are 4" x 4" x 48" or 6" X 6" X 48" and are manufactured in solid concrete with imbedded rebar. We can also manufacture custom sizes as well as markers/bounds with custom imprints upon request.



We manufacture bounds in any quantity and normally they can be ready for delivery and/or installation within 3 days or less from order.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# No-Disturb Wetland Markers and Bounds

---

Conigliaro Block manufactures and installs permanent concrete No-Disturb markers along wetland buffer zones as required by many Conservation Commissions in Massachusetts.

Our markers are 4" x 4" x 48" or 6" X 6" X 48" and are manufactured from solid concrete with imbedded rebar.

Our Markers meet Typical Conservation Commission Requirements for No-Disturb Zone Demarcation. If needed, we will also custom pour markers to meet your Town's specific requirements.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Concrete Parking Stops

Conigliaro Block manufacturers precast Parking Stops also known as Wheel Stops.

We offer two different styles of parking stops – our Standard Parking Stop and our Parking Stop with Drain Slots as shown below.



## Standard Parking Stops

Available in Three Sizes: 6', 7' or 8' long.

All lengths are 5.5" tall, 8" wide at the bottom and 4" wide at the top and have two 0.75" diameter holes for pinning the parking stop to the ground.

## Parking Stops with Drain Slots

Available in Three Sizes: 6', 7' long or 8' long.

All lengths are 5.5" tall, 8" wide at the bottom and 4" wide at the top and have two 0.75" diameter holes for pinning the parking stop to the ground.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Concrete Pavers and Stepping Stones

---

Our concrete Pavers / Steppingstone are beautiful and functional. They are available in three textured finishes - Smooth, York Stone or Rough Stone.

Precast concrete Pavers / Steppingstone will add beauty, value, and functionality to your yard.

**Smooth Finish 24"x24"x2" Paver**



**York Stone Finish 24"x24"x2" Paver**



**Rough Stone Finish 23"x23"x3" Paver**



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Solar Ballast Blocks

---

Conigliaro Block manufactures all types of precast concrete solar ballast footings used to securely mount and position solar panels.



Our solar ballast blocks are poured to your specifications to prevent movement and overturning of solar panel systems. Our footings are available in a wide range of sizes, weights, and mixes.

We will **cast-in** the mounting structures and hardware, as well as lifting points, during production to allow for instant footing placement and panel mounting in the field.

All our ballast footings are designed to be placed right on top of the ground so there is no need for ground penetration alternatives that are more costly and time-consuming.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Concrete Park Benches

---

Conigliaro Block offers Concrete Park Benches.



The bench legs are made with concrete and the seats are made with either reclaimed or recycled plastic lumber.

Whether you need just one bench or several, we will meet your requirements. Delivery and installation also available.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Recycled Aggregates

---

Conigliaro Block offers 100% recycled aggregates which are perfect for utility trench backfilling and other construction applications.

Our **CrusherRun** (3" minus), **GlassBlend** (3/4" minus), **GlassGravel** (3/4" minus) and **GlassSand** (1/4" minus) flow, rake and compact beautifully and help get the job done quickly and efficiently.



You will save money and help the environment using recycled versus virgin aggregates for your project.

Our recycled aggregates are sold "by the bag" or "by the truckload". Aggregates may be picked up in our yard. Delivery is also available.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com



# Concrete Mesh Beds

---

Conigliaro Block offers reinforcement mesh beds perfect for use when pouring all types of concrete slabs and pads.

Our reinforcement mesh beds are old mattress carcasses, and they work great!



Makes pouring reinforced concrete pads easy!

Concrete finishers love them because they are easy to walk on and won't shift off their blocks like traditional reinforcement mesh sheets. Even better there is no need to continually pull the mesh up with a rake during pouring operations because it can't sink!



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Force Protection Blocks

---

## Plas-Crete Blocks protect critical resources by:

- Blocking directly and indirectly fired weapons
- Protecting against small arms fire & shrapnel
- Deflecting near miss bomb & projectile blasts
- Preventing chain reaction explosions

## The advantages of Plas-Crete Force Protection Blocks

- 1) IMPACT ABSORPTION
- 2) NO LEAKS OR CRACKS
- 3) YES, THEY STACK
- 4) SAVE TIME AND LABOR
- 5) PERFECT FOR PERMANENT OR EXPEDIENT USE



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com

# Low-Cost Clunker Blocks

---

Looking for inexpensive, no-frills, clunker blocks to build something?  
Many of our jobs involve the removal of old blocks.

While they may not be the most handsome blocks in the world (after all they are not Conigliaro Blocks), they are still serviceable. Best of all – they are **cheap!**



Call for current inventory and availability.



Conigliaro Block Inc.  
701 Waverly St  
Framingham, MA 01702  
(888) CONIG - 25  
sales@conigliaro.com