



Quick Selection 2012/2013

# Automatic controls, electronic controls, compressors, condensing units and packages for all refrigerants

This catalogue covers the most popular refrigeration products and code numbers.

>100

products in one catalogue

The most frequently used refrigeration products from the extended Danfoss ranges have been collected in one catalogue. A timesaving way to find exactly what you are looking for. A part of your toolbox.

> 5000

code numbers in one catalogue

Simply the most easy way to find the code numbers you need for your specific application – all in one place.



## Welcome to Coolselector®

Please select section:

- > Industrial Refrigeration Controls
- > Commercial Refrigeration Controls
- > Compressors and Condensing Units

Version: 1.0.1.28 Database Version: 1.0.0.1

Danfoss.com All values calculated and selected by the software must be verified by the user. It's used without prior notice. This applies in accordance with standard industry practice in the market.

### Coolselector® – Select the right component the coolest way

As the world gets more complicated we all need support to make the right choices.

Danfoss helps you make the right selections also for the other components that you will need in your professional daily life. Coolselector® calculates for you the performance of the component at your conditions, not just according to the standards.

#### Select the right component the coolest way

Do you pick your solenoid valve for your cold room by connection size alone?

Maybe you could actually go for a size smaller, or maybe the cold room would have done better if you had optimized the selection of that particular valve to the flow. Most professionals know that selecting a thermostatic expansion valve can turn out to be a tricky task if the conditions are not exactly standard conditions. You will need to take superheat, sub cooling and pressure drop into consideration to find the optimal valve with the right orifice. But also other components require consideration before selecting the best valve for the purpose. Even the solenoid valve should be checked for the specific performance under the conditions you intend to expose it to.

Coolselector® helps you optimize the choice of component and even tells you how the component behaves at the conditions given.

With the new version of Coolselector® you have all the components required to control a commercial refrigeration plant. Danfoss have now included the well-known compressor and condensing unit selection program RS+3 in Coolselector® which means that you no longer have to open several programs to calculate a compressor, a solenoid valve and an expansion valve. You can now do this in just one program.

The new section with compressors and condensing units also includes compressors for heat pumps which mean that you easily can select the best suited compressor for heat pump applications. Danfoss have on purpose kept the familiar and user friendly interface from RS+3 and just extended the content in accordance with the additional compressors. Coolselector® will continue development and enhancement and offers you automatic-updates also in future.

Please do not hesitate and go to the web address: [coolselector.danfoss.com](http://coolselector.danfoss.com) to down-load the program.

## Table of contents

<b>Thermostatic expansion valves</b>		<b>7. Line components – Industrial</b>	
Thermostatic expansion valves .....	T2/TE2.....	Flexline™ Stop valves .....	SVA-S/SVA-L.....
Thermostatic expansion valves .....	TE5-55.....	Stop needle valves .....	SNV-ST/SNV-SS.....
Thermostatic expansion valves .....	TUA/TUAE/TCAE.....	Flexline™ Filters .....	FIA .....
Thermostatic expansion valves .....	TUB/TUBE .....	Flexline™ Regulating valves .....	REG-SA/REG-SB .....
Thermostatic expansion valves .....	PHT .....	Flexline™ Stop check and	
Thermostatic expansion valves – Product overview .....	25	Check valves .....	SCA-X/CHV-X.....
<b>Electronically operated</b>		Check valves .....	NRVA .....
Expansion valves .....	AKV .....	Safety relief valves.....	SFA 15 .....
Electronic expansion valves .....	ETS 6.....	Safety relief valves.....	SFV .....
Electronic expansion valves .....	ETS 12.5 - 400.....	Double stop valves .....	DSV .....
Electrically operated valves for CO <sub>2</sub> ...	CCM .....	Quick closing oil drain valves.....	QDV .....
Electrically operated valves for		Liquid level glasses .....	LLG .....
transcritical and subcritical CO <sub>2</sub> appl. ...	CCMT .....		
Electrically operated suction			
modulating control valves .....	KVS.....		
<b>2. Solenoid valves and coils</b>		<b>8. Gas Detector</b>	
Solenoid valves/coils.....	EVR/EVRH .....	Gas detectors .....	GD .....
Solenoid valves/coils.....	EVRS/EVRST .....		164
Solenoid valves/coils.....	EVRA/EVRAT .....		
4-way reversing valves .....	VHV/STF .....		
<b>3. Pressure controls and thermostats</b>		<b>9. Electronic controls</b>	
Pressure controls/		Electronic controls overview .....	166
Temperature controls .....	KP .....	Temperature controller .....	EKC 102 .....
Cartridge pressure controls .....	ACB .....	Refrigeration controllers .....	EKC 202 .....
Pressure controls/		Refrigeration controllers .....	EKC 302 .....
Temperature controls .....	RT.....	Universal refrigeration controller .....	AK-CC 210.....
Differential pressure controls.....	MP .....	Universal refrigeration controller .....	AK-CC 350.....
<b>4. Pressure regulators</b>		Controller for appliance control .....	AK-CC 550A .....
Evaporator pressure regulators .....	KVP .....	Controller for evaporator control .....	AK-CC 750 .....
Condensing pressure regulators .....	KVR/NRD .....	Refrigeration controllers .....	EKC 315A .....
Condenser fan speed controllers .....	XGE/RGE.....	Superheat controller .....	EKC 312 .....
Crankcase pressure regulators .....	KVL .....	Superheat controller .....	EKC 316A .....
Receiver pressure regulators .....	KVD .....	Superheat controller .....	EKD 316 .....
Capacity regulators .....	KVC .....	Controller for temperature control of	
Capacity regulators .....	CPCE .....	Liquid level controller .....	EKC 347 .....
Flexline™ Motor valves .....	ICM 20-150 .....	Capacity controller .....	EKC 331T .....
Flexline™ Pilot controlled servo valves .....	ICS 25-150 .....	Capacity controller .....	AK-PC 530 .....
Pilot valves for servo operated main valves .....	90 .....	Liquid Level Sensor .....	AKS 4100/4100U .....
Flexline™ Valve stations .....	ICF .....		
Liquid level sensors .....	AKS 4100/4100U .....		
<b>5. Water valves</b>		<b>10. Sensors and transmitters</b>	
Pressure controlled water valves .....	WVFX, WVO, WVS.....	Sensors and transmitters .....	EKS/AKS .....
Thermostatic controlled water valves .....	AVTA .....		200
<b>6. Line components – Commercial</b>		<b>11. Compressors</b>	
Ball valves .....	GBC .....	Compressors .....	202
Ball valves for CO <sub>2</sub> .....	GBC .....	Direct current compressors .....	204
Shut-off valves .....	BM .....	Reciprocating compressors – Household & Light commercial .....	206
Check valves .....	NRV/NRVH .....	Reciprocating compressors – Commercial .....	216
Liquid line filter driers .....	DCL .....	Scroll compressors – H series .....	220
Liquid line filter driers .....	DML .....	Scroll compressors – SH series .....	228
Filter driers .....	DCR .....	Reciprocating compressors - Variable speed .....	230
Bi-flow filter driers .....	DMB .....		
Combined filter driers and receivers .....	DMC .....		
Burn-out filter driers .....	DAS .....		
Sight glasses .....	SG+ .....		
Sight glasses .....	SG .....		
	132		
		<b>Extra points</b>	
		CO <sub>2</sub> overview products .....	234
		Danfoss hydrocarbon product range .....	236



## T2/TE2 – Thermostatic expansion valves

Thermostatic expansion valves regulate the injection of liquid refrigerant into evaporators. Injection is controlled by the refrigerant superheat. Therefore the valves are especially suitable for liquid injection in "dry" evaporators where the superheat at the evaporator outlet should always be kept constant.


### Features

- Laser-welded power element in stainless steel
  - longer diaphragm life
  - high pressure tolerance and working pressure
  - high corrosion resistance

Flare or solder outlet

Flare or solder pressure equalization

Interchangeable orifice assembly with dirt protection strainer

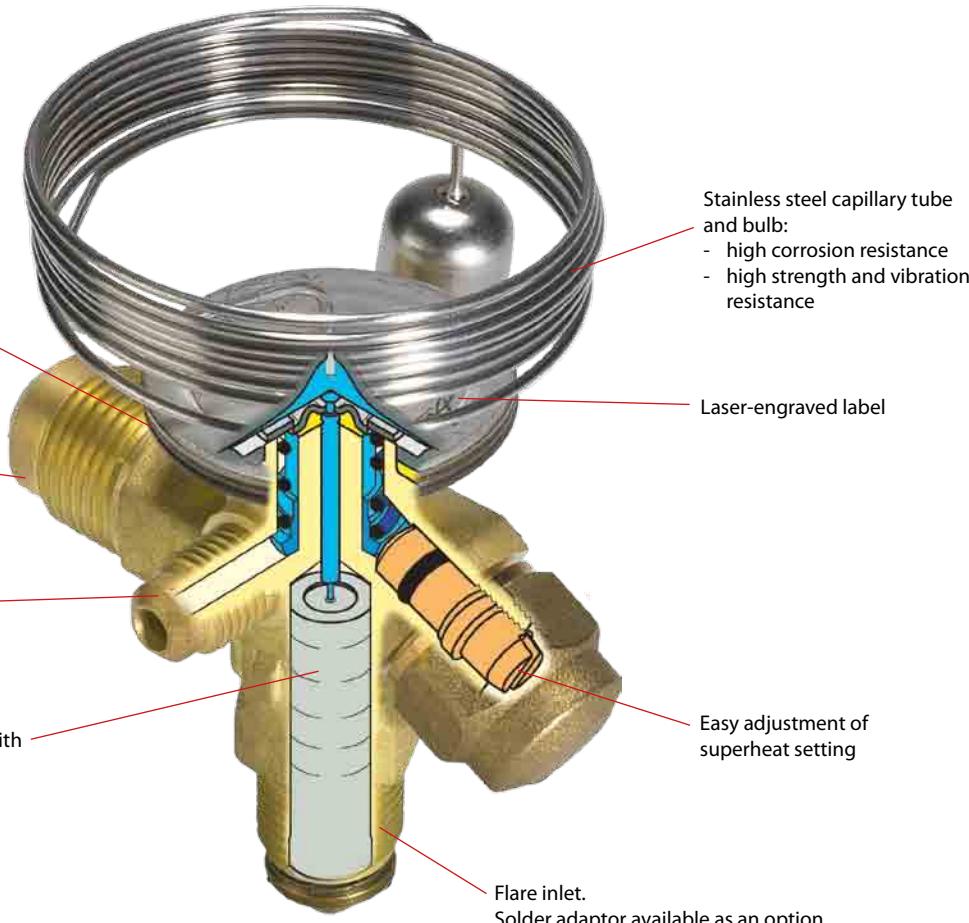

Stainless steel capillary tube and bulb:

- high corrosion resistance
- high strength and vibration resistance

Laser-engraved label

Easy adjustment of superheat setting

Flare inlet.  
Solder adaptor available as an option

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Traditional refrigeration</li> <li>Heat pump systems</li> <li>Air conditioning units</li> <li>Liquid coolers</li> <li>Transport refrigeration</li> </ul>	<ul style="list-style-type: none"> <li>Large temperature range. Equally applicable to freezing, refrigeration and air conditioning applications.</li> <li>Interchangeable orifice assembly           <ul style="list-style-type: none"> <li>easy stocking</li> <li>easy capacity matching</li> <li>better service</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Can be supplied with MOP (Max. Operating Pressure) Protects the compressor motor against excessive evaporating pressure during normal operation.</li> <li>Valves for special temperature ranges can be supplied.</li> <li>Flare / solder adaptor can be supplied.</li> </ul>

# Technical data and ordering

## Thermostatic element with: bulb strap, without: orifice, strainer cone and nuts

Flare x flare connection

Refrigerant	Valve type	Pressure equalization Flare	Capillary tube	Connection		Code no.					
				Inlet x outlet		Range N -40 to +10°C		Range NM -40 to -5°C		Range NL -40 to -15°C	
			m	in. x in.	mm x mm	Without MOP	MOP +15°C	MOP 0°C	MOP -10°C	Without MOP	MOP -20°C
R22/R407C	TX 2	-	1.5	3/8 x 1/2	10 x 12	068Z3206	068Z3208	068Z3224	068Z3226	068Z3207	068Z3228
	TEX 2	1/4 in.	1.5	3/8 x 1/2	10 x 12	068Z3209	068Z3211	068Z3225	068Z3227	068Z3210	068Z3229
R407C	TZ 2	-	1.5	3/8 x 1/2	10 x 12	068Z3496	068Z3516	-	-	-	-
	TEZ 2	1/4 in.	1.5	3/8 x 1/2	10 x 12	068Z3501	068Z3517	-	-	-	-
R134a	TN 2	-	1.5	3/8 x 1/2	10 x 12	068Z3346	068Z3347	068Z3393	068Z3369	-	-
	TEN 2	1/4 in.	1.5	3/8 x 1/2	10 x 12	068Z3348	068Z3349	068Z3392	068Z3370	-	-
R404A/R507	TS 2	-	1.5	3/8 x 1/2	10 x 12	068Z3400	068Z3402	068Z3406	068Z3408	068Z3401	068Z3410
	TES 2	1/4 in.	1.5	3/8 x 1/2	10 x 12	068Z3403	068Z3405	068Z3407	068Z3409	068Z3404	068Z3411

## Thermostatic element with: bulb strap, without: orifice, filter cone and nuts

Flare x solder connection

Refrigerant	Valve type	Pressure equalization Solder	Capillary tube	Connection		Code no.					
				Inlet Flare	Outlet ODF solder	Range N -40 to +10°C		Range NL -40 to -15°C		Range B -60 to -25°C	
			m	Without MOP	MOP +15°C	MOP -10°C	Without MOP	MOP -20°C			
R22/R407C	TX 2	-	1.5	3/8 in.	1/2 in.	068Z3281	068Z3287	-	068Z3357	-	
	TX 2	-	1.5	10 mm	12 mm	068Z3302	068Z3308	-	068Z3361	-	
	TEX 2	1/4 in.	1.5	3/8 in.	1/2 in.	068Z3284	068Z3290	068Z3311	068Z3359	-	
	TEX 2	6 mm.	1.5	10 mm	12 mm	068Z3305	068Z3311	068Z3367	068Z3363	068Z3277	
R407C	TZ 2	-	1.5	3/8 in.	1/2 in.	-	068Z3329	-	-	-	
	TZ 2	-	1.5	10 mm	12 mm	068Z3502	068Z3514	-	-	-	
	TEZ 2	1/4 in.	1.5	3/8 in.	1/2 in.	068Z3446	068Z3447	-	-	-	
	TEZ 2	6 mm.	1.5	10 mm	12 mm	068Z3503	068Z3515	-	-	-	
R134a	TN 2	-	1.5	3/8 in.	1/2 in.	068Z3383	068Z3387	-	-	-	
	TN 2	-	1.5	10 mm	12 mm	068Z3384	068Z3388	-	-	-	
	TEN 2	1/4 in.	1.5	3/8 in.	1/2 in.	068Z3385	068Z3389	-	-	-	
	TEN 2	6 mm.	1.5	10 mm	12 mm	068Z3386	068Z3390	-	-	-	
R404A/R507	TS 2	-	1.5	3/8 in.	1/2 in.	068Z3414	068Z3416	068Z3429	068Z3418	068Z3420	
	TS 2	-	1.5	10 mm	12 mm	068Z3435	068Z3423	068Z3436	068Z3425	068Z3427	
	TES 2	1/4 in.	1.5	3/8 in.	1/2 in.	068Z3415	068Z3417	068Z3430	068Z3419	068Z3421	
	TES 2	6 mm.	1.5	10 mm	12 mm	068Z3422	068Z3424	068Z3437	068Z3426	068Z3428	

<sup>1)</sup> For R407C plants, please select valves from the dedicated R407C program

## Orifice assembly

Valve type Orifice	R134a		R404A		R407C		R22		Code no.	
	kW	TR	kW	TR	kW	TR	kW	TR	Flare x Flare version	Solder adapter version
T2 Orif. 0X	0.68	0.19	0.64	0.18	0.92	0.26	0.90	0.25	068-2002	068-2089
T2 Orif. 00	1.2	0.34	1.3	0.37	1.8	0.51	1.8	0.51	068-2003	068-2090
T2 Orif. 01	2.1	0.59	2.6	0.75	3.5	1.0	3.5	0.99	068-2010	068-2091
T2 Orif. 02	2.5	0.73	3.7	1.1	4.8	1.4	4.7	1.3	068-2015	068-2092
T2 Orif. 03	4.3	1.2	6.3	1.8	8.1	2.3	8.0	2.3	068-2006	068-2093
T2 Orif. 04	6.4	1.8	9.9	2.8	12.4	3.5	12.1	3.5	068-2007	068-2094
T2 Orif. 05	8.4	2.3	13.0	3.7	16.5	4.7	16.7	4.8	068-2008	068-2095
T2 Orif. 06	10.1	2.9	15.5	4.4	19.7	5.6	19.7	5.6	068-2009	068-2096


The rated capacity is based on: Evaporating temperature t<sub>e</sub> = +4.4 °C for range N, condensing temperature t<sub>c</sub> = +38 °C, and refrigerant temperature ahead of valve t<sub>l</sub> = +37 °C.

## Solder adaptor without orifice assembly

Connection - ODF solder	Code no.
1/4 in.	068-2062
6 mm	068-2063
6 mm	068-4101 <sup>1)</sup>
3/8 in.	068-2060
10 mm	068-2061
10 mm	068-4100 <sup>1)</sup>

<sup>1)</sup> Including filter.

## Bulb strap (delivered with the valve) and accessories

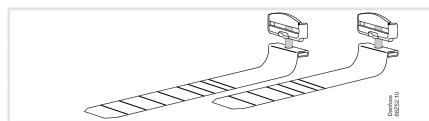

## Filter

Filter type	Code no.
For flare connection	068-0003
For solder adaptor	068-0015

The adaptor is for use with thermostatic expansion valves T2 and TE2. When the adaptor is fitted correctly it meets the sealing requirements of DIN 8964.

The flare orifice in T2 and TE2 can be used with a solder adaptor when the orifice filter is replaced with a specific filter intended for solder adaptors. Only in this way the sealing requirements of DIN 8964 can be fulfilled. Solder adaptors for filter driers (FSA) must not be used in the T2 inlet.

Thermostatic expansion valves – T2/TE2

# Capacities

Capacity in kW, range N -40 °C to +10 °C. Opening superheat sh= 4.4 K


Valve type/ Orifice	Cond. temp. <sup>3)</sup> [°C]	R134a					R404A					R407C					R22				
		Capacity in [kW] Evaporating temp. [°C]					Capacity in [kW] Evaporating temp. [°C]					Capacity in [kW] Evaporating temp. [°C]					Capacity in [kW] Evaporating temp. [°C]				
		-30	-10	-5	0	5	-40	-35	-30	-10	0	-10	-5	0	5	10	-35	-30	0	5	
T2 / 0X	25	0.54	0.62	0.62	0.61	0.58	0.55	0.58	0.61	0.65	0.62	0.90	0.90	0.88	0.86	0.81	0.79	0.82	0.81	0.81	0.76
T2 / 00		0.67	0.95	1.0	1.0	1.0	0.7	0.8	0.9	1.2	1.2	1.6	1.7	1.7	1.7	1.6	1.1	1.2	1.6	1.5	
T2 / 01		0.92	1.5	1.6	1.7	1.8	1.0	1.2	1.4	2.2	2.4	2.8	3.0	3.2	3.3	3.3	1.5	1.7	2.9	2.9	
T2 / 02		1.0	1.7	1.9	2.1	2.2	1.1	1.3	1.6	2.8	3.3	3.4	3.8	4.2	4.5	4.6	1.7	2.0	3.8	4.0	
T2 / 03		1.7	2.9	3.2	3.5	3.7	1.9	2.2	2.7	4.7	5.5	5.7	6.4	7.1	7.6	7.9	2.9	3.3	6.4	6.7	
T2 / 04		2.5	4.2	4.7	5.2	5.5	2.7	3.2	3.8	7.1	8.5	8.4	9.5	10.6	11.7	12.5	4.2	4.8	9.7	10.1	
T2 / 05		3.3	5.6	6.2	6.8	7.3	3.5	4.2	5.0	9.4	11.2	11.0	12.5	14.0	15.4	16.3	5.4	6.3	13.1	13.7	
T2 / 06		3.9	6.7	7.5	8.2	8.7	4.2	5.0	6.0	11.2	13.4	13.2	15.0	16.8	18.5	19.4	6.4	7.4	15.4	16.2	
T2 / 0X	35	0.57	0.67	0.68	0.69	0.68	0.52	0.55	0.59	0.67	0.68	0.94	0.95	0.95	0.94	0.92	0.82	0.86	0.92	0.89	
T2 / 00		0.69	1.0	1.1	1.2	1.2	0.67	0.78	0.88	1.3	1.3	1.7	1.8	1.8	1.9	1.9	1.1	1.2	1.8	1.8	
T2 / 01		0.96	1.6	1.8	2.0	2.1	0.95	1.1	1.3	2.3	2.6	2.9	3.2	3.4	3.6	3.8	1.6	1.8	3.3	3.5	
T2 / 02		1.1	1.9	2.1	2.4	2.6	1.1	1.3	1.5	2.9	3.6	3.5	4.0	4.5	4.9	5.3	1.8	2.1	4.4	4.7	
T2 / 03		1.8	3.1	3.5	4.0	4.4	1.8	2.1	2.6	4.9	6.1	6.0	6.8	7.6	8.4	9.0	3.0	3.5	7.4	8.0	
T2 / 04		2.6	4.6	5.2	5.9	6.5	2.6	3.1	3.8	7.5	9.5	8.7	10.0	11.4	12.9	14.2	4.4	5.1	11.2	12.1	
T2 / 05		3.5	6.1	6.9	7.7	8.6	3.4	4.1	4.9	9.8	12.5	11.5	13.2	15.1	17.0	18.6	5.8	6.7	15.3	16.7	
T2 / 06		4.1	7.2	8.2	9.2	10.2	4.0	4.8	5.8	11.7	14.9	13.8	15.9	18.1	20.4	22.2	6.8	7.8	17.9	19.7	
T2 / 0X	45	0.57	0.69	0.71	0.73	0.74	0.46	0.51	0.54	0.65	0.68	0.94	0.96	0.97	0.97	0.97	0.84	0.88	0.98	0.97	
T2 / 00		0.70	1.1	1.2	1.3	1.3	0.61	0.70	0.81	1.2	1.3	1.7	1.8	1.9	1.9	1.9	1.1	1.3	1.9	1.9	
T2 / 01		0.97	1.7	1.9	2.1	2.3	0.86	1.0	1.2	2.2	2.7	2.9	3.2	3.5	3.8	4.0	1.6	1.9	3.6	3.8	
T2 / 02		1.1	1.9	2.2	2.5	2.8	0.97	1.2	1.4	2.8	3.6	3.5	4.0	4.6	5.1	5.6	1.9	2.1	4.7	5.2	
T2 / 03		1.8	3.3	3.7	4.2	4.7	1.6	2.0	2.4	4.8	6.2	6.0	6.9	7.8	8.7	9.5	3.1	3.6	8.1	8.9	
T2 / 04		2.7	4.8	5.5	6.2	7.1	2.4	2.9	3.5	7.3	9.7	8.8	10.2	11.7	13.4	15.0	4.7	5.4	12.2	13.4	
T2 / 05		3.6	6.3	7.2	8.2	9.3	3.2	3.8	4.6	9.6	12.9	11.7	13.5	15.6	17.7	19.8	6.1	7.0	16.7	18.7	
T2 / 06		4.2	7.5	8.6	9.8	11.1	3.7	4.5	5.4	11.4	15.4	13.9	16.1	18.7	21.3	23.6	7.1	8.2	19.5	22.0	
T2 / 0X	55	0.56	0.69	0.72	0.74	0.75	0.39	0.44	0.47	0.59	0.62	0.91	0.93	0.95	0.96	0.96	0.84	0.88	1.0	1.0	
T2 / 00		0.69	1.1	1.2	1.3	1.4	0.52	0.61	0.70	1.1	1.2	1.6	1.7	1.8	1.9	1.9	1.1	1.3	2.0	2.0	
T2 / 01		0.95	1.7	1.9	2.1	2.3	0.74	0.89	1.1	2.0	2.4	2.8	3.1	3.4	3.7	4.0	1.6	1.9	3.7	4.0	
T2 / 02		1.1	1.9	2.2	2.6	2.9	0.8	1.0	1.2	2.5	3.4	3.4	3.9	4.5	5.1	5.6	1.9	2.2	4.9	5.5	
T2 / 03		1.8	3.3	3.8	4.3	4.9	1.4	1.7	2.1	4.3	5.8	5.8	6.7	7.7	8.7	9.6	3.2	3.7	8.5	9.5	
T2 / 04		2.8	4.9	5.6	6.4	7.3	2.2	2.6	3.1	6.5	9.0	8.7	10.0	11.6	13.3	15.1	4.8	5.5	12.5	14.0	
T2 / 05		3.6	6.4	7.3	8.4	9.6	2.8	3.4	4.1	8.6	11.9	11.4	13.3	15.4	17.8	20.0	6.3	7.2	17.3	19.6	
T2 / 06		4.3	7.5	8.7	10.0	11.4	3.3	4.0	4.8	10.3	14.3	13.6	15.9	18.5	21.3	24.0	7.3	8.4	20.3	23.2	

<sup>3)</sup> Condensing temperature at bubble point.

## Correction factor

Refrigerant	Subcooling [K]										
	2	4	10	15	20	25	30	35	40	45	50
R134a	0.98	1	1.08	1.13	1.19	1.25	1.31	1.37	1.42	1.48	1.54
R404A/R507	0.96	1	1.10	1.20	1.29	1.37	1.46	1.54	1.63	1.70	1.78
R407C	0.97	1	1.08	1.14	1.21	1.27	1.33	1.39	1.45	1.51	1.57
R22	0.98	1	1.06	1.11	1.15	1.20	1.25	1.30	1.35	1.39	1.44

When the subcooling ≠ 4 K then: Plant capacity / Factor = Table value
<b>Example:</b> Refrigerant = R407C $Q_{\text{nom}} = 10 \text{ kW}$ $t_e = 0^\circ\text{C}$ $t_c = 55^\circ\text{C}$ $\Delta t_{\text{sub}} = 25 \text{ K}$
Selection: $10 \text{ kW} / 1.27 = 7.9 \text{ kW} \rightarrow \text{T2, Orifice 04}$

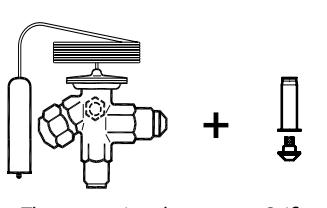

## Notes


#### **• Thermostatic expansion valves – T2/TE2 .....**



## TE5-55 – Thermostatic expansion valves


Thermostatic expansion valves TE5-55 regulate the injection of refrigerant liquid into evaporators for medium sized plants (rated capacities from 8 kW to 182 kW for R404A/R507). Injection is controlled by the refrigerant superheat. Therefore the valves are especially suitable for liquid injection in "dry" evaporators where the superheat at the evaporator outlet should always be kept constant.

### Features

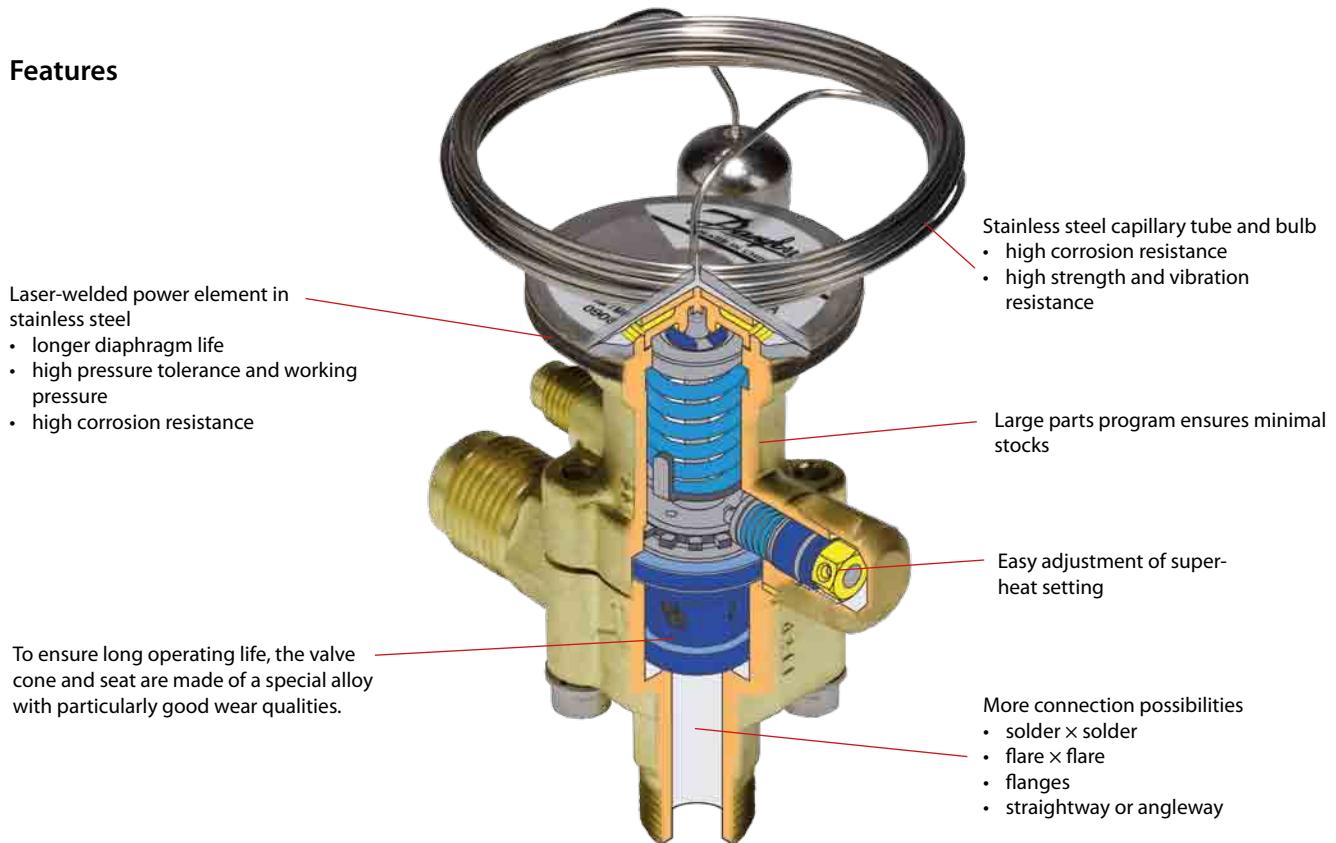

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>• Traditional refrigeration</li> <li>• Air conditioning units</li> <li>• Ice cube machines</li> <li>• Water chillers</li> </ul>	<ul style="list-style-type: none"> <li>• Interchangeable orifice assembly designed for:           <ul style="list-style-type: none"> <li>• Easy assembly and mounting</li> <li>• Optimised capacity matching</li> <li>• Balanced port (TE55 only)</li> <li>• Large temperature range -60 to +10°C</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Available with MOP (Max. Operating Pressure). Protects the compressor motor against excessive evaporating pressure.</li> <li>• Refrigerants: R22, R134a, R404A/R507, R407C</li> <li>• Maximum Working Pressure: 28 bar</li> </ul>

## Technical data and ordering:



Thermostatic element - including bulb strap

**R407C**

Valve type	Pressure equalization	Capillary tube	Code no.	
			Range N -40 to +10°C	
	1/4 in. / 6 mm	m	Without MOP	MOP+15°C
TEZ 5	Ext.	3	067B3278	067B3277
TEZ 12	Ext.	3	067B3366	067B3367
TEZ 20	Ext.	3	067B3371	067B3372
TEZ 55	Ext.	3	067G3240	067G3241

Thermostatic element - including bulb strap

**R134a**

Valve type	Pressure equalization	Capillary tube	Code no.		
			Range N -40 to +10°C		Range NM -40 to -5°C
	1/4 in. / 6 mm	m	Without MOP	MOP +15°C	MOP 0°C
TEN 5	Ext.	3	067B3297	067B3298	067B3360
TEN 12	Ext.	3	067B3232	067B3233	-
TEN 12	Ext.	5	067B3363	-	-
TEN 20	Ext.	3	067B3292	067B3293	-
TEN 20	Ext.	5	067B3370	-	-
TEN 55	Ext.	3	067G3222	067G3223	-
TEN 55	Ext.	5	067G3230	-	-

Thermostatic element - including bulb strap

**R404A/R507**

Valve type	Pressure equalization	Capillary tube	Code no.					
			Range N -40 to +10°C		Range NM -40 to -5°C	Range NL -40 to -15°C	Range B -60 to -25°C	
	1/4 in. / 6 mm	m	Without MOP	MOP +15°C	MOP 0°C	MOP -10°C	Without MOP	MOP -20°C
TES 5	Ext.	3	067B3342	-	067B3357	067B3358	067B3344	067B3343
TES 12	Ext.	3	067B3347	-	067B3345	067B3348	-	067B3349
TES 12	Ext.	5	067B3346	-	-	-	-	067B3350
TES 20	Ext.	3	067B3352	-	067B3351	067B3353	-	067B3354
TES 20	Ext.	5	067B3356	-	-	-	-	067B3355
TES 55	Ext.	3	067G3302	-	067G3303	067G3304	-	067G3305
TES 55	Ext.	5	067G3301	-	-	-	-	067G3306

Thermostatic element - including bulb strap

**R22/R407C**

Valve type	Pressure equalization	Capillary tube	Code no.					
			Range N -40°C to +10°C		Range NM -40 to -5°C	Range NL -40 to -15°C	Range B -60 to -25°C	
	1/4 in. / 6 mm	m	Without MOP	MOP+15°C	MOP 0°C	MOP -10°C	Without MOP	MOP -20°C
TEX 5	Ext	3	067B3250	067B3267	067B3249	067B3253	067B3263	067B3251
TEX 12	Ext.	3	067B3210	067B3227	067B3207	067B3213	-	067B3211
TEX 12	Ext.	5	067B3209	-	-	-	-	067B3212
TEX 20	Ext.	3	067B3274	067B3286	067B3273	067B3275	-	067B3276
TEX 20	Ext.	5	067B3290	-	-	-	-	067B3287
TEX 55	Ext.	3	067G3205	067G3220	067G3206	-	-	067G3207
TEX 55	Ext.	5	067G3209	-	-	-	-	067G3217

Bulb strap (delivered with the element)

Type	Length	Max. diameter of suction line	Code no.
TE5 and TE12	225 mm	2 1/8 in. (54 mm)	067N0558
TE20 and TE55	350 mm	3 1/8 in. (78 mm)	067N0559

# Technical data and ordering:

## Orifice assembly

SI N	R134a		R404A/R507		R407C		R22		Orifice no.	Code no.
	kW	TR	kW	TR	kW	TR	kW	TR		
TE5 - 0.5	6.7	1.9	8.1	2.3	10.7	3.1	10.4	3.0	0.5	067B2788
TE5 - 1	12.2	3.5	14.8	4.2	19.6	5.6	19.0	5.4	1	067B2789
TE5 - 2	17.0	4.8	20.4	5.8	27.1	7.7	26.3	7.5	2	067B2790
TE5 - 3	21.8	6.2	26.2	7.5	34.7	9.9	33.8	9.6	3	067B2791
TE5 - 4	29.7	8.5	35.5	10.1	47.3	13.5	45.9	13.1	4	067B2792
TE12 - 5	37.7	10.7	50.0	14.3	56.0	16.0	57.0	16.2	5	067B2708
TE12 - 6	50.0	14.3	64.0	18.2	74.0	21.1	76.0	21.7	6	067B2709
TE12 - 7	66.0	18.8	81.0	23.1	94.0	26.8	98.0	27.9	7	067B2710
TE20 - 8	78.0	22.2	87.0	24.8	117.0	33.3	128.0	36.5	8	067B2771
TE20 - 9	92.0	26.2	101.0	28.8	136.0	38.7	150.0	42.7	9	067B2773
TE55 - 10	111.0	31.6	127.0	36.2	161.0	45.8	168.0	47.9	10	067G2701
TE55 - 11	122.0	34.8	138.0	39.3	175.0	49.9	183.0	52.1	11	067G2704
TE55 - 12	134.0	38.2	151.0	43.0	191.0	54.4	202.0	57.6	12	067G2707
TE55 - 13	166.0	47.3	182.0	51.9	231.0	65.8	245.0	69.8	13	067G2710

The rated capacity is based on:

Evaporating temperature  $t_e = +4.4^\circ\text{C}$   
 Condensing temperature  $t_c = +38^\circ\text{C}$   
 Refrigerant temperature ahead of valve  $t_i = +37^\circ\text{C}$

## Valve body

Type	Connection Inlet x Outlet		Code no.			
	in.	mm	Flare angleway	Solder angleway	Solder straightway	Solder flanges
TE 5	$\frac{1}{2} \times \frac{5}{8}$	-	067B4013	067B4009 <sup>1)</sup> 067B4010 <sup>1)</sup> 067B4011 <sup>1)</sup> 067B4034 <sup>2)</sup>	067B4007 <sup>1)</sup> 067B4008 <sup>1)</sup> 067B4032 <sup>1)</sup> 067B4033 <sup>2)</sup>	-
	$\frac{1}{2} \times \frac{7}{8}$	-	-	-	-	-
	$\frac{5}{8} \times \frac{7}{8}$	-	-	-	-	-
	$\frac{7}{8} \times 1\frac{1}{8}$	-	-	-	-	-
TE 5	-	12 x 16	067B4013	067B4004 <sup>1)</sup> 067B4005 <sup>1)</sup> 067B4012 <sup>1)</sup> 067B4037 <sup>2)</sup>	067B4002 <sup>1)</sup> 067B4003 <sup>1)</sup> 067B4035 <sup>1)</sup> 067B4036 <sup>2)</sup>	-
	-	12 x 22	-	-	-	-
	-	16 x 22	-	-	-	-
	-	22 x 28	-	-	-	-
TE 12	$\frac{5}{8} \times \frac{7}{8}$	-	-	-	-	067B4025 <sup>1)</sup>
	$\frac{7}{8} \times 1$	-	-	-	-	067B4026 <sup>1)</sup>
	$\frac{7}{8} \times 1\frac{1}{8}$	-	-	067B4023 <sup>2)</sup>	067B4021 <sup>2)</sup>	-
TE 12	-	16 x 22	-	-	-	067B4027 <sup>1)</sup> 067B4015 <sup>1)</sup>
	-	22 x 25	-	-	-	-
	-	22 x 28	-	067B4017 <sup>2)</sup>	067B4016 <sup>2)</sup>	-
TE 20	$\frac{7}{8} \times 1\frac{1}{8}$	-	-	067B4023 <sup>2)</sup> 067B4017 <sup>2)</sup>	067B4021 <sup>2)</sup> 067B4016 <sup>2)</sup>	-
TE 55	$1\frac{1}{8} \times 1\frac{3}{8}$	-	28 x 35	-	067G4003 <sup>3)</sup> 067G4002 <sup>3)</sup>	-

<sup>1)</sup> ODF x ODF

<sup>2)</sup> ODF x ODM

<sup>3)</sup> ODM x ODM

ODF = Internal diameter

ODM = External diameter

## When the subcooling $\neq 4\text{ K}$ then:

Plant capacity / Factor = Table value

### Example:

Refrigerant = R404A

$Q_{\text{nom}} = 10\text{ kW}$

$t_e = -10^\circ\text{C}$

$t_c = 45^\circ\text{C}$

$Dt_{\text{sub}} = 25\text{ K}$

### Selection:

$10\text{ kW} / 1.46 = 6.85\text{ kW} \rightarrow \text{TE5, Orifice 01}$



Thermostatic element + Orifice + Valve body

# Capacities

Capacity in kW, range N -40 °C to +10 °C. Opening superheat sh= 4.4 K


Valve type/ Orifice	Cond. temp. <sup>3)</sup> [°C]	R134a					R404A/R507					R407C					R22			
		Capacity in [kW]					Capacity in [kW]					Capacity in [kW]					Capacity in [kW]			
		Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]			
		-30	-10	-5	0	5	-40	-35	-30	-10	0	-10	-5	0	5	10	-35	-30	0	5
TE5 - 0.5	25	3.3	5.0	5.4	5.7	5.8	3.7	4.2	4.8	6.9	7.5	8.6	9.2	9.7	10.0	10.0	5.1	5.7	8.9	8.9
TE5 - 1	25	6.1	9.2	9.8	10.3	10.6	6.8	7.7	8.8	12.7	13.7	15.7	16.8	17.6	18.2	18.2	9.4	10.5	16.2	16.2
TE5 - 2	25	8.6	12.8	13.7	14.4	14.6	9.5	10.9	12.3	17.6	18.8	21.8	23.3	24.4	25.0	24.9	13.2	14.8	22.3	22.2
TE5 - 3	25	11.0	16.5	17.7	18.6	19.0	12.0	13.8	15.6	22.6	24.4	28.1	30.0	31.6	32.4	32.4	16.8	18.8	28.9	28.8
TE5 - 4	25	14.9	22.5	24.2	25.4	25.9	16.1	18.5	21.1	30.8	33.1	38.2	40.9	42.9	44.0	43.7	22.6	25.5	39.3	38.9
TE12 - 5	25	19.3	29.0	31.2	33.0	33.9	20.7	24.2	27.9	43.9	48.9	45.1	49.2	53.0	55.0	56.0	27.7	31.2	51.0	51.0
TE12 - 6	25	25.2	38.4	41.4	43.9	45.2	24.9	29.3	34.1	55.0	62.0	59.0	65.0	70.0	73.0	75.0	35.8	40.5	67.0	68.0
TE12 - 7	25	33.8	52.0	56.0	59.0	61.0	32.5	37.9	43.9	72.0	81.0	78.0	86.0	93.0	98.0	100.0	46.9	53.0	90.0	91.0
TE20 - 8	25	39.1	60.0	64.0	68.0	69.0	35.7	41.8	48.4	75.0	83.0	96.0	104.0	110.0	113.0	113.0	62.0	71.0	113.0	112.0
TE20 - 9	25	45.4	72.0	78.0	82.0	85.0	39.5	46.5	54.0	88.0	100.0	112.0	123.0	131.0	137.0	137.0	69.0	80.0	136.0	135.0
TE55 - 10	25	53.0	84.0	92.0	98.0	102.0	46.5	55.0	65.0	108.0	124.0	130.0	142.0	153.0	162.0	166.0	75.0	86.0	150.0	153.0
TE55 - 11	25	59.0	93.0	102.0	109.0	113.0	51.0	61.0	71.0	118.0	136.0	143.0	156.0	168.0	177.0	181.0	83.0	95.0	165.0	167.0
TE55 - 12	25	64.0	103.0	113.0	121.0	126.0	55.0	65.0	77.0	130.0	151.0	156.0	172.0	186.0	197.0	202.0	90.0	103.0	183.0	187.0
TE55 - 13	25	80.0	130.0	142.0	152.0	157.0	67.0	79.0	94.0	159.0	183.0	192.0	211.0	228.0	241.0	246.0	111.0	127.0	225.0	228.0
TE5 - 0.5	35	3.4	5.3	5.9	6.4	6.8	3.5	4.0	4.6	7.1	8.1	8.8	9.6	10.4	11	11.4	5.27	5.93	10.0	10.4
TE5 - 1	35	6.29	9.85	10.8	11.6	12.4	6.3	7.3	8.37	12.9	14.8	16.2	17.7	19.0	20.1	20.9	9.69	10.9	18.4	19.1
TE5 - 2	35	8.83	13.8	15.0	16.2	17.1	8.9	10.3	11.8	18.0	20.4	22.6	24.6	26.4	27.8	28.7	13.6	15.3	25.4	26.2
TE5 - 3	35	11.3	17.6	19.3	20.8	22.1	11.1	12.9	14.8	22.9	26.3	28.8	31.4	33.8	35.7	370	17.1	19.3	32.7	33.9
TE5 - 4	35	15.2	24.0	26.3	28.4	30.1	14.9	17.3	19.9	31.2	35.7	39.1	42.7	46.0	48.6	50.0	22.9	25.9	44.5	45.9
TE12 - 5	35	19.5	30.3	33.3	36.1	38.5	18.6	21.8	25.3	42.3	51.0	44.2	49.2	54.0	58.0	62.0	27.7	31.2	55.0	58.0
TE12 - 6	35	25.1	39.8	43.9	47.8	51.0	22.3	26.3	30.7	53.0	64.0	58.0	64.0	71.0	77.0	82.0	35.4	40.1	74.0	77.0
TE12 - 7	35	33.3	52.0	58.0	63.0	68.0	27.8	32.6	37.9	66.0	81.0	73.0	82.0	92.0	100.0	107.0	45.5	51.0	95.0	101.0
TE20 - 8	35	39.2	62.0	69.0	74.0	79.0	32.4	38.0	44.3	74.0	87.0	96.0	105.0	114.0	122.0	127.0	62.0	70.0	125.0	129.0
TE20 - 9	35	44.4	73.0	81.0	88.0	95.0	34.9	41.1	48.2	84.0	101.0	108.0	120.0	132.0	143.0	151.0	67.0	76.0	146.0	153.0
TE55 - 10	35	51.0	85.0	95.0	105.0	114.0	40.6	48.7	58.0	103.0	126.0	126.0	141.0	155.0	169.0	180.0	72.0	83.0	162.0	172.0
TE55 - 11	35	56.0	94.0	105.0	116.0	126.0	44.2	53.0	63.0	112.0	137.0	138.0	153.0	169.0	184.0	196.0	79.0	91.0	177.0	187.0
TE55 - 12	35	61.0	103.0	116.0	128.0	139.0	47.1	57.0	67.0	121.0	150.0	149.0	167.0	185.0	202.0	216.0	85.0	98.0	194.0	207.0
TE55 - 13	35	75.0	128.0	144.0	159.0	172.0	56.0	68.0	80.0	146.0	181.0	181.0	203.0	225.0	245.0	262.0	103.0	119.0	237.0	251.0
TE5 - 0.5	45	3.4	5.5	6.1	6.7	7.3	3.1	3.6	4.1	6.8	8.0	8.7	9.5	10.4	11.3	12	5.32	5.98	10.6	11.3
TE5 - 1	45	6.3	10.1	11.2	12.3	13.4	5.65	6.6	7.6	12.3	14.7	15.9	17.6	19.2	20.7	22.1	9.76	11.0	19.5	20.7
TE5 - 2	45	8.8	14.1	15.7	17.2	18.6	7.94	9.3	10.7	17.2	20.4	22.4	24.6	26.8	28.9	30.5	13.7	15.4	27.2	28.7
TE5 - 3	45	11.2	17.9	19.9	21.9	23.7	9.85	11.5	13.2	21.6	25.9	28.0	30.9	33.9	36.6	38.9	17.1	19.3	34.5	36.6
TE5 - 4	45	14.9	24.3	27.1	29.8	32.4	13.0	15.3	17.7	29.4	35.4	38.0	42.2	46.3	50.0	53.0	22.7	25.7	47.1	49.9
TE12 - 5	45	19.0	30.0	33.3	36.7	40.1	16.1	18.8	21.9	37.8	47.4	40.9	46.0	51.0	57.0	61.0	27.1	30.3	56.0	60.0
TE12 - 6	45	24.3	39.1	43.7	48.5	53.0	19.0	22.5	26.4	46.9	60.0	53.0	60.0	67.0	75.0	82.0	34.2	38.6	74.0	80.0
TE12 - 7	45	31.7	50.0	56.0	62.0	68.0	23.1	27.0	31.3	56.0	72.0	65.0	73.0	83.0	92.0	102.0	43.3	48.3	92.0	100.0
TE20 - 8	45	38.0	62.0	69.0	76.0	83.0	28.0	32.9	38.4	67.0	83.0	90.0	100.0	111.0	121.0	130.0	60.0	68.0	127.0	136.0
TE20 - 9	45	42.1	70.0	79.0	88.0	97.0	29.5	34.8	40.7	73.0	93.0	97.0	110.0	123.0	137.0	149.0	63.0	71.0	144.0	156.0
TE55 - 10	45	47.4	83.0	94.0	105.0	117.0	33.4	40.5	48.5	91.0	117.0	116.0	131.0	147.0	164.0	179.0	67.0	78.0	163.0	177.0
TE55 - 11	45	52.0	91.0	103.0	115.0	128.0	36.2	43.9	52.0	98.0	126.0	126.0	142.0	160.0	177.0	194.0	74.0	85.0	176.0	192.0
TE55 - 12	45	56.0	98.0	111.0	126.0	140.0	38.2	46.4	56.0	105.0	136.0	135.0	153.0	172.0	192.0	211.0	78.0	90.0	191.0	209.0
TE55 - 13	45	68.0	120.0	137.0	154.0	171.0	44.6	54.0	65.0	125.0	162.0	161.0	183.0	207.0	231.0	253.0	93.0	108.0	231.0	252.0
TE5 - 0.5	55	3.3	5.4	6.1	6.7	7.4	2.6	3.0	3.5	5.8	7.2	8.1	9.0	9.9	10.8	11.7	5.3	5.9	10.7	11.6
TE5 - 1	55	6.1	10.0	11.1	12.4	13.6	4.8	5.6	6.4	10.8	13.3	14.9	16.6	18.3	20.0	21.7	9.7	10.9	19.8	21.3
TE5 - 2	55	8.5	14.0	15.6	17.3	19.0	6.7	7.9	9.1	15.2	18.6	21.1	23.4	25.8	28.1	30.3	13.5	15.3	27.8	29.7
TE5 - 3	55	10.8	17.5	19.6	21.8	24.0	8.2	9.6	11.1	18.7	23.2	25.9	28.8	31.9	35.0	37.9	16.8	18.9	34.6	37.2
TE5 - 4	55	14.3	23.7	26.6	29.6	32.7	10.8	12.7	14.8	25.5	31.9	35.1	39.4	43.8	48.2	52.0	22.1	25.0	47.5	51.0
TE12 - 5	55	18.0	28.3	31.7	35.2	39.0	13.3	15.5	18.0	31.1	39.9	36.0	40.6	45.6	51.0	56.0	26.1	29.0	53.0	58.0
TE12 - 6	55	22.8	36.8	41.4	46.4	52.0	15.5	18.3	21.4	38.4	50.0	46.4	53.0	60.0	67.0	75.0	32.6	36.5	71.0	78.0
TE12 - 7	55	29.4	45.8	51.0	57.0	64.0	18.6	21.6	24.9	43.4	57.0	55.0	62.0	70.0	79.0	88.0	40.8	45.0	84.0	92.0
TE20 - 8	55	35.9</td																		



## TUA/TUAE/TCAE – Thermostatic expansion valves

Thermostatic expansion valves regulate the injection of liquid refrigerant into evaporators. Injection is controlled by the refrigerant superheat. Therefore the valves are especially suitable for liquid injection in "dry" evaporators where the superheat at the evaporator outlet should always be kept constant.

### Features

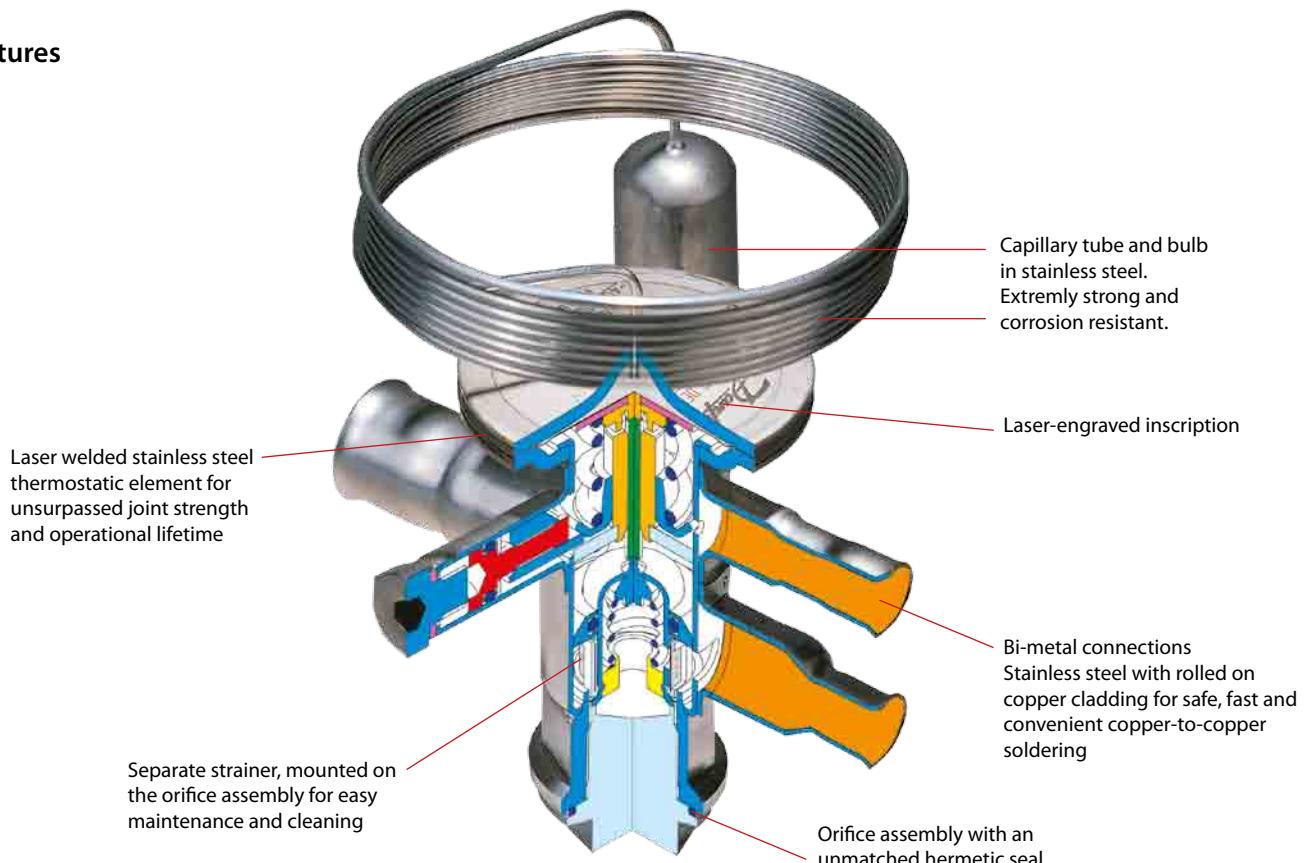

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Traditional refrigeration</li> <li>Heat pump systems</li> <li>Air conditioning units</li> <li>Liquid coolers</li> <li>Ice cube machines</li> <li>Transport refrigeration</li> </ul>	<ul style="list-style-type: none"> <li>The use of stainless steel makes the valves light and strong.</li> <li>Bi-metal connections for safe, fast and convenient soldering.</li> <li>Stainless steel capillary tube for superior strength and ductility.</li> <li>Allen key superheat setting screw is convenient and space-saving compared to the standard screwdriver adjustment used in most conventional valves.</li> </ul>	<ul style="list-style-type: none"> <li>Can be supplied with MOP (Max. Operating Pressure) Protects the compressor motor against excessive evaporating pressure during normal operation.</li> <li>Valves for special temperature ranges can be supplied.</li> <li>Only 4 K opening superheat.</li> <li>Bi-flow function.</li> </ul>

# Technical data and ordering: TUA/TUAE

Thermostatic element, without orifice or strainer, with bulb strap<sup>1)</sup>

Refrigerant	Type	Pressure equalization	Connections Inlet x outlet		Code no.					
					Range N -40 to +10°C		Range NM -40 to -5°C		Range B -60 to -25°C	
			in.	mm	Without MOP	MOP +15°C	MOP 0°C	Without MOP	MOP -20°C	
R22/R407C	TUA	Int.	1/4 x 1/2	6 x 12	068U2234	-	-	-	-	
	TUA	Int.	3/8 x 1/2		068U2230	-	-	-	-	
	TUA	Int.	3/8 x 1/2	10 x 12	068U2235	-	-	-	-	
	TUA	Int.	10 x 12		068U2231	-	-	-	-	
	TUAE	Ext. 1/4 in.	1/4 x 1/2	6 x 12	068U2236	-	-	-	-	
	TUAE	Ext. 6 mm	1/4 x 1/2		-	-	-	-	-	
	TUAE	Ext. 1/4 in.	3/8 x 1/2	10 x 12	068U2237	068U2245	-	-	-	
	TUAE	Ext. 6 mm	3/8 x 1/2		068U2233	068U2241	-	-	-	
R134a	TUA	Int.	1/4 x 1/2	6 x 12	068U2204	068U2212	-	-	-	
	TUA	Int.	3/8 x 1/2		068U2200	068U2208	-	-	-	
	TUA	Int.	3/8 x 1/2	10 x 12	068U2205	068U2213	-	-	-	
	TUA	Int.	10 x 12		068U2201	-	-	-	-	
	TUAE	Ext. 1/4 in.	1/4 x 1/2	6 x 12	068U2206	068U2214	-	-	-	
	TUAE	Ext. 6 mm	1/4 x 1/2		068U2202	-	-	-	-	
	TUAE	Ext. 1/4 in.	3/8 x 1/2	10 x 12	068U2207	068U2215	-	-	-	
	TUAE	Ext. 6 mm	3/8 x 1/2		068U2203	068U2211	-	-	-	
R404A/R507	TUA	Int.	1/4 x 1/2	6 x 12	068U2284	068U2292	068U2300	068U2308	068U2316	
	TUA	Int.	3/8 x 1/2		068U2280	-	068U2296	-	068U2312	
	TUA	Int.	3/8 x 1/2	10 x 12	068U2285	068U2293	-	068U2309	068U2317	
	TUA	Int.	10 x 12		068U2281	-	-	-	-	
	TUAE	Ext. 1/4 in.	1/4 x 1/2	6 x 12	068U2286	-	-	-	068U2318	
	TUAE	Ext. 6 mm	1/4 x 1/2		068U2282	-	-	-	-	
	TUAE	Ext. 1/4 in.	3/8 x 1/2	10 x 12	068U2287	068U2295	068U2303	-	068U2319	
	TUAE	Ext. 6 mm	3/8 x 1/2		068U2283	-	068U2299	-	068U2315	
R407C	TUA	Int.	1/4 x 1/2	6 x 12	068U2324	068U2332	-	-	-	
	TUA	Int.	3/8 x 1/2		068U2320	-	-	-	-	
	TUA	Int.	3/8 x 1/2	10 x 12	068U2325	068U2333	-	-	-	
	TUA	Int.	10 x 12		068U2321	-	-	-	-	
	TUAE	Ext. 1/4 in.	1/4 x 1/2	6 x 12	068U2326	-	-	-	-	
	TUAE	Ext. 6 mm	1/4 x 1/2		068U2322	068U2330	-	-	-	
	TUAE	Ext. 1/4 in.	3/8 x 1/2	10 x 12	068U2327	068U2335	-	-	-	
	TUAE	Ext. 6 mm	3/8 x 1/2		068U2323	068U2331	-	-	-	
R410A	TUA	Int.	3/8 x 1/2	10 x 12	068U2414	-	-	-	-	
	TUAE	Ext. 1/4 in.	3/8 x 1/2		068U1714	-	-	-	-	
	TUAE	Ext. 6 mm	3/8 x 1/2	10 x 12	068U2780	-	-	-	-	

## Orifice assembly with filter and gasket

Valve type/ Orifice	R134a		R404A/R507		R407C		R22		R410A		Code no.
	kW	TR	kW	TR	kW	TR	kW	TR	kW	TR	
TU Orif. 0	0.42	0.12	0.48	0.14	0.66	0.19	0.63	0.18	0.99	0.28	068U1030
TU Orif. 1	0.61	0.18	0.71	0.20	0.94	0.27	0.92	0.26	1.3	0.38	068U1031
TU Orif. 2	0.72	0.21	0.87	0.25	1.1	0.32	1.1	0.32	1.7	0.48	068U1032
TU Orif. 3	0.94	0.27	1.1	0.32	1.5	0.42	1.4	0.41	2.1	0.60	068U1033
TU Orif. 4	1.6	0.46	2.0	0.57	2.5	0.72	2.5	0.72	4.1	1.2	068U1034
TU Orif. 5	2.1	0.61	2.7	0.76	3.4	0.96	3.4	0.96	5.3	1.5	068U1035
TU Orif. 6	3.4	0.95	4.2	1.1	5.3	1.5	5.3	1.5	8.5	2.4	068U1036
TU Orif. 7	4.4	1.3	5.6	1.6	7.0	2.0	7.0	2.0	11.2	3.2	068U1037
TU Orif. 8	6.5	1.9	8.0	2.3	10.2	2.9	10.1	2.9	15.8	4.5	068U1038
TU Orif. 9 <sup>*)</sup>	9.0	2.6	11.3	3.2	14.0	4.0	14.1	4.0	23.1	6.6	068U1039

<sup>1)</sup> Capillary tube length 1.5 m.

<sup>2)</sup> The rated capacity is based on: Evaporating temperature t<sub>e</sub> = +4.4 °C for range N, condensing temperature t<sub>c</sub> = +38 °C, refrigerant temperature ahead of valve t<sub>v</sub> = +37 °C, and opening superheat OS = 4 K.

<sup>3)</sup> For R407C plants, please select valves from the dedicated R407C program

<sup>4)</sup> TUAE with orifice no. 9 cannot be used for Biflow operation

## Bulb strap (delivered with the valve) and Accessories

Type	Length	Max. diameter of suction line	Code no.
TUA / TUAE Accessories	110 mm	1 1/8" (28 mm)	068U3507
	190 mm	2" (50 mm)	067N3508

# Technical data and ordering: TCAE

Thermostatic element, without orifice or strainer, with bulb strap<sup>3)</sup>

Refrigerant	Type	Pressure equalization	Connection Inlet x outlet		Code no.				
			in.	mm	Range N -40 to +10°C		Range NM -40 to -5°C	Range B -60 to -25°C	
R22/R407C	TCAE	1/4 in..	3/8 x 5/8	-	068U4280	-	-	-	-
	TCAE	1/4 in.	1/2 x 5/8	-	068U4281	068U4283	-	-	-
	TCAE	6 mm	-	10 x 16	-	-	-	-	-
	TCAE	6 mm	-	12 x 16	-	-	068U4291	-	-
R134a	TCAE	1/4 in.	3/8 x 5/8	-	068U4292	-	-	-	-
	TCAE	1/4 in.	1/2 x 5/8	-	068U4293	068U4295	-	-	-
	TCAE	6 mm	-	10 x 16	068U4296	-	-	-	-
	TCAE	6 mm	-	12 x 16	068U4297	068U4299	-	-	-
R404A/R507	TCAE	1/4 in..	3/8 x 5/8	-	068U4304	-	-	-	-
	TCAE	1/4 in.	1/2 x 5/8	-	068U4305	068U4307	068U4313	068U4317	068U4319
	TCAE	6 mm	-	10 x 16	068U4308	068U4310	068U4314	-	068U4322
	TCAE	6 mm	-	12 x 16	068U4309	-	068U4315	068U4321	068U4323
R407C	TCAE	1/4 in..	3/8 x 5/8	-	068U4324	068U4326	-	-	-
	TCAE	1/4 in.	1/2 x 5/8	-	068U4325	068U4327	-	-	-
	TCAE	6 mm	-	10 x 16	068U4328	-	-	-	-
	TCAE	6 mm	-	12 x 16	068U4329	068U4331	-	-	-
R410A	TCAE	1/4 in..	3/8 x 5/8	-	068U4336	-	-	-	-
	TCAE	1/4 in.	1/2 x 5/8	-	068U4337	068U4339	-	-	-
	TCAE	6 mm	-	10 x 16	-	-	-	-	-
	TCAE	6 mm	-	12 x 16	068U4341	068U4343	-	-	-

## Orifice assembly with filter and gasket

SI N	R134a		R404A/R507		R407C		R22		R410A		Code no.	
	kW	TR	kW	TR	kW	TR	kW	TR	kW	TR	Without bleed	With 15% bleed
TC Orif. 1	13.0	3.7	13.0	3.7	17.8	5.1	18.3	5.2	21.2	6.0	068U4100	068U4097
TC Orif. 2	14.9	4.3	15.1	4.3	20.4	5.8	21.2	6.0	24.5	7.0	068U4101	068U4098
TC Orif. 3	18.6	5.3	18.9	5.4	25.2	7.2	26.7	7.6	30.6	8.7	068U4102	068U4099

<sup>3)</sup> Capillary tube length 1.5 m.

<sup>4)</sup> The rated capacity is based on: Evaporating temperature  $t_e = +4.4^\circ\text{C}$ , condensing temperature  $t_c = +38^\circ\text{C}$ , refrigerant temperature ahead of valve  $t_i = +37^\circ\text{C}$ , and opening superheat OS = 4 K.

<sup>5)</sup> TCAE with orifice no. 3 cannot be used for biflow operation.

<sup>6)</sup> For R407C plants, please select valves from the dedicated R407C program

## Bulb strap (delivered with the valve) and Accessories

Type	Length	Max. diameter of suction line	Code no.
TCAE	110 mm	1 1/8" (28 mm)	068U3507
Accessories	190 mm	2" (50 mm)	067N3508



# Capacities

Capacity in kW, range N -40 °C to +10 °C. Opening superheat sh= 4.4 K

Valve type/ Orifice	Cond. temp. <sup>3)</sup> [°C]	R134a					R404A/R507					R407C					R22					R410A				
		Capacity in [kW]					Capacity in [kW]					Capacity in [kW]					Capacity in [kW]					Capacity in [kW]				
		Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]				
		-30	-10	-5	0	5	-40	-35	-30	-10	0	-10	-5	0	5	10	-35	-30	0	5	-10	-5	0	5	10	
TU Orif. 0	25	0.18	0.29	0.32	0.35	0.36	0.17	0.20	0.24	0.39	0.44	0.49	0.54	0.58	0.60	0.62	0.27	0.30	0.53	0.54	0.81	0.86	0.87	0.86	0.80	
TU Orif. 1	25	0.26	0.43	0.47	0.51	0.51	0.26	0.30	0.35	0.57	0.64	0.71	0.78	0.83	0.87	0.88	0.39	0.45	0.77	0.78	1.1	1.2	1.1	1.2	1.1	
TU Orif. 2	25	0.29	0.49	0.54	0.59	0.62	0.28	0.33	0.39	0.66	0.77	0.82	0.91	0.98	1.0	1.1	1.4	0.43	0.50	0.91	0.94	1.3	1.4	1.5	1.5	1.4
TU Orif. 3	25	0.40	0.66	0.72	0.78	0.82	0.39	0.45	0.53	0.87	1.0	1.1	1.2	1.1	1.3	1.4	0.59	0.68	1.2	1.2	1.7	1.8	1.9	1.9	1.8	
TU Orif. 4	25	0.62	1.1	1.2	1.3	1.4	0.61	0.72	0.84	1.5	1.8	1.8	2.0	2.2	2.4	2.5	0.93	1.1	2.1	2.3	2.9	3.2	3.4	3.6	3.5	
TU Orif. 5	25	0.84	1.4	1.6	1.7	1.9	0.81	0.96	1.1	2.0	2.4	2.4	2.7	2.9	3.2	3.3	1.3	1.4	2.8	2.9	3.9	4.3	4.6	4.7	4.6	
TU Orif. 6	25	1.3	2.2	2.5	2.7	2.9	1.3	1.5	1.8	3.1	3.7	3.8	4.2	4.6	5.0	5.2	1.9	2.2	4.3	4.5	6.1	6.7	7.2	7.5	7.4	
TU Orif. 7	25	1.7	2.9	3.3	3.6	3.9	1.7	2.0	2.3	4.1	4.9	5.0	5.5	6.1	6.6	6.9	2.6	3.0	5.7	6.0	8.1	8.9	9.5	9.8	9.6	
TU Orif. 8	25	2.6	4.7	4.9	5.3	5.7	2.5	2.9	3.4	6.0	7.1	7.4	8.2	8.9	9.5	9.9	3.8	4.4	8.3	8.7	11.8	12.8	13.6	13.9	13.3	
TU Orif. 9	25	3.6	6.0	6.7	7.4	7.9	3.3	3.9	4.6	8.2	10.0	10.0	11.1	12.3	13.4	14.2	5.1	5.8	11.6	12.3	16.3	18.1	19.6	20.5	20.1	
TC Orif. 1	25	7.5	10.4	10.9	11.2	11.6	6.3	7.2	8.1	11.4	12.0	14.7	15.5	16.1	16.3	16.1	10.2	11.4	15.7	15.4	18.4	19.0	19.1	18.7	17.5	
TC Orif. 2	25	8.2	11.7	12.3	12.8	12.8	6.8	7.8	8.9	13.0	13.9	16.6	17.6	18.4	18.8	18.6	11.2	12.5	18.1	17.8	20.8	21.7	22.0	21.7	20.4	
TC Orif. 3	25	9.6	14.3	15.2	15.9	16.1	7.8	9.1	10.5	16.0	17.5	20.2	21.7	22.9	23.6	23.6	13.0	14.7	22.8	22.6	25.5	26.9	27.6	27.4	26.0	
TU Orif. 0	35	0.18	0.32	0.35	0.39	0.42	0.16	0.19	0.23	0.40	0.48	0.52	0.57	0.63	0.67	0.71	0.28	0.32	0.60	0.63	0.86	0.93	0.98	1.0	1.0	
TU Orif. 1	35	0.27	0.46	0.52	0.57	0.62	0.24	0.29	0.34	0.58	0.70	0.74	0.82	0.90	0.96	1.0	0.40	0.46	0.88	0.93	1.1	1.2	1.3	1.4	1.4	
TU Orif. 2	35	0.30	0.53	0.60	0.66	0.73	0.27	0.32	0.38	0.68	0.84	0.85	0.96	1.1	1.2	1.2	0.45	0.52	1.0	1.1	1.4	1.5	1.6	1.7	1.8	
TU Orif. 3	35	0.41	0.71	0.79	0.88	0.96	0.36	0.43	0.51	0.90	1.1	1.1	1.3	1.4	1.5	1.6	0.61	0.70	1.4	1.4	1.8	1.9	2.1	2.2	2.2	
TU Orif. 4	35	0.65	1.2	1.3	1.5	1.6	0.57	0.68	0.81	1.5	1.9	1.9	2.1	2.4	2.6	2.9	0.97	1.1	2.3	2.5	3.1	3.5	3.8	4.2	4.3	
TU Orif. 5	35	0.87	1.5	1.8	2.0	2.2	0.77	0.92	1.1	2.0	2.6	2.5	2.8	3.2	3.5	3.8	1.3	1.5	3.1	3.4	4.1	4.6	5.1	5.5	5.7	
TU Orif. 6	35	1.4	2.4	2.7	3.1	3.4	1.2	1.4	1.7	3.1	4.0	3.9	4.4	4.9	5.5	6.0	2.0	2.3	4.9	5.3	6.4	7.3	8.1	8.8	9.2	
TU Orif. 7	35	1.8	3.2	3.6	4.1	4.5	1.6	1.9	2.2	4.2	5.3	5.2	5.8	6.5	7.2	7.9	2.7	3.1	6.5	7.0	8.5	9.6	10.6	11.5	11.9	
TU Orif. 8	35	2.7	4.7	5.3	6.0	6.6	2.3	2.8	3.3	6.1	7.7	7.6	8.6	9.6	10.5	11.4	4.0	4.6	9.4	10.2	12.4	13.8	15.2	16.2	16.6	
TU Orif. 9	35	3.7	6.4	7.3	8.2	9.2	3.1	3.7	4.4	8.3	10.7	10.2	11.6	13.1	14.6	16.1	5.3	6.1	13.0	14.3	16.9	19.3	21.7	23.8	25.1	
TC Orif. 1	35	7.7	11.2	12.0	12.6	13.1	5.9	6.8	7.8	11.7	13.2	15.4	16.5	17.4	18.2	18.6	10.6	11.8	18.0	18.2	19.4	20.4	21.2	21.6	21.5	
TC Orif. 2	35	8.4	12.6	13.6	14.4	15.1	6.3	7.4	8.5	13.3	15.2	17.2	18.6	19.9	20.9	21.5	11.5	12.9	20.7	21.2	21.8	23.3	24.4	25.0	25.0	
TC Orif. 3	35	9.8	15.2	16.6	17.8	18.8	7.2	8.5	9.8	16.1	18.9	20.6	22.6	24.4	26.0	27.0	13.2	15.0	25.9	26.7	26.4	28.5	30.2	31.4	31.7	
TU Orif. 0	45	0.18	0.33	0.37	0.41	0.46	0.15	0.18	0.21	0.38	0.47	0.52	0.58	0.64	0.70	0.76	0.28	0.32	0.64	0.69	0.86	0.94	1.0	1.1	1.1	
TU Orif. 1	45	0.27	0.48	0.54	0.61	0.67	0.22	0.26	0.31	0.56	0.70	0.74	0.82	0.91	1.0	1.1	0.41	0.47	0.94	1.0	1.1	1.3	1.4	1.4	1.5	
TU Orif. 2	45	0.30	0.54	0.62	0.70	0.79	0.24	0.29	0.34	0.65	0.84	0.85	0.96	1.1	1.2	1.3	0.46	0.53	1.1	1.2	1.4	1.5	1.7	1.8	1.9	
TU Orif. 3	45	0.41	0.73	0.83	0.93	1.0	0.33	0.39	0.46	0.86	1.1	1.1	1.3	1.4	1.6	1.7	0.62	0.72	1.5	1.6	1.8	2.0	2.1	2.3	2.4	
TU Orif. 4	45	0.65	1.2	1.4	1.6	1.8	0.52	0.62	0.74	1.4	1.9	1.9	2.1	2.4	2.7	3.0	0.99	1.1	2.5	2.8	3.1	3.5	4.0	4.4	4.7	
TU Orif. 5	45	0.87	1.6	1.8	2.1	2.4	0.69	0.83	1.0	1.9	2.5	2.5	2.8	3.2	3.6	4.0	1.3	1.5	3.3	3.7	4.1	4.7	5.3	5.8	6.2	
TU Orif. 6	45	1.4	2.5	2.8	3.2	3.7	1.1	1.3	1.5	3.0	4.0	3.9	4.4	5.0	5.6	6.3	2.1	2.4	5.2	5.8	6.4	7.3	8.3	9.2	10.0	
TU Orif. 7	45	1.8	3.3	3.8	4.3	4.9	1.4	1.7	2.0	3.9	5.2	5.1	5.8	6.6	7.4	8.3	2.7	3.2	6.9	7.6	8.4	9.7	10.9	12.1	13.0	
TU Orif. 8	45	2.7	4.8	5.5	6.3	7.1	2.1	2.5	3.0	5.8	7.6	7.5	8.5	9.7	10.8	12.0	4.0	4.6	10.0	11.1	12.3	13.9	15.6	17.1	18.2	
TU Orif. 9	45	3.8	6.6	7.6	8.7	9.8	2.8	3.4	4.0	7.8	10.4	10.0	11.5	13.1	14.8	16.6	5.5	6.3	13.7	15.3	16.6	19.1	21.9	24.8	27.2	
TC Orif. 1	45	7.7	11.6	12.6	13.5	14.3	5.3	6.2	7.1	11.3	13.2	15.4	16.7	17.9	19.0	19.9	10.7	12.0	19.4	20.1	19.3	20.6	21.8	22.7	23.2	
TC Orif. 2	45	8.3	13.0	14.2	15.4	16.4	5.6	6.6	7.7	12.7	15.1	17.1	18.7	20.3	21.8	22.9	11.5	13.0	22.2	23.2	21.6	23.3	24.9	26.2	27.0	
TC Orif. 3	45	9.6	15.4	17.1	18.7	20.2	6.3	7.5	8.8	15.1	18.6	20.1	22.4	24.6	26.7	28.5	13.1	14.9	27.4	29.0	25.6	28.1	30.4	32.5	34.0	
TU Orif. 0	55	0.18	0.32	0.37	0.42	0.47	0.12	0.15	0.18	0.34	0.43	0.50	0.56	0.63	0.69	0.76	0.28	0.32	0.66	0.72	0.81	0.89	0.97	1.0	1.1	
TU Orif. 1	55	0.27	0.48	0.54	0.62	0.69	0.18	0.22	0.26	0.49	0.63	0.70	0.79	0.88	0.98	1.1	0.41	0.47	0.96	1.1	1.1	1.2	1.3	1.4	1.5	
TU Orif. 2	55	0.30	0.54	0.62	0.71	0.81	0.20	0.25	0.29	0.57	0.76	0.81	0.92	1.1	1.2	1.3	0.46	0.53	1.1	1.3	1.3	1.5	1.6	1.8	1.9	
TU Orif.																										


**When the subcooling  $\neq 4$  K then:**  
Plant capacity / Factor = Table value

**Example:**

Refrigerant = R134a  
 $Q_{\text{nom}} = 8 \text{ kW}$   
 $t_e = -10^\circ\text{C}$   
 $t_c = 55^\circ\text{C}$   
 $\Delta t_{\text{sub}} = 25 \text{ K}$


**Selection:**

$8 \text{ kW} / 1.25 = 6.4 \text{ kW} \rightarrow \text{TU, Orifice 09}$

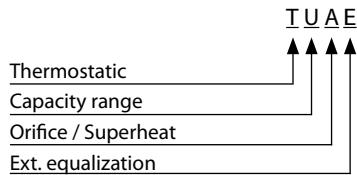

Orifice / Superheat		
	Interchangeable	Adjustable
A	Yes	YES
B	NO	YES
C	NO	NO

$N = -40^\circ\text{C} \rightarrow +10^\circ\text{C}$   
 NM =  $-40^\circ\text{C} \rightarrow -5^\circ\text{C}$  with MOP  
 NL =  $-40^\circ\text{C} \rightarrow -15^\circ\text{C}$  with MOP  
 B =  $-60^\circ\text{C} \rightarrow -25^\circ\text{C}$  with MOP

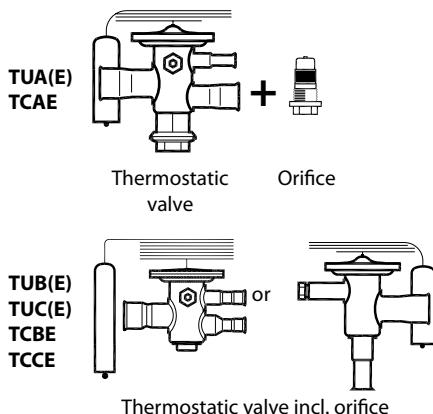

Valve types TUB(E)/TUC(E) and TCBE/TCCE can be replaced by TUA(E) and TCAE types

## Notes

## **Thermostatic expansion valves – TUA/TUAE/TCAE**




## TUB/TUBE – Thermostatic expansion valves

The TUB / TUBE serie is delivered with fixed orifice. The thermostatic expansion valves has been developed for soldering into hermetic refrigeration systems.

TU valves are made of stainless steel and are therefore very suitable for use in the food industry.

### Features

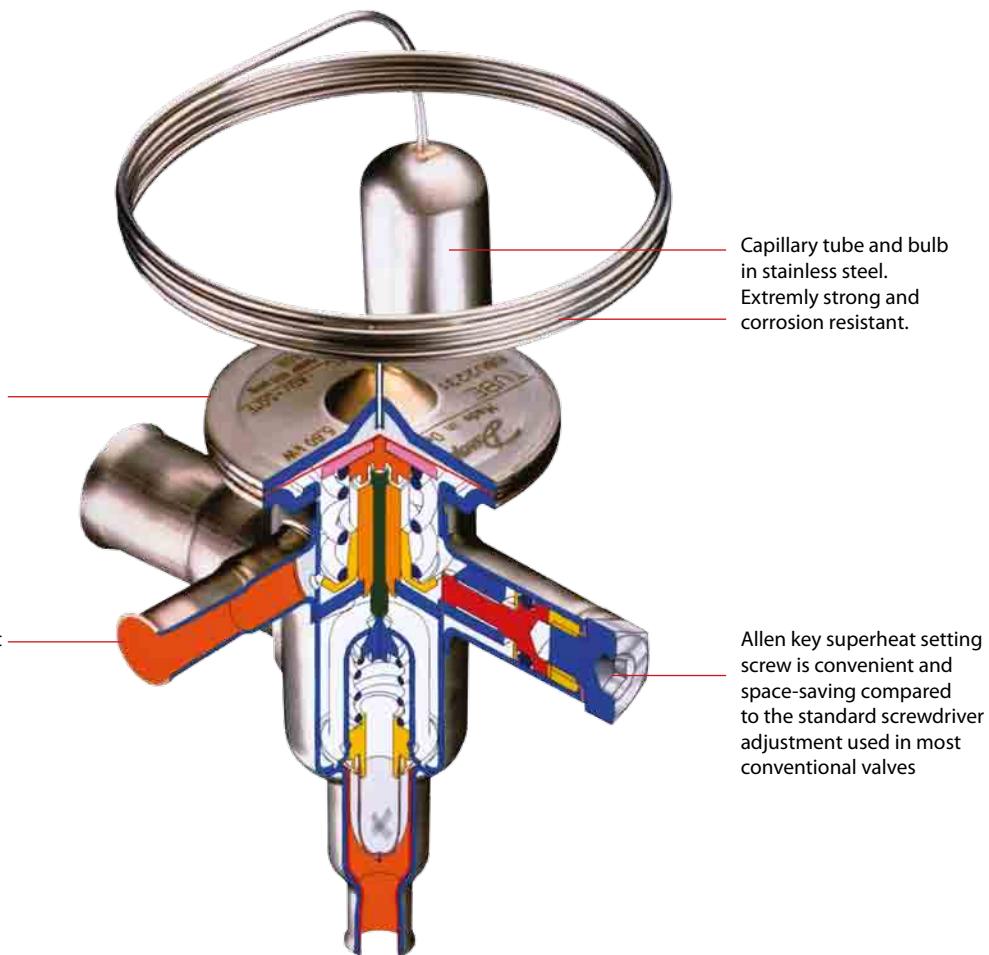


Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Heat pump systems</li><li>Air conditioning units</li><li>Liquid coolers</li><li>Ice cube machines</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>The use of stainless steel makes the valves light and strong.</li><li>Bi-metal connections for safe, fast and convenient soldering.</li><li>Stainless steel capillary tube for superior strength and ductility.</li></ul>	<ul style="list-style-type: none"><li>Can be supplied with MOP (Max. Operating Pressure) Protects the compressor motor against excessive evaporating pressure during normal operation.</li><li>Valves for special temperature ranges can be supplied.</li><li>Only 4 K opening superheat.</li><li>Bi-flow function.</li></ul>

# Technical data and ordering

## Ordering

### Angleway

Supplied with bulb strap  
Standard valve range



Range N = -40 → +10°C

## R22/R407C, R407C, R410A, R134a

Refrigerant	Type	Orifice no. <sup>2)</sup>	Rated capacity Q <sub>nom.</sub> <sup>1)</sup>		Pressure equalisation	Connection Inlet x Outlet			
			kW	TR		in.	Code no.	mm	Code no.
R22/ R407C <sup>3)</sup>	TUB	1	0.92	0.26	int.	1/4 × 1/2	068U2057	-	-
	TUB	2	1.1	0.32	int.	1/4 × 1/2	068U2058	-	-
	TUB	3	1.4	0.41	int.	1/4 × 1/2	068U2059	-	-
	TUB	4	2.5	0.72	int.	1/4 × 1/2	068U2060	-	-
	TUB	5	3.4	0.96	int.	1/4 × 1/2	068U2061	-	-
	TUB	6	5.3	1.5	int.	1/4 × 1/2	068U2062	-	-
	TUB	7	7.0	2.0	int.	3/8 × 1/2	068U2063	-	-
	TUB	8	10.1	2.9	int.	3/8 × 1/2	068U2064	-	-
	TUBE	5	3.4	0.96	ext.	1/4 × 1/2	068U2071	-	-
	TUBE	6	5.3	1.5	ext.	1/4 × 1/2	068U2072	-	-
	TUBE	7	7.0	2.0	ext.	3/8 × 1/2	068U2073	-	-
	TUBE	8	10.1	2.9	ext.	3/8 × 1/2	068U2074	-	-
	TUBE	9	14.1	4.0	ext.	3/8 × 1/2	068U2075	-	-
R407C	TUB	1	0.94	0.27	int.	-	-	6 × 12	068U1901
	TUB	2	1.1	0.32	int.	-	-	6 × 12	-
	TUB	3	1.5	0.42	int.	-	-	6 × 12	068U1903
	TUB	4	2.5	0.72	int.	-	-	6 × 12	068U1904
	TUB	5	3.4	0.96	int.	-	-	6 × 12	068U1905
	TUB	6	5.3	1.5	int.	-	-	6 × 12	068U1906
	TUB	7	7.0	2.0	int.	-	-	10 × 12	068U1907
	TUB	8	10.2	2.9	int.	-	-	10 × 12	068U1908
	TUB	9	14.0	4.0	int.	-	-	10 × 12	068U1909
	TUBE	1	0.94	0.27	ext.	-	-	6 × 12	-
	TUBE	2	1.1	0.32	ext.	-	-	6 × 12	068U1912
	TUBE	3	1.5	0.42	ext.	-	-	6 × 12	068U1913
	TUBE	4	2.5	0.72	ext.	-	-	6 × 12	068U1914
	TUBE	5	3.4	0.96	ext.	1/4 × 1/2	068U1935	6 × 12	068U1915
R410A	TUBE	6	5.3	1.5	ext.	1/4 × 1/2	068U1936	6 × 12	068U1916
	TUBE	7	7.0	2.0	ext.	3/8 × 1/2	068U1937	10 × 12	068U1917
	TUBE	8	10.2	2.9	ext.	3/8 × 1/2	068U1938	10 × 12	068U1918
	TUBE	9	14.0	4.0	ext.	3/8 × 1/2	068U1939	10 × 12	068U1919
R134a	TUB	1	1.34	0.38	int.	1/4 × 1/2	068U1958	-	-
	TUB	2	1.7	0.48	int.	1/4 × 1/2	068U1959	-	-
	TUB	3	2.1	0.60	int.	1/4 × 1/2	068U1960	-	-
	TUB	4	4.1	1.2	int.	1/4 × 1/2	068U1961	-	-
	TUB	5	5.3	1.5	int.	1/4 × 1/2	068U1962	-	-
	TUB	6	8.5	2.4	int.	1/4 × 1/2	068U1963	-	-
	TUBE	7	11.2	3.2	ext.	3/8 × 1/2	068U1973	-	-
	TUBE	8	15.8	4.5	ext.	3/8 × 1/2	068U1974	-	-
	TUBE	9	23.1	6.6	ext.	3/8 × 1/2	068U1975	-	-
R134a	TUB	0	0.42	0.12	int.	1/4 × 1/2	068U2660	-	-
	TUB	1	0.61	0.17	int.	1/4 × 1/2	068U2027	6 × 12	068U2000
	TUB	2	0.72	0.20	int.	1/4 × 1/2	068U2028	6 × 12	068U2001
	TUB	3	0.95	0.27	int.	1/4 × 1/2	068U2029	6 × 12	068U2002
	TUB	4	1.6	0.46	int.	1/4 × 1/2	068U2030	6 × 12	068U2003
	TUB	5	2.1	0.61	int.	1/4 × 1/2	068U2031	6 × 12	068U2004
	TUB	6	3.4	0.95	int.	1/4 × 1/2	068U2032	6 × 12	068U2005
	TUBE	1	0.61	0.17	ext.	-	-	6 × 12	068U2009
	TUBE	2	0.72	0.20	ext.	-	-	6 × 12	068U2010
	TUBE	3	0.95	0.27	ext.	1/4 × 1/2	068U2020	6 × 12	068U2011
	TUBE	4	1.6	0.46	ext.	1/4 × 1/2	068U2021	6 × 12	068U2012
	TUBE	5	2.1	0.61	ext.	1/4 × 1/2	068U2022	6 × 12	068U2013
	TUBE	6	3.4	0.95	ext.	1/4 × 1/2	068U2023	6 × 12	068U2014
	TUBE	7	4.4	1.3	ext.	3/8 × 1/2	068U2024	10 × 12	068U2015
	TUBE	8	6.5	1.9	ext.	3/8 × 1/2	068U2025	10 × 12	068U2016
	TUBE	9	9.0	2.6	ext.	3/8 × 1/2	068U2026	10 × 12	068U2017

<sup>1)</sup> Rated capacity Q<sub>nom.</sub> is based on:  
Evaporating temperature t<sub>e</sub> = +4.4 °C

Condensing temperature t<sub>c</sub> = +38 °C

Refrigerant liquid temperature t<sub>l</sub> = +37 °C

Opening superheat OS = 4 K

<sup>2)</sup> TUBE with orifice 0 and 9 and all TUB (internal pressure equalisation) cannot be used for biflow operation.


<sup>3)</sup> For R407C plants, please select valves from the dedicated R407C program

<sup>4)</sup> Capillary tube length 0.8 m

Valves with inch connections have 1/4 in. pressure equalisation.  
Valves with mm connections have 6 mm pressure equalisation.

## Ordering Angleway

Supplied with bulb strap  
Standard valve range



<sup>1)</sup> Rated capacity  $Q_{\text{nom.}}$  is based on:  
Evaporating temperature  
 $t_e = +4.4^\circ\text{C}$   
Condensing temperature  
 $t_c = +38^\circ\text{C}$   
Refrigerant liquid temperature  
 $t_l = +37^\circ\text{C}$   
Opening superheat  
 $OS = 4\text{ K}$

<sup>2)</sup> TUBE with orifice 0 and 9 and all TUB (internal pressure equalisation) cannot be used for biflow operation.

<sup>3)</sup> Capillary tube length 0.8 m

Range  $N = -40 \rightarrow +10^\circ\text{C}$

## R404A/R507

Refrigerant	Type	Orifice no. <sup>2)</sup>	Rated capacity $Q_{\text{nom.}}^{\text{1)}} \text{ kW}$		Pressure equali- sation	Connection Inlet x Outlet			
			kW	TR		in.	Code no.	mm	Code no.
R404A R507	TUB	1	0.71	0.20	int.	1/4 x 1/2	068U2094	6 x 12	068U2076
	TUB	2	0.87	0.25	int.	1/4 x 1/2	068U2095	6 x 12	068U2077
	TUB	3	1.1	0.32	int.	1/4 x 1/2	068U2096	6 x 12	068U2078
	TUB	4	2.0	0.57	int.	1/4 x 1/2	068U2097	6 x 12	068U2079
	TUB	5	2.7	0.76	int.	1/4 x 1/2	068U2098	6 x 12	068U2080
	TUB	6	4.2	1.2	int.	1/4 x 1/2	068U2099	-	-
	TUBE	1	0.71	0.20	ext.	1/4 x 1/2	068U2103	6 x 12	068U2085
	TUBE	2	0.87	0.25	ext.	1/4 x 1/2	068U2104	6 x 12	068U2086
	TUBE	3	1.1	0.32	ext.	1/4 x 1/2	068U2105	6 x 12	068U2087
	TUBE	4	2.0	0.57	ext.	1/4 x 1/2	068U2106	6 x 12	068U2088
	TUBE	5	2.7	0.76	ext.	1/4 x 1/2	068U2107	6 x 12	068U2089
	TUBE	6	4.2	1.2	ext.	1/4 x 1/2	068U2108	6 x 12	068U2090
	TUBE	7	5.6	1.6	ext.	3/8 x 1/2	068U2109	10 x 12	068U2091
	TUBE	8	8.0	2.3	ext.	3/8 x 1/2	068U2110	10 x 12	068U2092
	TUBE	9	11.3	3.2	ext.	3/8 x 1/2	068U2111	10 x 12	068U2093

Valves with inch connections have 1/4 in. pressure equalisation.  
Valves with mm connections have 6 mm pressure equalisation.

### When the subcooling $\neq 4\text{ K}$ then:

Plant capacity / Factor = Table value

#### Example:

Refrigerant = R134a

$Q_{\text{nom.}} = 8\text{ kW}$


$t_e = -10^\circ\text{C}$

$t_c = 55^\circ\text{C}$

$\Delta t_{\text{sub}} = 25\text{ K}$

#### Selection:

8 kW / 1.25 = 6.4 kW → TU, Orifice 09


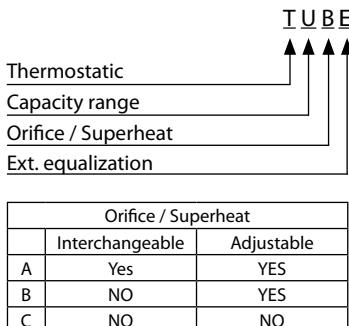


$N = -40^\circ\text{C} \rightarrow +10^\circ\text{C}$

NM =  $-40^\circ\text{C} \rightarrow -5^\circ\text{C}$  with MOP

NL =  $-40^\circ\text{C} \rightarrow -15^\circ\text{C}$  with MOP

B =  $-60^\circ\text{C} \rightarrow -25^\circ\text{C}$  with MOP

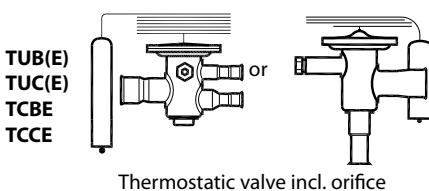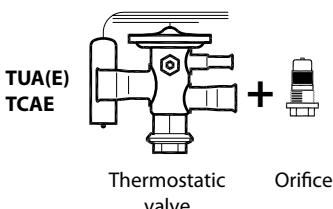

Valve types TUB(E)/TUC(E) and TCBE/TCCE can be replaced by TUA(E) and TCAE types

# Capacities

Capacity in kW, range N -40 °C to +10 °C. Opening superheat sh= 4.4 K

Valve type/ Orifice	Cond. temp. <sup>3)</sup> [°C]	R134a					R404A/R507					R407C					R22					R410A				
		Capacity in [kW]					Capacity in [kW]					Capacity in [kW]					Capacity in [kW]					Capacity in [kW]				
		Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]				
		-30	-10	-5	0	5	-40	-35	-30	-10	0	-10	-5	0	5	10	-35	-30	0	5	-10	-5	0	5	10	
TU Orif. 0X	25	0.14	0.23	0.25	0.27	0.28	0.14	0.16	0.19	0.30	0.34	0.39	0.42	0.45	0.46	0.47	0.21	0.24	0.41	0.41	0.62	0.65	0.65	0.64	0.59	
TU Orif. 0	25	0.18	0.29	0.32	0.35	0.36	0.17	0.20	0.24	0.39	0.44	0.49	0.54	0.58	0.60	0.62	0.27	0.30	0.53	0.54	0.81	0.86	0.87	0.86	0.80	
TU Orif. 1	25	0.26	0.43	0.47	0.51	0.51	0.26	0.30	0.35	0.57	0.64	0.71	0.78	0.83	0.87	0.88	0.39	0.45	0.77	0.78	1.1	1.2	1.1	1.2	1.1	
TU Orif. 2	25	0.29	0.49	0.54	0.59	0.62	0.28	0.33	0.39	0.66	0.77	0.82	0.91	0.98	1.0	1.1	1.2	1.1	1.3	1.4	1.3	1.4	1.5	1.5	1.4	
TU Orif. 3	25	0.40	0.66	0.72	0.78	0.82	0.39	0.45	0.53	0.87	1.0	1.1	1.2	1.1	1.3	1.4	0.59	0.68	1.2	1.2	1.7	1.8	1.9	1.9	1.8	
TU Orif. 4	25	0.62	1.1	1.2	1.3	1.4	0.61	0.72	0.84	1.5	1.8	1.8	2.0	2.2	2.4	2.5	0.93	1.1	2.1	2.3	2.9	3.2	3.4	3.6	3.5	
TU Orif. 5	25	0.84	1.4	1.6	1.7	1.9	0.81	0.96	1.1	2.0	2.4	2.4	2.7	2.9	3.2	3.3	1.3	1.4	2.8	2.9	3.9	4.3	4.6	4.7	4.6	
TU Orif. 6	25	1.3	2.2	2.5	2.7	2.9	1.3	1.5	1.8	3.1	3.7	3.8	4.2	4.6	5.0	5.2	1.9	2.2	4.3	4.5	6.1	6.7	7.2	7.5	7.4	
TU Orif. 7	25	1.7	2.9	3.3	3.6	3.9	1.7	2.0	2.3	4.1	4.9	5.0	5.5	6.1	6.6	6.9	2.6	3.0	5.7	6.0	8.1	8.9	9.5	9.8	9.6	
TU Orif. 8	25	2.6	4.7	4.9	5.3	5.7	2.5	2.9	3.4	6.0	7.1	7.4	8.2	8.9	9.5	9.9	3.8	4.4	8.3	8.7	11.8	12.8	13.6	13.9	13.3	
TU Orif. 9	25	3.6	6.0	6.7	7.4	7.9	3.3	3.9	4.6	8.2	10.0	10.0	11.1	12.3	13.4	14.2	5.1	5.8	11.6	12.3	16.3	18.1	19.6	20.5	20.1	
TU Orif. 0X	35	0.15	0.25	0.28	0.30	0.33	0.13	0.16	0.18	0.31	0.36	0.40	0.44	0.48	0.52	0.54	0.22	0.25	0.46	0.49	0.65	0.70	0.73	0.75	0.74	
TU Orif. 0	35	0.18	0.32	0.35	0.39	0.42	0.16	0.19	0.23	0.40	0.48	0.52	0.57	0.63	0.67	0.71	0.28	0.32	0.60	0.63	0.86	0.93	0.98	1.0	1.0	
TU Orif. 1	35	0.27	0.46	0.52	0.57	0.62	0.24	0.29	0.34	0.58	0.70	0.74	0.82	0.90	0.96	1.0	0.40	0.46	0.88	0.93	1.1	1.2	1.3	1.4	1.4	
TU Orif. 2	35	0.30	0.53	0.60	0.66	0.73	0.27	0.32	0.38	0.68	0.84	0.85	0.96	1.1	1.2	1.2	0.45	0.52	1.0	1.1	1.4	1.5	1.6	1.7	1.8	
TU Orif. 3	35	0.41	0.71	0.79	0.88	0.96	0.36	0.43	0.51	0.90	1.1	1.1	1.3	1.4	1.5	1.6	0.61	0.70	1.4	1.4	1.8	1.9	2.1	2.2	2.2	
TU Orif. 4	35	0.65	1.2	1.3	1.5	1.6	0.57	0.68	0.81	1.5	1.9	1.9	2.1	2.4	2.6	2.9	0.97	1.1	2.3	2.5	3.1	3.5	3.8	4.2	4.3	
TU Orif. 5	35	0.87	1.5	1.8	2.0	2.2	0.77	0.92	1.1	2.0	2.6	2.5	2.8	3.2	3.5	3.8	1.3	1.5	3.1	3.4	4.1	4.6	5.1	5.5	5.7	
TU Orif. 6	35	1.4	2.4	2.7	3.1	3.4	1.2	1.4	1.7	3.1	4.0	3.9	4.4	4.9	5.5	6.0	2.0	2.3	4.9	5.3	6.4	7.3	8.1	8.8	9.2	
TU Orif. 7	35	1.8	3.2	3.6	4.1	4.5	1.6	1.9	2.2	4.2	5.3	5.2	5.8	6.5	7.2	7.9	2.7	3.1	6.5	7.0	8.5	9.6	10.6	11.5	11.9	
TU Orif. 8	35	2.7	4.7	5.3	6.0	6.6	2.3	2.8	3.3	6.1	7.7	7.6	8.6	9.6	10.5	11.4	4.0	4.6	9.4	10.2	12.4	13.8	15.2	16.2	16.6	
TU Orif. 9	35	3.7	6.4	7.3	8.2	9.2	3.1	3.7	4.4	8.3	10.7	10.2	11.6	13.1	14.6	16.1	5.3	6.1	13.0	14.3	16.9	19.3	21.7	23.8	25.1	
TU Orif. 0X	45	0.15	0.26	0.29	0.32	0.36	0.12	0.14	0.17	0.29	0.36	0.40	0.45	0.50	0.54	0.58	0.22	0.25	0.49	0.53	0.65	0.71	0.76	0.79	0.80	
TU Orif. 0	45	0.18	0.33	0.37	0.41	0.46	0.15	0.18	0.21	0.38	0.47	0.52	0.58	0.64	0.70	0.76	0.28	0.32	0.64	0.69	0.86	0.94	1.0	1.1	1.1	
TU Orif. 1	45	0.27	0.48	0.54	0.61	0.67	0.22	0.26	0.31	0.56	0.70	0.74	0.82	0.91	1.0	1.1	0.41	0.47	0.94	1.0	1.1	1.3	1.4	1.4	1.5	
TU Orif. 2	45	0.30	0.54	0.62	0.70	0.79	0.24	0.29	0.34	0.65	0.84	0.85	0.96	1.1	1.2	1.3	0.46	0.53	1.1	1.2	1.4	1.5	1.7	1.8	1.9	
TU Orif. 3	45	0.41	0.73	0.83	0.93	1.0	0.33	0.39	0.46	0.86	1.1	1.1	1.3	1.4	1.6	1.7	0.62	0.72	1.5	1.6	1.8	2.0	2.1	2.3	2.4	
TU Orif. 4	45	0.65	1.2	1.4	1.6	1.8	0.52	0.62	0.74	1.4	1.9	1.9	2.1	2.4	2.7	3.0	0.99	1.1	2.5	2.8	3.1	3.5	4.0	4.4	4.7	
TU Orif. 5	45	0.87	1.6	1.8	2.1	2.4	0.69	0.83	1.0	1.9	2.5	2.5	2.8	3.2	3.6	4.0	1.3	1.5	3.3	3.7	4.1	4.7	5.3	5.8	6.2	
TU Orif. 6	45	1.4	2.5	2.8	3.2	3.7	1.1	1.3	1.5	3.0	4.0	3.9	4.4	5.0	5.6	6.3	2.1	2.4	5.2	5.8	6.4	7.3	8.3	9.2	10.0	
TU Orif. 7	45	1.8	3.3	3.8	4.3	4.9	1.4	1.7	2.0	3.9	5.2	5.1	5.8	6.6	7.4	8.3	2.7	3.2	6.9	7.6	8.4	9.7	10.9	12.1	13.0	
TU Orif. 8	45	2.7	4.8	5.5	6.3	7.1	2.1	2.5	3.0	5.8	7.6	7.5	8.5	9.7	10.8	12.0	4.0	4.6	10.0	11.1	12.3	13.9	15.6	17.1	18.2	
TU Orif. 9	45	3.8	6.6	7.6	8.7	9.8	2.8	3.4	4.0	7.8	10.4	10.0	11.5	13.1	14.8	16.6	5.5	6.3	13.7	15.3	16.6	19.1	21.9	24.8	27.2	
TU Orif. 0X	55	0.14	0.25	0.29	0.33	0.37	0.10	0.12	0.14	0.26	0.33	0.39	0.44	0.49	0.53	0.58	0.22	0.25	0.51	0.55	0.61	0.67	0.72	0.76	0.79	
TU Orif. 0	55	0.18	0.32	0.37	0.42	0.47	0.12	0.15	0.18	0.34	0.43	0.50	0.56	0.63	0.69	0.76	0.28	0.32	0.66	0.72	0.81	0.89	0.97	1.0	1.1	
TU Orif. 1	55	0.27	0.48	0.54	0.62	0.69	0.18	0.22	0.26	0.49	0.63	0.70	0.79	0.88	0.98	1.1	0.41	0.47	0.96	1.1	1.1	1.2	1.3	1.4	1.5	
TU Orif. 2	55	0.30	0.54	0.62	0.71	0.81	0.20	0.25	0.29	0.57	0.76	0.81	0.92	1.1	1.2	1.3	0.46	0.53	1.1	1.3	1.3	1.5	1.6	1.8	1.9	
TU Orif. 3	55	0.40	0.72	0.83	0.95	1.1	0.28	0.33	0.40	0.76	0.98	1.1	1.2	1.4	1.5	1.7	0.60	0.71	1.5	1.6	1.7	1.9	2.0	2.2	2.3	
TU Orif. 4	55	0.64	1.2	1.4	1.6	1.8	0.44	0.53	0.66	1.3	1.7	1.8	2.0	2.3	2.6	3.0	0.99	1.1	2.6	2.9	2.9	3.3	3.8	4.2	4.6	
TU Orif. 5	55	0.86	1.6	1.8	2.1	2.4	0.59	0.71	0.86	1.7	2.3	2.4	2.7	3.1	3.5	4.0	1.3	1.5	3.4	3.8	3.9	4.5	5.0	5.6	6.1	
TU Orif. 6	55	1.4	2.5	2.8	3.3	3.8	0.93	1.1	1.3	2.6	3.6	3.7	4.2	4.8	5.5	6.2	2.1	2.4	5.3	6.0	6.1	6.9	7.9	8.9	9.7	
TU Orif. 7	55	1.8	3.3	3.8	4.3	5.0	1.2	1.5	1.8	3.5	4.7	4.9	5.6	6.4	7.2	8.1	2.8	3.2	7.0	7.9	8.0	9.2	10.4	11.6	12.7	
TU Orif. 8	55	2.6	4.8	5.5	6.4	7.3	1.8	2.2																		



## PHT – Thermostatic expansion valves

PHT thermostatic expansion valves regulate the injection of refrigerant liquid into evaporators.

Injection is controlled by the refrigerant superheat.

Therefore the valves are especially suitable for liquid injection in "dry" evaporators where the superheat at the evaporator outlet is proportional to the evaporator load should always be kept constant.

### Features


Capillary tube and sensor in stainless steel.  
Vibration proof due to the strong capillary tube.

Easy adjustment of superheat

Laser welded thermostatic element in stainless steel. Secure, stronger diaphragm and longer lifetime.

Connection for external pilot solenoid valve

Weld or solder flanges  
Weld: 1 to 2 in.  
Solder: 1 1/8 in (28 mm)  
to 1 3/8 in (35 mm)

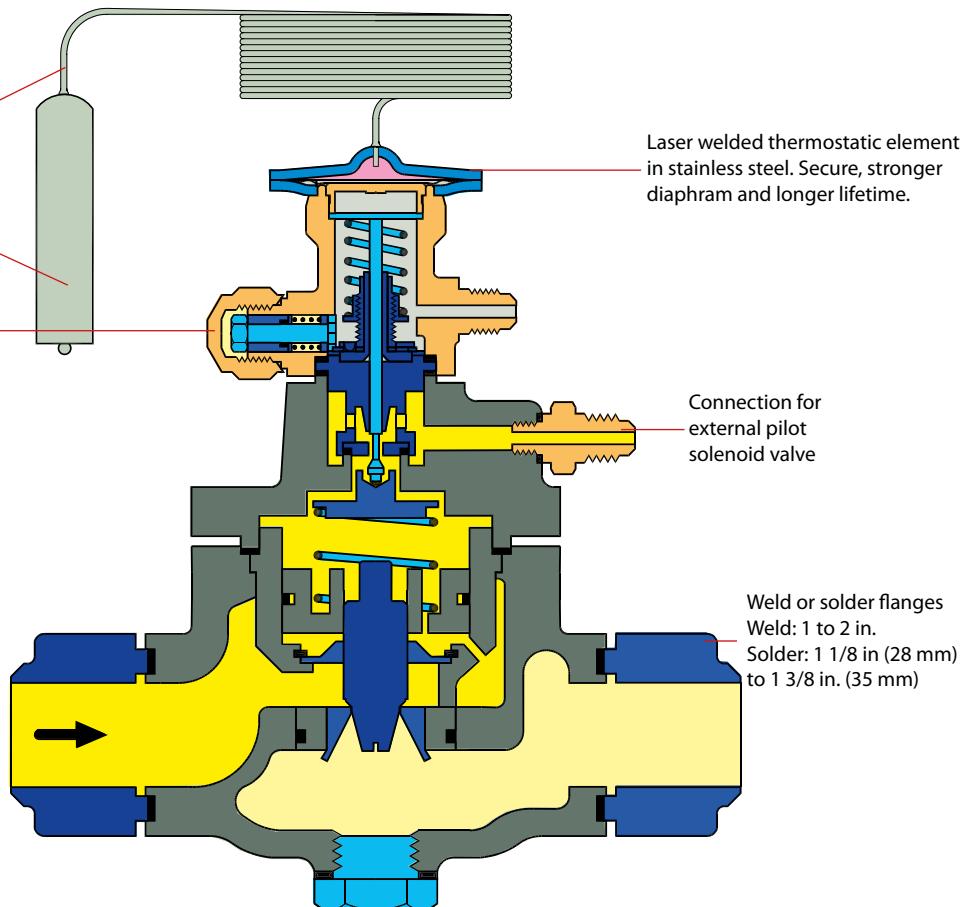

### Applications

- Traditional refrigeration and freezing applications
- Water coolers and air conditioning


### Advantages

- Interchangeable orifice assembly*
  - easier stocking
  - easy capacity matching
  - better service.
- Very tight main orifice*  
Also used as solenoid valve (not PHT 300)
- Superheat*  
Static superheat SS can be adjusted with setting spindle.


### Facts

- Maximum working pressure*
  - PHT 85 and 125: PS / MWP = 28 bar
  - PHT 300: PS / MWP = 20 bar
- Rated capacities from 113 to 1944 kW* (32 to 554 TR) for R22
- Can be supplied with MOP* (Max. Operating Pressure)  
Protects the compressor motor against excessive evaporating pressure
- Range:* -40 to +50°C

# Technical data and ordering




PHT 85  
Solder or weld flanges

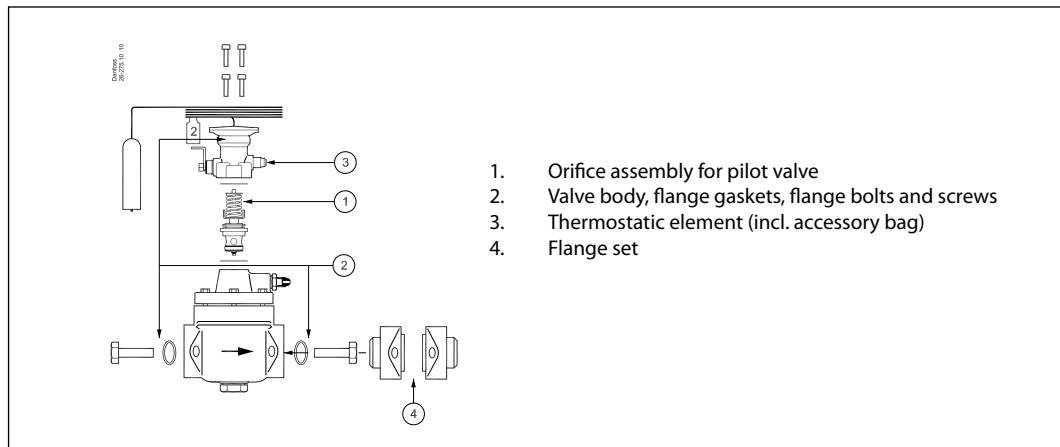

## 1. Pilot orifice assembly

Type	Code no.
PHT	067B2790



## 2. Valve body, flange gaskets, flange bolts and screws


SI N	R134a		R404A/R507		R407C		R22		Code no.
	kW	TR	kW	TR	kW	TR	kW	TR	
PHT85-1	61.0	17.4	98.0	27.9	118.0	33.6	113.0	32.2	026H1160
PHT85-2	103.0	29.3	152.0	43.3	188.0	53.6	181.0	51.6	026H1161
PHT85-3	159.0	45.3	244.0	69.5	299.0	85.2	288.0	82.1	026H1162
PHT85-4	212.0	60.4	418.0	119.1	498.0	141.9	481.0	137.0	026H1163
PHT125-1	479.0	136.5	647.0	184.3	820.0	233.6	780.0	222.2	026H1164
PHT300-1	676.0	192.6	1005.0	286.3	1237.0	352.4	1199.0	341.6	026H1165
PHT300-2	1154.0	328.8	1583.0	451.0	2002.0	570.4	1944.0	553.8	026H1166

The rated capacity is based on:

Evaporating temperature  $t_e = +4.4^\circ\text{C}$

Condensing temperature  $t_c = +38^\circ\text{C}$

Refrigerant temperature ahead of valve  $t_i = +37^\circ\text{C}$



## 3. Thermostatic element (incl. accessory bag)

Range	Refrigerant	Code no.	
		3 m capillary tube	5 m capillary tube
-40 to +10°C	R22/R407C	067B3303	067B3304
	R22/R407C, MOP 100 psig	067B3300	067B3306
	R407C	067B3314	067B3341
	R407C, MOP 95 psig	067B3311	
	R134a	067B3310	067B3315
	R134a, MOP 55 psig	067B3316	067B3317
	R404A / R507		067B3319
+10 to +50°C	R134a		067B3318



## 4. Flange set

Valve flange	Flange type	Weld flanges		Solder flanges			
		in.	Code no.	in.	Code no.	mm	Code no.
PHT 85	2	1	027N1025				
PHT 85	2			1 1/8	027L1029	28	027L1028
PHT 85	2			1 3/8	027L1035	35	027L1035
PHT 125	3 A	1 1/4	027N1032				
PHT 300	4 A	1 1/2	027N1040				
PHT 300	4 A	2	027N1050				

# Capacities

Capacity in kW, range N -40 °C to +10 °C. Opening superheat sh= 4.4 K

Valve type/ Orifice	Cond. temp. <sup>3)</sup> [°C]	R134a					R404A/R507					R407C					R22				
		Capacity in [kW]					Capacity in [kW]					Capacity in [kW]					Capacity in [kW]				
		Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]					Evaporating temp. [°C]				
		-30	-10	-5	0	5	-40	-35	-30	-10	0	-10	-5	0	5	10	-35	-30	0	5	
PHT85-1	25	17.7	38.2	43.2	47.6	50.0	34.2	40.4	47.1	76.0	87.0	85.0	94.0	101.0	107.0	111.0	41.7	48.6	90.0	93.0	
PHT85-2	25	31.4	67.0	75.0	82.0	86.0	60.0	70.0	81.0	125.0	139.0	143.0	156.0	166.0	174.0	177.0	73.0	84.0	149.0	151.0	
PHT85-3	25	46.4	100.0	113.0	124.0	131.0	90.0	105.0	122.0	194.0	221.0	220.0	242.0	261.0	277.0	285.0	110.0	128.0	234.0	240.0	
PHT85-4	25	52.0	108.0	127.0	149.0	171.0	97.0	112.0	139.0	301.0	372.0	317.0	371.0	422.0	464.0	492.0	109.0	128.0	377.0	403.0	
PHT125-1	25	160.0	321.0	359.0	390.0	410.0	284.0	325.0	372.0	564.0	616.0	654.0	699.0	729.0	738.0	718.0	357.0	407.0	653.0	642.0	
PHT300-1	25	223.0	444.0	498.0	546.0	579.0	393.0	456.0	524.0	812.0	924.0	929.0	1018.0	1098.0	1163.0	1202.0	482.0	552.0	993.0	1024.0	
PHT300-2	25	410.0	786.0	875.0	950.0	1000.0	695.0	800.0	909.0	1338.0	1483.0	1571.0	1700.0	1810.0	1889.0	1925.0	863.0	979.0	1640.0	1669.0	
PHT85-1	35	19.6	42.9	49.4	56.0	61.0	32.8	39.3	46.5	79.0	95.0	91.0	101.0	111.0	121.0	129.0	45.1	53.0	105.0	112.0	
PHT85-2	35	34.4	75.0	86.0	96.0	104.0	57.0	68.0	80.0	130.0	151.0	152.0	168.0	181.0	194.0	203.0	79.0	92.0	173.0	181.0	
PHT85-3	35	51.0	113.0	130.0	146.0	160.0	87.0	103.0	121.0	201.0	239.0	234.0	260.0	285.0	307.0	327.0	119.0	139.0	271.0	288.0	
PHT85-4	35	58.0	125.0	150.0	180.0	215.0	93.0	111.0	140.0	316.0	404.0	341.0	401.0	460.0	514.0	560.0	121.0	144.0	438.0	483.0	
PHT125-1	35	173.0	356.0	403.0	447.0	485.0	272.0	316.0	367.0	581.0	657.0	697.0	756.0	803.0	834.0	842.0	379.0	436.0	759.0	772.0	
PHT300-1	35	244.0	494.0	561.0	626.0	684.0	381.0	447.0	518.0	836.0	989.0	981.0	1084.0	1184.0	1276.0	1355.0	521.0	598.0	1134.0	1204.0	
PHT300-2	35	448.0	871.0	980.0	1082.0	1170.0	677.0	786.0	901.0	1378.0	1581.0	1659.0	1808.0	1944.0	2063.0	2156.0	934.0	1063.0	1865.0	1952.0	
PHT85-1	45	20.7	45.8	53.0	61.0	68.0	28.7	35.3	42.7	77.0	96.0	93.0	104.0	115.0	127.0	137.0	47.1	55.0	116.0	125.0	
PHT85-2	45	35.8	80.0	92.0	104.0	115.0	51.0	62.0	74.0	127.0	151.0	155.0	172.0	187.0	202.0	214.0	83.0	97.0	188.0	200.0	
PHT85-3	45	53.0	120.0	139.0	158.0	176.0	77.0	93.0	111.0	196.0	239.0	238.0	266.0	293.0	320.0	345.0	125.0	146.0	295.0	318.0	
PHT85-4	45	61.0	134.0	163.0	199.0	241.0	81.0	99.0	129.0	311.0	406.0	350.0	413.0	476.0	535.0	588.0	129.0	155.0	477.0	532.0	
PHT125-1	45	179.0	375.0	428.0	480.0	527.0	240.0	287.0	339.0	565.0	653.0	712.0	782.0	842.0	889.0	918.0	384.0	447.0	837.0	870.0	
PHT300-1	45	255.0	523.0	598.0	673.0	746.0	342.0	408.0	480.0	810.0	981.0	994.0	1104.0	1213.0	1317.0	1415.0	548.0	630.0	1223.0	1314.0	
PHT300-2	45	468.0	920.0	1041.0	1158.0	1266.0	616.0	725.0	843.0	1339.0	1570.0	1680.0	1838.0	1986.0	2122.0	2240.0	984.0	1121.0	2006.0	2122.0	
PHT85-1	55	21.0	47.2	55.0	63.0	72.0	21.9	28.4	35.7	71.0	91.0	91.0	103.0	115.0	127.0	139.0	47.7	56.0	122.0	133.0	
PHT85-2	55	35.5	82.0	95.0	108.0	121.0	40.0	51.0	63.0	117.0	143.0	152.0	169.0	186.0	201.0	215.0	84.0	99.0	197.0	212.0	
PHT85-3	55	51.0	121.0	142.0	162.0	183.0	59.0	76.0	94.0	179.0	225.0	233.0	261.0	290.0	318.0	346.0	127.0	149.0	308.0	334.0	
PHT85-4	55	61.0	137.0	169.0	207.0	253.0	59.0	77.0	107.0	288.0	385.0	345.0	409.0	472.0	533.0	589.0	134.0	162.0	500.0	559.0	
PHT125-1	55	176.0	380.0	437.0	492.0	546.0	190.0	237.0	290.0	522.0	615.0	701.0	781.0	852.0	911.0	955.0	372.0	443.0	891.0	939.0	
PHT300-1	55	252.0	531.0	611.0	692.0	772.0	275.0	339.0	410.0	738.0	916.0	972.0	1084.0	1195.0	1305.0	1409.0	561.0	647.0	1272.0	1375.0	
PHT300-2	55	466.0	933.0	1061.0	1186.0	1305.0	510.0	618.0	734.0	1231.0	1471.0	1641.0	1800.0	1951.0	2091.0	2216.0	1010.0	1152.0	2081.0	2211.0	

<sup>3)</sup> Condensing temperature at bubble point.

## Correction factor

Refrigerant	Subcooling [K]										
	2	4	10	15	20	25	30	35	40	45	50
R22	0.98	1	1.06	1.11	1.15	1.2	1.25	1.3	1.35	1.39	1.44
R134a	0.98	1	1.08	1.13	1.19	1.25	1.31	1.37	1.42	1.48	1.54
R404A	0.96	1	1.1	1.2	1.29	1.37	1.46	1.54	1.63	1.7	1.78
R407C	0.97	1	1.08	1.14	1.21	1.27	1.33	1.39	1.45	1.51	1.57

## When the subcooling ≠ 4 K then:

1. Table value × Factor = Plant capacity

2. Plant capacity/Factor = Table value

## Example:

Refrigerant = R134a

Q<sub>o</sub> = 130 kW

t<sub>o</sub> = -10 °C

t<sub>c</sub> = 45 °C

Δt<sub>u</sub> = 25 K

## Selection:

130 kW : 1.25 = 104 kW = PHT 85, Orifice 03 ✓

# Product overview

Complete Danfoss program of thermostatic expansion valves:

## Thermostatic Expansion valves with exchangeable orifice


Type	Rated capacities in kW for range N					Connections
	R22	R134a	R404A / R507	R407C	R410A	
T 2 / TE 2	0.9 - 19.7	0.7 - 10.1	0.64 - 15.5	0.9 - 19.7	-	Flare x flare and flare x solder Solder (solder adaptor) x solder
TUA / TUAЕ	0.63 - 14.1	0.42 - 9.0	0.5 - 11.3	0.66 - 14.0	1.0 - 23.1	Solder - Bi-metal (stainless steel / copper)
TCAE	18.3 - 26.7	13 - 18.6	13 - 18.9	17.8 - 25.2	21.2 - 30.6	Solder - Bi-metal (stainless steel / copper)
TE 5 - TE 55	19.7 - 356	12.9 - 220	13 - 197	21.3 - 385	-	Flare / solder /solder flanges
PHT	105 - 1890	55 - 1083	99 - 1623	117 - 2020	-	Solder or weld flanges

## Thermostatic Expansion valves with fixed orifice

Type	Rated capacities in kW for range N					Connections
	R22	R134a	R404A / R507	R407C	R410A	
TUB / TUBE	0.63 - 14.9	0.42 - 9.0	0.5 - 11.3	0.66 - 14.0	1.0 - 23.1	Solder Bi-metal (stainless steel / copper)
TCBE	18.3 - 26.7	13 - 18.6	13 - 18.9	17.8 - .2	21.2 30.6	Solder Bi-metal (stainless steel / copper)
TGE	10 - 134	6 - 87	7 - 92	9 - 121	12 - 161	Flare / solder (copper)
TRE 10 - TRE 80	28 - 245	18 - 196	21 - 187	28 - 245	28 - 350	Solder Bi-metal (stainless steel / copper)

## Thermostatic expansion valves parts program:


T 2 and TE 2

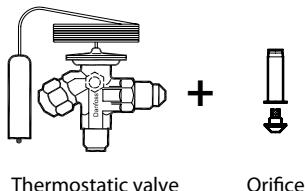

Thermostatic valve

Orifice


TUA/TUAЕ and TCAE

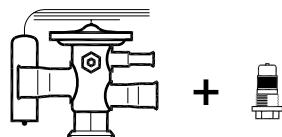

Thermostatic valve

Orifice

TE 5 - TE 55

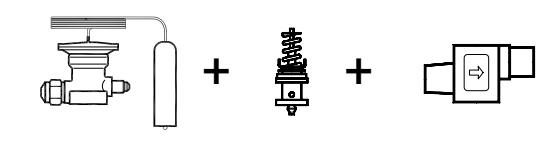


Thermostatic element

Orifice

Valve body

PHT

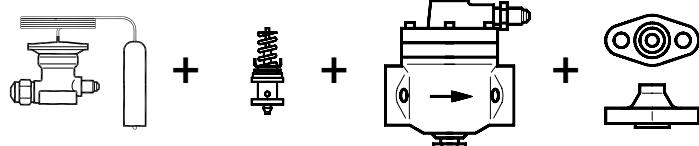

Thermostatic element

Orifice

Valve body

Flanges




Thermostatic expansion valves – PHT overview



## AKV – Electronically operated expansion valves

AKV are electrically operated expansion valves designed for refrigerating plant. The AKV valves are normally operated by a controller from the Danfoss ADAP-KOOL® range. The valves are operated in pulse-width modulation. This means that the valve is either completely open or completely closed.

### Features

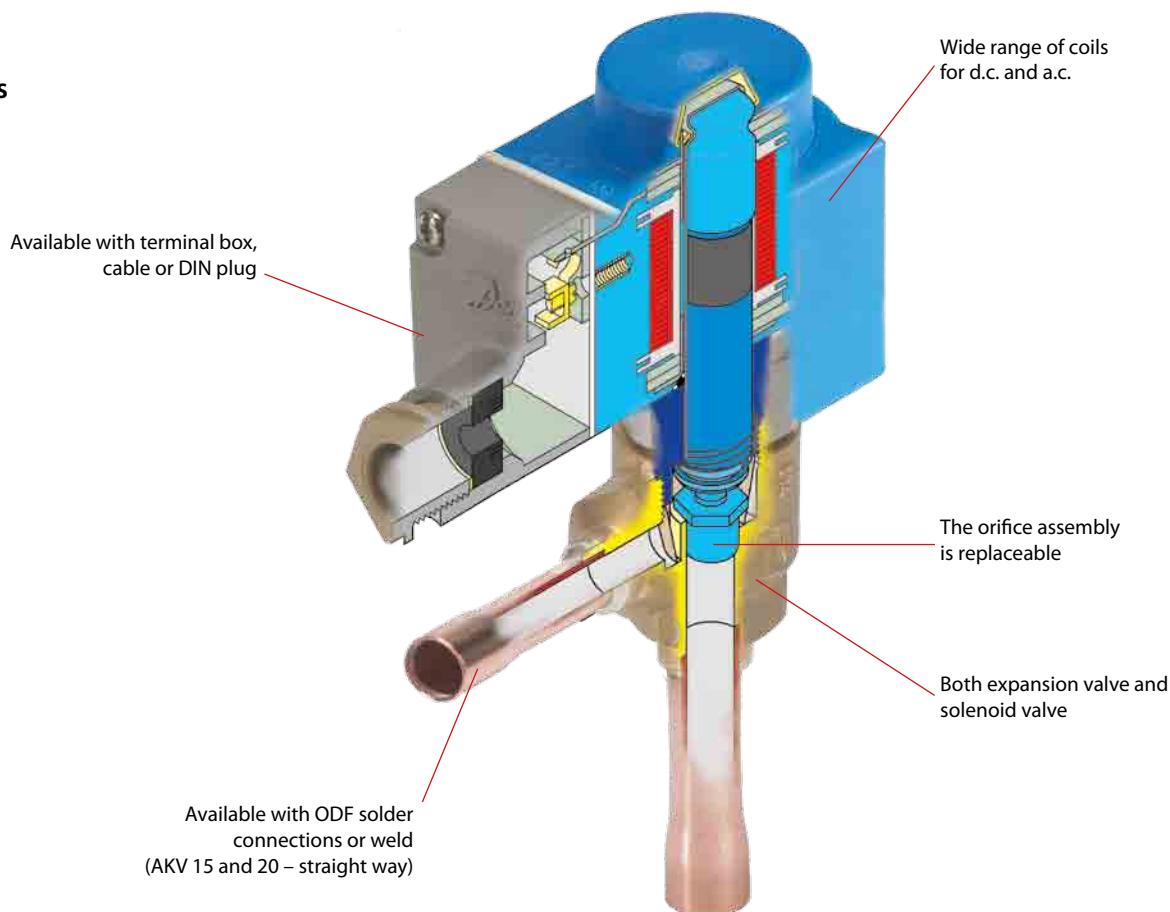

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Cold rooms</li><li>Water chillers</li></ul>	<ul style="list-style-type: none"><li>The AKV valves are supplied as a part programme, as follows:<ul style="list-style-type: none"><li>- Separate valve incl. exchangeable orifice</li><li>- Separate coil</li></ul></li><li>The valve requires no adjustment</li></ul>	<ul style="list-style-type: none"><li>The AKV 10 valves cover a capacity range from 0.6 kW to 14 kW (404A/R507) and are divided into 7 capacity ranges.</li><li>The AKV 15 valves cover a capacity range from 14 kW to 85 kW (404A/R507) and are divided into 4 capacity ranges.</li><li>The AKV 20 valves cover a capacity range from 56 kW to 530 kW (404A/R507) and are divided into 5 capacity ranges.</li><li>The AKV valves can be used for HCFC, HFC and R744 (up to the stated max. working pressure) refrigerants.</li></ul>

# Technical data and ordering

**AKV 10**

Valve type	Rated capacity kW <sup>1)</sup>				k <sub>v</sub> value	Connections			
						Solder ODF			
	R22/ R407C	R134a	R404A/R507	R407C	m <sup>3</sup> /h	Inlet × outlet in.	Code no.	Inlet × outlet mm	Code no.
AKV 10-1	1.0	0.9	0.8	1.1	0.010	3/8 × 1/2	068F1161	10 × 12	068F1162
AKV 10-2	1.6	1.4	1.3	1.7	0.017	3/8 × 1/2	068F1164	10 × 12	068F1165
AKV 10-3	2.6	2.1	2.0	2.5	0.025	3/8 × 1/2	068F1167	10 × 12	068F1168
AKV 10-4	4.1	3.4	3.1	4.0	0.046	3/8 × 1/2	068F1170	10 × 12	068F1171
AKV 10-5	6.4	5.3	4.9	6.4	0.064	3/8 × 1/2	068F1173	10 × 12	068F1174
AKV 10-6	10.2	8.5	7.8	10.1	0.114	3/8 × 1/2	068F1176	10 × 12	068F1177
AKV 10-7	16.3	13.5	12.5	17.0	0.162	1/2 × 5/8	068F1179	12 × 16	068F1180

**AKV 15**

AKV 15-1	25.5	21.2	19.6	25.2	0.25	3/4 × 3/4	068F5000	18 × 18	068F5001
AKV 15-2	40.8	33.8	31.4	40.4	0.40	3/4 × 3/4	068F5005	18 × 18	068F5006
AKV 15-3	64.3	53.3	49.4	63.7	0.63	7/8 × 7/8	068F5010	22 × 22	068F5010
AKV 15-4	102	84.6	78.3	101	1.0	1 1/8 × 1 1/8	068F5015	28 × 28	068F5016

**AKV 20**

Valve type	Rated capacity kW <sup>1)</sup>				k <sub>v</sub> value	Connections				Weld	
						Solder ODF				Inlet × outlet in.	Code no.
	R22/ R407C	R134a	R404A/R507	R407C	m <sup>3</sup> /h	Inlet × outlet in.	Code no.	Inlet × outlet mm	Code no.	Inlet × outlet in.	Code no.
AKV 20-1	102	84.6	78.3	101	1.0	1 3/8 × 1 3/8	042H2020	35 × 35	042H2020	1 1/4 × 1 1/4	042H2021
AKV 20-2	163	135	125	170	1.6	1 3/8 × 1 3/8	042H2022	35 × 35	042H2022	1 1/4 × 1 1/4	042H2023
AKV 20-3	255	212	196	252	2.5	1 5/8 × 1 5/8	042H2024	42 × 42	042H2025	1 1/4 × 1 1/4	042H2026
AKV 20-4	408	338	314	404	4.0	2 1/8 × 2 1/8	042H2027	54 × 54	042H2027	1 1/2 × 1 1/2	042H2028
AKV 20-5	643	533	494	637	6.3	2 1/8 × 2 1/8	042H2029	54 × 54	042H2029	2 × 2	042H2030

<sup>1)</sup> Rated capacities are based on:

Condensing temperature t<sub>c</sub> = 32°C

Liquid temperature t<sub>l</sub> = 28°C

Evaporating temperature t<sub>e</sub> = 5°C

## Technical data

Valve type	AKV 10	AKV 15	AKV 20
Tolerance of coil voltage	+10 / -15%	+10 / -15%	+10 / -15%
Enclosure to IEC 529	Max. IP67	Max. IP67	Max. IP67
Working principle (Pulse-width modulation)	PWM	PWM	PWM
Recommended period of time	6 Seconds	6 Seconds	6 Seconds
Capacity (404A/R507)	0.6 to 14 kW	14 to 85 kW	56 to 530 kW
Regulation range (Capacity range)	10 to 100%	10 to 100%	10 to 100%
Connection	Solder	Solder	Solder or weld
Evaporating temperature	-50 to 60°C	-50 to 60°C	-40 to 60°C
Ambient temperature	-50 to 50°C	-40 to 50°C	-40 to 50°C
Leak of valve seat	<0.02% of k <sub>v</sub> -value	<0.02% of k <sub>v</sub> -value	<0.02% of k <sub>v</sub> -value
MOPD	18 bar	22 bar	18 bar
Filter, replaceable	Internal 100 µm	External 100 µm	External 100 µm
Max. working pressure	AKV 10-1 to 6 PS=52 bar g AKV 10-7 PS=42 bar g	AKV 15-1,2,3 PS 42 bar g AKV 15-4 PS 28 bar g	28 bar g

# Technical data and ordering

## Ordering

*Coils for AKV valves*


AKV	AKV	AKV	AKV	AKV	AKV
<b>10-1</b>	10-6	10-7	15-1	20-1	20-4
<b>10-2</b>			15-2	20-2	20-5
<b>10-3</b>			15-3		
<b>10-4</b>			15-4	20-3	
<b>10-5</b>					

D.C. coils	Code no.							
<b>220 V d.c. 20 W, standard with terminal box</b>	018F6851	+	+	+	+	+	+	+
<b>100 V d.c. 18 W, special with terminal box with DIN plugs</b>	018F6780	+	+	+	+	+	+	+
<b>230 V d.c. 18 W, special with terminal box with DIN plugs</b>	018F6781 <sup>1)</sup> 018F6991 <sup>1)</sup>	+	+	+	+	+	+	+
<b>230 V d.c. 18 W, special with 2.5 m cable with 4.0 m cable with 8.0 m cable</b>	018F6288 <sup>1)</sup> 018F6278 <sup>1)</sup> 018F6279 <sup>1)</sup>	+	+	+	+	+	+	+

<sup>1)</sup> Recommended for commercial refrigeration plant

A.C. coils	Code no.							
<b>240 V a.c. 10 W, 50 Hz with terminal box with DIN plugs</b>	018F6702 018F6177	+	+	-	+	-	-	-
<b>240 V a.c. 10 W, 60 Hz with terminal box with DIN plugs</b>	018F6713 018F6188	+	+	-	+	-	-	-
<b>240 V a.c. 12 W, 50 Hz with terminal box</b>	018F6802	+	+	+	+	+	+	-
<b>230 V a.c. 10 W, 50 Hz with terminal box with DIN-plugs</b>	018F6701 018F6176	+	+	-	+	-	-	-
<b>230 V a.c. 10 W, 60 Hz with terminal box with DIN-plugs</b>	018F6714 018F6189	+	+	-	+	-	-	-
<b>230 V a.c. 10 W, 50/60 Hz with terminal box with DIN-plugs</b>	018F6732 018F6193	+	+	-	+	-	-	-
<b>230 V a.c. 12 W, 50 Hz with terminal box</b>	018F6801	+	+	-	+	+	-	-
<b>230 V a.c. 12 W, 60 Hz with terminal box</b>	018F6814	+	+	-	+	+	-	-
<b>115 V a.c. 10 W, 50 Hz with terminal box with DIN-plugs</b>	018F6711 018F6186	+	+	-	+	-	-	-
<b>115 V a.c. 10 W, 60 Hz with terminal box with DIN-plugs</b>	018F6710 018F6185	+	+	-	+	-	-	-
<b>110 V a.c. 12 W, 50 Hz with terminal box</b>	018F6811	+	+	-	+	+	-	-
<b>110 V a.c. 12 W, 60 Hz with terminal box</b>	018F6813	+	+	-	+	+	-	-
<b>110 V a.c. 20 W, 50 Hz with terminal box</b>	018Z6904	+	+	+	+	+	+	+
<b>24 V a.c. 10 W, 50 Hz with terminal box with DIN-plugs</b>	018F6707 018F6182	+	-	-	+	-	-	-
<b>24 V a.c. 10 W, 60 Hz with terminal box with DIN-plugs</b>	018F6715 018F6190	-	-	-	+	-	-	-
<b>24 V a.c. 12 W, 50 Hz with terminal box</b>	018F6807	+	-	-	+	+	-	-
<b>24 V a.c. 12 W, 60 Hz with terminal box</b>	018F6815	+	-	-	+	+	-	-
<b>24 V a.c. 20 W, 50 Hz with terminal box</b>	018F6901	+	+	+	+	+	+	+
<b>24 V a.c. 20 W, 60 Hz with terminal box</b>	018F6902	+	+	+	+	+	+	+

## Application example

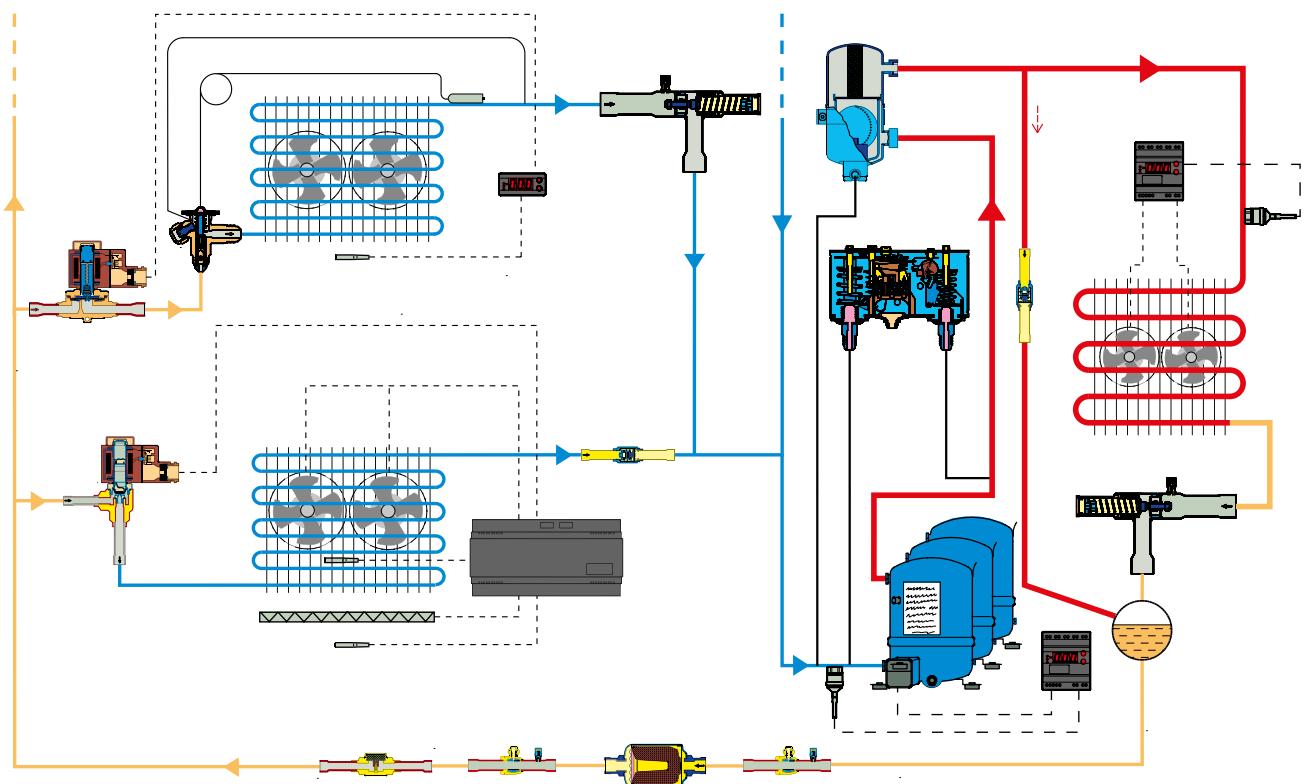




## ETS 6 – Electronic expansion valves

Compact and lightweight, the current range are available with different capacities, and can be used with all common refrigerants (e.g R410A, R407C, R404A, R134a, R22). Bi-flow operation is also possible for reversible system such as heat pumps.

The valve design uses uni-polar drives, and different control solutions exist that are compatible with uni-polar drives.

### Features

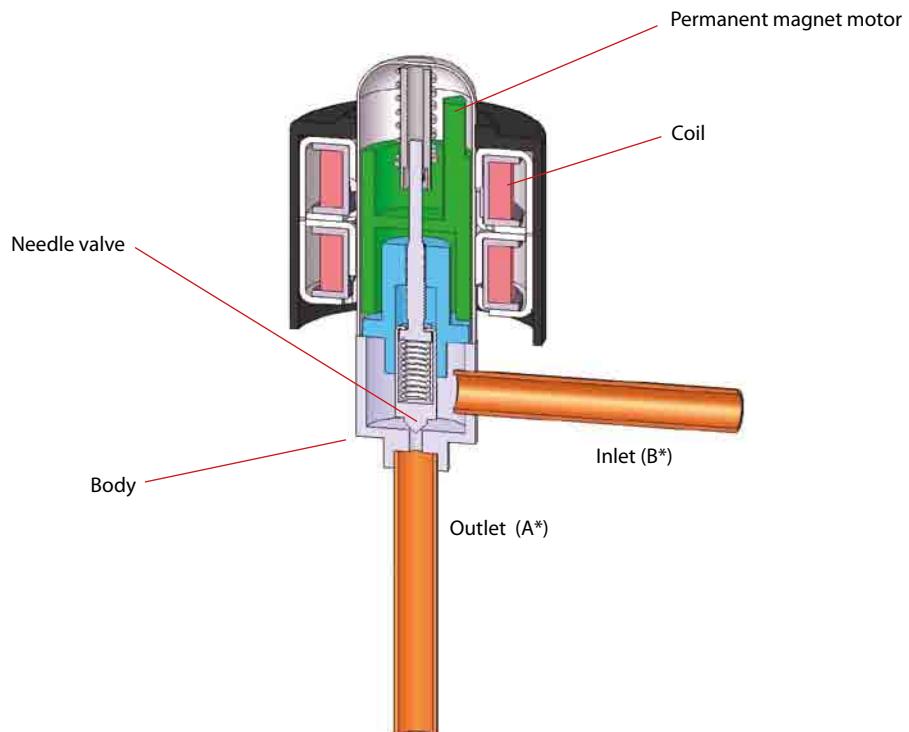

Cross section diagram of ETS 6 series

\* Refers to refrigerant flow in cooling mode

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Heat Pumps</li> <li>Modular Air Cooled Chillers</li> <li>VRF, Multi Split</li> <li>Inverter Mini Split</li> <li>Bus air conditioning</li> <li>IT cooling</li> </ul>	<ul style="list-style-type: none"> <li>Precision flow control with high resolution</li> <li>Proven know-how and high reliability</li> <li>Power saving design that enables energy efficiency.</li> <li>Compact &amp; lightweight hermetic design with removable coil</li> <li>Bi-flow operation for reversible systems</li> </ul>	<ul style="list-style-type: none"> <li>ETS 6 are designed for HFC/HCFC conditions including R410A, providing 47 bar (670 psig) working pressure.</li> <li>EIM 336, EKD 316 and MCX are examples of Danfoss controllers with drivers matching the ETS 6 needs.</li> <li>For manual operation and service of ETS 6 valves an AST-g service driver is available.</li> </ul>

## Technical data

<b>Maximum working pressure</b>	47 bar (670 psig), 48 bar (680 psig) in abnormal condition
<b>Compatible refrigerants</b>	HFC, HCFC (e.g. R22, R134a, R404A, R407C, R410A, R507)
<b>Refrigerant oil</b>	All mineral oils and ester oils (to lubricate ETS 6 valve)
<b>Ambient temperature</b>	-30°C to 60°C (-22 °F to 140 °F)
<b>Fluid Temperature</b>	-30°C to 70°C (-22 °F to 158 °F)
<b>Durability</b>	Tested for 60 Million total pulses supplies to the valve during partially open valve, which is comparable to 150,000 cycles if the valve is operated between 100 to 300 pulses open.  Tested for 30,000 full stroke cycles including 20 pulse overdrive at each closing.
<b>Ambient humidity</b>	95% RH or less
<b>Modulation</b>	Permanent magnet type direct operating stepper motor
<b>Excitation method</b>	1-2 phase
<b>Electrical connection</b>	JST XHP-6 and JST XHP-5
<b>Excitation speed</b>	min. 30 pps (pulses per second) to max. 90 pps, recommended 31.3 pps
<b>Operating range</b>	0 to 480 pulses, no holding power required (NOTE: do not apply more than 520 pulses)
<b>Full motion transit time</b>	e.g. 16 sec @ 30 pps, 6 sec @ 80 pps
<b>Installation position</b>	With coil on the upper side and the valve/coil assembly within ±15° of the vertical axis
<b>Liquid line solenoid valve</b>	If using a liquid line solenoid valve, it must be installed in such a way that it does not create liquid hammering in ETS 6 valve
<b>Max. coil winding temperature</b>	115°C (239 °F)

## Technical specifications and ordering



### Valve Specifications

Model No.	Single pack Code no.	I-pack Code no. (100 units per box)	Orifice	Nominal Capacity [kW]						Connection (solder)		Valve tube configuration	MWP [bar]	MOPD [bar]	Max. Reverse Pressure [bar]	Flow direction characteristic
				[mm]	R22	R134a	R404A/R507	R407C	R410A	A [mm]	B [mm]					
ETS 6 - 10	034G5005	034G5000	1	2.6	2	1.8	2.7	3.1	7.94	7.94	90°	47	35	35	Bi-flow	
ETS 6 - 14	034G5015	034G5010	1.4	5.8	4.5	4.1	5.9	6.8	7.94	7.94	90°	47	35	20	Bi-flow	
ETS 6 - 18	034G5026	034G5024	1.8	10.3	8.1	7.3	10.6	12.1	6.35	6.35	90°	47	35	28	Bi-flow	
ETS 6 - 25	034G5035	034G5030	2.5	19.6	15.3	13.8	20.1	23	7.94	7.94	90°	47	35	22	Bi-flow	
ETS 6 - 32	034G5055	034G5050	3.2	28.8	22.5	20.3	29.6	33.9	7.94	7.94	90°	47	28	12*	Bi-flow	

### Nominal Capacity based on:

CT=38°C, ET=5°C, SC=0°C, SH=0°C

\*Please contact Danfoss if higher maximum reverse pressure valve is required.



### Coil Specifications

Model No.	Single pack Code no.	I-pack Code no. (100 units per box)	Relevant valve model	Voltage (current)	Cable length [m]	Protective cable tube length [m]	Enclosure	Insulation class	Connector
ETS 6 Coil	034G5105	034G5100	Coil for ETS 6 valves	12 VDC (0.26A/phase)	0.7	0.6	IP66	Class E (UL Class 105 (A))	JST XHP-6
ETS 6 Coil	034G5115	034G5110	Coil for ETS 6 valves	12 VDC (0.26A/phase)	0.7	0.6	IP66	Class E (UL Class 105 (A))	JST XHP-5

Please contact Danfoss for longer cable length




## ETS 12.5 - 400 – Electronic expansion valves

ETS is a series of electrically operated expansion valves for precise liquid injection in evaporators for air conditioning and refrigeration applications.

The valve piston and linear positioning design is fully balanced, providing bi-flow feature as well as solenoid tight shut-off function in both flow directions.

The ETS needs a current or voltage driver as partner to be operated.

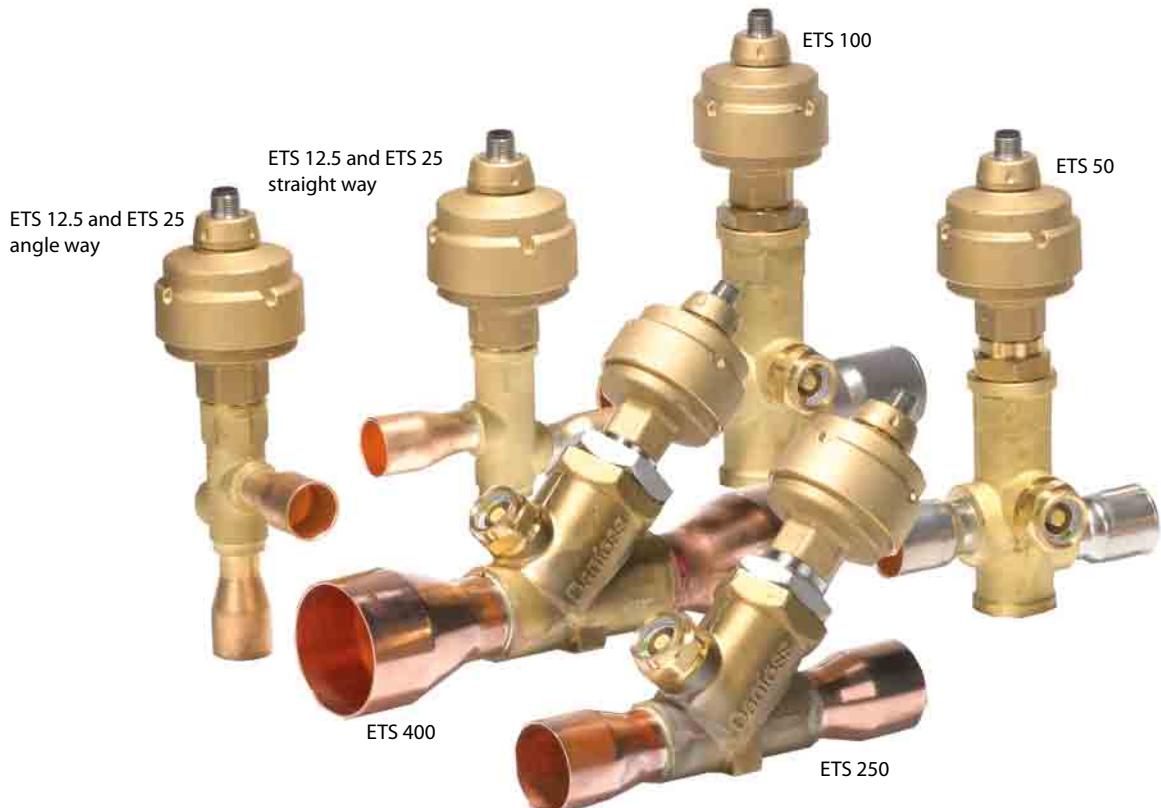

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Heat pumps</li><li>Refrigeration</li><li>Air conditioning</li><li>Chillers</li></ul>	<ul style="list-style-type: none"><li>Precise positioning for optimal control of liquid injection.</li><li>Balanced design (ETS 12.5 to 400) providing bi-flow operation as well as solenoid tight shut-off function in both flow directions.</li><li>Lower energy consumption</li><li>ETS 50 &amp; ETS 100 feature improved process and productivity due to waterless brazing i.e soldering without wet cloth for cooling.</li><li>ETS 50 to 400 are all designed with built-in sight glass with moisture indicator.</li><li>Internal and external corrosion resistant design</li></ul>	<ul style="list-style-type: none"><li>ETS valves are compatible with wide range of all common refrigerants, HFC, HCFC.</li><li>ETS 12.5, ETS25, ETS 50, ETS100 provides working pressure of 45.5 bar (660 psig) and ETS 250, ETS 400 provides 34 bar (493 psig).</li><li>EKC316A, 312 and EKD316 are examples of Danfoss controllers with drivers matching the ETS needs.</li><li>Equipped with M12 connector for cable connection (cable and connector assemblies as accessories)</li><li>For manual operation and service of ETS valves an AST-g service driver is available.</li></ul>

# Technical data

## Technical data

<b>Compatible refrigerants</b>	HFC, HCFC (e.g. R410A, R407C, R404A, R134a, R22)
<b>Refrigerant oil</b>	All mineral oils and ester oils
<b>Comply with P.E.D.</b>	Yes
<b>MOPD</b>	33 bar (478.6 psig)
<b>Max. working pressure (PS/MWP)</b>	ETS 12.5/ETS 25/ETS 50/ETS 100: 45.5 bar (660 psig) ETS 250/ETS 400: 34 bar (493 psig)
<b>Refrigerant temperature range</b>	-40°C to 65°C (-40°F to 149°F)
<b>Ambient temperature</b>	-40°C to 60°C (-40°F to 140°F)
<b>Material of Construction</b>	ETS 50, 100: Body and AST enclosure in brass, connections in bi-metal (stainless steel/copper) ETS 12.5, 250, 400: Body and AST enclosure in brass, connections in copper

## Electrical data

<b>Motor enclosure</b>	IP67
<b>Stepper motor type</b>	Bi-polar - permanent magnet
<b>Step mode</b>	2 phase full step
<b>Phase resistance</b>	52 Ω ±10%
<b>Phase inductance</b>	85 mH
<b>Holding current</b>	Depends on application. Full current allowed (100% duty cycle)
<b>Step angle</b>	7.5° (motor), 0.9° (lead screw), Gearing ration 8.5:1. (38/13)²:1
<b>Nominal voltage</b>	(Constant voltage drive) 12 V dc -4% +15%, 150 steps/sec.
<b>Phase current</b>	(Using chopper drive) 100 mA RMS -4% +15%,
<b>Max. total power</b>	Voltage / current drive: 5.5 / 1.3 W (UL: NEC class 2)
<b>Step rate</b>	150 steps/sec. (constant voltage drive) 0-300 steps/sec. 300 recommended (chopper current drive)
<b>Total steps</b>	ETS 12.5, 25, 50: 2625 [+160 / -0] steps ETS 100: 3530 [+160 / -0] steps ETS 250 and 400: 3810 [+160 / -0] steps
<b>Full travel time</b>	ETS 12.5, 25, 50: 17 / 8.5 sec. (voltage / current) ETS 100: 23 / 11.5 sec. (voltage / current) ETS 250 and 400: 25.4 / 12.7 sec. (voltage / current)
<b>Lifting height</b>	ETS 12.5, 25, 50: 13 mm (0.5 in.) ETS 100: 16 mm (0.6 in.) ETS 250-400: 17.2 mm (0.7 in.)
<b>Reference position</b>	Overdriving against the full close position
<b>Electrical connection</b>	M12 connector




**NOTE:**

Full life time of ETS can only be ensured if oil is present in the system. In oil-free systems, life time of the ETS cannot be guaranteed.

# Ordering


## ETS 12.5, 25 Valve incl. actuator



Type	Rated capacity <sup>1)</sup>										Connection			
	R410A		R407C		R22		R134a		R404A		ODF x ODF (A x B)		Code no.	
	kW	TR	kW	TR	kW	TR	kW	TR	kW	TR	in.	mm	Straight way Single Pack	Angle way Single Pack
ETS 12.5	70	20	63	18	57	16	45	13	43	12	1/2 x 1/2	-	034G4209	034G4213
ETS 25	144	41	129	37	117	34	93	27	88	25	-	12 x 12	034G4208	034G4212
											5/8 x 5/8	16 x 16	034G4210	034G4214
											7/8 x 7/8	22 x 22	034G4211	034G4215
											1/2 x 1/2	-	034G4201	034G4205
											-	12 x 12	034G4200	034G4204
											5/8 x 5/8	16 x 16	034G4202	034G4206
											7/8 x 7/8	22 x 22	034G4203	034G4207

ETS 12.5 and ETS 25 do not feature sight glass


## ETS 50, 100 Valve incl. actuator

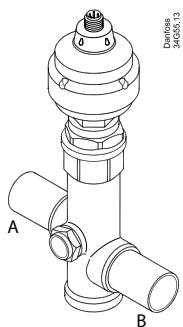

Type	Rated capacity <sup>1)</sup>										Connection			
	R410A		R407C		R22		R134a		R404A		ODF x ODF (A x B)		Code no.	
	kW	TR	kW	TR	kW	TR	kW	TR	kW	TR	in.	mm	Single pack	
ETS 50	262.3	75.7	240.5	69.1	215	62	170	48.9	161.4	46.3	7/8 x 7/8	22 x 22	034G1708	
ETS 100	488.4	140.9	447.8	128.7	400.4	115.4	316.5	91.2	300.5	86.6	7/8 x 1 1/8	22 x 28	034G1705	
											1 1/8 x 1 1/8	28 x 28	034G1706	
											1 1/8 x 1 3/8	28 x 35	034G1704	
											1 1/8 x 1 1/8	28 x 28	034G0507	
											1 1/8 x 1 3/8	28 x 35	034G0501	
											1 1/8 x 1 3/8	35 x 35	034G0508	
											1 1/8 x 15/8	-	034G0505	

ETS 50 and ETS 100 have integrated sight glass

## ETS 250, 400 Valve incl. actuator

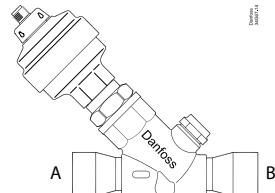


Type	Rated capacity <sup>1)</sup>										Connection			
	R410A		R407C		R22		R134a		R404A		ODF x ODF (A x B)		Code no.	
	kW	TR	kW	TR	kW	TR	kW	TR	kW	TR	in.	mm	Single pack	
ETS 250	-	-	1212	349	1106	319	874	252	828	239	1 1/8 x 1 1/8	28 x 28	034G2600	
ETS 400	-	-	1933	556	1764	509	1394	402	1320	381	1 3/8 x 1 3/8	35 x 35	034G2601	
			-	-	-	-	-	-	-	-	1 5/8 x 1 5/8	-	034G2602	
			-	-	-	-	-	-	-	-	1 5/8 x 1 5/8	-	034G3500	
			-	-	-	-	-	-	-	-	2 1/8 x 2 1/8	54 x 54	034G3501	

- <sup>1)</sup> The Rated capacity is based on:  
 Evaporating temperature  $t_e$ : 5°C (40°F)  
 Liquid temperature  $t_l$ : 28°C (82°F)  
 Condensing temperature  $t_c$ : 32°C (90°F)  
 Full stroke opening in normal flow direction

ETS 250 and ETS 400 have integrated sight glass

## ETS for CO<sub>2</sub> Applications

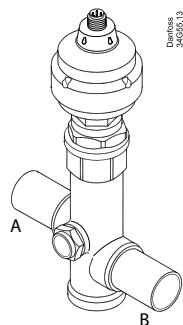

Type	Rated capacity <sup>1)</sup>										Connection			
	ODF x ODF (A x B)		in.		Code no.		Single pack		ODF x ODF (A x B)		in.		Code no.	
	kW	TR	kW	TR	kW	TR	kW	TR	kW	TR	in.	mm	in.	mm
ETS 12.5	70	20	63	18	57	16	45	13	43	12	7/8	7/8 in	034G4220	
ETS 25	144	41	129	37	117	34	93	27	88	25	7/8	7/8 in	034G4219	
ETS 50	262.3	75.7	240.5	69.1	215	62	170	48.9	161.4	46.3	1 1/8	1 1/8 in	034G1714	
ETS 100	488.4	140.9	447.8	128.7	400.4	115.4	316.5	91.2	300.5	86.6	1 1/8	1 1/8 in	034G0515	


ETS 50 and ETS 100 have integrated sight glass

ETS for CO<sub>2</sub> can be used for expansion as well as gas bypass.

ETS for CO<sub>2</sub> Applications (MWP 45.5 bar / 660 psig).

## Accessories

### M12 Female Connector Cable

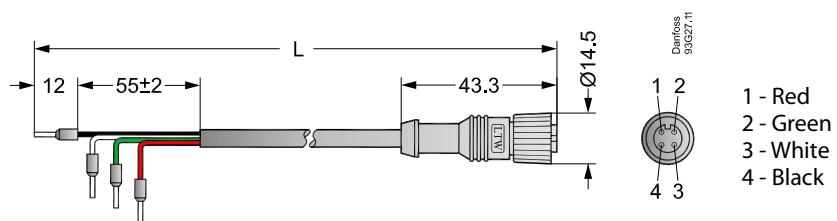

Cable quality	Temperature range	Cable length (L)		Design	Code no.	
		Single pack	Industrial pack (20 pcs)		034G2201	034G2330
Jacket: PVC	-50 / +80°C	2 m	6.6 ft	M12 actuator connector to 4 flying wires for driver connection	034G2200	034G2323
Jacket: CPE	-40 / +80°C	2 m	6.6 ft		034G2202	034G2331

Cable Specification	Jacket	Colour	UV resistant	Insulation	Connection	Outer diameter	M12 connector	Special
PVC cables	Half Matt PVC	Black	Yes	SR-PVC	4 wires (0.33 mm <sup>2</sup> (22 AWG))	5.0 mm	PU (polyurethane)	UL VW-1
CPE cables	CPE	Gray	Yes	EPR	4 wires (0.5mm <sup>2</sup> (20 AWG))	6.3 mm	PU (polyurethane)	Resistant to gear oil, diesel oil, ethylene glycol, propylene glycol

**Note:**

CPE cables are recommended for outdoor application.



## CCM – Electrically operated valves for CO<sub>2</sub>

The CCM is an electrically operated valve designed specifically for operation in CO<sub>2</sub> systems. The valve is capable of functioning both as an expansion valve, and as a gas bypass valve with back-pressure regulation in subcritical applications.

The pressure rating allows for operation in environments where system standby capability is required without the need for auxiliary cooling systems during servicing or power outages.



### Advantages and features

- Up to 90 bar (1305 psi) working pressure to accommodate CO<sub>2</sub> system pressures during standstill conditions.
- Precise positioning for optimal control of intermediate pressures in transcritical CO<sub>2</sub> systems or liquid injection in heat exchangers.
- Possibility of bi-flow operation
- MOPD up to 50 bar (725 psi)
- Combined stainless steel butt weld/solder connections for installation in copper piped systems (K65 alloy or standard) as well as steel piped systems.

- Standard M12 connector for simple and flexible connection to the motor driver.
- For manual operation and service of the CCM an AST-g service driver is available.

# Technical data



Parameter	CCM
Compatibility	R744
MOPD	50 bar (725 psi)
Max. working pressure (PS/MWP)	90 bar (1305 psi)
Refrigerant temperature range	-40°C to 40°C (-40°F to 104°F)
Ambient temperature	-40°C to 60°C (-40°F to 140°F)
Total stroke	13 mm / 16 mm (0.5 in. / 0.6 in.)
Motor enclosure	IP67

# Electrical data

Parameter	CCM
Stepper motor type	Bi-polar - permanent magnet
Step mode	2 phase full step
Phase resistance	52Ω ±10%
Phase inductance	85 mH
Holding current	Depends on application. Full current allowed (100% duty cycle)
Step angle	7.5° (motor), 0.9° (lead screw), Gearing ration 8.5:1. (38/13)²:1
Nominal voltage	(Constant voltage drive) 12 V dc -4% +15%, 150 steps/sec.
Phase current	(Using chopper drive) 100 mA RMS -4% +15%,
Max. total power	Voltage / current drive: 5.5 / 1.3 W (UL: NEC class 2)
Step rate	150 steps/sec. (constant voltage drive) 0-300 steps/sec. 300 recommended (chopper current drive)
Total steps	CCM 10, 20, 30      2625 [+160 / -0] steps CCM 40      3530 [+160 / -0] steps
Full travel time	CCM 10, 20, 30      17 / 8.5 sec. (voltage / current) CCM 40      23 / 11.5 sec. (voltage / current)
Lifting height	CCM 10, 20, 30      13 mm (0.5 in.) CCM 40      16 mm (0.6 in.)
Reference position	Overdriving against the full close position
Electrical connection	4 wire 0.5 mm² (0.02 in²), 0.3 m (1 ft) long cable

Stepper motor switch sequence:			
CCM	Connector		
	4	Black	4
	3	White	3
	2	Green	2
	1	Red	1
	Connection 1	Wire Color	Connection 2
		Pin Out	

### Stepper motor switch sequence:

STEP	Coil I		Coil II		
	Red	Green	White	Black	
1	+	-	+	-	
↑ CLOSING ↑	+	-	-	+	↓ OPENING ↓
2	+	-	-	+	
3	-	+	-	+	
4	-	+	+	-	
1	+	-	+	-	

# Ordering

### Valve incl. actuator Single pack

Type	Connections (Combi)		Code nos single pack
	Weld <sup>1)</sup> [in]	Solder ODF × ODF [in]	
CCM 10	1/2 × 1/2	5/8 × 5/8	027H7188
CCM 20	3/4 × 3/4	7/8 × 7/8	027H7187
CCM 30	1 × 1	1 1/8 × 1 1/8	027H7186
CCM 40	1 × 1	1 1/8 × 1 1/8	027H7185

<sup>1)</sup> OD according to EN 10220



## CCMT – Electrically operated valves for transcritical and subcritical CO<sub>2</sub> applications

The CCMT is an electrically operated valve designed specifically for operation in CO<sub>2</sub> systems. The valve is capable of functioning either as an expansion valve, as a pressure regulator for the gascooler or as a gas bypass valve with back-pressure regulation in transcritical or subcritical applications.




Advantages and features	
<ul style="list-style-type: none"><li>Designed for high pressure CO<sub>2</sub> systems with maximum working pressure of 140 bar / 2030 psig.</li><li>Applicable to other common refrigerants as well. The CCMT is not applicable for flammable refrigerants and ammonia.</li><li>The CCMT is compatible with the oil types PAG, POE and PVE</li><li>Regulating cone ensures optimum regulating accuracy, particularly at part load.</li><li>Patented cone and balance design</li><li>The PEEK seat provides excellent valve tightness and robustness.</li></ul>	<ul style="list-style-type: none"><li>Combined butt weld and solder connections</li><li>Top part with built-in strainer</li><li>MOPD up to 90 bar (1305 psi)</li><li>Standard M12 connector for simple and flexible connection to the motor driver.</li><li>For manual operation and service of the CCMT an AST-service driver is available.</li><li>Low weight and compact design.</li><li>Easy to service. Insert easily taken out by removing top part.</li></ul>

## Technical data

Parameter	CCMT
Compatibility	R744
MOPD	90 bar (1305 psi)
Max. working pressure (PS/MWP)	140 bar (2030 psi)
Refrigerant temperature range	-40°C to 60°C (-40°F to 140°F)
Ambient temperature	-40°C to 60°C (-40°F to 140°F)
Total stroke	4.8 mm (0.2 in.)
Motor enclosure	IP 67

## Electrical data

Parameter	CCMT
Stepper motor type	Bi-polar - permanent magnet
Step mode	2 phase full step
Phase resistance	52Ω ±10%
Phase inductance	85 mH
Holding current	Depends on application. Full current allowed (100% duty cycle)
Step angle	7.5° (motor), 0.9° (lead screw), Gearing ration 8.5:1. (38/13)²:1
Nominal voltage	(Constant voltage drive) 12 V dc -4% +15%, 150 steps/sec.
Phase current	(Using chopper drive) 100 mA RMS -4% +15%,
Max. total power	Voltage / current drive: 5.5 / 1.3 W (UL: NEC class 2)
Step rate	max. 150 steps/sec. (constant voltage drive) max. 300 steps/sec. (chopper current drive)
Total steps	CCMT 2, 4 & 8: 1100 [+80 / - 0] steps
Full travel time	CCMT 2, 4 & 8: 5 sec. at 220 steps/sec.
Reference position	Overdriving against the full close position
Electrical connection	4 wire 0.5 mm² (0.02 in²), 0.3 m (1 ft) long cable

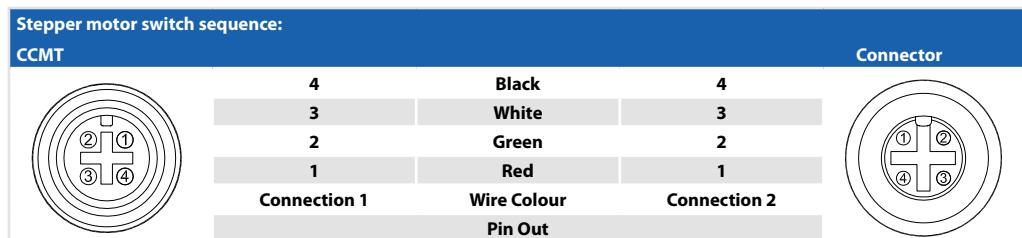

**Stepper motor switch sequence:**

STEP	Coil I		Coil II			
	Red	Green	White	Black		
1	+	-	+	-		
↑ CLOSING ↑	2	+	-	-	+	↓ OPENING ↓
	3	-	+	-	+	
	4	-	+	+	-	
	1	+	-	+	-	

## Ordering

### Valve incl. actuator

Type	Connections (Combi)		$k_v$ value	Code no.
	Weld <sup>1)</sup> [in]	Solder ODF × ODF [in]		
CCMT 2			0.17	027H7200
CCMT 4	1/2 × 1/2	5/8 × 5/8	0.45	027H7201
CCMT 8			0.8	027H7202


<sup>1)</sup>OD according to EN 10220



## KVS – Electrically operated suction modulating control valves


KVS is a series of electrically operated suction modulating control valves for AC transport and refrigeration applications. Accurate temperature or pressure control is obtained by modulating the refrigerant flow in the evaporator with a current or voltage driver.

With an EKC 368 controller (current driver) and an AKS sensor placed in the media to be controlled, an accuracy better than  $\pm 0.5\text{K}$  can be obtained. The balanced design provides bi-flow operation as well as solenoid shut-off function in both flow directions at MOPD 33 bar (478 psi).

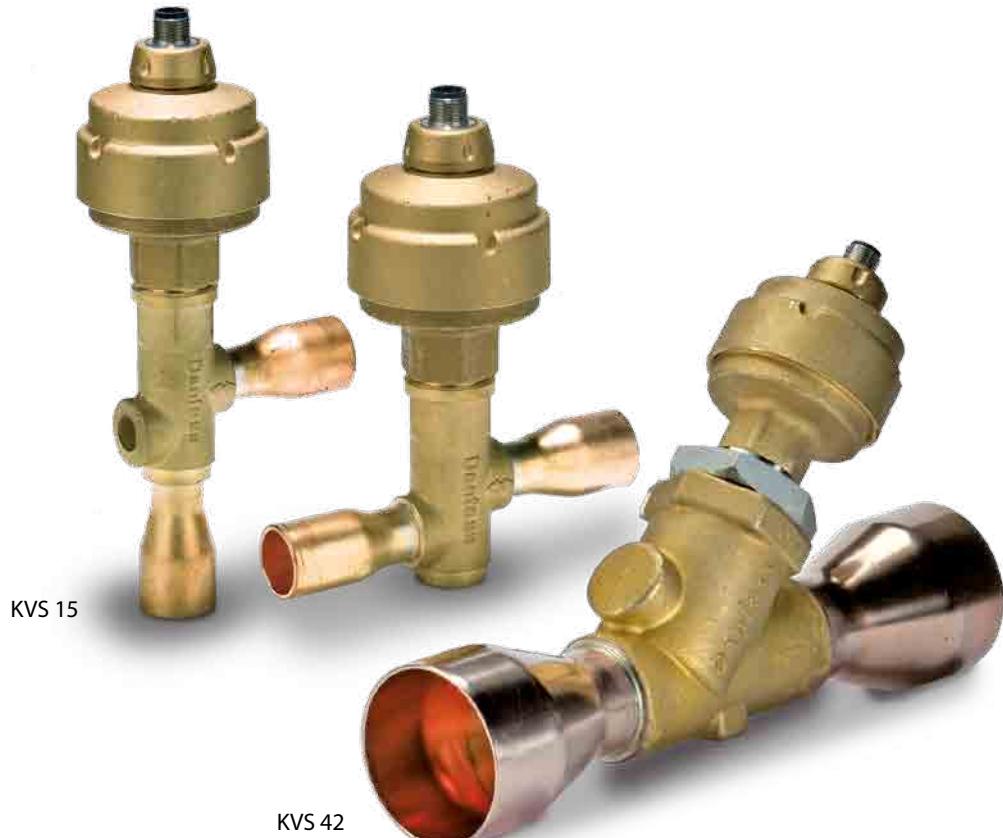

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Refrigeration</li><li>Air conditioning</li><li>AC transport</li><li>Supermarket</li></ul>	<ul style="list-style-type: none"><li>Biflow</li><li>High resolution for precise control.</li><li>Low power consumption.</li><li>Corrosion resistant design external as well as internal.</li><li>Solenoid tight shut off.</li></ul>	<ul style="list-style-type: none"><li>KVS is designed for all common refrigerants HFC, HCFC.</li><li>Balanced port design (KVS 42).</li><li>For manual operation and service of KVS valves an AST-g service driver is available.</li><li>Cable and connector assemblies as accessories.</li></ul>

## Technical data

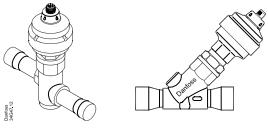

Parameter	KVS 15	KVS 42
<b>Compatible refrigerants</b>	HFC, HCFC (e.g. R410A, R407C, R404A, R134a, R22)	HFC, HCFC (e.g. R410A, R407C, R404A, R134a, R22)
<b>Refrigerant oil</b>	All mineral and ester oils	All mineral and ester oils
<b>CE marking</b>	No	Yes
<b>MOPD</b>	33 bar (478.6 psig)	33 bar (478 psig)
<b>Max. working pressure</b>	45.5 bar (660 psig)	34 bar (493 psig)
<b>Refrigerant temperature range</b>	-40°C to 65°C (-40°F to 149°F)	-40 to +65°C (-40 to +149°F)
<b>Ambient temperature</b>	-40°C to 60°C (-40°F to 140°F)	-40 to +60°C (-40 to +140°F)
<b>Total stroke</b>	13 mm (0.5 in.)	17.2 mm (0.68 in.)
<b>Motor enclosure</b>	IP 67	IP 67
<b>Material of Construction</b>	Body and AST Encloser: Brass; Connector: Copper	Body and AST Encloser: Brass; Connector: Copper

## Electrical data

Parameter	KVS 15 & 42
<b>Stepper motor type</b>	Bi-polar - permanent magnet
<b>Step mode</b>	2 phase full step
<b>Phase resistance</b>	52 Ω ±10%
<b>Phase inductance</b>	85 mH
<b>Holding current</b>	Depends on application. Full current allowed (100% duty cycle)
<b>Step angle</b>	7.5° (motor), 0.9° (lead screw), Gearing ration 8.5:1. (38/13)2:1
<b>Nominal voltage</b>	(Constant voltage drive) 12 V dc -4% +15%,
<b>Phase current</b>	(Using chopper drive) 100 mA RMS -4% +15%,
<b>Max. total power</b>	Voltage / current drive: 5.5 / 1.3 W (UL: NEC class 2) 150 steps/sec. (constant voltage drive) 0-300 steps/sec. 300 recommended (chopper current drive)
<b>Step rate</b>	
<b>Total steps</b>	KVS 15: 2625 [+160 / -0] steps KVS 42: 3810 [+160 / -0] steps
<b>Full travel time</b>	KVS 15: 17 / 8.5 sec. (voltage / current) KVS 42: 25.4 / 12.7 sec. (voltage / current)
<b>Lifting height</b>	KVS 15: 13 mm (0.5 in.) KVS 42: 17.2 mm (0.68 in.)
<b>Reference position</b>	Overdriving against the full close position
<b>Electrical connection</b>	M12 connector

## Specifications and Ordering

KVS valves in single pack




Type	Rated capacity <sup>1)</sup>						KVS valve		Code no. single pack
	R22		R134a		R404A/R507		Connection A × B		
	kW	TR	kW	TR	kW	TR	mm	in.	
<b>KVS 15</b>	5.15	1.31	3.78	0.94	4.58	1.07	16	5/8	034G4252
							22	7/8	034G4253
<b>KVS 42</b>							22	7/8	034G2858
							28	1 1/8	034G2850
							35	1 3/8	034G2851
							-	15/8	034G2852

<sup>1)</sup> Rated capacity is the valve capacity at evaporating temperature  $t_e = -10^\circ\text{C}$  ( $14^\circ\text{F}$ ), condensing temperature  $t_c = +25^\circ\text{C}$  ( $77^\circ\text{F}$ ) and pressure drop across valve  $\Delta p = 0.2 \text{ bar}$  (2.9 psig).

## Accessories

### M12 Female Connector Cable

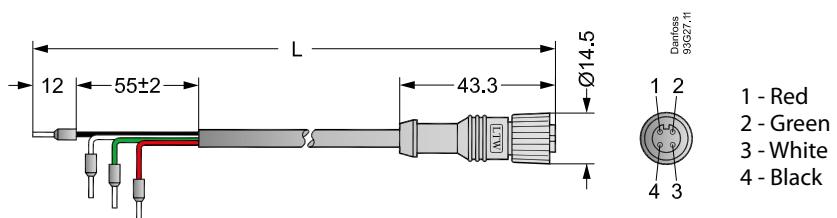

Cable quality	Temperature range	Cable length (L)		Design	Code no.	
					Single pack	Industrial pack (20 pcs)
<b>Jacket: PVC</b>	-50 / +80°C	2 m	6.6 ft	M12, 4 pins to actuator and flying wires for driver connection	034G2201	034G2330
		8 m	26.2 ft		034G2200	034G2323
<b>Jacket: CPE</b>	-40 / +80°C	2 m	6.6 ft		034G2202	034G2331

Cable Specification	Jacket	Colour	UV resistant	Insulation	Connection	Outer diameter	M12 connector	Special
<b>PVC cables</b>	Half Matt PVC	Black	Yes	SR-PVC	4 wires (0.33 mm <sup>2</sup> (22 AWG))	5.0 mm	PU (polyurethane)	UL VW-1
<b>CPE cables</b>	CPE	Gray	Yes	EPR	4 wires (0.5 mm <sup>2</sup> (20 AWG))	6.3 mm	PU (polyurethane)	Resistant to gear oil, diesel oil, ethylene glycol, propylene glycol

✓ Note: CPE cables are recommended for outdoor application.


## Notes



## EVR/EVRH - Solenoid valves and coils


EVR valves are direct or servo-operated solenoid valves for liquid, suction and hot gas lines. They are suitable for condensing units and power packs in all refrigeration, freezing and air conditioning applications and are compatible with fluorinated refrigerants, including high-pressure refrigerants such as R410A (EVRH). The valves can be delivered as normally open and normally closed valves as well as with or without manual operation.

### Features

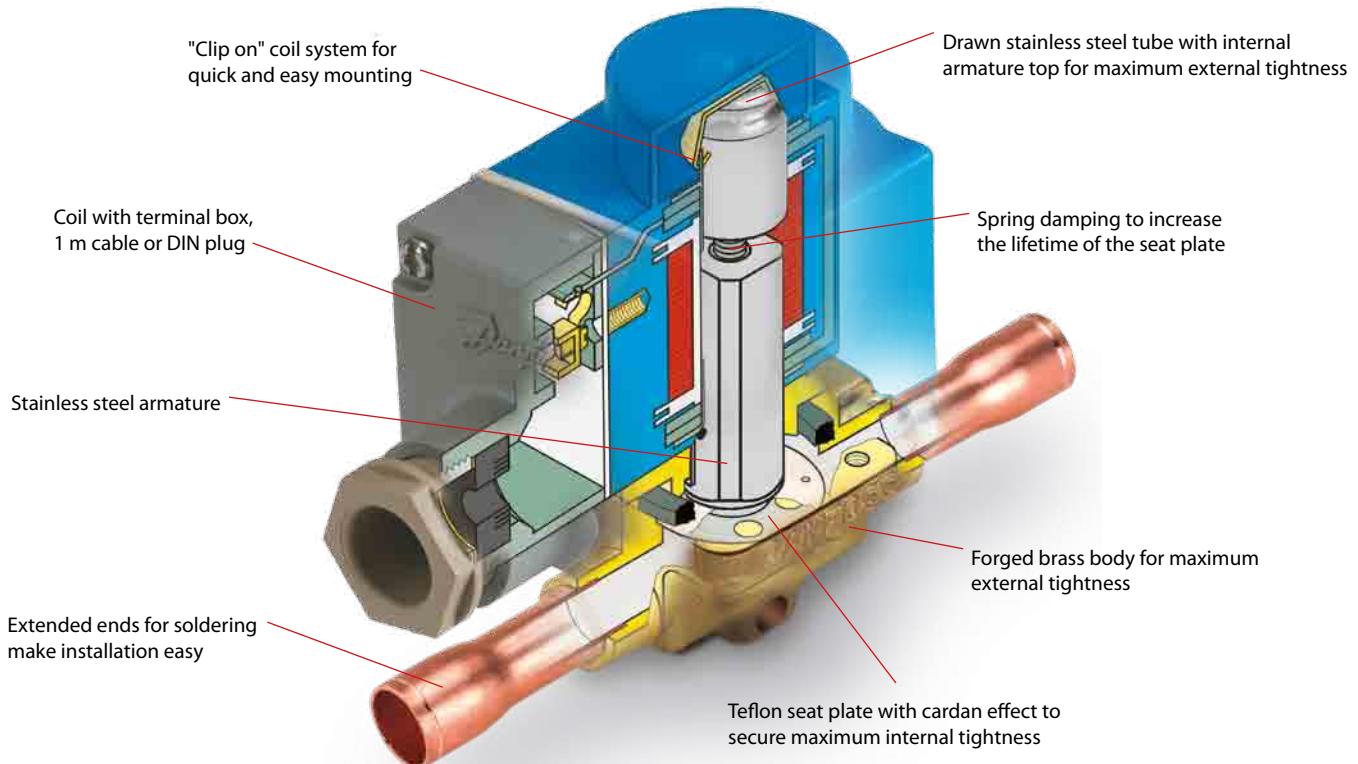

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Heat pump systems</li><li>Air conditioning units</li><li>Liquid coolers</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>Complete programme of valves and coils for every application.</li><li>Wide range of coils for a.c. and d.c.</li><li>Wide range of connection types and sizes.</li><li>Normally open or normally closed.</li><li>With or without manual operation.</li><li>High reliability and durability due to maximum internal and external tightness.</li></ul>	<ul style="list-style-type: none"><li>Can be used for all fluorinated refrigerants (CFC, HCFC and HFC).</li><li>Temperature range: -40 to 105°C</li><li>Max. working pressure (MWP) 32 bar (EVR 2-6, 45.2 bar / EVR 10, 35 bar / EVR 15-40, 32 bar / EVRH 10-20, 45.2).</li><li>MOPD up to 25 bar with 12 W a.c. coil.</li><li>100% test of functionality, internal/external leakage and electrical characteristics.</li></ul>

# Technical data and ordering

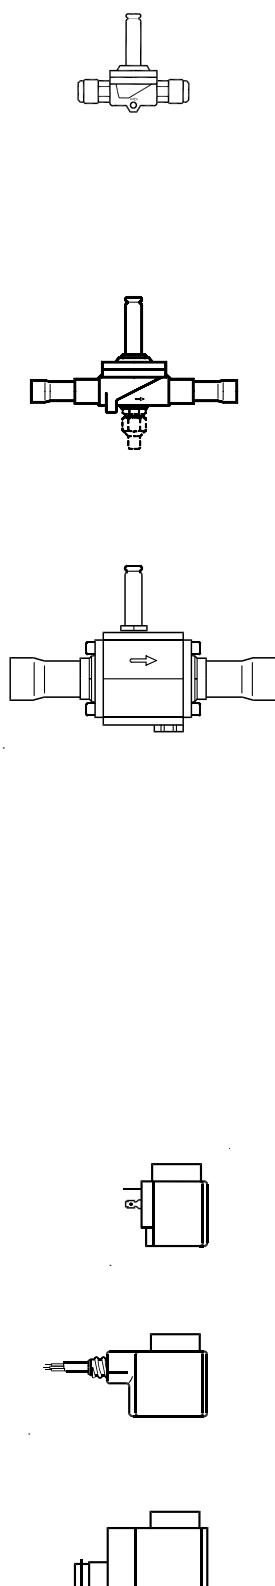

## Separate valve bodies, normally closed (NC)

Type	Required coil type	Connection		Code no. Valve body without coil					Max. working pressure bar	kv value <sup>1)</sup>		
				Flare		Solder ODF						
		in.	mm	in./mm	in.	mm	With manual operation	Without manual operation				
EVR 2	a.c.	1/4	6	032F8056	032F1201	032F1202			45.2	0.16		
EVR 3	a.c./d.c.	1/4	6	032F8107	032F1206	032F1207			45.2	0.27		
		5/8	10	032F8116	032F1204	032F1208						
		5/8	10	032F8072	032F1212	032F1213			45.2	0.8		
		1/2	12	032F8079	032F1209	032F1236						
		1/2	12	032F8095	032F1217	032F1218			35	1.9		
		5/8	16	032F8098	032F1214	032F1214						
EVR 10	a.c./d.c.	5/8	16	032F8101	032F1228	032F1228						
		5/8	16	032F8100			032F1227		32	2.6		
EVR 15	a.c.	5/8	22		032F1225	032F1225						
		7/8	22		032F1240	032F1240						
		7/8	22				032F1254		32	5.0		
		1 1/8	28		032F1244	032F1245						
		7/8	22		032F1264	032F1264						
		7/8	22				032F1274					
EVR 20	a.c.	1 3/8	35		032F3267	032F3267			32	6.0		
		1 1/8					032F2200	032F2201				
EVR 25	a.c./d.c.		28				032F2205	032F2206	32	10.0		
		1 3/8	35				032F2207	032F2208				
EVR 32	a.c./d.c.	1 3/8	35				042H1105	042H1106				
		1 1/8					042H1103	042H1104	32	16.0		
EVR 40	a.c.		42				042H1107	042H1108				
		1 5/8					042H1109	042H1110				
EVRH 10			42				042H1113	042H1114	32	25.0		
		2 1/8	54				042H1111	042H1112				
EVRH 15		1/2	12		032G1054	032G1055				1.9		
EVRH 20	a.c.	5/8	16		032G1056	032G1056			45.2	2.6		
EVRH 20	d.c.	7/8	22		032G1057	032G1057				5.0		
		7/8	22		032G1058	032G1058				5.0		

## Mounting bracket

Mounting bracket	For mounting EVR 2, 3, 6 and 10	032F0197
------------------	---------------------------------	----------

## Coils - alternating current a.c

Type	Voltage V	Frequency Hz	Code no.				Appendix no.	Power consumption
			With 1 m 3-core cable IP67	With terminal box IP67	With DIN plugs and protective cap IP20	With DIN plugs		
EVR 2 → 40 (NC)	12	50	018F6256	018F6706	018F6181		15	
	24	50	018F6257	018F6707	018F6182	018F7358	16	
	42	50	018F6258	018F6708	018F6183		17	
	48	50	018F6259	018F6709	018F6184		18	
	115	50	018F6261	018F6711	018F6186	018F7361	22	
	220-230	50	018F6251	018F6701	018F6176	018F7351	31	Holding: 10 W 21 VA
	240	50	018F6252	018F6702	018F6177	018F7352	33	
	380-400	50	018F6253	018F6703	018F6178		37	
	420	50	018F6254	018F6704	018F6179		38	Inrush: 44 VA
	24	60	018F6265	018F6715	018F6190		14	
	115	60	018F6260	018F6710	018F6185		20	
	220	60	018F6264	018F6714	018F6189		29	
	240	60	018F6263	018F6713	018F6188		30	
	110	50/60	018F6280	018F6730	018F6192	018F7360	21	
	220-230	50/60	018F6282	018F6732	018F6193	018F7363	32	

## Terminal box with LED light indicator

Terminal box	With built-in light emitting indicator diode for solenoid valves	018Z0089
DIN socket		042N0156

<sup>1)</sup> The kv value is the water flow in m<sup>3</sup>/h at a pressure drop across valve of 1 bar, ρ = 1000 kg/m<sup>3</sup>.

Solenoid valves/coils – EVR/EVRH



## EVRS/EVRST – Solenoid valves and coils

EVRS and EVRST are valves made of stainless steel. EVRS 3 is direct operated. EVRS 10, 15 and 20 are servo operated. EVRST 10,15 and 20 are forced servo operated valves used in liquid, suction, hot gas and oil return lines with ammonia or fluorinated refrigerants.



### Advantages and features

- |  |   |
|--|---|
| <ul style="list-style-type: none"><li>• Stainless steel valve body and connections</li><li>• Max. working pressure 50 barg (suitable for CO<sub>2</sub> subcritical).</li><li>• Used for ammonia and all fluorinated refrigerants</li><li>• MOPD up to 38 bar with 20 watt a.c. coil</li></ul> | <ul style="list-style-type: none"><li>• Wide choice of a.c. and d.c. coils</li><li>• Designed for temperatures of media up to 105°C</li><li>• Manual stem on EVRS and EVRST 10, EVRST 15 and EVRST 20</li></ul> |
|--|---|

# Technical data and ordering

## Technical data

### Refrigerants

R717 (NH<sub>3</sub>), R22, R134a, R404A; R744; R410A etc.

### Temperature of medium

-40 → +105°C for 10 or 12 watt coil. Max. 130°C during defrosting.

-40 → +80°C for 20 watt coil.

Ambient temperature and enclosure for coil: See "Coils for solenoid valves", lit.no. DKRCC.PD.BS0.A4

Type	Opening differential pressure Δp bar					k <sub>v</sub> value <sup>2)</sup> m <sup>3</sup> /h	Max. working pressure Ps		
	Min.	Max. (MOPD) liquid <sup>1)</sup>							
		10 W a.c.	12 W a.c.	20 W a.c.	20 W d.c.				
EVRS 3	0.0	21	25	38	14	0.23			
EVRS 10	0.05	21	25	38	18	1.5			
EVRST 10	0.0	14	21	38	16	1.5	50 barg		
EVRS 15	0.05	21	25	38	18	2.7			
EVRST 15	0.0	14	21	38	18	2.7			
EVRS 20	0.05	21	25	38	13	4.5	28 barg for R717, HCFC, HFC, R744 <sup>3)</sup> 50 barg only for R744, R410A <sup>4)</sup>		
EVRST 20	0.0	14	21	38	13	4.5			

<sup>1)</sup> MOPD for media in gas form is approx. 1 bar greater.

<sup>2)</sup> The k<sub>v</sub> value is the water flow in m<sup>3</sup>/h at a pressure drop in the valve of 1 bar, p = 1000 kg/m<sup>3</sup>.

<sup>3)</sup> All refrigerants in group I according to Pressure Equipment Directive PED 97/23/CE article 9 section 2.1

Group I comprises fluids defined as:

- explosive
- extremely flammable
- highly flammable
- flammable (where the maximum allowable temperature is above flashpoint)
- very toxic
- toxic
- oxidizing

<sup>4)</sup> Only for refrigerants in group 2 according to Pressure Equipment Directive PED 97/23/CE article 9 section 2.2

Group 2 comprises all other fluids not referred to in 2.1

Type	Rated capacity <sup>1)</sup> kW														
	Liquid					Suction vapour				Hot gas					
	R717	R22	R134a	R404A/ R507	R410A	R717	R22	R134a	R404A/ R507	R410A	R717	R22	R134a	R404A/ R507	R410A
EVRS 3	21.8	4.6	4.3	3.2	4.5					6.5	2.1	1.7	1.7	2.3	
EVRS/EVRST 10	142.0	30.2	27.8	21.1	29.7	9.0	3.4	2.5	3.1	4.3	42.6	13.9	11.0	11.3	14.9
EVRS/EVRST 15	256.0	54.4	50.1	38.0	53.5	16.1	6.2	4.4	5.5	7.7	76.7	24.9	19.8	20.3	26.7
EVRS/EVRST 20	426.0	90.6	83.5	63.3	89.1	26.9	10.3	7.3	9.2	12.0	128.0	41.5	32.9	33.9	44.5


<sup>1)</sup> Rated liquid and suction vapour capacity is based on evaporating temperature t<sub>e</sub> = -10°C, liquid temperature ahead of valve t<sub>i</sub> = +25°C, and pressure drop across valve Δp = 0.15 bar.

Rated hot gas capacity is based on condensing temperature t<sub>c</sub> = +40°C, pressure drop across valve Δp = 0.8 bar, hot gas temperature t<sub>h</sub> = +60°C, and subcooling of refrigerant Δt<sub>sub</sub> = 4 K.

Type	R 744 Rated capacity kW <sup>2)</sup>	
	Liquid	Suction
EVRS 3	6.65	-
EVRS/EVRST 10	43.3	6.9
EVRS/EVRST 15	78.0	12.4
EVRS/EVRST 20	130.0	20.7

<sup>2)</sup> Rated liquid and suction vapour capacity is based on evaporating temperature t<sub>e</sub> = -40°C, liquid temperature ahead of the valve t<sub>i</sub> = -8°C and pressure drop across the valve Δp = 0.15 bar

# Code numbers

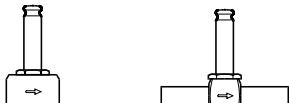

## Separate valve bodies

Type	Max. working pressure Ps barg	Connection		Code no.	
		Weld in.	Pipe thread ISO 228/1	With manual stem	Without manual stem
EVRS 3	50	3/8			032F3080
EVRS 3	50		G 1/4		032F3081
EVRS 10	50	1/2		032F3082	
EVRST 10	50	1/2		032F3083	
EVRS 15	50	3/4		032F3084	
EVRST 15	50	3/4		032F3085	
EVRS 20	28	1		032F3086	
EVRST 20	28	1		032F2237	
EVRS 20	50	1		032F5437	
EVRST 20	50	1		032F5438	


Coils See "Coils for solenoid valves", lit.no. DKRCC.PD.B50.A4.

## Clip-on coils

Valve type	Voltage V	Frequency Hz	Code no.				Appendix no.*)	Power consumption
			With 1 m 3-core cable IP67	With terminal box IP67	With DIN plugs and protect. cap IP20	With DIN plugs**) IP20		

## Alternating current a.c.

<b>EVR 2 → 40 (NC) EVR 6 → 22 (NO) EVRH 4 → 40 EVRC EVRA EVRAT EVRS / EVRST EVM (NC)</b>	12	50	018F6256	018F6706	018F6181		15	
	24	50	018F6257	018F6707	018F6182	018F7358	16	
	42	50	018F6258	018F6708	018F6183		17	
	48	50	018F6259	018F6709	018F6184		18	
	115	50	018F6261	018F6711	018F6186	018F7361	22	
	220-230	50	018F6251	018F6701	018F6176	018F7351	31	
	240	50	018F6252	018F6702	018F6177	018F7352	33	Holding: 10 W 21 VA
	380-400	50	018F6253	018F6703	018F6178		37	
	420	50	018F6254	018F6704	018F6179		38	
	24	60	018F6265	018F6715	018F6190		14	Inrush: 44 VA
	115	60	018F6260	018F6710	018F6185		20	
	220	60	018F6264	018F6714	018F6189		29	
	240	60	018F6263	018F6713	018F6188		30	
	110	50/60	018F6280	018F6730	018F6192	018F7360	21	
	220-230	50/60	018F6282	018F6732	018F6193	018F7363	32	




## Direct current d.c.

### Coil type I

<b>EVR 2 → 15 (NC) EVR 25 → 40 (NC/NO) EVR 6 → 15 (NO) EVRC 10 → 15 EVRA 3 → 15 (NC) EVR 25 → 40 (NC) EVRAT 10 → 15 (NC) EVRS / EVRST 3 → 15 EVM (NC/NO)</b>	12		018F6856		01		
	24		018F6857		02		
	48		018F6859		04		
	110		018F6860		06		
	115		018F6861		07		
	220		018F6851		09		

20 W

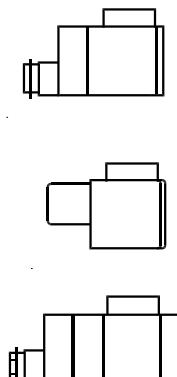

## Direct current d.c.

### Coil type II

<b>EVR 20 → 22 (NC/NO) EVRC 20 EVRA 20 EVRAT 20 EVRS 20</b>	12		018F6886		01		
	24		018F6887		02		
	48		018F6889		04		
	110		018F6890		06		
	220		018F6881		09		

20 W

See "Opening differential pressure" under "Technical data" for the valve concerned.

\* ) Indicates voltage and frequency

\*\*) Can only be used with DIN socket


\*\*\*) When replacing a coil with terminal box, it is sufficient to change the coil unit itself. Therefore, order coil with DIN plugs and protective cap.

## Code numbers

### Special coils

Valve type	Voltage V	Frequency Hz	Code no.	Appendix no. Indicates voltage and frequency	Power consumption
			With terminal box IP67		

### Alternating current a.c.



<b>EVRS / EVRST</b>	24	50	018F6807	16	Holding: 12 W 26 VA  Inrush: 55 VA
	42	50	018F6808	17	
	48	50	018F6809	18	
	110	50	018F6811	22	
	220-230	50	018F6801	31	
	240	50	018F6802	33	
	380-400	50	018F6803	37	
	24	60	018F6815	14	
	110	60	018F6813	20	
	220	60	018F6814	29	

### Alternating current a.c.


<b>EVR/EVRST</b>	24	50	018F6901	Holding: 20 W 45VA  Inrush: 65VA
	24	60	018F6902	
	230	50	018F6905	

Recommended use for EVRH with high MOPD (38 bar)



## EVRA/EVRAT – Solenoid valves/coils

EVRA is a direct or servo operated solenoid valve for liquid, suction and hot gas lines with ammonia or fluorinated refrigerants. EVRA valves can be supplied as complete valves or as components, i.e. valve body, flanges and coils. EVRAT has capacities similar to the EVRA but has the advantage of no opening pressure differential is needed – it will open – and stay open, also when there is no flow through that valve.

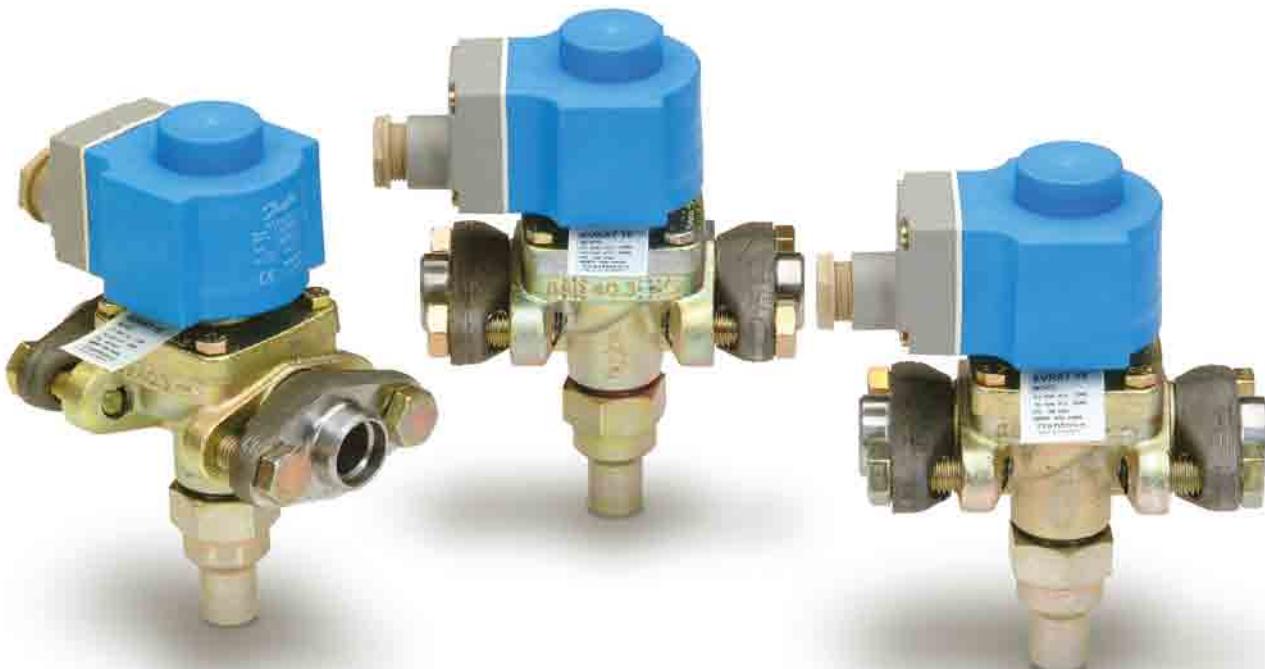

Advantages and features	
<ul style="list-style-type: none"><li>EVRA and EVRAT valves can be used for all non-flammable refrigerants, including R 717, and non-corrosive gases/liquids – assuming seals of correct material are used</li><li>EVRA and EVRAT valves uses a teflon gasket which ensures a very high tightness across valve seat</li><li>EVRA valves has a low pressure drop</li><li>EVRAT valves has a minimal opening differential pressure of 0 (zero)</li><li>The EVRA and EVRAT valves offers a wide range of flange connection dimensions in accordance with standards: DIN ANSI, SOC, SA and FPT</li><li>The EVRA and EVRAT valve range can be used with the wide range of standard Danfoss coils</li><li>Strainer type FA can be mounted directly on the valve body except for EVRA 32 and 40</li></ul>	<p><i>Connections</i></p> <p>There is a wide range of connection possibilities with EVRA 3 to 25 and EVRAT 10-20:</p> <ul style="list-style-type: none"><li>Butt welding DIN (2448)</li><li>Butt welding ANSI (3/8 - 1½ in. B36.10 schedule 80, 2 in. B36.10 schedule 40)</li><li>Socket welding ANSI (B 16.11)</li><li>Solder connection DIN (2856)</li><li>Solder connection ANSI (B 16.22)</li><li>FPT internal thread, NPT (ANSI/ASME B 1.20.1)</li></ul> <p>EVRA 32 and 40 are supplied with integrated flanges for either:</p> <ul style="list-style-type: none"><li>Welding DIN (2448) or</li><li>Welding ANSI (B 36.10)</li></ul>

# Technical data and code numbers

## Technical data

Type	Opening differential pressure with standard coil $\Delta p$ bar				Temperature of medium °C -40 → 105	Max. working pressure PB bar 42	kv-value m³/h			
	Min.	Max. (= MOPD) liquid <sup>2)</sup>								
		10 W a.c.	12 W a.c.	20 W d.c.						
EVRA 3	0.00	21	25	14			0.23			
EVRA 10	0.05	21	25	18			1.5			
EVRAT 10	0.00	14	21	16			1.5			
EVRA 15	0.05	21	25	18			2.7			
EVRAT 15	0.00	14	21	16			2.7			
EVRA 20	0.05	21	25	13			4.5			
EVRAT 20	0.00	14	21	13			4.5			
EVRA 25	0.20	21	25	14			10.0			
EVRA 32	0.20	21	25	14			16.0			
EVRA 40	0.20	21	25	14			25.0			

<sup>1)</sup> The kv value is the water flow in m<sup>3</sup>/h at a pressure drop across valve of 1 bar,  $\rho = 1000 \text{ kg/m}^3$ .

<sup>2)</sup> MOPD for media in gas form is approx. 1 bar greater.

## Code numbers

### Complete valves without flanges

	Type	Connection	Code no. <sup>1)</sup>	
			10 W coil with 1 m cable	10 W coil with terminal box
<b>Valves with manual operation</b>	EVRA 3	See table "Flange set"	032F3102	032F3103
	EVRA 10		032F6207	032F6208
<b>Valves without manual operation</b>	EVRA 10	See table "Flange set"	032F6212	032F6213
	EVRA 15		032F6217	032F6218
	EVRA 20		032F6222	032F6223

<sup>1)</sup> Valve body with gaskets, bolts and 10 W a.c. coil. Please specify code no., voltage and frequency. Voltage and frequency can also be given in the form of an appendix number, see table "Appendix numbers", under EVR.

### Separate valve bodies

	Type	Connection	Required coil type	Code no.	
				10 W coil with 1 m cable	10 W coil with terminal box
<b>Valves with manual operation</b>	EVRA 10	See table Flange set	a.c. / d.c.	032F6210	
	EVRAT 10		a.c. / d.c.	032F6214	
	EVRA 15		a.c. / d.c.	032F6215	
	EVRAT 15		a.c. / d.c.	032F6216	
	EVRA 20		a.c.	032F6220	
	EVRAT 20		d.c.	032F6221	
	EVRA 25		a.c. / d.c.	032F6225	
	EVRA 3		a.c. / d.c.	032F3050	
<b>Valves without manual operation</b>	EVRA 10	See table Flange set	a.c. / d.c.	032F6211	
	EVRA 25		a.c. / d.c.	032F6226	

### Separate valve bodies with butt weld connections

	Type	Size	Butt weld connection	
			DIN	ANSI
<b>Valves with manual operation</b>	EVRA 32	1 1/4 in.	042H1126	042H1140
	EVRA 32	1 1/2 in.	042H1131	042H1141
	EVRA 40	1 1/2 in.	042H1128	042H1142
	EVRA 40	2 in.	042H1132	042H1143

### Flange sets


		Connection		Code no.
		mm	in.	
<b>EVRA 3, 10 and 15</b> <b>EVRAT 10 and 15</b>	Butt welding DIN (2448), Tongue flange sets	10	3/8	027N1112
		15	1/2	027N1115
		20	3/4	027N1120
	Butt welding ANSI B 36.10, Tongue flange sets	10	3/8	027N2020
		15	1/2	027N2021
		20	3/4	027N2022
	Socket welding ANSI (B 16.11), Tongue flange sets	10	3/8	027N2010
		15	1/2	027N2011
		16		027L1116
<b>EVRA 20 and 25</b> <b>EVRAT 20</b>	Solder DIN (2856), Tongue flange sets	22		027L1122
			5/8	027L1117
			7/8	027L1123
	Solder ANSI B 16.22, Tongue flange sets	10	3/8	027G1005
		15	1/2	027G1006
		20	3/4	027N1220
	Butt welding DIN (2448), Tongue flange sets	25	1	027N1225
		32	1 1/4	027N1230
		20	3/4	027N3031
	Butt welding ANSI B 36.10, Tongue flange sets	25	1	027N3032
		32	1 1/4	027N3033
		20	3/4	027N2001
	Socket welding ANSI (B 16.11), Tongue flange sets	25	1	027N2002
		22		027N1222
		28		027N1228
	Soldering DIN (2856), Tongue flange sets		7/8	027N1223
			1 1/8	027N1229
		20	3/4	027G1001
	FPT internal thread, NPT (ANSI / ASME B 1.20.1), Tongue flange sets	25	1	027G1002

# Code numbers

## Clip-on coils

Valve type	Voltage V	Frequency Hz	Code no.				Appendix no.*)	Power con- sumption
			With 1 m 3-core cable IP67	With terminal box IP67	With DIN plugs and protect. cap IP20	With DIN plugs**)		

## Alternating current a.c.

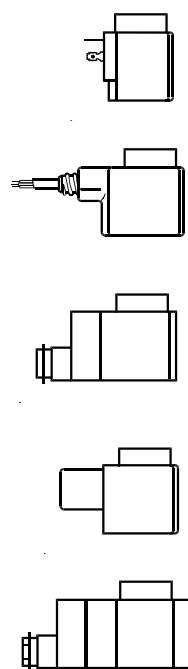

<b>EVR 2 → 40 (NC) EVR 6 → 22 (NO) EVRH 4 → 40 EVRC EVRA EVRAT EVRS / EVRST EVM (NC)</b>	12	50	018F6256	018F6706	018F6181		15	
	24	50	018F6257	018F6707	018F6182	018F7358	16	
	42	50	018F6258	018F6708	018F6183		17	
	48	50	018F6259	018F6709	018F6184		18	
	115	50	018F6261	018F6711	018F6186	018F7361	22	
	220-230	50	018F6251	018F6701	018F6176	018F7351	31	Holding: 10 W
	240	50	018F6252	018F6702	018F6177	018F7352	33	21 VA
	380-400	50	018F6253	018F6703	018F6178		37	
	420	50	018F6254	018F6704	018F6179		38	
	24	60	018F6265	018F6715	018F6190		14	Inrush: 44 VA
	115	60	018F6260	018F6710	018F6185		20	
	220	60	018F6264	018F6714	018F6189		29	
	240	60	018F6263	018F6713	018F6188		30	
	110	50/60	018F6280	018F6730	018F6192	018F7360	21	
	220-230	50/60	018F6282	018F6732	018F6193	018F7363	32	

## Direct current d.c.

### Coil type I

<b>EVR 2 → 15 (NC) EVR 25 → 40 (NC/NO) EVR 6 → 15 (NO) EVRC 10 → 15 EVRA 3 → 15 (NC) EVRA 25 → 40 (NC) EVRAT 10 → 15 (NC) EVRS / EVRST 3 → 15 EVM (NC/NO)</b>	12	018F6856	01	
	24	018F6857	02	
	48	018F6859	04	
	110	018F6860	06	20 W
	115	018F6861	07	
	220	018F6851	09	

## Direct current d.c.

### Coil type II

<b>EVR 20 → 22 (NC/NO) EVRC 20 EVRA 20 EVRAT 20 EVRST 20</b>	12	018F6886	01	
	24	018F6887	02	
	48	018F6889	04	
	110	018F6890	06	20 W
	220	018F6881	09	

See "Opening differential pressure" under "Technical data" for the valve concerned.

\*) Indicates voltage and frequency

\*\*) Can only be used with DIN socket

\*\*\*) When replacing a coil with terminal box, it is sufficient to change the coil unit itself. Therefore, order coil with DIN plugs and protective cap.


## Notes



## VHV/STF – 4-way reversing valves

Pilot operated 4-way reversing valves allow an inversion of the refrigeration cycle, changing from cooling mode in summer to heating mode in winter. 4 way valves are also used in defrost cycles in order to allow hot gas to be sent into iced up evaporators. The cycle inversion is initiated by a small solenoid pilot valve, which controls the movement of a slider, and in turn governs the refrigerant flow path. The valve is connected to the discharge and suction of the compressor.

### Features

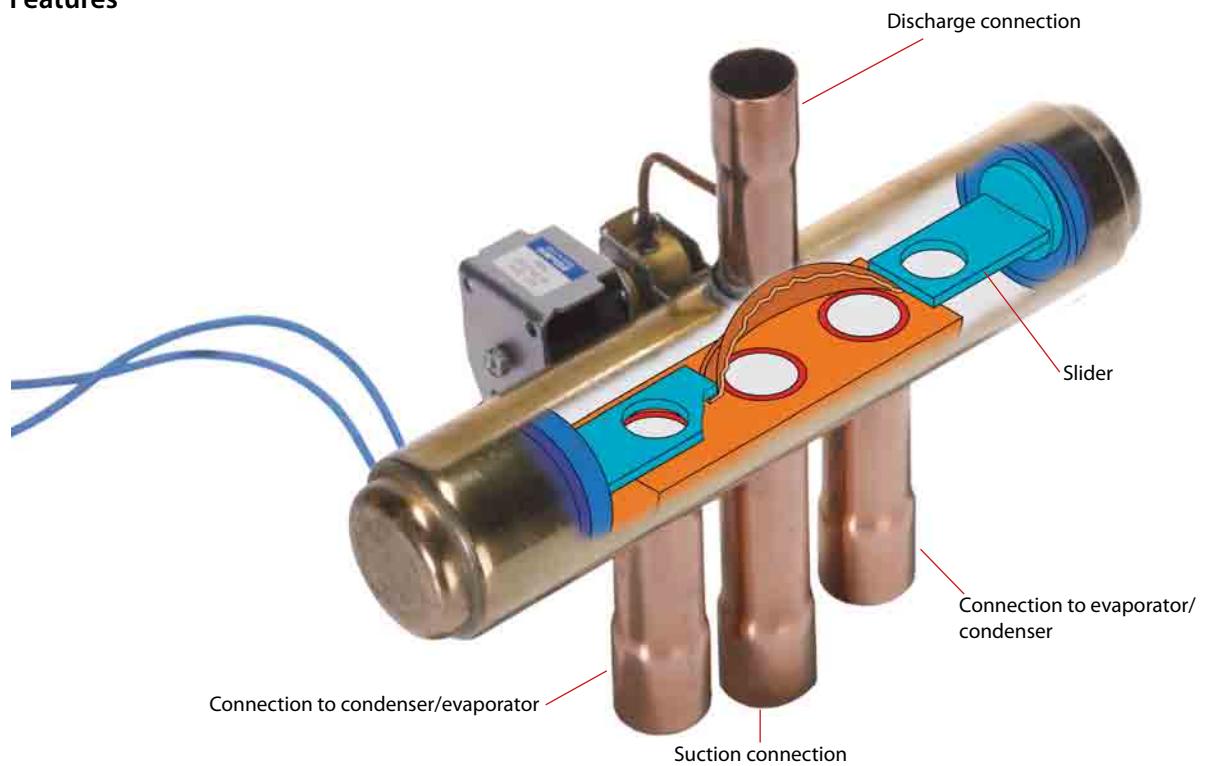

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Heat pump applications</li><li>Reversing chillers</li><li>Packaged air conditioning systems</li><li>Room air conditioning systems</li></ul>	<ul style="list-style-type: none"><li>Each model can be used with R410A refrigerant as well as R407C, R134a, R404A, R22</li><li>Different tube diameters and configurations available</li><li>Designed for instantaneous change-over with minimum pressure differential</li><li>Minimized leakage in the valve</li><li>Reduced pressure drop due to unique design (shape of internal elements)</li></ul>	<ul style="list-style-type: none"><li>Wide application range for all commonly used refrigerants: (R134a, R404A, R407C, R22 and R410A)</li><li>Max. working pressure: 45 bar</li><li>Ambient temperature: -20 to 55°C</li><li>Full capacity range up to 400 kW</li><li>Largest valve available on the market (VHV-6001)</li><li>30 years of experience and know-how</li></ul>

## Technical data and ordering

Model	Discharge		Suction		Nominal capacity <sup>1)</sup>	Style	Code no.	Box qty
	I.D. mm	O.D. Inch	I.D. mm	O.D. Inch				
STF-0101G	7.95	5/16	9.50	3/8	1.6 - 5.1	A	061L1206	4
STF-0101G	7.95	5/16	9.50	3/8	1.6 - 5.1	A	061L1188	45
STF-0104G	7.95	5/16	9.50	3/8	2.4 - 6.4	A	061L1143	45
STF-0201G	9.50	3/8	12.70	1/2	2.8 - 11.4	A	061L1207	3
STF-0201G	9.50	3/8	12.70	1/2	2.8 - 11.4	A	061L1144	32
STF-0204G	9.50	3/8	15.90	5/8	2.8 - 11.4	D	061L1145	32
STF-0205G	7.95	5/16	12.70	1/2	2.8 - 11.4	B	061L1146	32
STF-0208G	9.50	3/8	15.90	5/8	2.8 - 11.4	C	061L1147	32
STF-0209G	9.50	3/8	12.70	1/2	2.8 - 11.4	B	061L1148	32
STF-0214G	12.70	1/2	15.90	5/8	2.8 - 11.4	D	061L1149	32
STF-0301G	12.70	1/2	15.90	5/8	5.3 - 14.6	E	061L1208	4
STF-0306G	12.70	1/2	19.05	3/4	5.3 - 14.6	E	061L1151	32
STF-0401G	12.70	1/2	19.05	3/4	8.3 - 29.2	B	061L1209	2
STF-0401G	12.70	1/2	19.05	3/4	8.3 - 29.2	B	061L1152	24
STF-0404G	12.70	1/2	19.05	3/4	8.4 - 33	B	061L1193	24
STF-0409G	12.70	1/2	22.20	7/8	8.3 - 29.2	B	061L1154	24
STF-0413G	15.90	5/8	22.20	7/8	8.3 - 29.2	B	061L1155	24
STF-0420G	12.70	1/2	22.20	7/8	8.4 - 33	B	061L1156	24
STF-0712G	19.05	3/4	22.20	7/8	21 - 53	B	061L1223	1
STF-0712G	19.05	3/4	22.20	7/8	21 - 53	B	061L1195	6
STF-0715G	22.20	7/8	28.60	1 1/8	21 - 53	B	061L1158	6
STF-0728G	22.20	7/8	22.20	7/8	21 - 53	B	061L1160	6
STF-1511G	22.20	7/8	28.60	1 1/8	41 - 61	F	061L1224	1
STF-1513G	22.20	7/8	34.95	1 3/8	41 - 61	F	061L1217	1
STF-1514G	28.60	1 1/8	34.95	1 3/8	41 - 61	F	061L1218	1
STF-2011G	22.20	7/8	28.60	1 1/8	41 - 77	B	061L1219	1
STF-2017G	28.60	1 1/8	34.95	1 3/8	41 - 77	B	061L1225	1
STF-2501G <sup>2)</sup>	25.40	1	31.80	1 1/4	55 - 98	G	061L1278	1
STF-2505G	28.60	1 1/8	34.95	1 3/8	55 - 98	G	061L1279	1
STF-2506G	28.60	1 1/8	41.30	1 5/8	55 - 98	G	061L1280	1
STF-3001G	31.80	1 1/4	38.10	1 1/2	68 - 129	G	061L1281	1
STF-3003G	28.60 <sup>3)</sup>	1 1/8 <sup>5)</sup>	41.30	1 5/8	68 - 129	G	061L1282	1
STF-4001G	38.10	1 1/2	44.50	1 3/4	122 - 195	G	061L1284	1
STF-4002G	41.30 <sup>3)</sup>	1 5/8 <sup>5)</sup>	41.30	1 5/8	122 - 195	G	061L1285	1
STF-5001G	38.10	1 1/2	54.00	2 1/8	183 - 256	G	061L1286	1
STF-5002G	41.30 <sup>3)</sup>	1 5/8 <sup>5)</sup>	54.00	2 1/8	183 - 256	G	061L1287	1
VHV-6001	41.30 <sup>3)</sup>	1 5/8 <sup>5)</sup>	66.70	2 5/8	267 - 374	G	061L1186	1

Model <sup>4)</sup>	Cable length mm	Rated voltage	Code no.	Box qty
STF-01AB500A1	600	24 V AC	061L2092	10
STF-01AB503B1	1200	24 V AC	061L2038	100
STF-01AJ506B1	600	220-240 V AC	061L2093	10
STF-01AJ504F1	1200	208-240 V AC	061L2125	1
STF-01AJ504F1	1200	208-240 V AC	061L2094	10
STF-01AJ512D1	2000	220-240 V AC	061L2095	10
STF-01AJ512D1	2000	220-240 V AC	061L2074	60

1) The nominal capacities for R407C

2) STF-2501G does not have a bracket


3) Refers to O.D.

4) STF coils can be used with all STF and VHV valves


5) Refers to I.D.

NOTE: R407C and R410A: For discharge and suction, I.D. describes exact inner diameter of valve connections. O.D. relates to the outer diameter of connection pipe in the system.


SAGINOMIYA




A



B




C



D



E



F




G



## KP – Pressure controls and temperature controls


KP pressure controls are designed to protect refrigeration systems from excessively high discharge pressures, excessively low suction pressures, to start/stop compressors or to operate fans of aircooled condensers. KP temperature controls with adsorption charge are the optimum choice for frost protection of chillers. The enhanced contact system for 16 A makes it possible to operate electrical motors up to 2 kW directly, without the use of contactors.

### Features

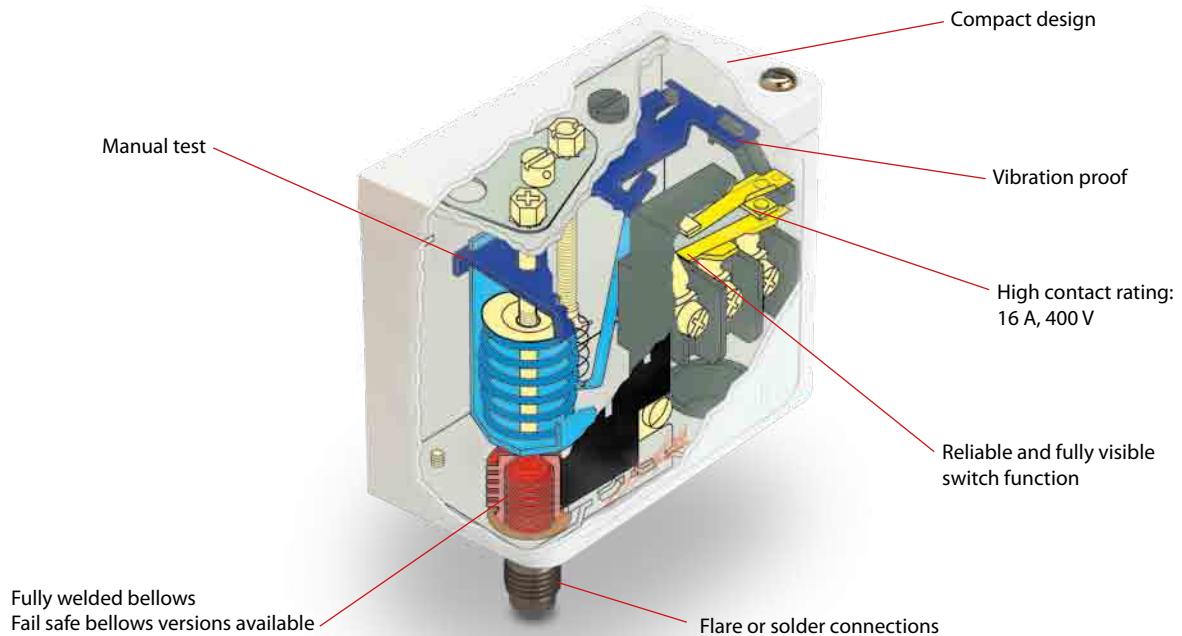

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Heat pump systems</li><li>Air conditioning units</li><li>Liquid coolers</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>Easy to handle compact design with large and visible scale plates.</li><li>Vibration and shock resistant.</li><li>Accurate and reliable compressor operation due to excellent electro-mechanical function.</li><li>Easy functional check with manual test function of contact system (no tools).</li><li>Easy to install electrical connection which also facilitates rack mounting.</li></ul>	<ul style="list-style-type: none"><li>Can be used for all fluorinated refrigerants.</li><li>The KP-A types can be used for ammonia.</li><li>Pressure controls available with flare, solder or capillary tube connections.</li><li>Temperature controls available with capillary sensor, air sensor or cylindrical pocket sensor.</li><li>IP30 and IP44 enclosures available.</li></ul>

# Technical data and ordering

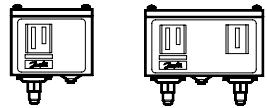

## Pressure controls for fluorinated refrigerants

Pressure	Type	Low pressure (LP)		High pressure (HP)		Reset		Contact system	Code no.		
		Regulating range [bar]	Differential Δp [bar]	Regulating range [bar]	Differential Δp [bar]	Low pressure LP	High pressure HP		1/4 in. 6 mm flare	1/4 in. ODF solder	6 mm ODF solder
Low	KP 1	-0.2 - 7.5	0.7 - 4	-	-	Aut.	-		060-110166 <sup>3)</sup>	060-111266 <sup>3)</sup>	060-111066 <sup>3)</sup>
Low	KP 1	-0.2 - 7.5	0.7 - 4	-	-	Aut.	-		060-114166 <sup>1)</sup> <sup>3)</sup>	-	-
Low	KP 1	-0.9 - 7	0.7	-	-	Man.	-		060-110366	060-111166	060-110966
Low	KP 2	-0.2 - 5	0.4 - 1.5	-	-	Aut.	-	SPDT	060-112066 <sup>3)</sup>	-	060-112366 <sup>3)</sup>
High	KP 5	-	-	8 - 32	1.8 - 6.0	-	Aut.		060-117166 <sup>3)</sup>	060-117966 <sup>3)</sup>	060-117766 <sup>3)</sup>
High	KP 5	-	-	8 - 32	3	-	Man.		060-117366	060-118066	060-117866
Dual	KP 15	-0.2 - 7.5	0.7 - 4	8 - 32	4	Aut.	Aut.		060-124166 <sup>3)</sup>	060-125466 <sup>3)</sup>	-
Dual	KP 15	-0.2 - 7.5	0.7 - 4	8 - 32	4	Aut.	Man.	SPDT + LP signal	060-124366	-	-
Dual	KP 15	-0.2 - 7.5	0.7 - 4	8 - 32	4	Aut.	Man.		060-114866 <sup>1)</sup>	-	-
Dual	KP 15	-0.9 - 7	0.7	8 - 32	4	Man.	Man.		060-124566	-	-
Dual	KP 15	-0.9 - 7	0.7	8 - 32	4	Conv. <sup>2)</sup>	Conv. <sup>2)</sup>		060-126166	-	-
Dual	KP 15	-0.2 - 7.5	0.7 - 4	8 - 32	4	Aut.	Aut.	SPDT + LP and HP signal	060-126566 <sup>3)</sup>	060-129966 <sup>3)</sup>	-
Dual	KP 15	-0.2 - 7.5	0.7 - 4	8 - 32	4	Aut.	Man.		060-126466	060-128466	-
Dual	KP 15	-0.2 - 7.5	0.7 - 4	8 - 32	4	Conv. <sup>2)</sup>	Conv. <sup>2)</sup>		060-115466 <sup>3)</sup>	060-001066 <sup>3)</sup>	-
Dual	KP 15	-0.9 - 7	0.7	8 - 32	4	Conv. <sup>2)</sup>	Conv. <sup>2)</sup>		060-122066	-	-

## For fluorinated refrigerants and R 717 (NH<sub>3</sub>)

Pressure	Type	Low pressure (LP)		High pressure (HP)		Reset	Contact system	Code no.		
		Regulating range bar	Differential Δp bar	Regulating range bar	Differential Δp bar			LP/HP	M10 × 0.75	1 m cap. tube with M10 × 0.75
Low	KP 1A	-0.2 → 7.5	0.7 → 4.0			Aut.			060-116266	060-116066 <sup>3)</sup>
Low	KP 1A	-0.9 → 7.0	Fixed 0.7			Man.				060-116166
High	KP 5A			8 → 32	1.8 → 6.0	Aut.	SPDT			060-123066 <sup>3)</sup>
High	KP 5A			8 → 32	Fixed 3	Man.			060-115366	060-123166
Dual	KP 15A	-0.2 → 7.5	0.7 → 4.0	8 → 32	Fixed 4	Aut./Aut.	SPDT + LP and HP signal		060-129566	060-129366 <sup>3)</sup>
Dual	KP 15A	-0.2 → 7.5	0.7 → 4.0	8 → 32	Fixed 4	Aut./Man.			060-129666	060-129466
Dual	KP 15A	-0.9 → 7.0	Fixed 0.7	8 → 32	Fixed 4	Conv./Conv. <sup>2)</sup>	SPDT LP signal			060-128366
High	KP 7ABS			8 → 32	Fixed 4	Man./Man.	SPST			060-120566

<sup>1)</sup> Pressure controls with gold-plated contacts

<sup>2)</sup> Convertible reset: optional automatic or manual reset

<sup>3)</sup> Enclosure IP44

## Temperature controls

Charge	Type	Sensor type	Setting - range [°C]	Differential Δt		Reset	Max. Sensor temp. [°C]	Capillary-tube length [m]	Code no.
				Lowest temperature [°C]	Highest temperature [°C]				
Vapour <sup>1)</sup>	KP 61	A	-30 - 15	5.5 - 23	1.5 - 7	aut.	120	2	060L110066
	KP 61	A	-30 - 15	5.5 - 23	1.5 - 7	aut.	120	5	060L110166
	KP 61	B	-30 - 13	4.5 - 23	1.2 - 7	aut.	120	2	060L110266
	KP 61	B	-30 - 15	5.5 - 23	1.5 - 7	aut.	120	2	060L110366 <sup>3)</sup>
	KP 61	B	-30 - 15	5.5 - 23	1.5 - 7	aut.	120	2	060L112866 <sup>3)</sup> <sup>4)</sup>
	KP 61	A	-30 - 15	6	2	min.	120	5	060L110466
	KP 61	B	-30 - 15	6	2	min.	120	2	060L110566
	KP 62	C 1	-30 - 15	6 - 23	1.5 - 7	aut.	120	-	060L110666
	KP 63	A	-50 -- 10	10 - 70	2.7 - 8	aut.	120	2	060L110766
	KP 63	B	-50 -- 10	10 - 70	2.7 - 8	aut.	120	2	060L110866
Adsorb- tion <sup>2)</sup>	KP 68	C 1	-5 - 35	4.5 - 25	1.8 - 7	aut.	120	-	060L111166
	KP 69	B	-5 - 35	4.5 - 25	1.8 - 7	aut.	120	2	060L111266
	KP 62	C 2	-30 - 15	5 - 20	2 - 8	aut.	80	-	060L111066 <sup>3)</sup> <sup>4)</sup>
	KP 71	E 2	-5 - 20	3 - 10	2.2 - 9	aut.	80	2	060L111366
	KP 71	E 2	-5 - 20	3	3	min.	80	2	060L111566
	KP 73	E 1	-25 - 15	12 - 70	8 - 25	aut.	80	2	060L111766
	KP 73	D 1	-25 - 15	4 - 10	3.5 - 9	aut.	80	2	060L111866 <sup>3)</sup>
	KP 73	D 1	-25 - 15	3.5	3.5	min.	80	2	060L113866
	KP 73	D 2	-20 - 15	4 - 15	2 - 13	aut.	55	3	060L114066
	KP 73	D 1	-25 - 15	3.5 - 20	3.25 - 18	aut.	80	2	060L114366
F	KP 75	F	0 - 35	3.5 - 16	2.5 - 12	aut.	110	2	060L112066
	KP 75	E 2	0 - 35	3.5 - 16	2.5 - 12	aut.	110	2	060L113766
	KP 77	E 3	20 - 60	3.5 - 10	3.5 - 10	aut.	130	2	060L112166
	KP 77	E 3	20 - 60	3.5 - 10	3.5 - 10	aut.	130	3	060L112266
	KP 77	E 2	20 - 60	3.5 - 10	3.5 - 10	aut.	130	5	060L116866
	KP 79	E 3	50 - 100	5 - 15	5 - 15	aut.	150	2	060L112666
	KP 81	E 3	80 - 150	7 - 20	7 - 20	aut.	200	2	060L112566
	KP 81	E 3	80 - 150	9	9	max.	200	2	060L115566
	KP 98	E 2	OIL: 60 - 120	OIL: 14	OIL: 14	max.	150	1	060L113166
			HT: 100 - 180	HT: 25	HT: 25	max.	250	2	

<sup>1)</sup> Sensor must always be placed colder than the temperature control housing and capillary tube. The temperature control will then regulate independent of ambient temperature.

<sup>2)</sup> Sensor can be placed warmer or colder than temperature control housing and capillary tube, but variations from +20°C ambient temperature will influence the scale accuracy.

<sup>3)</sup> With manual switch, not isolating switch.

<sup>4)</sup> Panel mounting model with top plate.



## ACB – Cartridge pressure controls

The ACB series cartridge switches, are small disc type pressure controls manufactured by Danfoss Saginomiya in Poland. The core steps of the manufacturing process of these controls are carried out using precision manufacturing techniques, and within a clean-room environment. This ensures that product specifications can be guaranteed over a longer period, providing reliable performance during the whole product lifetime.

### Features

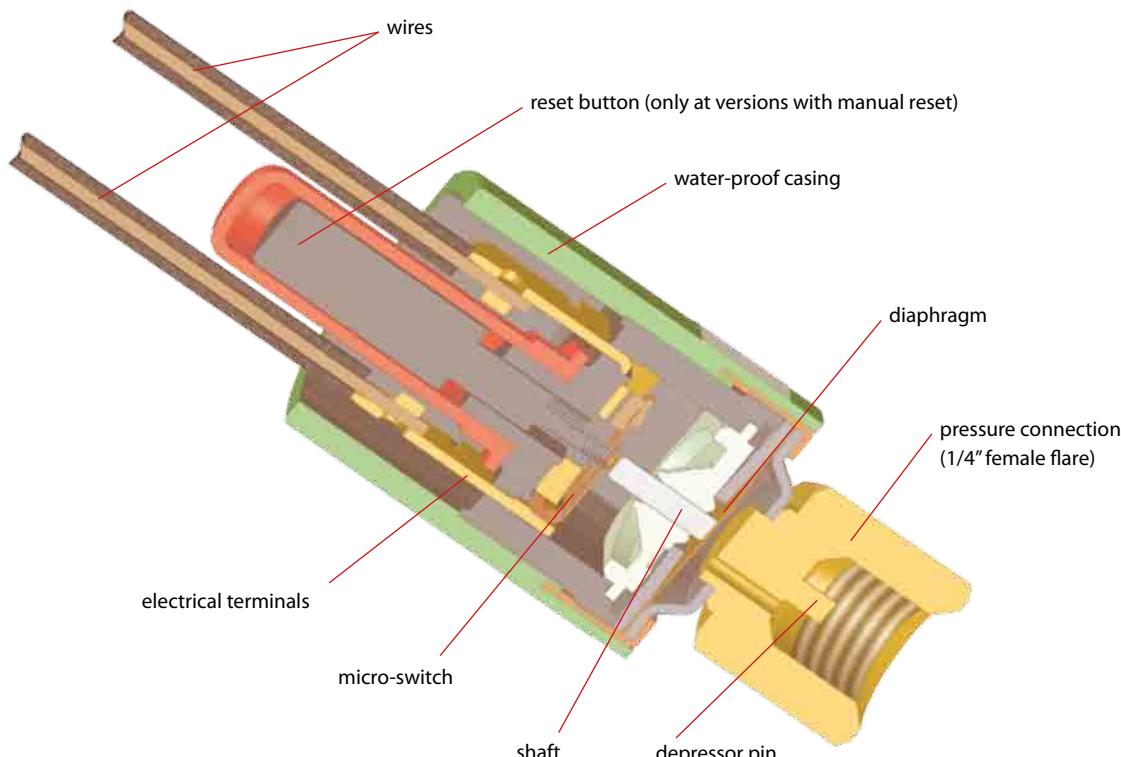


Fig.: type SPST manual reset

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>• Traditional refrigeration</li> <li>• Heat pump systems</li> <li>• Air conditioning units</li> <li>• Liquid coolers</li> <li>• Transport refrigeration</li> </ul>	<ul style="list-style-type: none"> <li>• Compact and easy to install</li> <li>• Excellent reliability and repeatability</li> <li>• Wide choice of specifications: set-point, pressure connection, electrical connection</li> <li>• Flexible order quantity due to European production with short lead times</li> <li>• Global coverage and widespread use at all major OEMs</li> <li>• Over 100 million pcs installed in the field</li> </ul>	<ul style="list-style-type: none"> <li>• CE, TÜV, VDE, UL and C-UL approvals (SPDT man. only CE approvals)</li> <li>• Contact load up to 6 A (250 V AC)</li> <li>• Normally Closed (NC), Normally Open (NO) or SPDT contact system</li> <li>• Spades or cables (1.5 m cable for standard program)</li> <li>• Pressure range from - 0.50 bar to 45 bar</li> <li>• Automatic or manual reset</li> <li>• IP65 (water proof version with cables) and IP40 (version with spade connectors) available</li> </ul>

## Technical data and ordering

Application	Reset	Cut out	Cut in	Contact system/ enclosure type: W-water-proof <sup>1)</sup> S-with spades <sup>2)</sup>	Connection				
		bar	bar		Solder		1/4" female flare		
					6 mm	1/4"			
High pressure cut-out	automatic	18 ± 0.7	13 ± 1.2	SPST-NC / W	061F7504	061F7505	061F7506		
				SPST-NC / S	-	061F8711	061F8709		
		20 ± 1.0	16 ± 1.5	SPDT / W	-	-	061F9057		
				SPST-NC / S	-	061F8710	061F8708		
		23 ± 1.0	19 ± 1.5	SPST-NC / S	-	061F8707	061F8703		
	automatic			SPST-NC / W	-	-	061F8494		
				SPDT / W	-	-	061F9056		
	manual	23 ± 0.7	19 ± 1.2	SPDT / W	-	-	061F9243		
	automatic			SPST-NC / W	061F7507	061F7508	061F7509		
	26 ± 1.0	20 ± 1.5	SPST-NC / S	-	061F8705	061F8701			
			automatic			SPDT / S	-	061F9104	061F9100
						SPDT / W	-	-	061F9055
	manual	26 ± 1.0	20 ± 2.0	SPST-NC / W	061F9703	061F9714	061F9713		
	automatic	28 ± 1.0	21 ± 1.5	SPST-NC / W	061F7510	061F7513	061F7514		
	automatic			SPST-NC / S	-	061F8704	061F8700		
	automatic			SPDT / W	-	-	061F9054		
				SPDT / S	-	061F9107	061F9103		
	manual	28 ± 1.0	21 ± 2.0	SPDT / W	-	-	061F9242		
	manual			SPST-NC / W	-	-	061F9522		
	31 ± 1.0	24 ± 1.5	SPST-NC / S	-	061F8706	061F8702			
			SPDT / W	-	-	061F9053			
	automatic	42 ± 1.2	33 ± 2.0	SPST-NC / W	061F7515	061F7516	061F7517		
	manual			SPST-NC / W	-	-	061F9575		
	automatic			SPDT / W	-	-	061F9052		
Low pressure cut-out	automatic	0.5 ± 0.4	1.5 ± 0.3	SPST-NO / W	061F7518	061F7519	061F7520		
		0.5 ± 0.5	1.5 ± 0.5	SPST-NO / S	-	061F7402	061F7400		
	automatic	0.7 ± 0.5	1.7 ± 0.4	SPDT / S	-	061F9106	061F9102		
		0.7 ± 0.5	1.7 ± 0.5	SPST-NO / W	061F7521	061F7522	061F7523		
	automatic	0.7 ± 0.5	1.7 ± 0.5	SPDT / W	-	-	061F9058		
		0.7 ± 0.5	1.7 ± 0.5	SPST-NO / S	-	061F7403	061F7401		
	automatic	1.7 ± 0.5	2.7 ± 0.4	SPDT / S	-	061F9105	061F9101		
Fan Control	automatic	1.7 ± 0.5	2.7 ± 0.4	SPST-NO / W	061F7524	061F7525	061F7526		
		8.5 ± 1.2	11 ± 0.8	SPST-NO / W	061F8491	-	061F8490		
		13 ± 1.5	16 ± 1.0	SPST-NO / W	061F8334	-	061F8333		

<sup>1)</sup> Waterproof models (IP65) with 1.5 m wires AWG18, packed per 20 pcs


<sup>2)</sup> Models with spade connectors (IP40), packed per 50 pcs



## RT – Pressure controls and temperature controls

The RT series includes temperature controls and pressure controls for general applications within industrial and marine refrigeration. An RT temperature controls is fitted with a single-pole changeover switch. The position of the contacts depends on the sensor temperature and the set scale value. An RT pressure control contains a pressure operated single-pole changeover contact, the position of which depends on the pressure in the inlet connection and the set scale value.

### Features

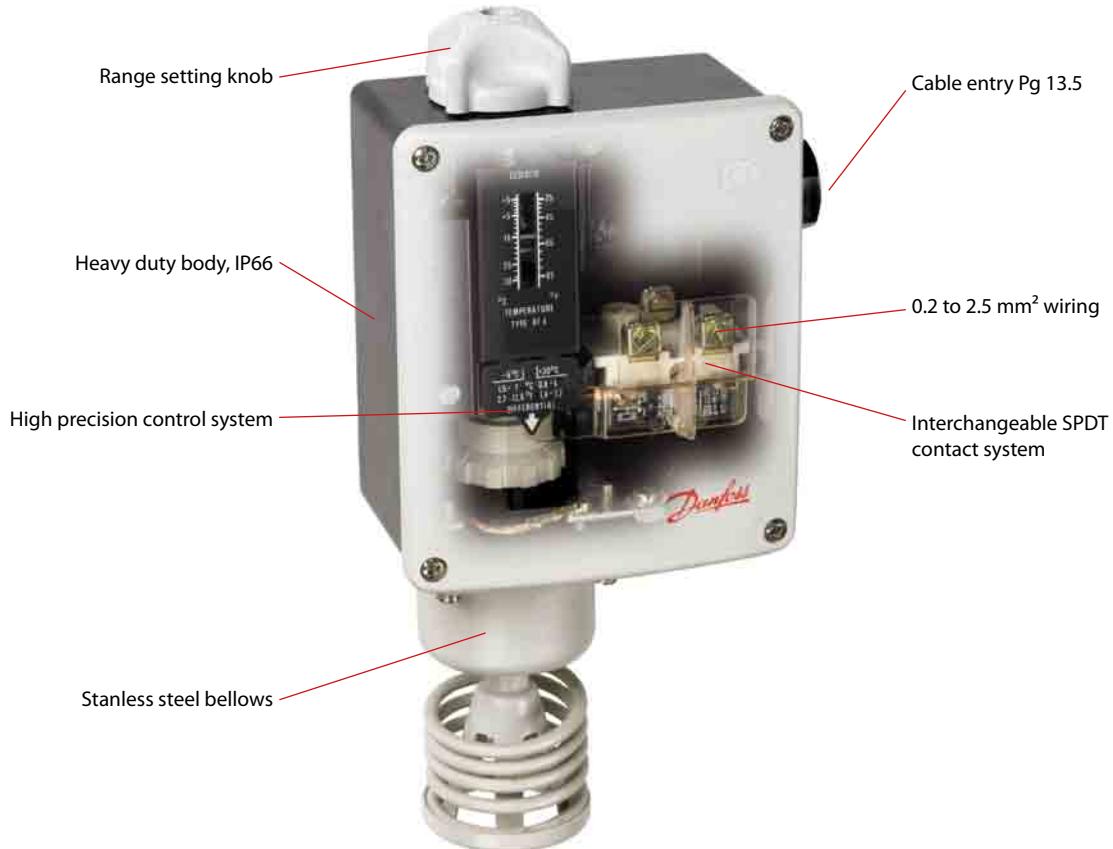

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>General applications within industrial and marine refrigeration</li></ul>	<ul style="list-style-type: none"><li>Wide regulating range</li><li>Suitable for alternating and direct current</li><li>Interchangeable contact system</li><li>Special versions with gold plated contact surfaces for PLC applications</li><li>Versions for neutral zone regulation</li><li>Waterproof versions, enclosure IP66</li><li>High stability and accuracy</li><li>Long operating life time</li></ul>	<ul style="list-style-type: none"><li>Enclosure: IP66 to EN 60529 / IEC 60529, except for versions with ext. reset which are to IP54</li><li>Insulation 400 V</li><li>Ambient temperature: -50 - 70 °C for housing</li><li>Cable connection: Pg 13.5.</li><li>Cable diameter: 6 → 14 mm.</li><li>Pressure controls for fluorinated refrigerants and R717 (NH<sub>3</sub>)</li></ul>

# Technical data and ordering: RT temperature controls

Charge type	Type	Sensortype	Regulation range [°C]	Differential Δ t		Reset	Max. sensor temp. [°C]	Capillary tube length [m]	Code no.
				Lowest temp. setting [°C]	Highest temp. setting [°C]				
State Vapour <sup>1)</sup>	RT 10	A	-60 - -25	1.7 - 7	1 - 3	aut.	150	2	017-507766
	RT 9	A	-45 - -15	2.2 - 10	1 - 4.5	aut.	150	2	017-506666
	RT 3	A	-25 - +15	2.8 - 10	1 - 4	aut.	150	2	017-501466
	RT 17	B	-50 - -15	2.2 - 7	1.5 - 5	aut.	100	-	017-511766
	RT 11	B	-30 - 0	1.5 - 6	1 - 3	aut.	66	-	017-508366
	RT 4	B	-5 - +30	1.5 - 7	1.2 - 4	aut.	75	-	017-503666 017-503766 <sup>4)</sup>
	RT 13	A	-30 - 0	1.5 - 6	1 - 3	aut.	150	2	017-509766
Adsorption <sup>2)</sup>	RT 2	A	-25 - +15	5 - 18	6 - 20	aut.	150	2	017-500866
	RT 8	A	-20 - +12	1.5 - 7	1.5 - 7	aut.	145	2	017-506366
	RT 12	A	-5 - +10	1 - 3.5	1 - 3	aut.	65	2	017-508966
	RT 23	A	+5 - +22	1.1 - 3	1 - 3	aut.	85	2	017-527866
	RT 15	A	+8 - +32	1.6 - 8	1.6 - 8	aut.	150	2	017-511566
	RT 24	A	+15 - +34	1.4 - 4	1.4 - 3.5	aut.	105	2	017-528566
	RT 140	C	+15 - +45	1.8 - 8	2.5 - 11	aut.	240	2	017-523666
	RT 102	D	+25 - +90	2.4 - 10	3.5 - 20	aut.	300	2	017-514766
	RT 34	B	-25 - +15	2 - 10	2 - 12	aut.	100	-	017-511866
	RT 7	A	-25 - +15	2 - 10	2.5 - 14	aut.	150	2	017-505366
	RT 14	A	-5 - +30	2 - 8	2 - 10	aut.	150	2	017-509966
	RT 101	A	+25 - +90	2.4 - 10	3.5 - 20	aut.	300	2	017-500366
Partial <sup>3)</sup>	RT 107	A	+70 - 150	6 - 25	1.8 - 8	aut.	215	2	017-513566

<sup>1)</sup> The sensor must be located colder than temperature control housing and capillary tube.

<sup>2)</sup> The sensor can be located warmer or colder than temperature control housing.





<sup>3)</sup> The sensor must be located warmer than temperature control housing and capillary tube.

<sup>4)</sup> With built-in heating coil - reduces the thermal differential.

## Temperature controls with adjustable neutral zone

Charge	Type	Sensor type	Regulation range [°C]	Differential [°C]	Differential Δ t		Max. sensor temp. [°C]	Capillary tube length [m]	Code no.
					Lowest temp. setting [°C]	Highest temp. setting [°C]			
Vapour	RT 16L	B	0 - +38	1.5 / 0.7	1.5 - 5	0.7 - 1.9	100	-	017L002466
Adsorption	RT 8L	A	-20 - +12	1.5	1.5 - 4.4	1.5 - 4.9	145	2	017L003066
	RT 14L	A	-5 - +30	1.5	1.5 - 5	1.5 - 5	150	2	017L003466
	RT 140L	C	+15 - +45	1.8 / 2	1.8 - 4.5	2.0 - 5	240	2	017L003166
	RT 101L	A	+25 - +90	2.5 / 3.5	2.5 - 7	3.5 - 12.5	300	2	017L006266

## Type of sensor

A	B	C	D
			

Cylindrical remote sensor      Room sensor      Duct sensor      Capillary tube sensor

## Overview RT temperature controls

-50	0	+50	+100	+150	+200	+250	+300 °C	Range °C	Type
								-60 → -25	RT 10
							Vapour-charged with remote sensor (sensor coldest)	-45 → -15	RT 9
								-30 → 0	RT 13
								-25 → +15	RT 3
								-25 → +15	RT 2, 7
								-20 → +12	RT 8
								-5 → +10	RT 12
								-5 → +30	RT 14
							Adsorption-charged with remote sensor (sensor warmest or coldest)	+5 → +22	RT 23
								+8 → +32	RT 15
								+15 → +34	RT 24
								+15 → +45	RT 140
								+25 → +90	RT 101, 102
							Partial charge with remote sensor (sensor warmest)	+70 → +150	RT 107
								-50 → -15	RT 17
							Vapour-charged with coiled capillary tube sensor (room temperature controls)	-30 → 0	RT 11
								-5 → +30	RT 4
							Adsorption-charged with coiled capillary tube sensor (room temperature controls)	-25 → +15	RT 34
								-20 → +12	RT 8L
							Adsorption-charged dead zone temperature controls with remote sensor (sensor warmest or coldest)	-5 → +30	RT 14L
								+15 → +45	RT 140L
							Vapour-charged dead zone temperature control (room temperature controls)	0 → +38	RT 16L
							Vapour-charged differential temperature controls with remote sensor (sensor warmest or coldest)	-30 → +40	RT 270
-50	0	+50	+100	+150	+200	+250	+300 °C		

## Technical data and ordering: RT pressure controls

Safety pressure controls with EN 12263 / DIN 32733 appr. and CE marked according to PED, Pressure Equipment Directive

Pressure	Type	Regulation range [bar]	Differential (fixed) Δp [bar]	Reset	Max. working pressure [bar]	Max. test pressure [bar]	Code no.			
							Connection			
							1/4 in. 6 mm flare	cutting ring Ø 6 mm	G 3/8 A <sup>1)</sup> + weld nipple Ø 6.5/10 mm	G 1/2 A <sup>1)</sup>
<b>High</b>	RT 36B <sup>2)</sup>	0 – 2.5	0.2	man.	22	25	017-525866	-	-	-
	RT 36S <sup>2)</sup>	0 – 2.5	0.2	man.	22	25	017-525966	-	-	-
<b>High</b>	RT 6W <sup>2)</sup>	5 – 25	3	aut.	34	38	017-503166	-	-	-
	RT 6B <sup>2)</sup>	10 – 28	1	man.	34	38	017-503466	-	-	-
	RT 6S <sup>2)</sup>	10 – 28	1	man.	34	38	017-507566	-	-	-
<b>High</b>	RT30AW <sup>3)</sup>	1 – 10	0.8	aut.	22	25	-	-	-	017-518766
	RT30AB <sup>3)</sup>	1 – 10	0.4	man.	22	25	-	-	-	017-518866
	RT30AS <sup>3)</sup>	1 – 10	0.4	man.	22	25	-	-	-	017-518966
<b>High</b>	RT6AW <sup>3)</sup>	5 – 25	3	aut.	34	38	-	017-513166	017-503266	-
	RT6AB <sup>3)</sup>	10 – 28	1.5	man.	34	38	-	017-513366	017-503566	-
	RT6AS <sup>3)</sup>	10 – 28	1.5	man.	34	38	-	017-514666	017-507666	-

<sup>1)</sup> G ext. thread, ISO 228-1.

<sup>2)</sup> Pressure controls for fluorinated refrigerants.

<sup>3)</sup> Pressure controls for R 717 (NH<sub>3</sub>) and fluorinated refrigerants.

# Technical data and ordering: RT pressure controls

## Pressure controls for fluorinated refrigerants

Pressure	Type	Regulation range [bar]	Differential $\Delta p$ [bar]	Reset	Max. working pressure [bar]	Max. test pressure [bar]	Code no.	
							Connection	
							1/4 in. 6 mm flare	G 3/8 A <sup>1)</sup>
Low	RT 1	-0.8 – 5	0.5 – 1.6	aut.	22	25	017-524566	-
	RT 1	-0.8 – 5	0.5	man.	22	25	017-524666	-
	RT 200	0.2 – 6	0.25 – 1.2	aut.	22	25	-	017-523766
High	RT 117L	10 – 30	1 – 4	aut.	42	47	-	017-529566

<sup>1)</sup> G ext. thread, ISO 228-1.

## Safety – Pressure controls for R717 (NH<sub>3</sub>) and fluorinated refrigerants

Pressure	Type	Regulation range [bar]	Differential $\Delta p$ [bar]	Reset	Max. working pressure [bar]	Max. test pressure [bar]	Code no.	
							Connection	
							1/4 in. 6 mm flare	G 3/8 A <sup>1)</sup>
Low	RT 1A	-0.8 – 5	0.5 – 1.6	aut.	22	25	017-501966	017-500166
		-0.8 – 5	0.5	man.	22	25	017-502766	017-500266
		-0.8 – 5	1.3 – 2.4	aut.	22	25	-	017-500766
High	RT 5A	4 – 17	1.2 – 4	aut.	22	25	017-505266	017-504666
		4 – 17	1.2	man.	22	25	017-506166	017-504766

<sup>1)</sup> G ext. thread, ISO 228-1.

## Pressure controls with adjustable neutral zone for R717 (NH<sub>3</sub>) and fluorinated refrigerants

Pressure	Type	Regulation range [bar]	Differential $\Delta p$ [bar]	Neutral zone $\Delta p$ [bar]	Max. working pressure [bar]	Max. test pressure [bar]	Code no.	
							Connection	
							cutting ring $\varnothing$ 6 mm	G 3/8 A <sup>1)</sup> + weld nipple $\varnothing$ 6.5/10 mm
Low	RT 1AL <sup>2)</sup>	-0.8 – 5	0.2	0.2 – 0.9	22	25	017L001666	017L003366
	RT 200L <sup>3)</sup>	0.2 – 6	0.25	0.25 – 0.7	22	25	-	017L003266
High	RT 5AL <sup>2)</sup>	4 – 17	0.35	0.35 – 1.4	22	25	017L001766 <sup>4)</sup>	017L004066 <sup>4)</sup>
	RT 117L <sup>3)</sup>	10 – 30	1	1 – 3	42	47	-	017L004266 <sup>4)</sup>

<sup>1)</sup> G ext. thread, ISO 228-1.

<sup>2)</sup> Pressure controls for R 717 (NH<sub>3</sub>) and fluorinated refrigerants.

<sup>3)</sup> Pressure controls for fluorinated refrigerants.

<sup>4)</sup> Without nipple.

## Differential pressure controls for R 717(NH<sub>3</sub>) and fluorinated refrigerants

Type	Regulation range [bar]	Differential $\Delta p$ [bar]	Operating range for LP bellows [bar]	Max. working pressure [bar]	Max. test pressure [bar]	Code no.	
						Connection	
						cutting ring $\varnothing$ 6 mm	G 3/8 A <sup>1)</sup> + weld nipple $\varnothing$ 6.5/10 mm
RT 260A	0.5 – 4	0.3	-1 – 18	22	25	017D001466	017D002166
	0.5 – 4	0.3	-1 – 18	22	25	-	017D002266 <sup>2)</sup>
	0.5 – 6	0.5	-1 – 36	42	47	017D001566	017D002366
	1.5 – 11	0.5	-1 – 31	42	47	017D001666	017D002466
RT 252A	0.1 – 1.5	0.1	-1 – 9	22	13	017D001366	017D002566
RT 265 <sup>3)</sup>	1 – 6	0.5	-1 – 36	42	47	-	017D007266

<sup>1)</sup> G ext. thread, ISO 228-1.

<sup>2)</sup> Man. reset.

<sup>3)</sup> Filter monitor: Alarm  $\Delta p$  = 0.8 bar, cut-out  $\Delta p$  = 1 bar (factory setting).

## Differential pressure controls with adjustable neutral zone for R 717(NH<sub>3</sub>) and fluorinated refrigerants

Type	Regulation range [bar]	Differential $\Delta p$ [bar]	Neutral zone [bar]	Operating range for LP bellows [bar]	Max. working pressure [bar]	Max. test pressure [bar]	Code no.	
							Connection	
							G 1/2 A <sup>1)</sup> + weld nipple $\varnothing$ 6.5/10 mm	
RT 262 AL	0.1 – 1.5	0.1	-1 – 0.33	-1 – 9	11	13	017D004366 <sup>2)</sup>	

<sup>1)</sup> G ext. thread, ISO 228-1.


<sup>2)</sup> Differential pressure control for R 717 (NH<sub>3</sub>) and fluorinated refrigerants.



## MP – Differential pressure controls

MP 54 and MP 55 oil differential pressure controls are used as safety switches to protect refrigeration compressors against low lubricating oil pressure. If the oil pressure fails the oil differential pressure control stops the compressor after a certain time period. MP 54 and 55 are used in refrigerating systems using fluorinated refrigerants. MP 55A is used in refrigerating systems with R717 ( $\text{NH}_3$ ). MP 55A can also be used in systems with fluorinated refrigerant. MP 54 has a fixed differential pressure setting. It also incorporates a thermal time relay with a fixed release time setting. MP 55 and 55A have adjustable differential pressure and are available both with and without thermal time relay.


### Features

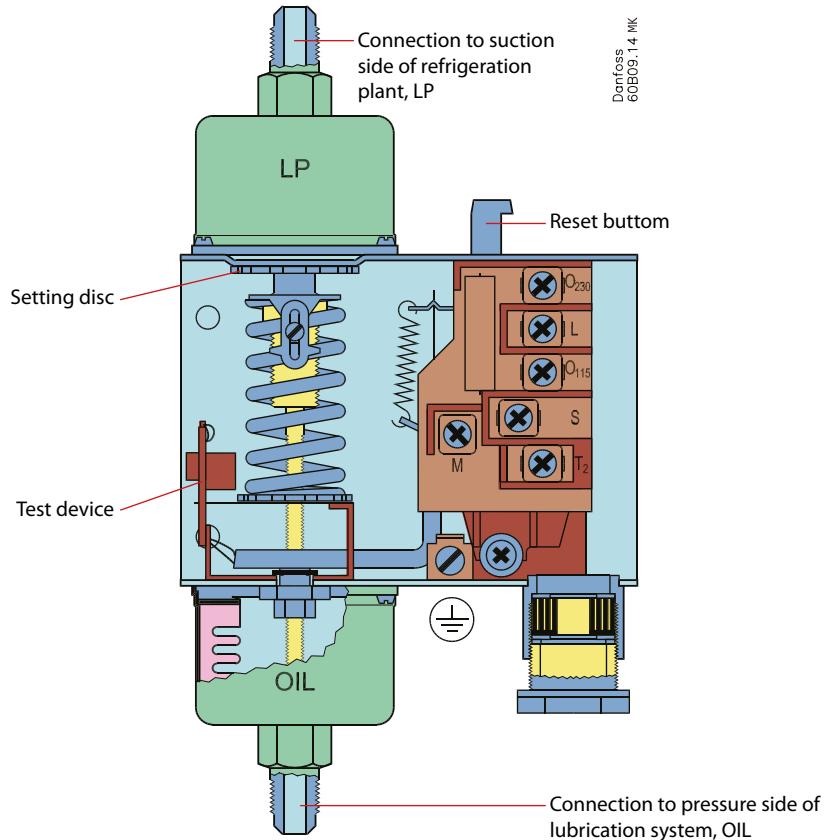

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Deep freeze, refrigeration and air conditioning plant</li> </ul>	<ul style="list-style-type: none"> <li>Suitable for both alternating and direct current</li> <li>Small contact differential</li> <li>Can be used for all normal fluorinated refrigerants</li> </ul>	<ul style="list-style-type: none"> <li>Meets the requirements of EN 60947</li> <li>Wide regulating range</li> <li>Screwed cable entry for cables from 6 to 14 mm diameter</li> <li>Electrical connection at the front of the unit</li> <li>Small contact differential</li> </ul>

# Technical data and ordering

For fluorinated refrigerants

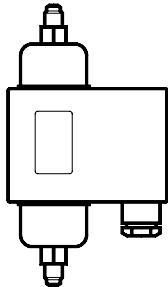

Type	Differential $\Delta p$ [bar]	Switch differential max. $\Delta p$ [bar]	Operation range, LP side [bar]	Time relay release time [s]	Contact load	Code no.	
						Connection	
						1/4 in. 6 mm flare	1 m cap.tube 1/4 in. ODF solder
MP 54	0.65	0.2	-1 - 12	0 <sup>2)</sup>	B	060B029766	-
	0.65	0.2	-1 - 12	45	A	060B016666	-
	0.9	0.2	-1 - 12	60	A	060B016766	-
	0.65	0.2	-1 - 12	90	A	060B016866	-
	0.65	0.2	-1 - 12	120	A	060B016966	-
MP 55	0.3 - 4.5	0.2	-1 - 12	45	A	060B017066	060B013366
	0.3 - 4.5	0.2	-1 - 12	60	A	060B017166	-
	0.3 - 4.5	0.2	-1 - 12	60	A	060B017866 <sup>1)</sup>	-
	0.3 - 4.5	0.2	-1 - 12	90	A	060B017266	-
	0.3 - 4.5	0.2	-1 - 12	120	A	060B017366	060B013666
	0.3 - 4.5	0.2	-1 - 12	0 <sup>2)</sup>	B	060B029966	-

For fluorinated refrigerants and R717 ( $NH_3$ )

Type	Differential $\Delta p$ [bar]	Switch differential max. $\Delta p$ [bar]	Operation range, LP side [bar]	Time relay release time [s]	Contact load	Code no.	
						Connection	
						$\varnothing$ 6,5 / $\varnothing$ 10 mm weld nipple	Cutting ring 6 mm
MP 55A	0.3 - 4.5	0.2	-1 - 12	45	A	060B017466	060B018266
	0.3 - 4.5	0.2	-1 - 12	60	A	060B017566	060B018366
	0.3 - 4.5	0.2	-1 - 12	60	A	060B017966 <sup>1)</sup>	-
	0.3 - 4.5	0.2	-1 - 12	90	A	060B017666	060B018466
	0.3 - 4.5	0.2	-1 - 12	120	A	060B017766	-
	0.3 - 4.5	0.2	-1 → 12	0 <sup>2)</sup>	B	060B029866 <sup>2)</sup>	060B029666

<sup>1)</sup> With operational light that remains on during normal operation.

**Note:** If the operational light goes out, the compressor should not run longer than the release time.

<sup>2)</sup> Versions without time relay are for applications where an external time relay is required - perhaps with a different release time than the one specified.

## Contact loads

### Type A:

On time relay output contacts M-S:

AC15: 2 A, 250 V

DC13: 0,2 A, 250 V

### Type B without time relay:

AC15: 0,1 A, 250 V


DC13: 12 W, 125 V



## KVP – Evaporator pressure regulators


The KVP is mounted in the suction line after the evaporator and is maintaining a constant evaporating pressure and thereby a constant surface temperature on the evaporator. The regulation is modulating. By throttling in the suction line, the amount of refrigerant gas is matched to the evaporator load.

### Features

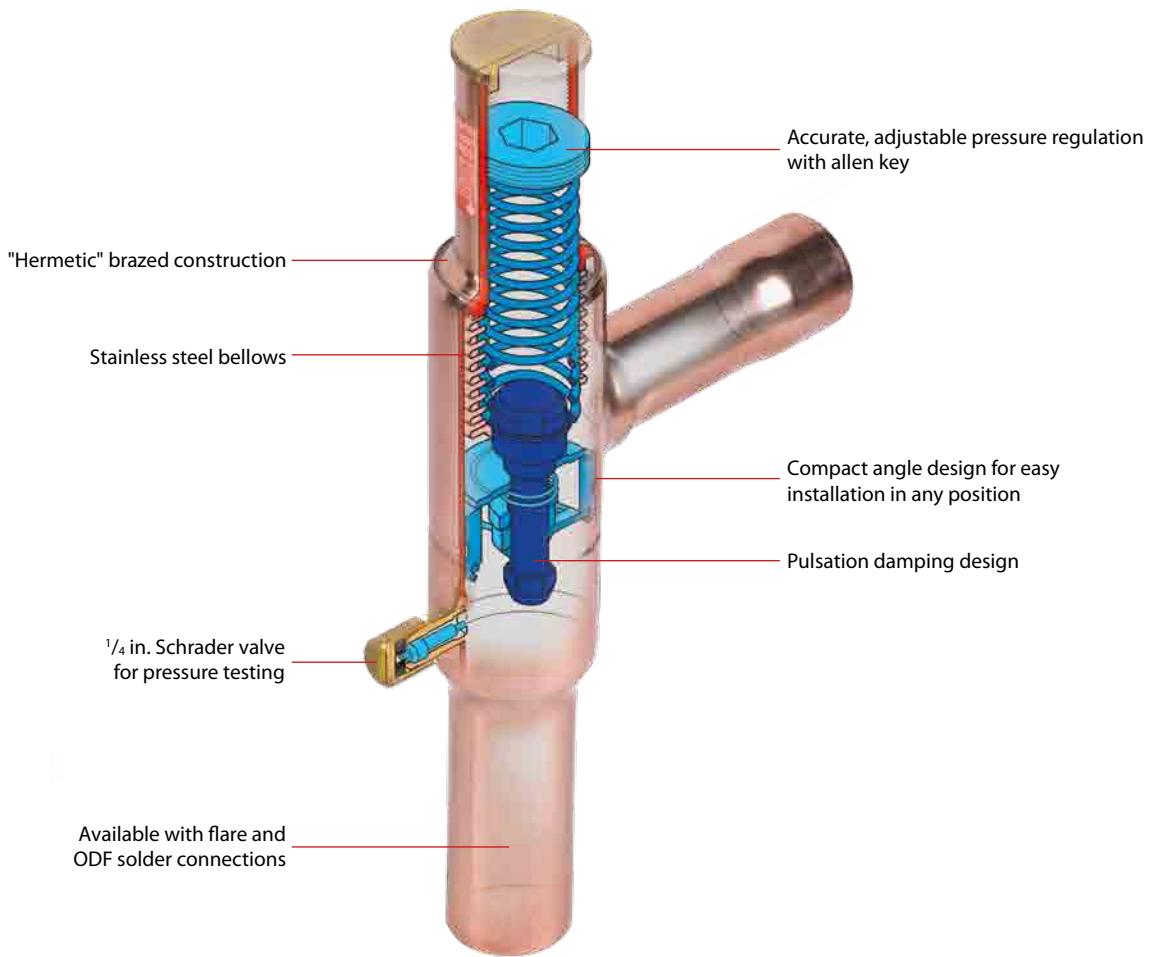

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Air conditioning units</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>The KVP can be used to differentiate the evaporating pressures in two or more evaporators in systems with one compressor.</li><li>Protection against a too low evaporating pressure. The regulator closes when the pressure in the evaporator falls below the set value.</li></ul>	<ul style="list-style-type: none"><li>Wide capacity and operating range</li><li>Regulation range: 0 to 5.5 bar</li><li>For use with HCFC and HFC refrigerants</li><li>Maximum working pressure PS = 18 bar</li></ul>

# Technical data and ordering




**Evaporator pressure regulator**

Type	Rated capacity in kW <sup>1)</sup>				Flare connection <sup>2)3)</sup>		Code no. <sup>4)</sup>	Solder, ODF connection <sup>3)</sup>		Code no.
	R22	R134a	R404A/R507	R407C	in.	mm		in.	mm	
<b>KVP 12</b>	4.0	2.8	3.6	3.7	½	12	034L0021	½	-	034L0023
<b>KVP 15</b>	4.0	2.8	3.6	3.7	5/8	16	034L0022	5/8	16	034L0029
<b>KVP 22</b>	4.0	2.8	3.6	3.7	-	-	-	7/8	22	034L0025
<b>KVP 28</b>	8.6	6.1	7.7	7.9	-	-	-	1 1/8	-	034L0026
<b>KVP 35</b>	8.6	6.1	7.7	7.9	-	-	-	1 3/8	35	034L0032

<sup>1)</sup> Rated capacity is the capacity of the regulator at  
– Evaporating temperature  $t_e = -10^\circ\text{C}$ ,  
– Condensing temperature  $t_c = +25^\circ\text{C}$   
– Pressure drop in regulator  $\Delta p = 0.2 \text{ bar}$ , offset = 0.6 bar

<sup>2)</sup> Supplied without flare nuts. Separate flare nuts can be supplied:  
½ in./12 mm, code no. **011L1103**, 5/8 in./16 mm, code no.  
**011L1167**.

<sup>3)</sup> The connection dimensions chosen must not be too small, since  
gas velocities in excess of 40 m/s at the inlet of the regulator can  
give flow noise.

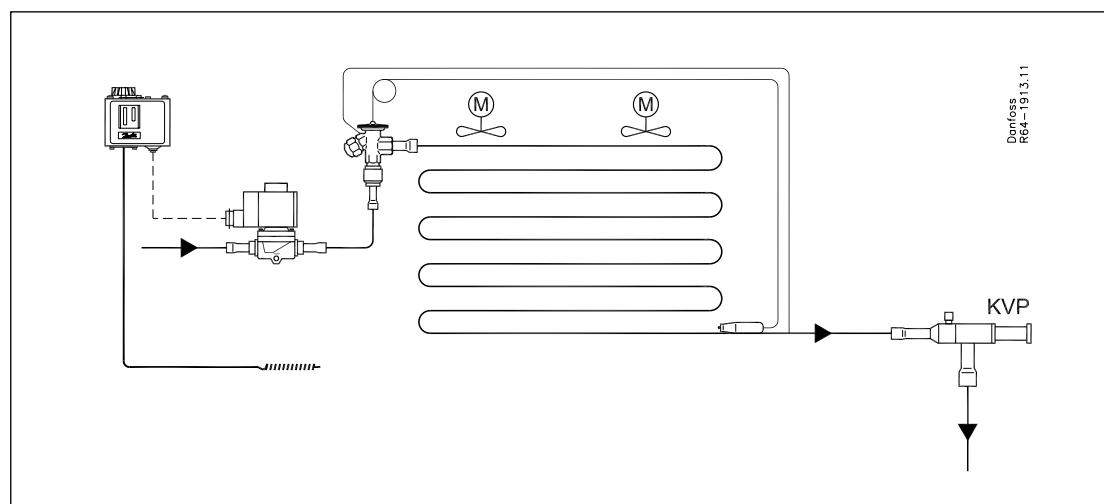




## KVR/NRD – Condensing pressure regulators


Regulator system KVR and NRD is used to maintain a constant and sufficiently high condenser and receiver pressure in refrigeration and air conditioning plant with air-cooled condensers. KVR can also be used together with receiver pressure regulator type KVD.

### Features

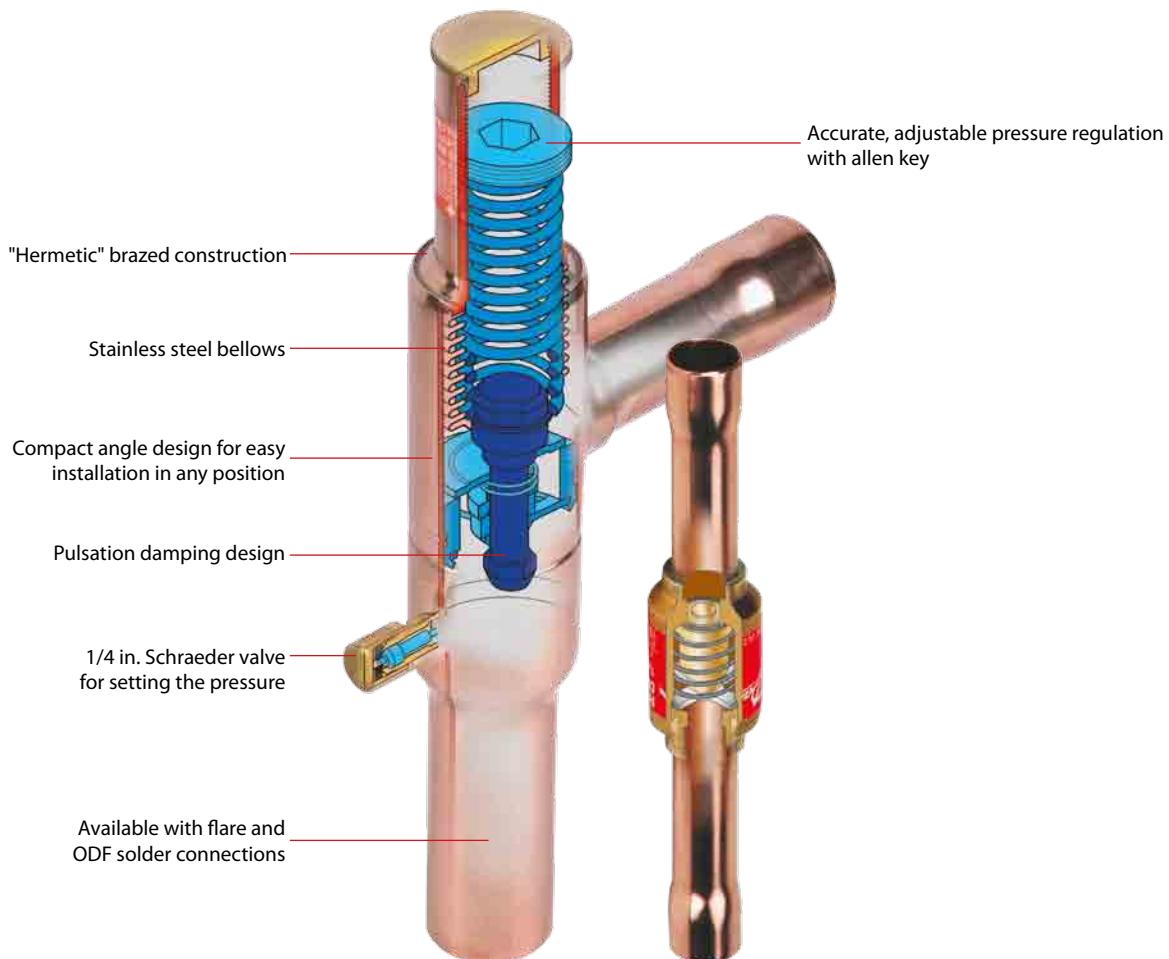

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Traditional refrigeration</li> <li>Air conditioning units</li> <li>Transport refrigeration</li> </ul>	<ul style="list-style-type: none"> <li>The valves are the most compact on the market.</li> <li>Excellent performance because of balanced port design (equalization of force on port)</li> <li>The refrigeration system can operate with very large load variations</li> <li>Very easy to adjust the KVR</li> <li>The NRD is non-adjustable – it always follows the actual pressure in the system</li> <li>Reliable design</li> </ul>	<ul style="list-style-type: none"> <li>Wide capacity and operating range</li> <li>Regulation range: 5 to 17.5 bar</li> <li>For use with HCFC and HFC refrigerants</li> <li>Maximum working pressure PS = 28 bar</li> </ul>

# Technical data and ordering

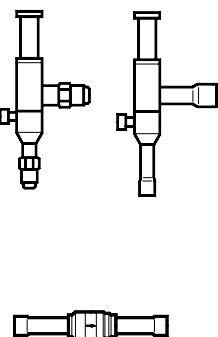

Condensing pressure regulator

Type	Evaporator capacity							Code no. <sup>4)</sup>	Solder, ODF connection <sup>3)</sup>		Code no.
	Rated liquid capacity in kW <sup>1)</sup>			Rated hot gas capacity in kW <sup>1)</sup>					Flare connection <sup>2)</sup>	in.	
	R22	R134a	R404A/ R507	R407C	R22	R134a	R404A/ R507	R407C	in.	mm	
KVR 12	50.4	47.3	36.6	54.4	13.2	11.6	12.0	14.3	½	12	034L0091
KVR 15									-	-	12
KVR 22									5/8	16	034L0092
KVR 28	129	121	93.7	139.3	34.9	30.6	34.9	37.7	-	-	5/8
KVR 35									-	-	16
NRD									-	-	22
									-	-	034L0095
									-	-	034L0099
									-	-	034L0100
									1 3/8	35	
									½	-	020-1132
									-	12	020-1136

<sup>1)</sup> Rated capacity is the capacity of the regulator at  
– Evaporating temperature  $t_e = -10 \text{ }^\circ\text{C}$ ,


– Condensing temperature  $t_c = +30 \text{ }^\circ\text{C}$

– Pressure drop in regulator  $\Delta p =$

- liquid line  $dp = 0.2 \text{ bar}$
- hotgas line  $dp = 0.4 \text{ bar}$
- offset = 3 bar

<sup>2)</sup> Supplied without flare nuts. Separate flare nuts can be supplied:  
½ in./12 mm, code no. **011L1103**, 5/8 in./16 mm, code no.  
**011L1167**.

<sup>3)</sup> The connection dimensions chosen must not be too small, since  
gas velocities in excess of 40 m/s at the inlet of the regulator can  
give flow noise.

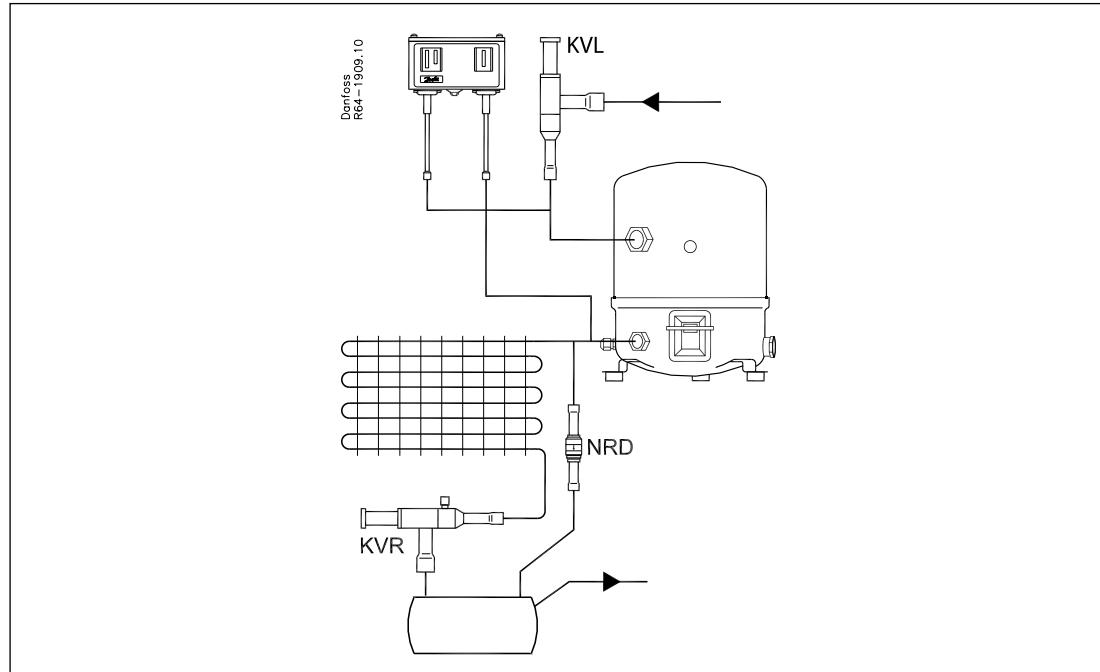




## XGE/RGE – Condenser fan speed controls

Fan speed control is becoming increasingly widespread in different refrigeration and air conditioning units, with the benefits of reduced noise and stable condensing pressures under different climatic conditions. The XGE range is very compact and offers the ideal solution for reliable fan control for most units where small fans are used. For medium to large sized fans (single and three phase) the RGE range offers a simple and efficient fan speed control solution.

### Features

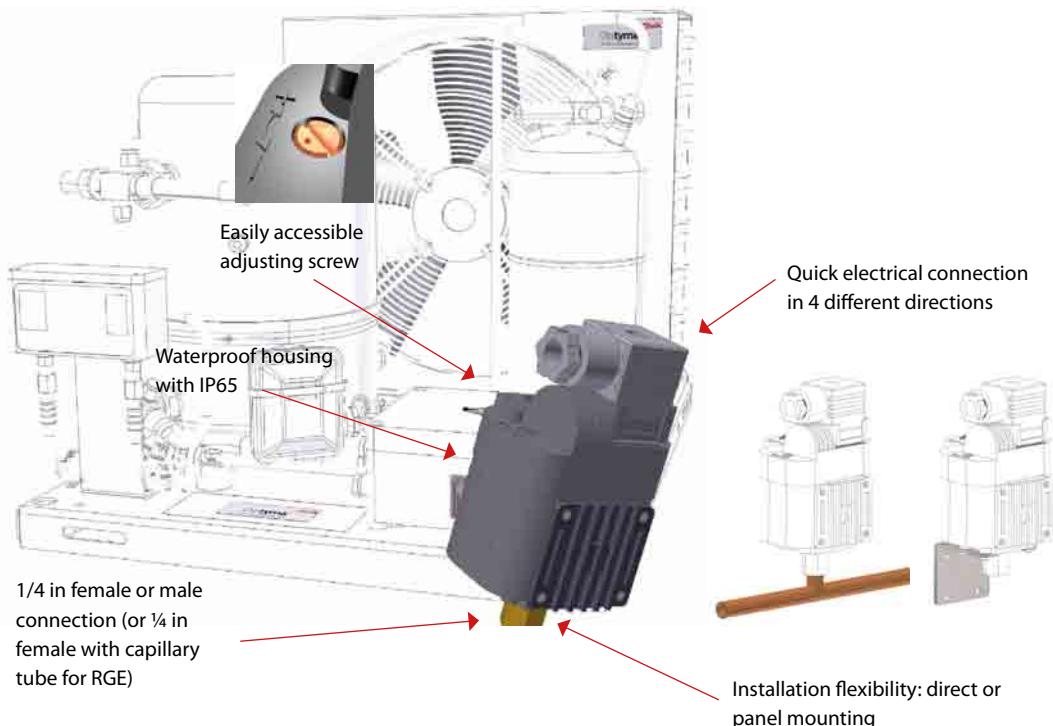

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Freezing and refrigeration condensing units</li><li>Packaged air conditioners and chillers</li></ul>	<ul style="list-style-type: none"><li>Simple to install and easy setting</li><li>"All in one": senses pressure and controls fan speed</li><li>Reliable sensing mechanism</li><li>XGE:<ul style="list-style-type: none"><li>Compact &amp; light weight (length: 112 mm - diameter: 66 mm - weight: 180 g)</li><li>Can be directly mounted onto the refrigeration line or fixed onto a simple bracket (accessory) and screwed to a panel</li><li>Easily accessible adjusting screw on the top surface</li><li>Easy wiring and electrical connection</li><li>Specially designed heat dissipation radiator to prevent overheating</li></ul></li></ul>	<ul style="list-style-type: none"><li>Electrical rating from 3 to 8A (single phase) and 5 to 7A (3 phase)</li><li>For all the commonly used refrigerants, including R410A</li><li>Enclosure: IP65 (XGE) and IP54 (RGE)</li><li>Full CE / EMC approved</li><li>Dual frequency: 50/60 Hz</li><li>Max. working pressure: 47 bar</li><li>With low speed operation it is possible to select either minimum speed operation or cut-off operation</li></ul>

## Technical data and ordering



Model	Mode <sup>1)</sup>	Pressure connection	Adjusting range [bar]	P-band [bar]	Pre-setting [bar]	Rated motor rating [A]	No. of phase/voltage [VAC]	Code no.	Box qty
XGE-4C	C	1/4 in female flare	10-25	6	19	0.2-3	1 / 200-240	061H3140	50
XGE-4CB	C	1/4 in male flare	10-25	6	19	0.2-3	1 / 200-240	061H3142	50
XGE-6C	C	1/4 in female flare	22-39	7	28	0.2-3	1 / 200-240	061H3160	50
XGE-6CB	C	1/4 in male flare	22-39	7	28	0.2-3	1 / 200-240	061H3162	50
XGE-4M	M	1/4 in female flare	10-25	6	19	0.2-3	1 / 200-240	061H3240	50
XGE-4MB	M	1/4 in male flare	10-25	6	19	0.2-3	1 / 200-240	061H3242	50
XGE-6M	M	1/4 in female flare	22-39	7	28	0.2-3	1 / 200-240	061H3260	50
RGE-Z1N4-7DS	C or M	1/4 in female flare	8-28	4	19	0.2-4	1 / 200-240	061H3005	20
RGE-Z1N6-7DS	C or M	1/4 in female flare	16-39	8	32	0.2-4	1 / 200-240	061H3021	20
RGE-Z1P4-7DS	C or M	1/4 in female flare	8-28	4	19	0.2-6	1 / 200-240	061H3008	16
RGE-Z1P6-7DS	C or M	1/4 in female flare	16-39	8	32	0.2-6	1 / 200-240	061H3022	16
RGE-Z1Q4-7DS	C or M	1/4 in female flare	8-28	4	19	0.2-8	1 / 200-240	061H3009	16
RGE-Z1Q6-7DS	C or M	1/4 in female flare	16-39	8	32	0.2-8	1 / 200-240	061H3023	16
RGE-Z3R4-7DS	C or M	1/4 in female flare	8-28	4	16	0.2-5	3 / 200-240	061H3003	6
RGE-X3R4-7DS	C or M	1/4 in female flare	8-28	4	16	0.2-5	3 / 380-415	061H3006	6
RGE-X3R6-7DS	C or M	1/4 in female flare	16-39	8	32	0.2-5	3 / 380-415	061H3028	6
RGE-Z3T4-7DS	C or M	1/4 in female flare	8-28	4	16	0.2-7	3 / 200-240	061H3050	6

<sup>1)</sup> C = Cut-off, M = Min. speed

## Accessories

Model	Description	Dimensions	Code no.	Box qty
XGE-AE01	Fixing bracket accessory for panel mount	H: 38 mm, W: 42 mm, D: 45 mm	061H3102	50






## KVL – Crankcase pressure regulators


Crankcase pressure regulator type KVL is fitted into the suction line ahead of the compressor. The KVL protects the compressor motor against overload during start-up after long standstill periods or after defrost periods (high pressure in evaporator).

### Features

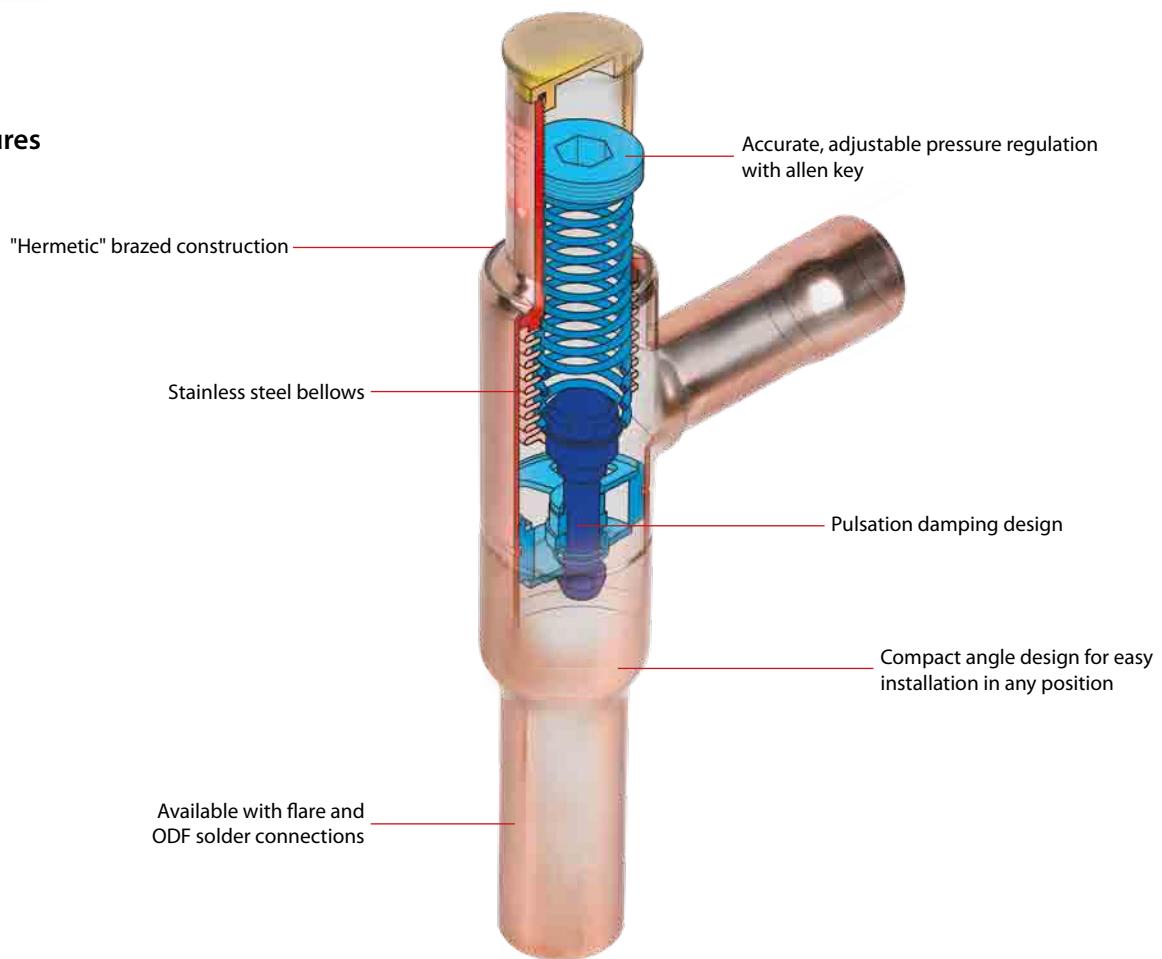

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Air conditioning units</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>Unaffected by ambient pressure variations</li><li>Bellows welded to the body for long lifetime</li><li>Accurate, adjustable pressure regulation</li><li>Easy adjustment before start up</li><li>Protects the compressor against electrical motor overloading</li></ul>	<ul style="list-style-type: none"><li>Wide capacity and operating range</li><li>Regulation range: 0.2 to 6 bar</li><li>For use with HCFC and HFC refrigerants</li><li>Maximum working pressure PS = 18 bar</li></ul>

# Technical data and ordering




Crankcase pressure regulator

Type	Rated capacity in kW <sup>1)</sup>				Flare connection <sup>2) 3)</sup>		Code no.	Solder, ODF connection <sup>3)</sup>		Code no.
	R22	R134a	R404A/R507	R407C	in.	mm		in.	mm	
KVL 12	7.1	5.3	6.3	6.4	½	12	034L0041	½	-	034L0043
KVL 15	7.1	5.3	6.3	6.5	5/8	16	034L0042	5/8	16	034L0049
KVL 22	7.1	5.3	6.3	6.5	-	-	-	7/8	22	034L0045
KVL 28	17.8	13.2	15.9	16.4	-	-	-	1 1/8	-	034L0046
KVL 35	17.8	13.2	15.9	16.4	-	-	-	1 3/8	35	034L0052

<sup>1)</sup> Rated capacity is the capacity of the regulator at  
– Evaporating temperature  $t_e = -10^\circ\text{C}$ ,  
– Condensing temperature  $t_c = +25^\circ\text{C}$   
– Pressure drop in regulator  $\Delta p = 0.2 \text{ bar}$

<sup>2)</sup> Supplied without flare nuts. Separate flare nuts can be supplied:  
½ in./12 mm, code no. **011L1103**, 5/8 in./16 mm, code no. **011L1167**.

<sup>3)</sup> The connection dimensions chosen must not be too small, since  
gas velocities in excess of 40 m/s at the inlet of the regulator can  
give flow noise.

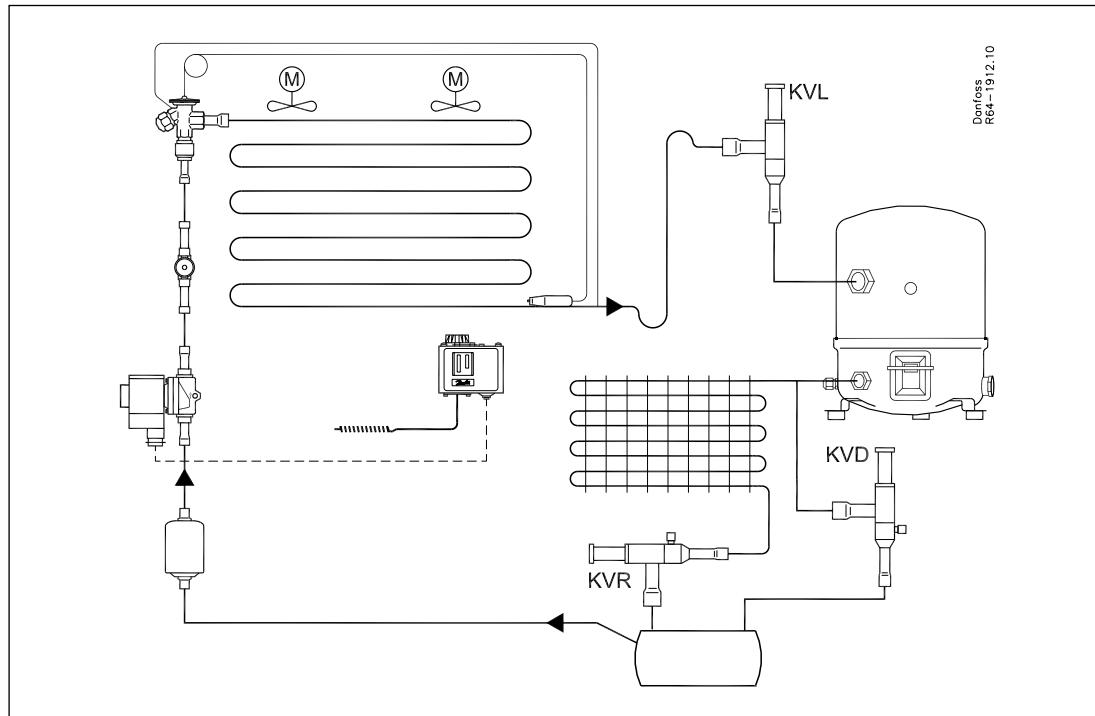




## KVD – Receiver pressure regulators

KVD is a modulating pressure regulator. It opens on falling receiver pressure and bypasses hot gas to maintain the receiver pressure at the regulator setting (adjustable).


KVD and KVR form a regulating system, used to maintain constant and adequately high condensing and receiver pressure in plant with heat-recovery, and in refrigeration and air conditioning plant with air-cooled condensers.

### Features

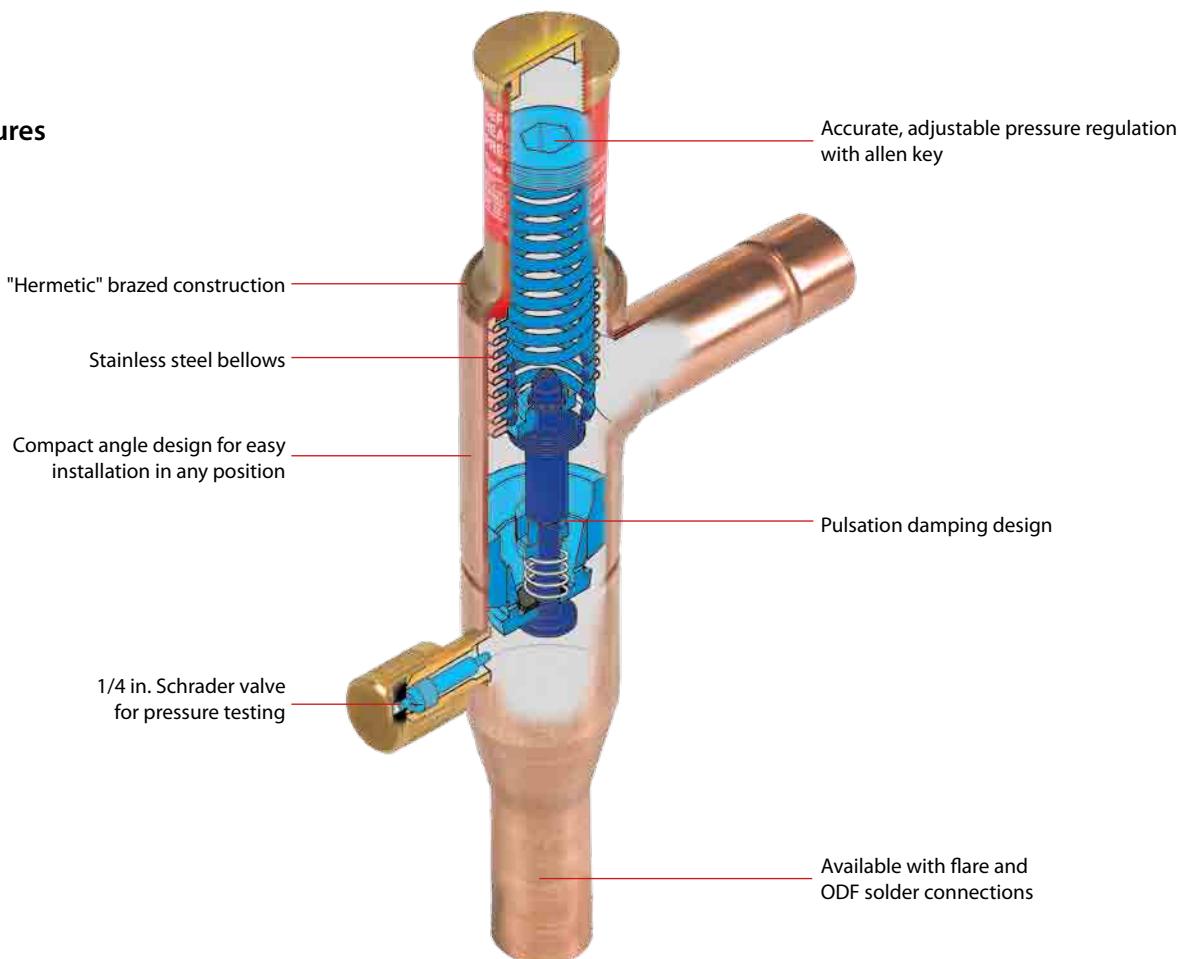

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Air conditioning units</li><li>Commercial refrigeration</li></ul>	<ul style="list-style-type: none"><li>The regulator is equipped with an effective damping device against pulsations which can normally arise in a refrigeration plant.</li><li>KVD regulations is only dependent upon the outlet pressure. Pressure variations on the inlet side of the regulator do not affect the degree of opening since KVD is equipped with an equalization bellows.</li></ul>	<ul style="list-style-type: none"><li>Wide capacity and operating range</li><li>Regulation range: 3 to 20 bar</li><li>Max. working pressure PS = 28 bar</li><li>Can be used as a relief valve from high pressure to suction side</li><li>For use with HCFC and HFC refrigerants</li></ul>

## Technical data and ordering



### Receiver pressure regulators


Type	kv value m <sup>3</sup> /h <sup>1)</sup>	Flare connection <sup>2)3)</sup>		Code no.	Solder, ODF connection <sup>3)</sup>		Code no.
		in.	mm		in.	mm	
KVD 12	1.75	1/2	12	034L0171	1/2	-	034L0173
KVD 15	1.75	-	-	-	-	12	034L0176
		5/8	16	034L0172	5/8	16	034L0177

<sup>1)</sup> The kv value is the flow of water in m<sup>3</sup>/h at a pressure drop across valve of 1 bar,  $\rho = 1000 \text{ kg/m}^3$ .

<sup>2)</sup> Supplied without flare nuts. Separate flare nuts can be supplied:  
1/2 in./12 mm, code no. **011L1103**, 5/8 in./16 mm, code no.

**011L1167**.

<sup>3)</sup> The connection dimensions chosen must not be too small, since gas velocities in excess of 40 m/s at the inlet of the regulator can give flow noise.

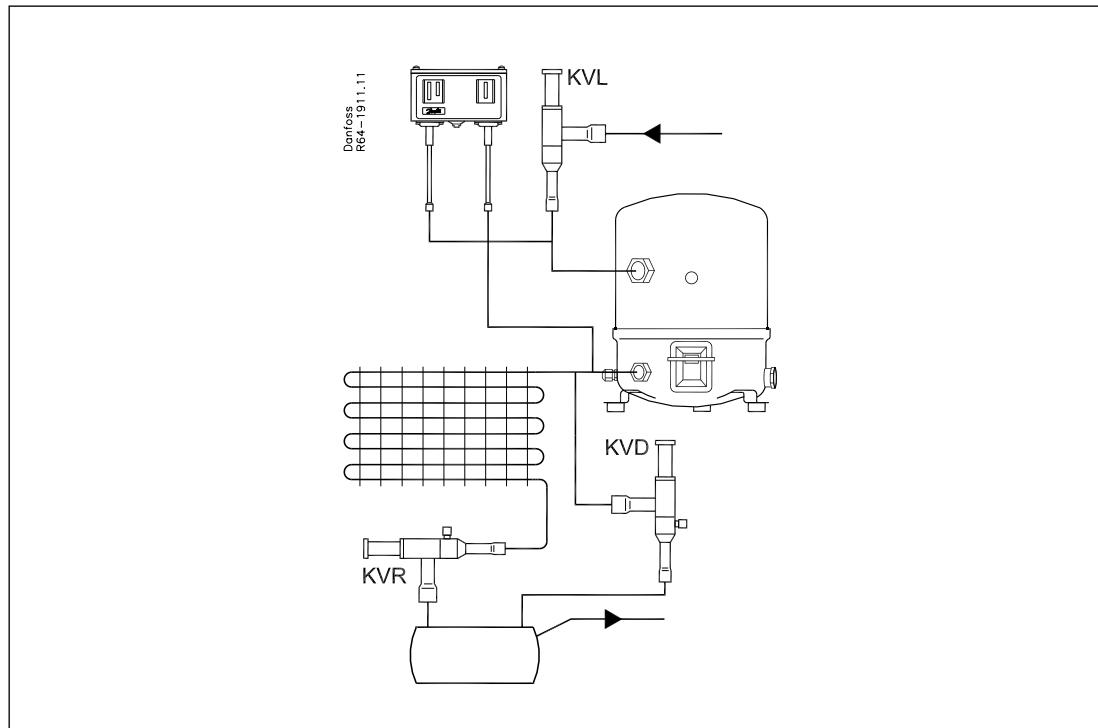




## KVC – Capacity regulators


KVC is a capacity regulator used for the adaption of the compressor capacity to the actual evaporator load. Placed in a bypass between high- and low pressure sides of the refrigeration system, KVC imposes a lower limit on the compressor suction pressure by supplying the low pressure side with replacement capacity in the form of hot gas/cool gas from the high pressure side.

### Features

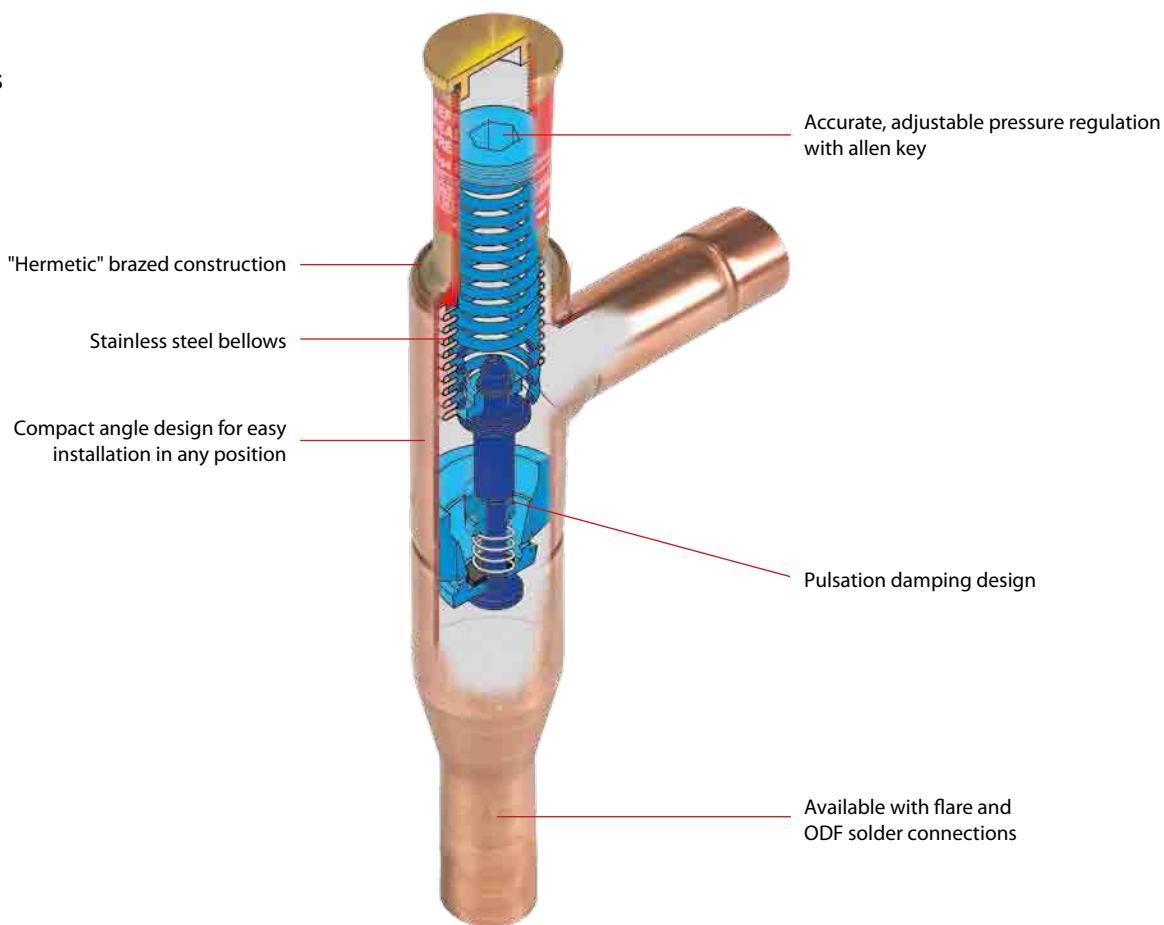

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Air conditioning units</li><li>Transport refrigeration</li><li>Commercial refrigeration</li><li>Compressed air driers</li></ul>	<ul style="list-style-type: none"><li>KVC regulations is only dependent upon the outlet pressure. Pressure variations on the inlet side of the regulator do not affect the degree of opening since KVC is equipped with an equalization bellows.</li><li>The regulator is also equipped with an effective damping device against pulsations which can normally arise in a refrigeration plant.</li><li>Compact angle design for easy installation</li></ul>	<ul style="list-style-type: none"><li>Wide capacity and operating range</li><li>Regulation range: 0.2 to 6 bar</li><li>Maximum working pressure PS = 28 bar</li><li>For use with HCFC and HFC refrigerants</li><li>Medium temperature:<ul style="list-style-type: none"><li>- 45 up to 130 °C</li></ul></li></ul>

# Technical data and ordering



## Capacity regulators


Type	Rated capacity in kW <sup>4)</sup>				Flare connection <sup>1) 2)</sup>		Code no.	Solder connection <sup>2)</sup>		Code no.
	R22	R134a	R404A/R507	R407C	in.	mm		in.	mm	
KVC 12 <sup>3)</sup>	7.6	4.8	6.9	8.4	1/2	12	034L0141	1/2	-	034L0143
KVC 15 <sup>3)</sup>	14.9	9.4	13.6	16.4	5/8	16	034L0142	5/8	16	034L0147
KVC 22 <sup>3)</sup>	19.1	12.0	17.4	21.0	-	-	-	7/8	22	034L0144

<sup>1)</sup> Supplied without flare nuts. Separate flare nuts can be supplied:  
1/2 in./12 mm, code no. **011L1103**, 5/8 in./16 mm, code no.  
**011L1167**.

<sup>2)</sup> The connection dimensions chosen must not be too small, since  
gas velocities in excess of 40 m/s at the inlet of the regulator can  
give flow noise.

<sup>3)</sup> If the discharge temperature becomes too high in relation to the  
compressor specification, the installation of an injection valve  
in a bypass between liquid line and compressor suction line is  
recommended.

<sup>4)</sup> Rated capacity is the capacity of the regulator at:  
– Evaporating temperature  $t_e = -10^\circ\text{C}$ ,  
– Condensing temperature  $t_c = +25^\circ\text{C}$

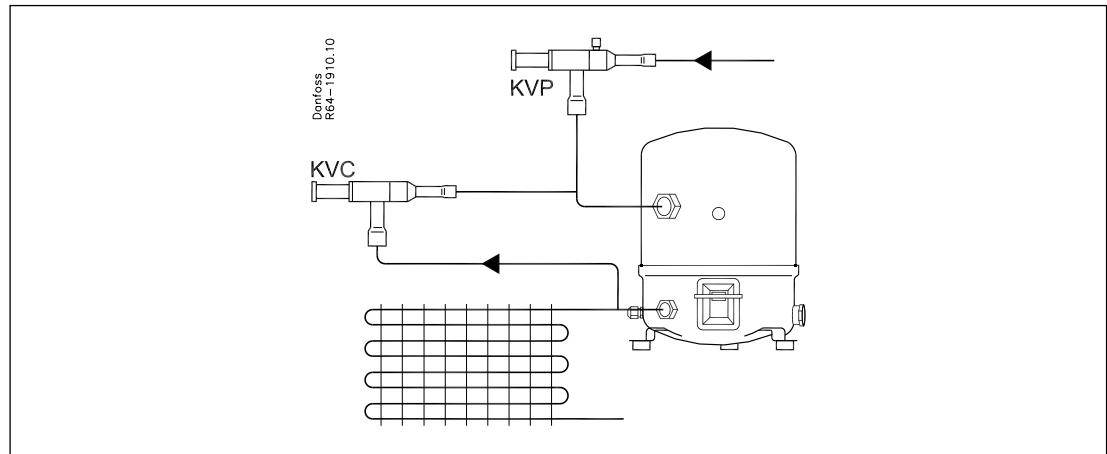




## CPCE – Capacity regulator


CPCE capacity regulators adapt compressor capacity to actual evaporator load. They are designed for installation in a bypass line between the low and high pressure sides of the refrigeration system, for hot gas injection between evaporator and thermostatic expansion valve. Injection should be arranged to occur through an LG liquid-gas mixer.

### Features

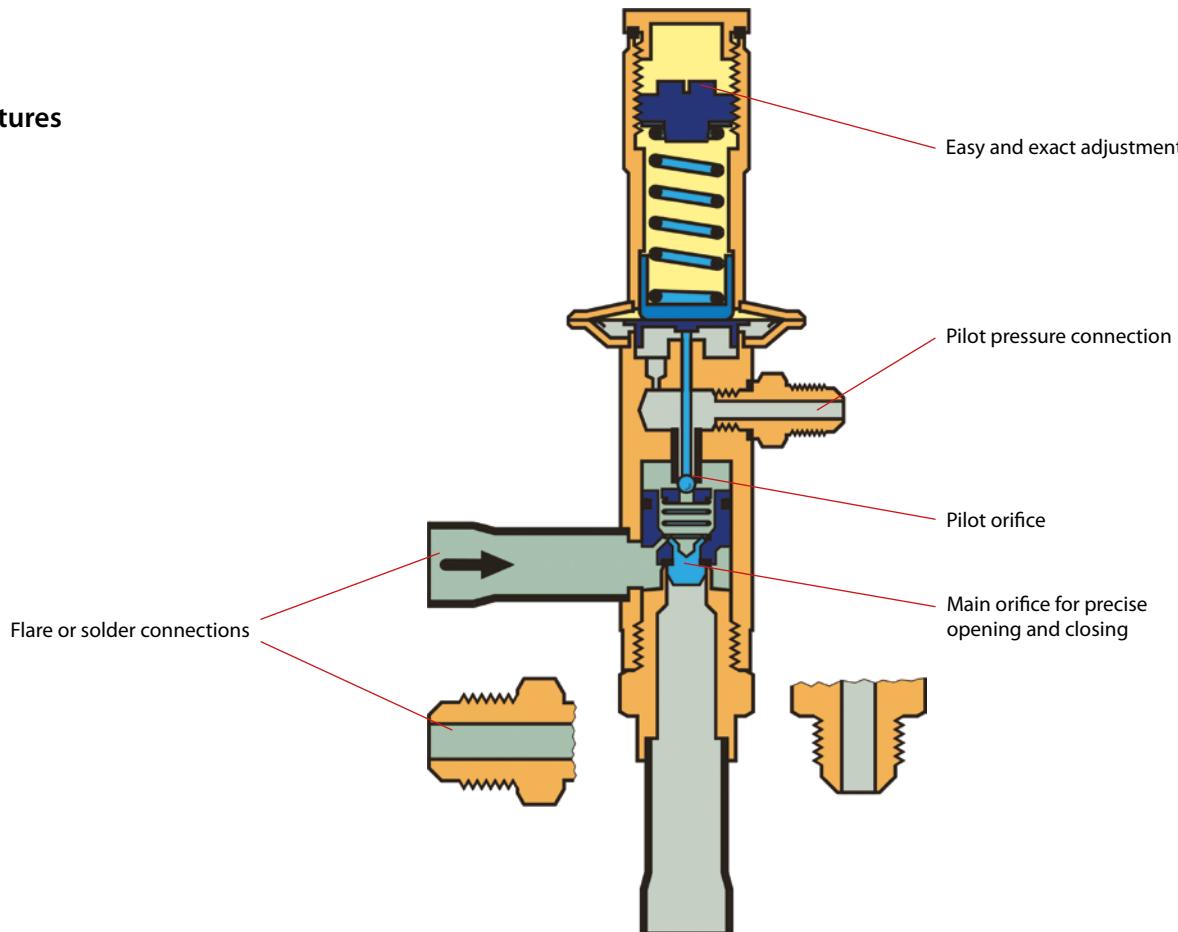

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Air conditioning units</li><li>Commercial refrigeration</li><li>Compressed air dryers</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>Avoids high suction superheats by combining hot gas injection with expansion valve characteristics</li><li>Can also protect against too low an evaporating temperature, i.e. avoids evaporator icing</li><li>LG can be used for hot gas defrosting or reverse cycle systems</li><li>Superior control accuracy</li></ul>	<ul style="list-style-type: none"><li>The regulator increases evaporator gas velocity thus ensuring better oil return to compressor</li><li>Direct connection to system suction line regulates hot gas injection independent of evaporator pressure drop</li><li>LG provides homogenous mixing of the liquid and hot gas refrigerant injected into the evaporator</li><li>Can be used for HCFC and HFC refrigerants</li><li>Max. working pressure PS = 28 bar</li></ul>

# Technical data and ordering



## Capacity regulators

Type	Rated capacity in kW <sup>1)</sup>				Flare connection		Solder connection		Code no.
	R22	R134a	R404A/R507	R407C	in.	mm	in.	mm	
CPCE 12	17.4	7.9	16.4	19.0	1/2	12	-	-	034N0081
CPCE 12	17.4	7.9	16.4	19.0	-	-	1/2	12	034N0082
CPCE 15	25.6	11.6	24.2	27.9	-	-	5/8	16	034N0083
CPCE 22	34.0	15.2	32.0	37.1	-	-	7/8	22	034N0084


<sup>1)</sup> Rated capacity is the capacity of the regulator at:

- Evaporating temperature  $t_e = -10^\circ\text{C}$ ,
- Condensing temperature  $t_c = +30^\circ\text{C}$
- Reduction of suction temperature/pressure  $\Delta t_s = \text{CPCE}: 4\text{ K}$ .



## Liquid-gas mixer

Type	Connection						Code no.	
	Expansion valve Solder, ODM		Hot gas Solder, ODF		Liquid distributor Solder, ODF			
	in.	mm	in.	mm	in.	mm		
LG 12-16	5/8	16	1/2	12	5/8	16	069G4001	
LG 12-22	7/8	22	1/2	12	7/8	22	069G4002	
LG 16-28	11/8	28	5/8	16	11/8	28	069G4003	
LG 22-35	13/8	35	7/8	22	13/8	35	069G4004	

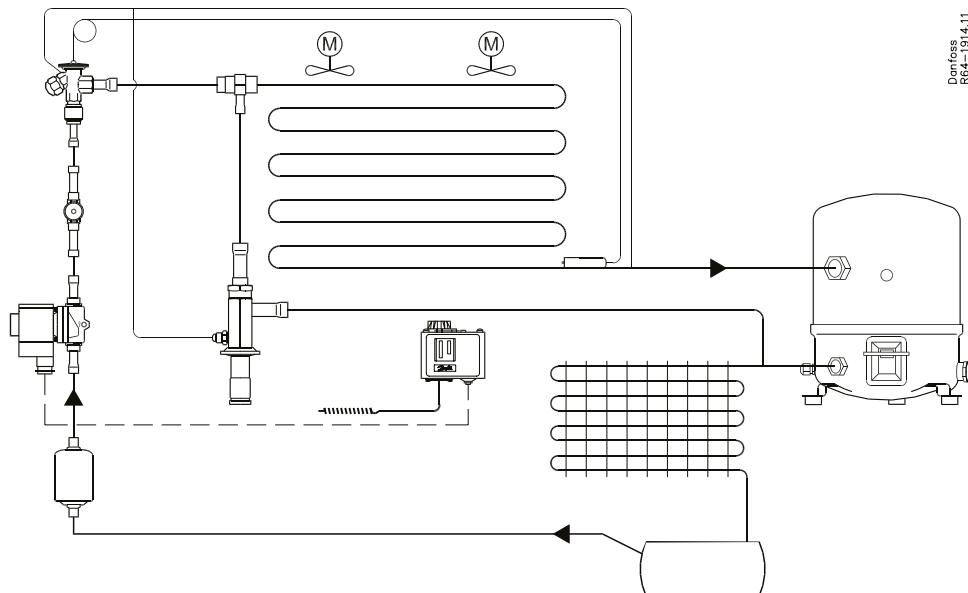


Danfoss  
R64-191.4.11



## ICM – Flexline™ Motor valves

Danfoss' extensive experience has been used to create a new valve concept which sets new and improved standards with respect to the demands required from control and injection valves. ICM valves are manufactured with a series of unique features.

### Features

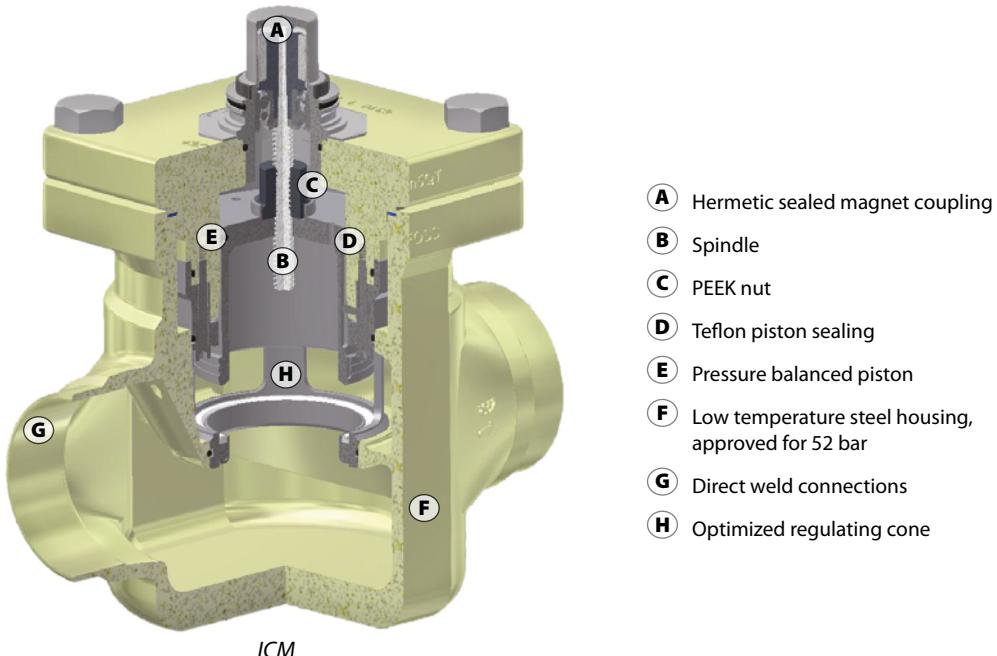

The Flexline™ platform is synonymous of flexibility within industrial refrigeration components.

Based on a modular design concept each product features a variety of benefits, including flexible selection, easy installation and maintenance.

The products in the Flexline™ series are: ICV control valves, ICF valve stations and SVL line components.

Advantages and features	Facts
<ul style="list-style-type: none"><li>Designed for industrial refrigeration applications for a maximum working pressure of 52 bar/754 psig.</li><li>Modular Concept<ul style="list-style-type: none"><li>Each valve body is available with several different connection types and sizes</li><li>Valve overhaul is performed by replacing the function module</li><li>Possible to convert ICM motor valve to ICS servo valve.</li></ul></li><li>Low weight and compact design.</li><li>Low temperature steel body</li><li>Direct coupled connections Connection types include butt weld, socket weld, solder and threaded connections.</li><li>V-port regulating cone ensures optimum regulating accuracy particularly at part load.</li><li>Manual opening possible via ICAD or Multifunction tool.</li><li>Cavitation resistant valve seat.</li><li>Magnet coupling - real hermetic sealing.</li></ul>	<ul style="list-style-type: none"><li>Refrigerants: Applicable to all common refrigerants including R717 and R744 (CO<sub>2</sub>) and non- corrosive gases/liquids. Use with flammable hydrocarbons cannot be recommended; please contact Danfoss.</li><li>Temperature range –60/+120 °C (–76/+248°F).</li><li>Surface protection The external surface is zinc-chromated to provide good corrosion protection.</li><li>Pressure range The valve is designed for: Max. working pressure: 52 bar g (754 psig)</li><li>Max. opening pressure differential (MOPD)<ul style="list-style-type: none"><li>– ICM 20-32: 52 bar (750 psi)</li><li>– ICM 40: 40 bar (580 psi)</li><li>– ICM 50: 30 bar (435 psi)</li><li>– ICM 65: 20 bar (290 psi)</li><li>– ICM 100: 20 bar (290 psi)</li><li>– ICM 125: 20 bar (290 psi)</li><li>– ICM 150: 20 bar (290 psi)</li></ul></li></ul>


# The ICM concept

The ICM concept is developed around a modular principle. This gives the possibility of combining function modules and top covers with special valve body size that is available in a variety of connection possibilities.

## The valve body



There are nine valve bodies available.

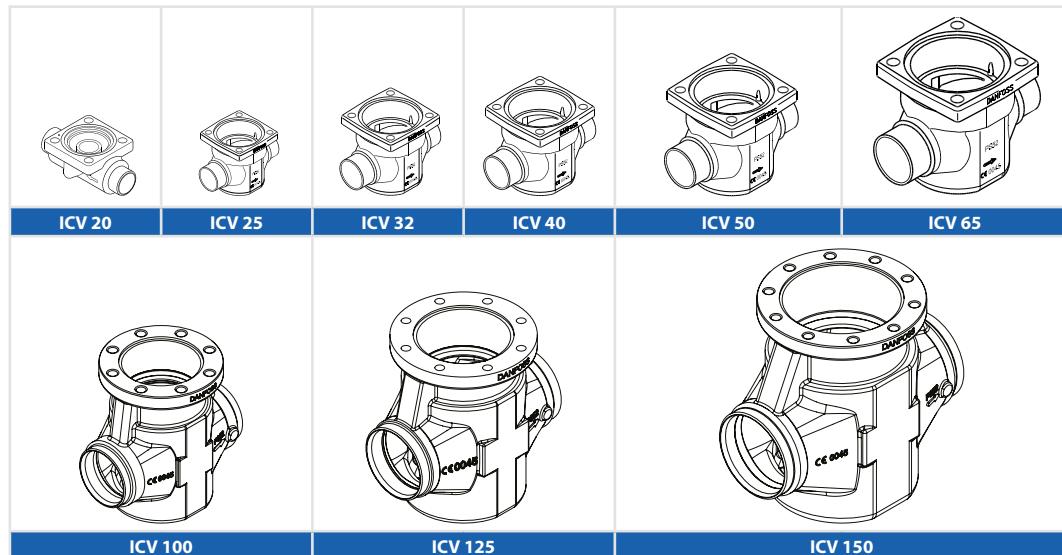


Valve bodies in the sizes ICV 20-ICV 65 are available with a range of undersizes through oversized connection sizes and types. ICV 100-ICV 150 are available in butt-weld DIN and butt-weld ANSI nominal sizes.

D	A	J	SOC	SD	SA	FPT
Butt-weld DIN	Butt-weld ANSI	Butt-weld JIS	Socket weld ANSI	Solder DIN	Solder ANSI	Female Pipe Thread

## The function module / top cover



Each body may be fitted with multiple function module / top cover to give different capacities.

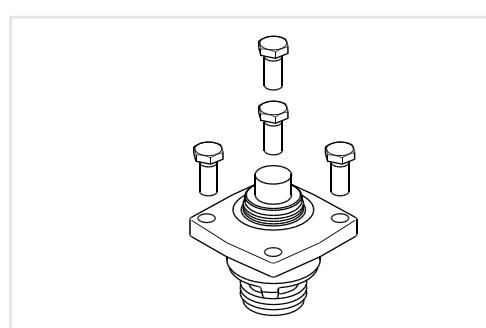

## The actuator



A magnetic coupled actuator is easily installed. Three actuators cover the entire ICM program


Type	Valve body size	$k_v$ ( $m^3/h$ )	$C_v$ (USgal/min)
ICM20A-33		0.2	0.23
ICM 20-A		0.6	0.7
ICM 20-B66	20	1.6	1.9
ICM 20-B		2.4	2.8
ICM 20-C		4.6	5.3
ICM 25-A	25	6	7.0
ICM 25-B		12	13.9
ICM 32-A	32	9	10.4
ICM 32-B		17	20
ICM 40-A	40	15	17
ICM 40-B		26	30
ICM 50-A	50	23	27
ICM 50-B		40	46
ICM 65-A	65	35	41
ICM 65-B		70	81
ICM 100-B	100	142	167
ICM 125-B	125	223	260
ICM 150-B	150	370	430



# Ordering the ICM valve


For correct selection of the ICM motor valve please use the Danfoss calculation Software. The software is free of charge.

Type	ICM 20-A	ICM 20-B	ICM 20-C	ICM 25-A	ICM 25-B	ICM 32-A	ICM 32-B
<b>For ICAD 600 actuator (not included)</b>							
Connection	Code no.						
Butt-weld DIN	DN 20	027H1030	027H1031	027H1032			
	DN 25	027H1020	027H1021	027H1022	027H2000	027H2001	
	DN 32					027H3000	027H3001
	DN 40				027H2016	027H3012	
Solder DIN & ANSI	22 mm	027H1045	027H1046	027H1047	027H2006	027H2007	
	28 mm				027H2008	027H2009	
	35 mm				027H2014		027H3006
	7/8"SA	027H1050	027H1051	027H1052	027H2010	027H2011	027H3007
	1 1/8"SA				027H2012	027H2013	
	1 3/8"SA					027H3006	027H3007
	1 5/8"SA					027H3008	027H3009




ICM 20


Type	ICM 40-A	ICM 40-B	ICM 50-A	ICM 50-B	ICM 65-B	ICM 100-B	ICM 125-B	ICM 150-B
<b>For ICAD 900 actuator (not included) (ICAD 1200 optional possible)</b>								
Connection	Code no.	Code no.	Code no.	Code no.	Code no.	Code no.	Code no.	Code no.
Butt-weld DIN	DN 40	027H4000	027H4001					
	DN 50	027H4010		027H5000	027H5001			
	DN 65			027H5008		027H6001		
Solder DIN & ANSI	42 mm	027H4008	027H4009					
	54 mm			027H5006	027H5007			
	76 mm					027H6009		
	1 5/8"SA	027H4006	027H4007					
	2 1/8"SA			027H5006	027H5007			
	2 5/8"SA					027H6007		
	100 D (4 in.)					027H7130		
Butt-weld D = DIN A = ANSI	100 A (4 in.)					027H7131		
	125 D (5 in.)						027H7150	
	125 A (5 in.)						027H7151	
	150 D (6 in.)							027H7170
	150 A (6 in.)							027H7171



ICM 25-65

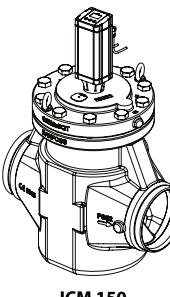

ICM 150

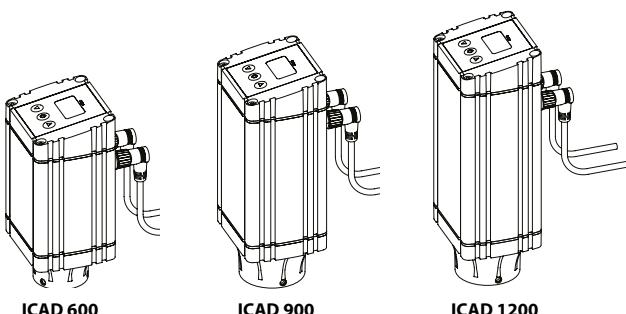

ICAD 600

ICAD 900

ICAD 1200

Actuator type	Supply voltage	Load	Analog Input	Digital Input	Output	Code no.
ICAD 600 with cables		1.2 A				027H9065
ICAD 600 without cables						027H9100
ICAD 900 with cables	24 V d.c.	2.0 A	0/4-20 mA 0/2-10 V	ON/OFF Volt free contact	0/4-20 mA	027H9066
ICAD 900 without cables						027H9101
ICAD 1200 with cable		3.0 A				027H9067
ICAD 1200 without cable						027H9102



Service Tool	Functions	Code no.
for ICM 20-32	Featuring a magnetic coupling for manual operation of the ICM and a threaded end for dismantling of the ICS function module and other useful functions.	027H0180
for ICM 40-150		027H0181

Can be ordered as parts programme (separate ordering of valve body, function / top cover and actuator).


## Notes



## ICS – Flexline™ Servo valves

Danfoss' extensive experience has been used to create a new valve concept which sets new and improved standards with respect to the demands required from control and injection valves. ICS valves are manufactured with a series of unique features.

### Features

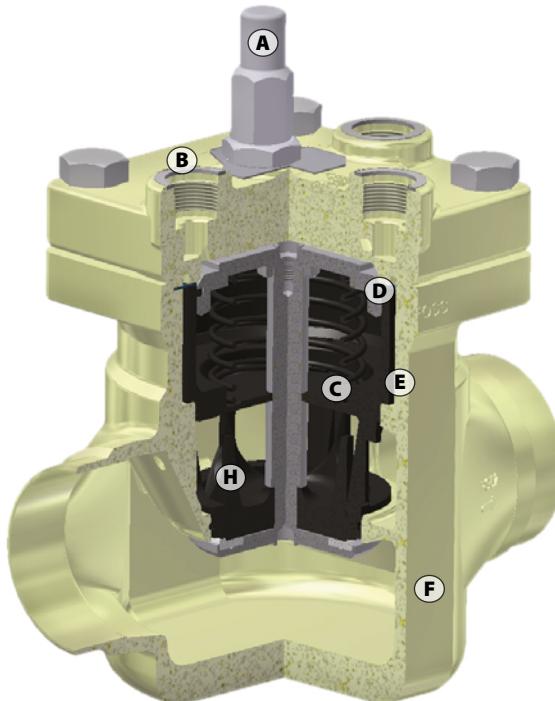

- Ⓐ Manual opening stem
- Ⓑ Top cover for 1-3 pilots
- Ⓒ Function module
- Ⓓ Steel piston ring
- Ⓔ Surface treated insert
- Ⓕ Low temperature steel housing, approved for 52 bar
- Ⓖ Direct weld connections
- Ⓗ Optimized regulating cone



The Flexline™ platform is synonymous of flexibility within industrial refrigeration components.

Based on a modular design concept each product features a variety of benefits, including flexible selection, easy installation and maintenance.

The products in the Flexline™ series are: ICV control valves, ICF valve stations and SVL line components.

Advantages and features	Facts
<ul style="list-style-type: none"><li>• Designed for industrial refrigeration applications for a maximum working pressure of 52 bar/754 psig.</li><li>• Modular Concept<ul style="list-style-type: none"><li>• Each valve body is available with several different connection types and sizes</li><li>• Valve overhaul is performed by replacing the function module</li><li>• Possible to convert ICS servo to ICM motor valve</li></ul></li><li>• Low weight and compact design.</li><li>• Low temperature steel body</li><li>• Direct coupled connections Connection types include butt weld, socket weld, solder and threaded connections.</li><li>• V-port regulating cone ensures optimum regulating accuracy particularly at part load.</li><li>• Manual operating spindle.</li><li>• The ICS valve is a multifunction valve where 1 or up to 3 pilot valves can be mounted into the pilot ports.</li></ul>	<ul style="list-style-type: none"><li>• Refrigerants: Applicable to all common refrigerants including R717 and R744 (CO<sub>2</sub>) and non- corrosive gases/liquids. Use with flammable hydrocarbons cannot be recommended; please contact Danfoss.</li><li>• Temperature range –60/+120 °C (–76/+248°F).</li><li>• Surface protection The external surface is zinc-chromated to provide good corrosion protection.</li><li>• Pressure range The valve is designed for: Max. working pressure: 52 bar g (754 psig)</li></ul>

# The ICS concept

The ICS concept is developed around a modular principle. This gives the possibility of combining function modules and top covers with valve bodies, which are available in many different sizes and with a variety of connection possibilities.

## The valve body



There are eight valve bodies available.



Valve bodies in the sizes ICV 20-ICV 65 are available with a range of undersizes through oversized connection sizes and types.


ICV 100-ICV 150 are available in butt-weld DIN and butt-weld ANSI nominal sizes.

D	A	J	SOC	SD	SA	FPT
Butt-weld DIN	Butt-weld ANSI	Butt-weld JIS	Socket weld ANSI	Solder DIN	Solder ANSI	Female Pipe Thread

## The top cover




Each valve body may be fitted with a 1 pilot or 3 pilot top cover (except ICS 100-150 – only available as 3 pilots version).

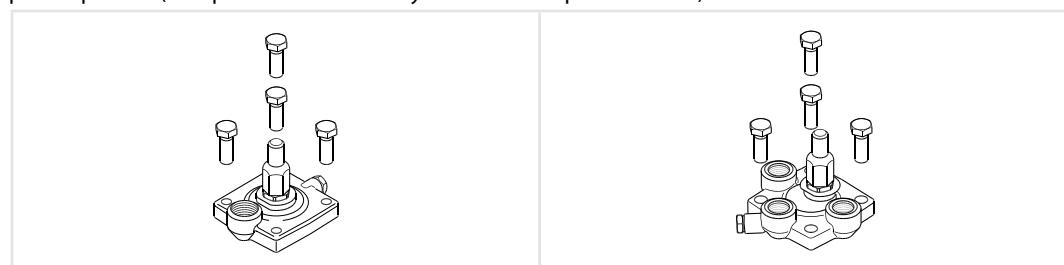

## The function module




In ICS, multiple inserts (function modules) are available to give different capacities.

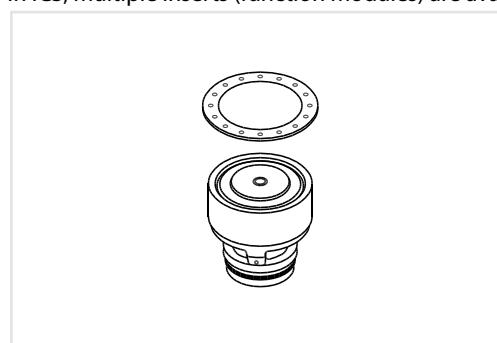


Type	Valve body size	$k_v$ ( $m^3/h$ )
ICS 25-5		1.7
ICS 25-10		3.5
ICS 25-15	25	6.0
ICS 25-20		8
ICS 25-25		11.5
ICS 32	32	17
ICS 40	40	27
ICS 50	50	44
ICS 65	65	70
ICS 80	80	85
ICS 100	100	142
ICS 125	125	207
ICS 150	150	354

# Ordering the ICS valve

For correct selection of the ICS motor valve please use the Danfoss calculation Software. The software is free of charge.

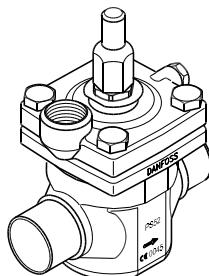

1 pilot

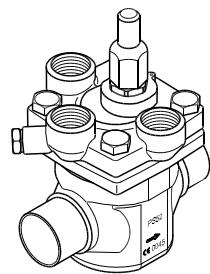

3 pilots

		Available connections							
		20 D (3/4 in.)	25 D (1 in.)	32 D (1 1/4 in.)	40 D (1 1/2 in.)	35 SD (1 1/8 in. SA)	28 SA (1 1/8 in.)	22 SA (7/8 in.)	28 SD (1 1/8 in.)
<b>ICS 25-5</b>	1 Pilot	027H2028	027H2020				027H2026	027H2025	027H2024
	3 Pilots*	027H2078	027H2070				027H2076	027H2075	027H2074
<b>ICS 25-10</b>	1 Pilot	027H2038	027H2030				027H2036	027H2035	027H2034
	3 Pilots*	027H2088	027H2080				027H2086	027H2085	027H2084
<b>ICS 25-15</b>	1 Pilot	027H2048	027H2040				027H2046	027H2045	027H2044
	3 Pilots*	027H2098	027H2090				027H2096	027H2095	027H2094
<b>ICS 25-20</b>	1 Pilot	027H2058	027H2050				027H2056	027H2055	027H2054
	3 Pilots*	027H2108	027H2100				027H2106	027H2105	027H2104
<b>ICS 25-25</b>	1 Pilot	027H2068	027H2060				027H2066	027H2065	027H2064
	3 Pilots*	027H2118	027H2110				027H2116	027H2115	027H2114

		22 SD (7/8 in.)	20 A (3/4 in.)	25 A (1 in.)	32 A (1 1/4 in.)	20 SOC (3/4 in.)	25 SOC (1 in.)	20 FPT (3/4 in.)	25 FPT (1 in.)
<b>ICS 25-5</b>	1 Pilot	027H2023	027H2029	027H2021		027H2140			
	3 Pilots*	027H2073	027H2079	027H2071		027H2145			
<b>ICS 25-10</b>	1 Pilot	027H2033	027H2039	027H2031		027H2141			
	3 Pilots*	027H2083	027H2089	027H2081		027H2146			
<b>ICS 25-15</b>	1 Pilot	027H2043	027H2049	027H2041		027H2142			
	3 Pilots*	027H2093	027H2099	027H2091		027H2147			
<b>ICS 25-20</b>	1 Pilot	027H2053	027H2059	027H2051		027H2143			
	3 Pilots*	027H2103	027H2109	027H2101		027H2148			
<b>ICS 25-25</b>	1 Pilot	027H2063		027H2061			027H2062		
	3 Pilots*	027H2113		027H2111			027H2112		

		Available connections							
		32 D (1 1/4 in.)	40 D (1 1/2 in.)	42 SA (1 5/8 in.)	42 SD (1 1/8 in. SA)	35 SD (1 1/8 in. SA)	32 A (1 1/4 in.)	32 SOC (1 1/4 in.)	40 A (1 1/2 in.)
<b>ICS 32</b>	1 Pilot	027H3020				027H3023	027H3021	027H3022	
	3 Pilots*	027H3030				027H3033	027H3031	027H3032	

		Available connections						
		40 D (1 1/2 in.)	50 D (2 in.)	42 SA (1 5/8 in.)	42 SD (1 1/8 in. SA)	40 A (1 1/2 in.)	40 SOC (1 1/2 in.)	50 A (2 in.)
<b>ICS 40</b>	1 Pilot	027H4020		027H4024	027H4023	027H4021	027H4022	
	3 Pilots*	027H4030		027H4034	027H4033	027H4031	027H4032	

		Available connections					
		50 D (2 in.)	65 D (2 1/2 in.)	54 SD (2 1/8 in. SA)	65 A (2 1/2 in.)	50 A (2 in.)	50 SOC (2 in.)
<b>ICS 50</b>	1 Pilot	027H5020		027H5023		027H5021	027H5022
	3 Pilots*	027H5030		027H5033		027H5031	027H5032

		Available connections							
		65 D (2 1/2 in.)	65 A (2 1/2 in.)	65 SOC (2 1/2 in.)	80 D (3 in.)	80 A (3 in.)	67 SA (2 5/8 in.)	76 SD (3 in.)	65 J (2 1/2 in.)
<b>ICS 65</b>	1 Pilot	027H6020	027H6021	027H6023			027H6025	027H6024	
	3 Pilots*	027H6030	027H6031	027H6033			027H6035	027H6034	
<b>ICS 80</b>	1 Pilot*				027H8020	027H8021			
	3 Pilots*				027H8030	027H8031			

		Available connections					
		100 D (4 in.)	100 A (4 in.)	125 D (5 in.)	125 A (5 in.)	150 D (6 in.)	150 A (6 in.)
<b>ICS 100</b>	3 Pilots*	027H7120	027H7121				
	3 Pilots*						
<b>ICS 125</b>	3 Pilots*			027H7140	027H7141		
	3 Pilots*					027H7160	027H7161

Can be ordered as parts programme (separate ordering of valve body, top cover and function module).


\* Including one blanking plug

# ICS application examples

There are several combination possibilities; here you will see an overview of the most important ICS application possibilities.


## Example no. 1-1

Constant pressure regulation.  
-0.66 to 7 bar g  
(19.5 in. Hg to 102 psig).




## Products

1 × ICS 1 Pilot  
1 × CVP (LP)




## Example no. 1-2

Differential pressure regulation.  
0 to 7 bar g (0 to 102 psig).




## Products

1 × ICS 1 Pilot  
1 × CVPP (LP)




## Example no. 1-5

On/off regulation (solenoid valve).




## Products

1 × ICS 1 Pilot  
1 × EVM  
1 × coil




## Example no. 1-11

Electronically controlled media temperature regulation.  
-1 to 8 bar g  
(0 in. Hg to 116 psig).




## Products

1 × ICS 1 Pilot  
1 × CVQ




## Example no. 3-1

Constant pressure regulation combined with electrical shut off.  
-0.66 to 7 bar g  
(19.5 in. Hg to 102 psig).





## Products

1 × ICS 3 Pilots  
1 × blanking plug  
1 × CVP (LP)  
1 × EVM  
1 × coil



The ICS valve will be fully open if the pilot valve in P is fully open, irrespective of the degree of opening of pilot valves SI and SII. The ICS valve will be fully closed if the pilot valve in P is fully closed and at least one of the valves in SI or SII is fully closed at the same time. The relation between the pilot valves in ports SI, SII and P is shown in the table below.

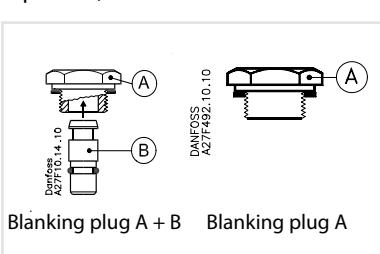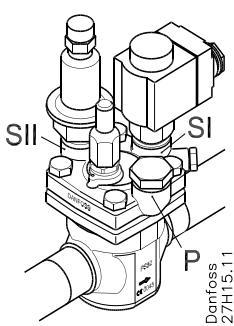


Pilot valve port			ICS valve
SI	SII	P	
Open	Open	Closed	Open
Open	Open	Open	Open
Open	Closed	Closed	Closed
Open	Closed	Open	Open
Closed	Open	Closed	Closed
Closed	Open	Open	Open
Closed	Closed	Closed	Closed
Closed	Closed	Open	Open

## ICS application examples (continued)


### Example no. 3-2

Constant pressure regulation combined with electrical wide open.  
-0.66 to 7 bar g  
(19.5 in. Hg to 102 psig).




### Products

- 1 x ICS 3 Pilots
- 1 x blanking plug
- 1 x CVP (LP)
- 1 x EVM




### Example no. 3-4

Constant pressure regulation with change-over between two preset evaporating pressures.  
-0.66 to 7 bar g  
(19.5 in. Hg to 102 psig).




### Products

- 1 x ICS 3 Pilots
- 2 x CVP (LP)
- 1 x EVM
- 1 x coil




### Example no. 3-5

External control pressure with electrical shut off combined with constant pressure regulation.  
-0.66 to 7 bar g  
(19.5 in. Hg to 102 psig).




### Products

- 1 x ICS 3 Pilots
- 1 x nipple for external control pressure
- 1 x CVP (LP)
- 1 x EVM
- 1 x coil




### Example no. 3-18

Constant pressure regulation with change-over between two preset evaporating pressures.  
-0.66 to 28 bar g  
(19.5 in. Hg to 406 psig).




### Products

- 1 x ICS 3 Pilots
- 2 x CVP (HP)
- 1 x EVM
- 1 x coil




### Example no. 3-21

Differential pressure regulation combined with electrical wide open and shut off.  
0 to 22 bar g  
(0 to 319 psig).




### Products

- 1 x ICS 3 Pilots
- 1 x CVPP (HP)
- 2 x EVM
- 2 x coils




### Example no. 3-25

Crankcase pressure regulation (max. suction pressure regulation) at low pressure drops across the valve.  
-0.45 to 7 bar g  
(13.3 in. Hg to 102 psig).




### Products

- 1 x ICS 3 Pilots
- 1 x blanking plug
- 1 x nipple for external control pressure
- 1 x CVC




### Example no. 3-31

Electronically controlled media temperature regulation combined with electrical shut off and changeover to constant pressure regulation.  
-1 to 8 bar g  
(0 in. Hg to 116 psig).



### Products

- 1 x ICS 3 Pilots
- 1 x CVQ
- 1 x CVP (LP)
- 1 x EVM
- 1 x coil



## Notes



## Pilot valves for servo operated main valves

Each pilot valve is designed to give the optimum control accuracy within the specific function range of the valve.

Several pilot valves can be mounted in series and/or in parallel on a ICS or PM main valve to give a very large number of functions.

Mounted in a CVH housing, the pilot valves can be used in external lines, either as independently operating valves or as external control valves for the main valve.



### Advantages and features

The range of pilot valves consists of:

- Constant-pressure pilot valve, type CVP (LP) and CVP (HP)
- Differential-pressure pilot valve, type CVPP (LP) and CVPP (HP)
- High pressure pilot valve, type CVP (XP) ideal for CO<sub>2</sub> hot gas defrosting
- Pressure-operated pilot valve with reference pressure connection, type CVC
- Electronically operated constant-pressure pilot valve, type CVQ (pressure-dependent)
- Solenoid pilot valve, type EVM (NC)
- Solenoid pilot valve, type EVM (NO)
- Housing, type CVH for pilot valves, for mounting in external pilot lines


- Applicable to all common non flammable refrigerants including R 717 and non corrosive gases/liquids dependent on sealing material compatibility.
- The pilot valves can be screwed direct into the main valve, thus avoiding the necessity of welding, soldering and separate pilot lines.
- The pilot valves can be mounted direct in a ICS or PM main valve or be connected via an external pilot line and a CVH housing.
- All pilot valves can be used on all sizes of main valves.
- Extremely accurate pressure and temperature control.
- Several pilot valves can be connected in series or in parallel to provide many functions in the same ICS or PM main valve.

# Technical data and code numbers

## Technical data

	Valve type	MWP	k <sub>v</sub> -value	Temperature range	Pressure range	Code no.
<b>Low-pressure version</b>						
	CVP (LP)	17 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	0 bar g to 7 bar g	027B1100
	CVP (LP)	17 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	-0.66 bar g to 2 bar g	027B1101
	CVPP (LP)	17 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	Δp = 0 to 7 bar g	027B1102
	CVC (LP)	28/17 bar g	0.20 m <sup>3</sup> /h	-50 to 120°C	-0.45 bar g to 7 bar g	027B1070
<b>High-pressure version</b>						
	CVP (HP)	28 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	4 bar g to 22 bar g	027B1160
	CVP (HP)	28 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	4 bar g to 28 bar g	027B1161
	CVP (HP)	28 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	-0.66 bar g to 7 bar g	027B1164
	CVPP (HP)	28 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	Δp = 0 to 7 bar g	027B1162
	CVPP (HP)	40 bar g	0.40 m <sup>3</sup> /h	-50 to 120°C	Δp = 4 to 22 bar g	027B1268
	CVP (XP)	52 bar g	0.45 m <sup>3</sup> /h	-50 to 120°C	25 bar g to 52 bar g	027B0080
	CVC (XP)	52/28 bar g	0.20 m <sup>3</sup> /h	-50 to 120°C	4 bar g to 28 bar g	027B0087
<b>Normally closed</b>						
	EVM (NC)	45.2 bar g	0.37 m <sup>3</sup> /h	MOPD: 21 bar g		027B1120
	EVM (NC)	65 bar g	0.37 m <sup>3</sup> /h	MOPD: 21 bar g		032F8011
<b>Normally open</b>						
	EVM (NO)	45.2 bar g	0.12 m <sup>3</sup> /h	MCPD: 19 bar g		027B1130
	EVM (NO)	52 bar g	0.12 m <sup>3</sup> /h	MCPD: 19 bar g		027B1131

## CVQ electrical data


	CVQ	17 bar g	0.45 m <sup>3</sup> /h	-1 bar g to 5 bar g	027B1139
	CVQ	17 bar g	0.45 m <sup>3</sup> /h	0 bar g to 6 bar g	027B1140
	CVQ	17 bar g	0.45 m <sup>3</sup> /h	1.7 bar g to 8 bar g	027B1141
Supply voltage		24V a.c. ±10%			
Frequency		50 to 60 Hz			
Power consumption, operation start		50 VA 75 VA			
Enclosure		NEMA 3 / IP55			
Cable entry		Pg 13.5			
Ambient temperature, operation transport		-30 to 50°C (-22 to 122°F) -50 to 70°C (-58 to 158°F)			
		EMC-Directive 89/336/EEC, EMC-Directive 89/336/EN 50081-1 and EN 50082-1			

Pilot valves for servo operated main valves



## ICF – Flexline™ Valve stations

The ICF valve station is an innovative solution that provides the full functionality of a conventional valve station in a single compact unit. This solution not only provides a number of advantages in the design phase of a refrigeration plant but also in the installation, service and maintenance.

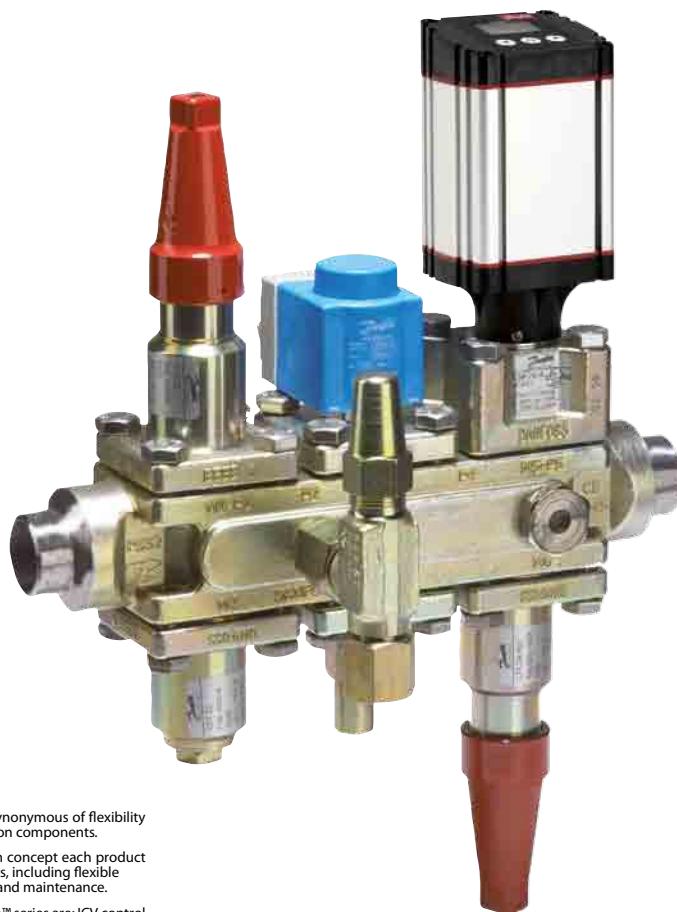

The Flexline™ platform is synonymous of flexibility within industrial refrigeration components.





Based on a modular design concept each product features a variety of benefits, including flexible selection, easy installation and maintenance.

The products in the Flexline™ series are: ICV control valves, ICF valve stations and SVL line components.

Advantages and features	
<ul style="list-style-type: none"><li>Applicable to all common non-flammable refrigerants including R744 and R717.</li><li>The main components of the ICF solution are:<ul style="list-style-type: none"><li>A housing</li><li>A maximum of four or six function modules</li></ul></li><li>Designed for low and high pressure refrigerants and can be used in liquid lines, compressor injection and hotgas lines</li><li>The ICF concept is designed to fulfil global refrigeration requirements. For specific approval information, please contact Danfoss</li><li>One code number equals one application solution</li><li>Modular concept: Each housing is available with several different connection types and sizes</li><li>The ICF is leak tested at high pressure and its functions are tested under factory controlled conditions</li><li>The ICF valve is a compact valve train ready for the jobsite. No need to disassembly prior to installation under normal welding procedures</li></ul>	<ul style="list-style-type: none"><li>Down time during service is reduced to a fraction compared to conventional valve trains. The unique design of the ICF ensures a quick pump down and faster access to valve modules.</li><li>Valve service is performed by replacing the function module</li><li>Standard side ports to fit service valves, pressure transmitters, sight glasses</li><li>Direct Weld Connections (no leaks through flanges)</li><li>Available with different connection types including ANSI and DIN, Socket weld</li><li>Low temperature steel housing</li><li>High capacities low pressure drop</li><li>Compact design</li><li>Low weight design</li></ul>

# Technical data and application examples

## Technical data
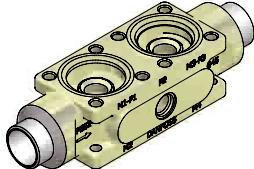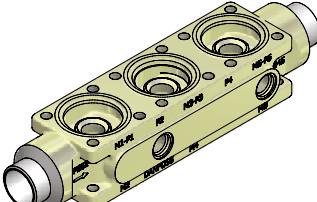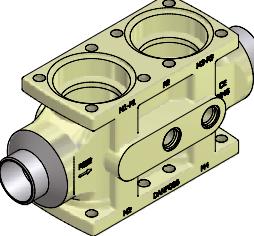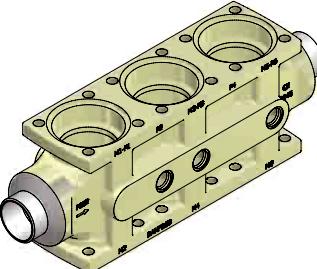
<b>Refrigerants</b>	Applicable to all common non-flammable refrigerants including R717, R744 (CO <sub>2</sub> ) and non-corrosive gases/liquids dependent on sealing material compatibility.
<b>Temperature range</b>	-60/+120°C (-76/+248°F).
<b>Pressure range</b>	The ICF is designed for max. working pressure: 52 bar g (754 psig)
<b>Modules</b>	4 or 6
<b>Connections</b>	Butt weld, DIN (EN 10220): 20D (3/4") to 40D (1½") Butt weld, ANSI (B 36.10) : 20A (3/4") to 40A (1½") Socket weld, ANSI (B 16.11): 20SOC (3/4") to 40SOC (1½")
<b>Housing ICF 20</b>	<p style="text-align: center;"><b>Small frame</b></p>   <p style="text-align: center;">ICF 20-4                                  ICF 20-6</p>
<b>Housing ICF 25-40</b>	<p style="text-align: center;"><b>Large frame</b></p>   <p style="text-align: center;">ICF (25-40)-4                                  ICF (25-40)-6</p>
<b>Side ports</b>	Number of side port are depending on model and connection type

## Accessories

- Stop valve (for sideport)
- Blind plug
- Connectors
- Sight glass
- Weld connector
- ICAD and ICAD accessories
- Coils

For a complete overview of available ICF configurations please visit [www.danfoss.com/icf](http://www.danfoss.com/icf)

# Description of the function modules for ICF 20

**ICF 20**

**ICFS 20**


*Stop valve module*

This module has the function of a stop valve, and has a red cap.

**ICFR 20A**

*Manual regulating valve module*

This module has the function of a hand regulating valve, and has a yellow cap.




ICFS 20 / ICFR 20A

**ICFC 20**

*Check valve module*

This module has the function of a check valve.



ICFC 20

**ICFF 20 / ICFF 20E**

*Filter module*


This module functions as a filter.

Filter size (ICFF 20):

ICF with DIN and ANSI connections: Pleated 150 $\mu$  (100 mesh) / 45 cm<sup>2</sup> (7.0 in<sup>2</sup>)

ICF with SOC connections (ICFF 20E):

Pleated 250 $\mu$  (72 mesh) / 160 cm<sup>2</sup> (24.8 in<sup>2</sup>)




ICFF 20 / ICFF 20E

**ICFN 20**

*Stop/check valve module*

This module has the function of a combined stop and check valve, and has a red cap.



ICFN 20

**ICFE 20**


*Solenoid valve module*

This module has the function of a normally closed solenoid valve for controlling the refrigerant flow.

**ICFA 20**

*Electronic expansion valve module*

This module has the function of an electronic pulse width modulating (PWM) expansion valve.




ICFE 20 / ICFA 20

**ICM 20-A, B or C**

*Motor valve module*

This module is a stepper motor actuator valve for on/off and modulating control of the refrigerant flow.




ICM 20-A, B or C

**ICFO 20**

*Manual opening module*

This module facilitates the manual opening of the solenoid valve (type ICFE).




ICFO 20

**ICFB 20**

*Blank top cover*

This provides a blanking cover for unused module ports.




ICFB 20

**ICFE 20H**

*Solenoid valve module with integrated manual opener*

This module has the function of a normally closed solenoid valve for controlling the refrigerant flow.




ICFE 20H

**ICFW 20**

*Welding module 20 DIN or 3/4"*

This module is used for drain connection during hot-gas defrosting - in case of high capacity.



ICFW 20



**Please note:**

At about 10% of maximum mass flow of ICFE 20H, the pressure differential correspond to about 0.07 Bar (1 psi). ICFE 20H will start to open at these conditions. At a pressure differential of minimum 0.2 Bar (2.9 psi) ICFE 20H will be 100 % open.


## Description of the function modules for ICF 25-40

**ICF 25-40**

**ICFS 25-40**

*Stop valve module*

This module has the function of a stop valve, and has a red cap.




ICFS 25-40

**ICFR 25-40, A or B**

*Manual regulating valve module*

This module has the function of a hand regulating valve, and has a yellow cap.



ICFR 25-40

**ICFC 25-40**

*Check valve module*

This module has the function of a check valve.



ICFC 25-40

**ICFF 25-40 / ICFF (25-40)E**


*Filter module*

This module functions as a filter.

Filter size:

ICF with DIN and ANSI (ICFF 25-40)  
connections: Pleated 150 $\mu$   
(100 mesh) / 160 cm<sup>2</sup> (24.8 in<sup>2</sup>)

ICF with SOC connections  
(ICF (25-40)E):  
Pleated 250 $\mu$  (72 mesh) /  
330 cm<sup>2</sup> (51.2 in<sup>2</sup>)




ICFF 25-40 / ICFF (25-40)E

**ICFN 25-40**

*Stop/check valve module*

This module has the function of a combined stop and check valve, and has a red cap.




ICFN 25-40

**ICFE 25-40**

*Solenoid valve module*

This module has the function of a normally closed solenoid valve for controlling the refrigerant flow.

It has a built-in manual opening function.




ICFE 25-40

**ICM 25-A or B**

*Motor valve module*

This module is a stepper motor actuator valve for on/off and modulating control of the refrigerant flow.

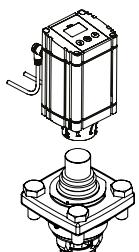

ICM 25-A or B

**Please note:**


At about 10% of maximum mass flow of ICFE 25-40, the pressure differential correspond to about 0.07 Bar (1 psi). ICFE 25-40 will start to open at these conditions.

At a pressure differential of minimum 0.2 Bar (2.9 psi) ICFE 25-40 will be 100 % open.

**ICFW 25-40**

*Welding module, 25 DIN or 25 (1") SOC*

This module is used for drain connection during hot-gas defrosting - in case of high capacity.




ICFW 25-40

**ICFB 25-40**

*Blank top cover*

This provides a blanking cover for unused module ports.



ICFB 25-40


## Application example A

A valve combination for a flooded evaporator operating on/off from a thermostat and with electric defrost is required. Manual override of the solenoid valve is requested. Common ICF configurations for this kind of application:

ICF20-6-1, ICF25-6-1A, ICF32-6-1B, ICF40-6-1B, ICF20-4-10/H, ICF25-4-10, ICF32-4-10, ICF40-4-10.

Depending on capacity and size **ICF 32-6-1A with 32mm butt weld DIN connection**, code number **027L4006** could be used.

### Example A

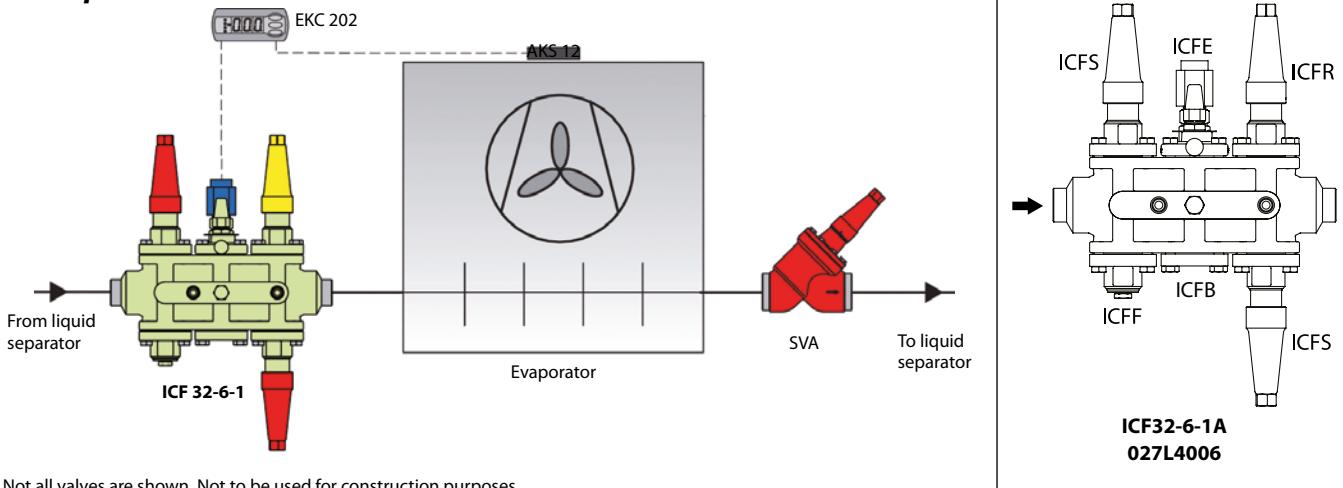

## Application example B

Evaporator with soft opening gas powered valve PMLX in the suction line and hot gas defrost featuring: **ICF pumped liquid** and **ICF Hot gas valve stations**. ICS+CVP as a defrost regulator (OFV optional depending on capacity).


ICF pumped liquid configurations vary according to capacity and size: ICF20-6-2, ICF20-6-3H, ICF25-6-3A, ICF32-6-3B, ICF40-6-3B.

Depending on capacity and size **ICF 20-6-2 with 25mm butt weld DIN connections**, code number **027L3011** could be used.

On the same evaporator ICF Hot gas Valve station with side port to power PMLX/GPLX. Depending on capacity: ICF20-4-9, ICF20-4-9H, ICF25-4-9, ICF32-4-9, ICF40-4-9.

Depending on capacity and size **ICF 20-4-9 with 32 mm DIN butt weld connections**, code number **027L3068** could be used.

### Example B

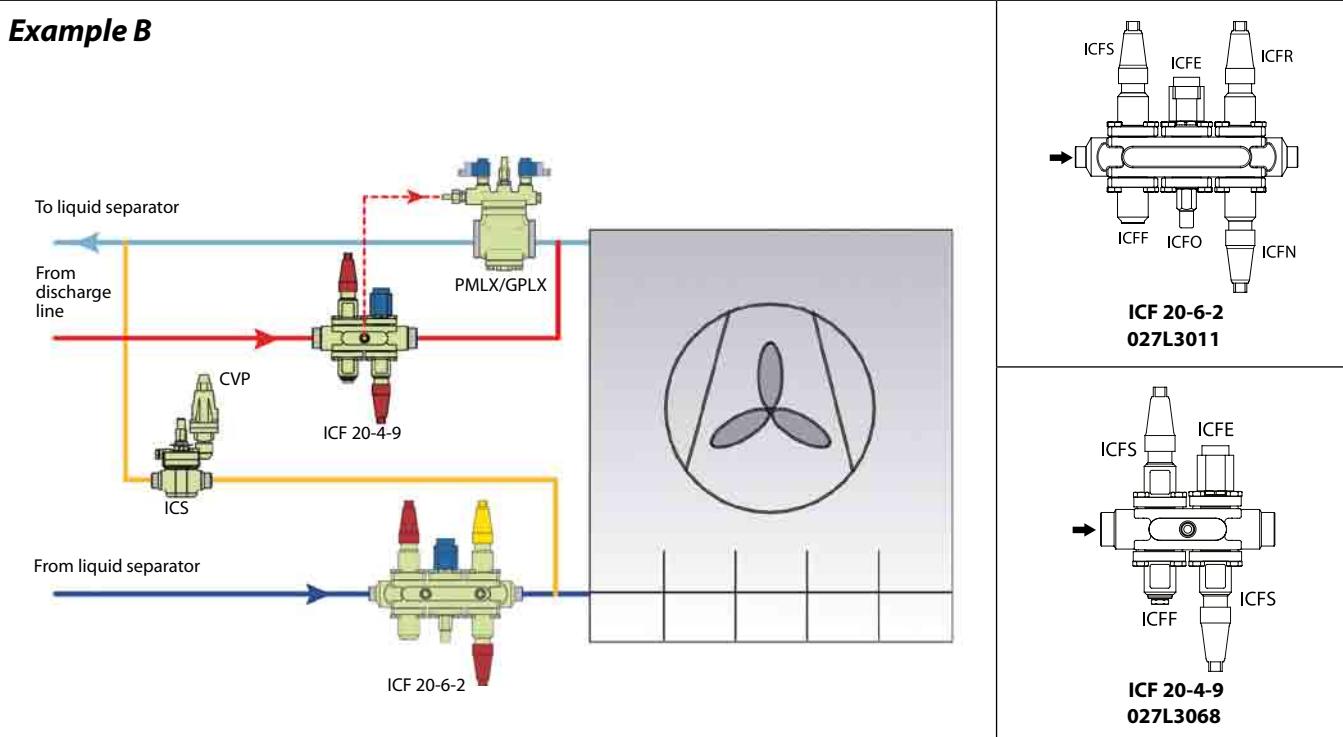


## Application example C

A valve combination for liquid injection to separator with electronic injection valve is required. It is requested to have a solenoid valve in front of the control valve.

Depending on capacity and size **ICF 32-6-5A with 32 mm socket weld connections**, code number **027L4044** could be used.

### Example C

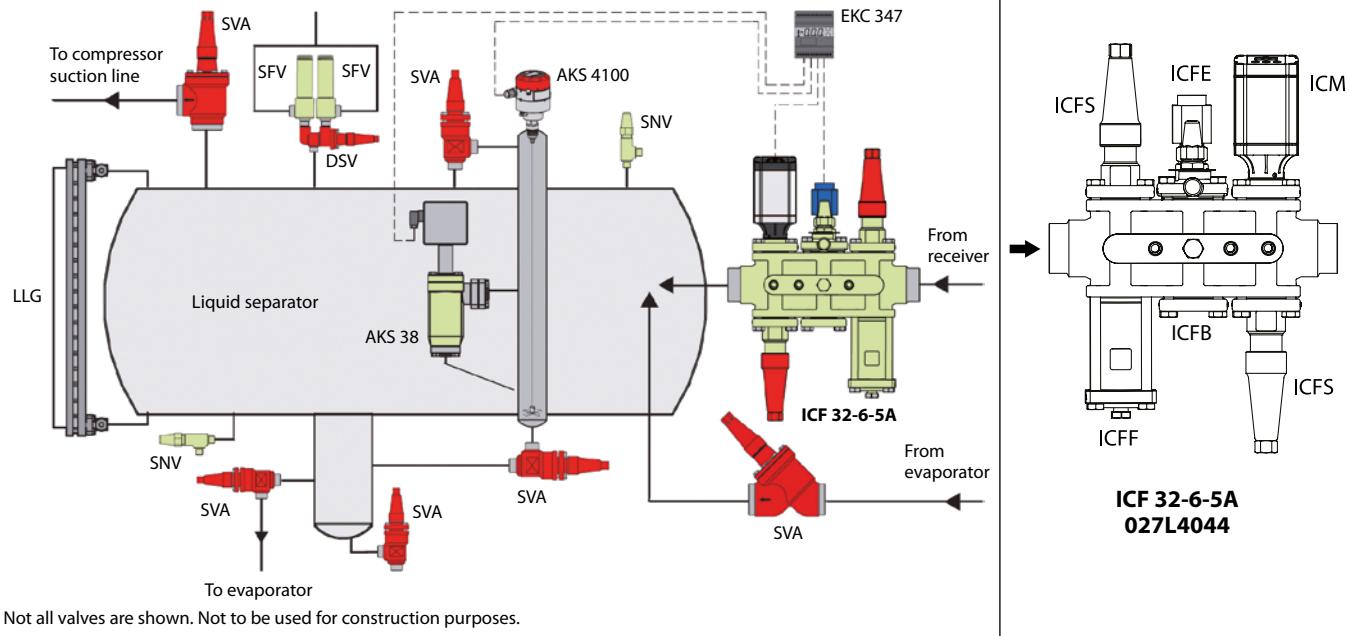


## Application example D

A valve combination for compressor liquid injection with electronic injection valve is required. It is required to have a solenoid valve in front of the control valve.

For this application **ICF 20-6-5** is recommended. Verify cone size (A33;A;B66;B) of motorized valve based on compressor side port inlet pressure, oil rejection capacity and liquid inlet pressure. Depending on capacity and size **ICF 20-6-5B with 25 DIN butt well connection**, code number **027L3042** could be used.



### Example D

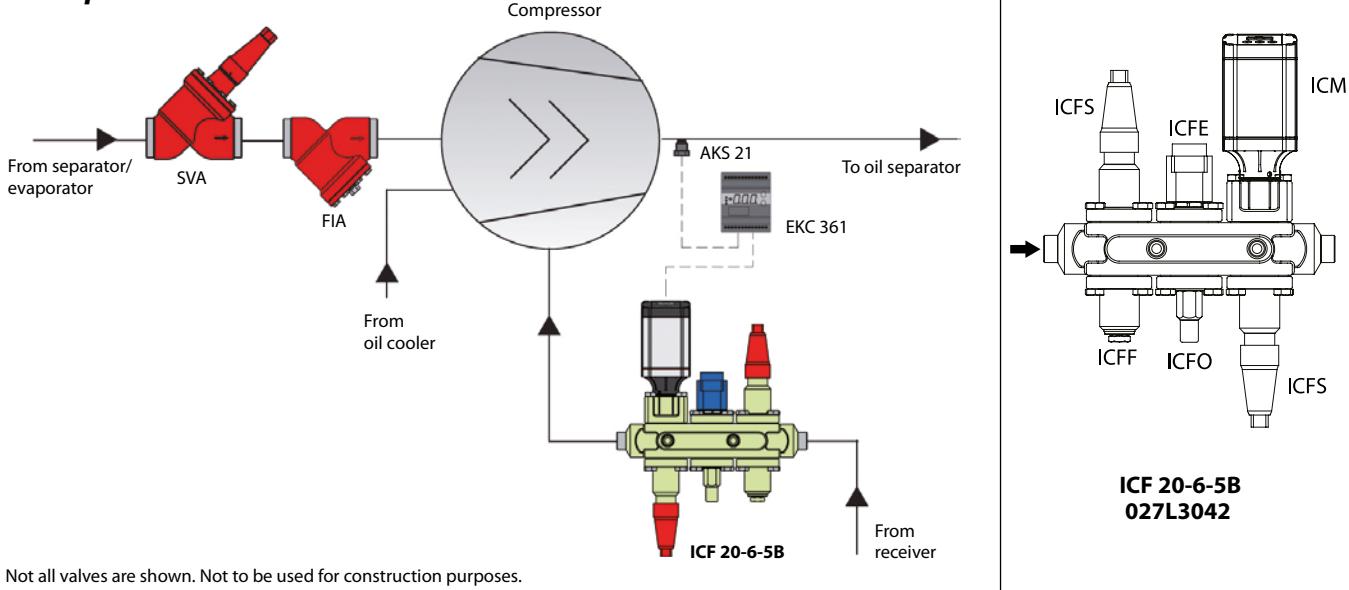

## Application example E


A valve combination for an electronically controlled DX evaporator without hotgas defrost is required.  
Depending on capacity and size **ICF 20-6-6 with 20mm DIN butt weld connections**, code number **027L3053** could be used.

### Example E

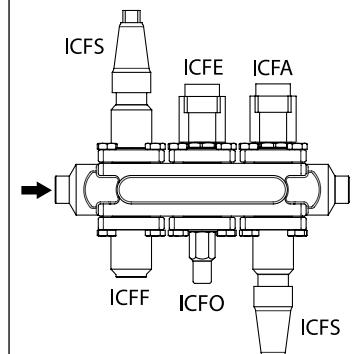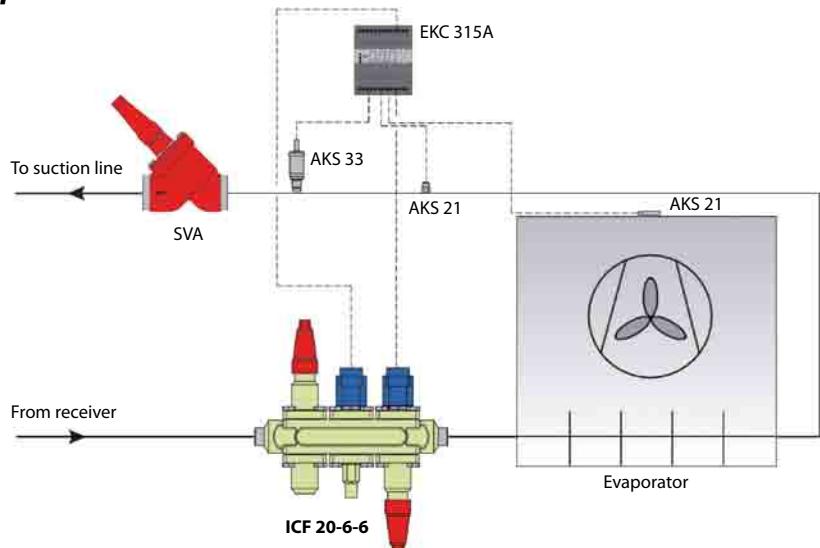

Not all valves are shown. Not to be used for construction purposes.

# Notes

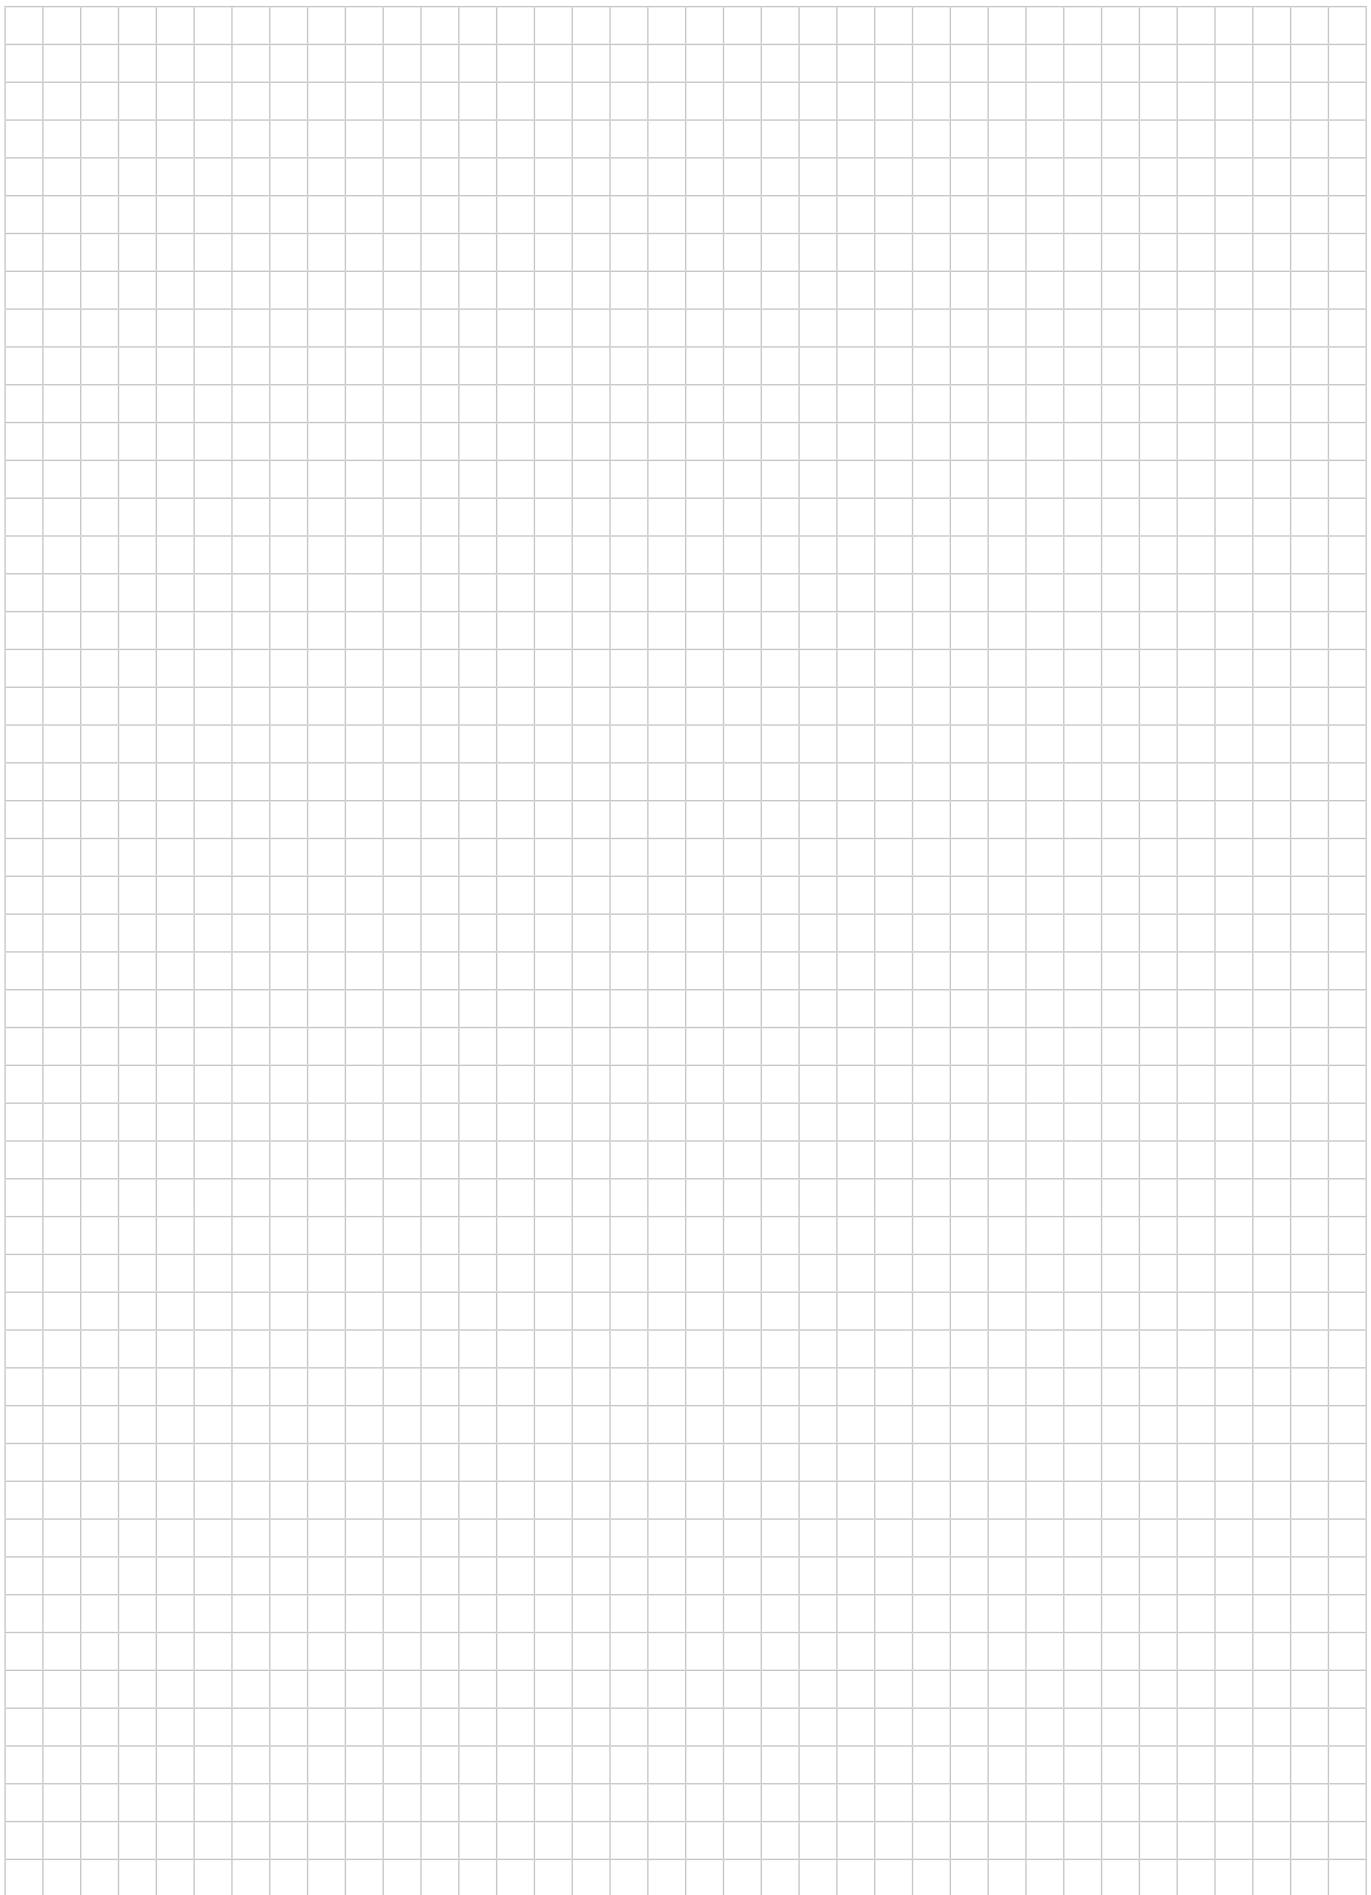



## AKS 4100/4100U – Liquid level sensors

The AKS 4100/4100U liquid level sensor is designed specifically to measure liquid levels in a wide range of refrigeration applications.

The liquid level sensor is based on a proven technology called Time Domain Reflectometry (TDR) or Guided Micro Wave.

AKS 4100/4100U liquid level sensor can be used to measure the liquid level of many different refrigerants in vessels, accumulators, receivers, standpipes, etc.



### Advantages and features

- Approved and qualified by Danfoss for refrigeration applications
- One product covering several probe lengths (cable version)
- A single product for all commonly used refrigerants (cable version)
- Cable version requires less top-end clearance for installation and service
- Proven operation with all refrigerants in combination with oil
- No need to clean cable version when fully covered by oil

- The cable version is very compact and easy to handle, ship, install and use with different lengths and refrigerants
- Changes of the liquid dielectric constant ( $\epsilon_r$ ) do not affect operation.
- 5000 mm (197 in.) probe length with cable version
- 2-wire loop powered; no separate transformer needed
- Multi language HMI.  
Level and setting readout in mm,cm,m( ft, in.)

## Technical data

Supply Voltage	14-30 V d.c. Min/Max. Value for an output of 22 mA at the terminal.			
Ambient temperature supply voltage limitations	-40°C/+80°C(-40°F / +176°F) : 16-30 V d.c. -20°C/+80°C(-4°F / +176°F) : 14-30 V d.c.			
Load	RL [Ω] ≤ ((Uext -14 V)/20 mA) – Default (Error output set to 3.6 mA) RL [Ω] ≤ ((Uext -14 V)/22 mA) – (Error output set to 22 mA)			
Cable gland	AKS 4100 PG 13, M20×1.5 ; (cable diameter: 6-8 mm (0.24-0.31in.) AKS 4100U ½ in. NPT			
Refrigerant temperature	-60°C/100°C (-76°F/212°F)			
Ambient temperature	-40°C / +80°C (-40°F / +176°F) For HMI : -20°C / +60°C (-4°F / +140°F)			
Process pressure	-1 barg / 100 barg (-14.5 psig / 1450 psig)			
Terminals (spring loaded)	0.5-1.5 mm <sup>2</sup> (~20-15 AWG)			
Enclosure:	IP66/67 (~NEMA type 4X)			
Mechanical connection	AKS 4100: Cable version/Coaxial version	G1 in. pipe thread. Aluminium gasket included		
AKS 4100U:		¾ in. NPT		
Refrigerants	The listed refrigerants are qualified and approved by Danfoss			
R717 / NH <sub>3</sub>	-40°C / +50°C (-40°F / +122°F)			
R744 / CO <sub>2</sub>	-50°C / +15°C (-58°F / +59°F)			
HCFC:	R22 -50°C / +48°C (-58°F / +118°F)			
HFC:	R404A -50°C / +15°C (-58°F / +59°F) R410A -50°C / +15°C (-58°F / +59°F) R134a -40°C / +50°C (-40°F / +122°F)			
The listed refrigerants may be used in the complete temperature range of AKS 4100/4100U, however, the accuracy may be affected if the above listed temperature range is exceeded.				
Other refrigerants within the groups of HCFC and HFC can be detected and measured if the following conditions are fulfilled:				
Reference conditions	Dielectric constant Cable version to be used in R717 / NH <sub>3</sub> , HCFC and HFC ε <sub>r</sub> , liquid > 5.6			
The coaxial version is mandatory for R744 / CO <sub>2</sub> ε <sub>r</sub> , liquid > 1.3 and marine applications.				
The coaxial version can also be used R717 / NH <sub>3</sub> , HCFC and HFC.				

# Ordering

## Cable version - AKS 4100/4100U



Description	Code number With HMI	Code number Without HMI*
<b>AKS 4100</b> with 5 m (197 in.) Ø2 mm (Ø0.08 in.) stainless cable and counterweight	084H4501	084H4500
<b>AKS 4100U</b> with 5 m (197 in.) Ø2 mm (Ø0.08 in.) stainless cable and counterweight	084H4521	084H4520

## Coaxial version - AKS 4100/4100U (available in predefined lengths, with or without HMI)



Description	Probe length		Code number With HMI	Code number Without HMI*
	mm	in.		
<b>AKS 4100</b> - Coaxial	500		084H4510	084H4503
<b>AKS 4100</b> - Coaxial	800		084H4511	084H4504
<b>AKS 4100</b> - Coaxial	1000		084H4512	084H4505
<b>AKS 4100</b> - Coaxial	1200		084H4513	084H4506
<b>AKS 4100</b> - Coaxial	1500		084H4514	084H4507
<b>AKS 4100</b> - Coaxial	1700		084H4515	084H4508
<b>AKS 4100</b> - Coaxial	2200		084H4516	084H4509
<b>AKS 4100U</b> - Coaxial		19.2	084H4530	084H4524
<b>AKS 4100U</b> - Coaxial		30	084H4531	084H4525
<b>AKS 4100U</b> - Coaxial		45	084H4532	084H4526
<b>AKS 4100U</b> - Coaxial		55	084H4533	084H4527
<b>AKS 4100U</b> - Coaxial		65	084H4534	084H4528
<b>AKS 4100U</b> - Coaxial		85	084H4535	084H4529

## Accessories



Description	Code number
<b>AKS 4100/4100U</b> HMI Service/Display unit with rear cover and mounting bracket	084H4540
<b>AKS 4100/4100U</b> HMI Display	084H4548




Description	Code number
<b>AKS 4100/4100U</b> Signal Converter <b>without</b> HMI, excluding cable gland	084H4541

\* When ordering without HMI please observe:  
Each AKS 4100/AKS 4100 must always be programmed via the HMI display unit.

The HMI display unit can be ordered separately and there are two possibilities:

- 084H4540 AKS 4100/4100U HMI display unit with rear cover and mounting bracket. The mounting bracket is very useful when the AKS 4100/4100U have to be programmed. The same AKS 4100/4100U HMI display unit can be used to programme more AKS 4100/4100U and both Cable and Coaxial versions.
- 084H4548 AKS 4100/4100U HMI display unit (usually spare part).

# Notes

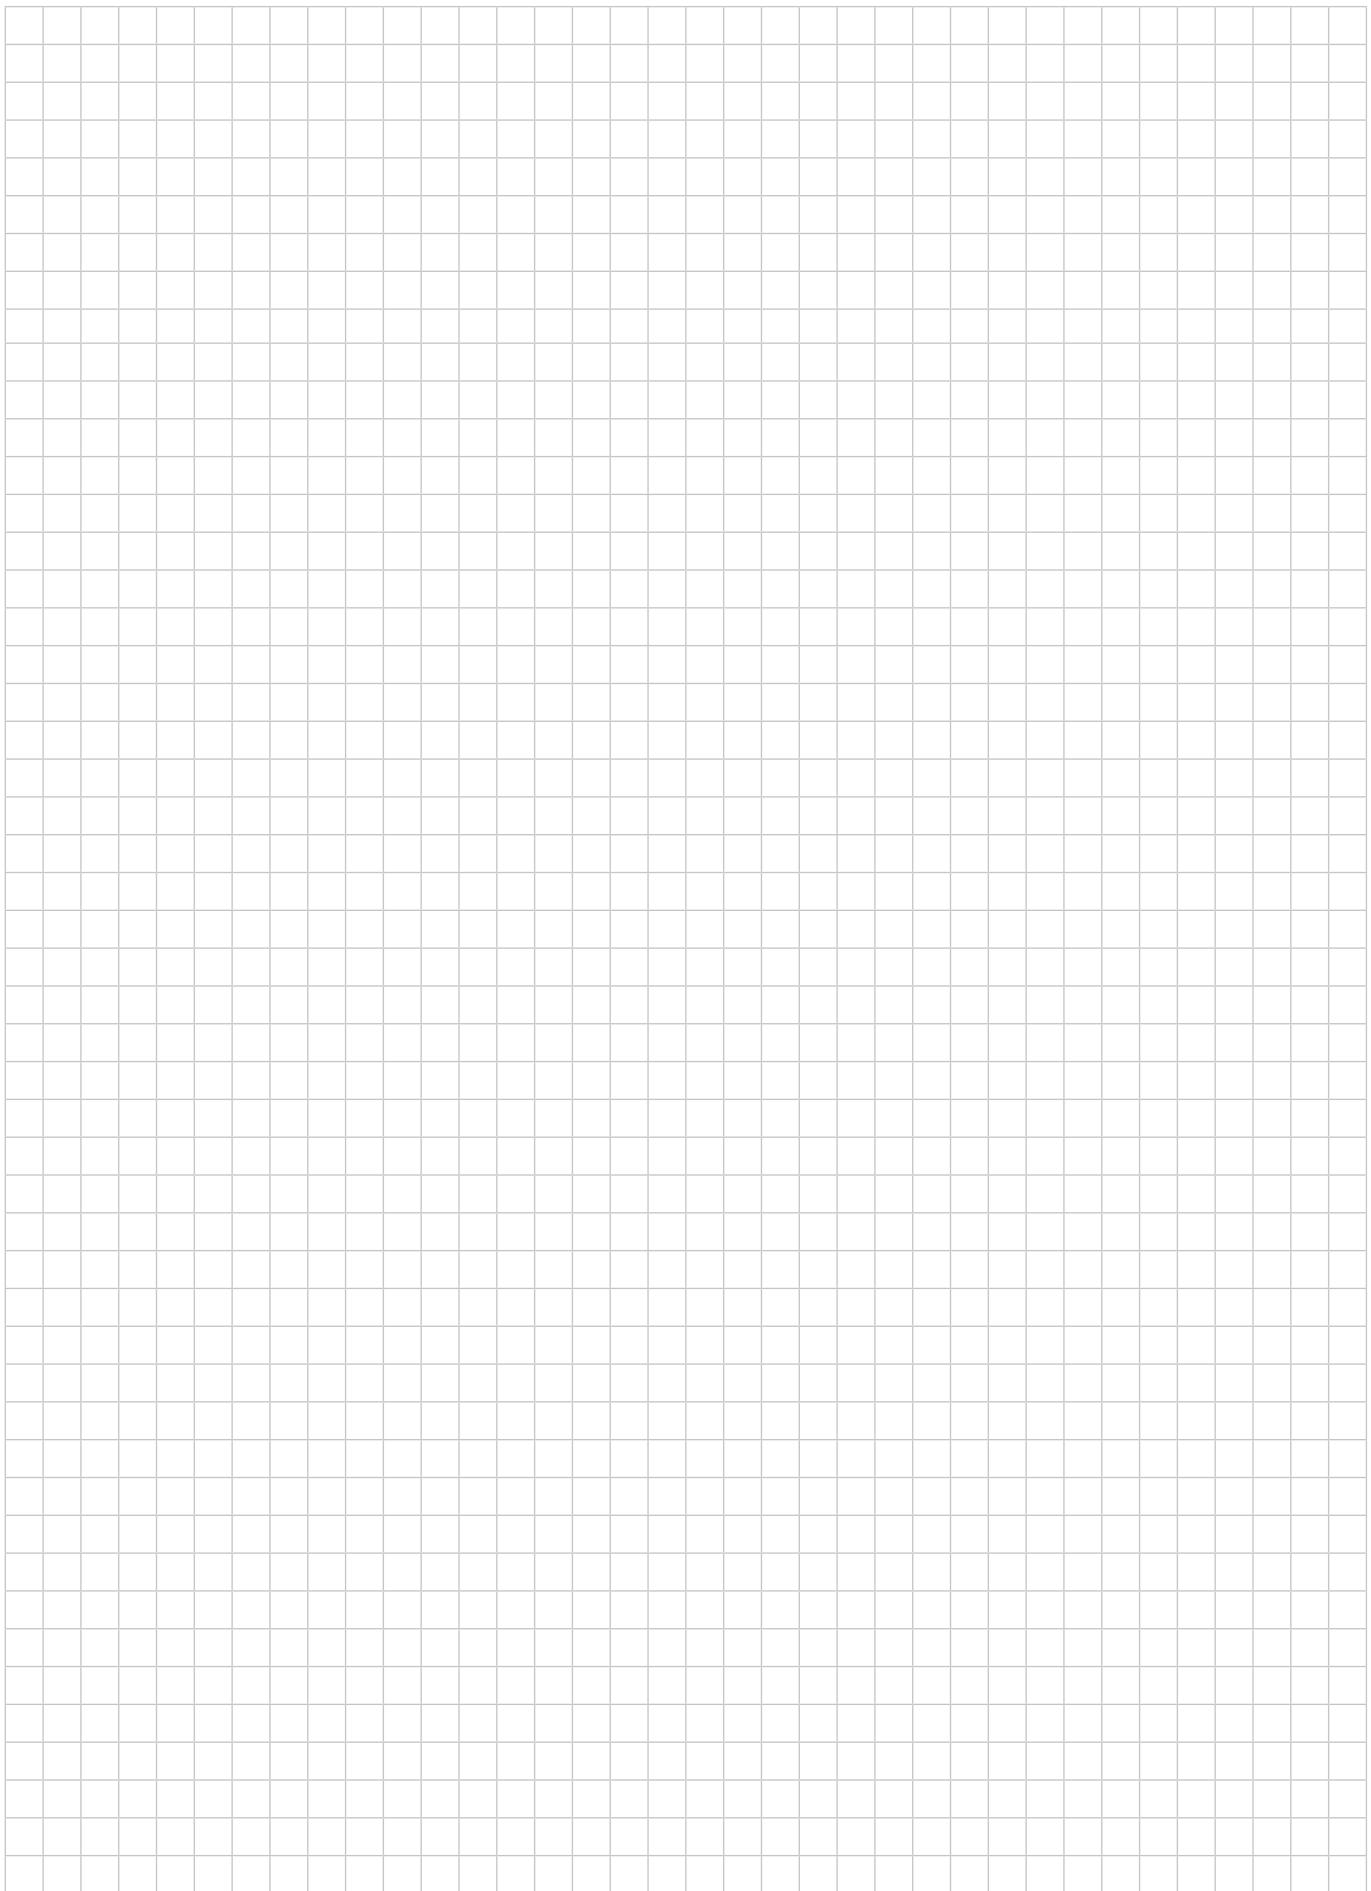A large grid of empty squares, intended for handwritten notes.




## WVFX, WVO and WVS – Pressure controlled water valves

Water regulating valves type WVFX, WVO and WVS are used to regulate the flow of water in refrigeration plant with water-cooled condensers.

The water valve modulates the water flow to maintain the condensing pressure at a constant level during operation. When the refrigeration plant is stopped, the cooling water flow is shut off automatically.

Valves guarantee constant proportional regulation of condensing pressure.

### Features

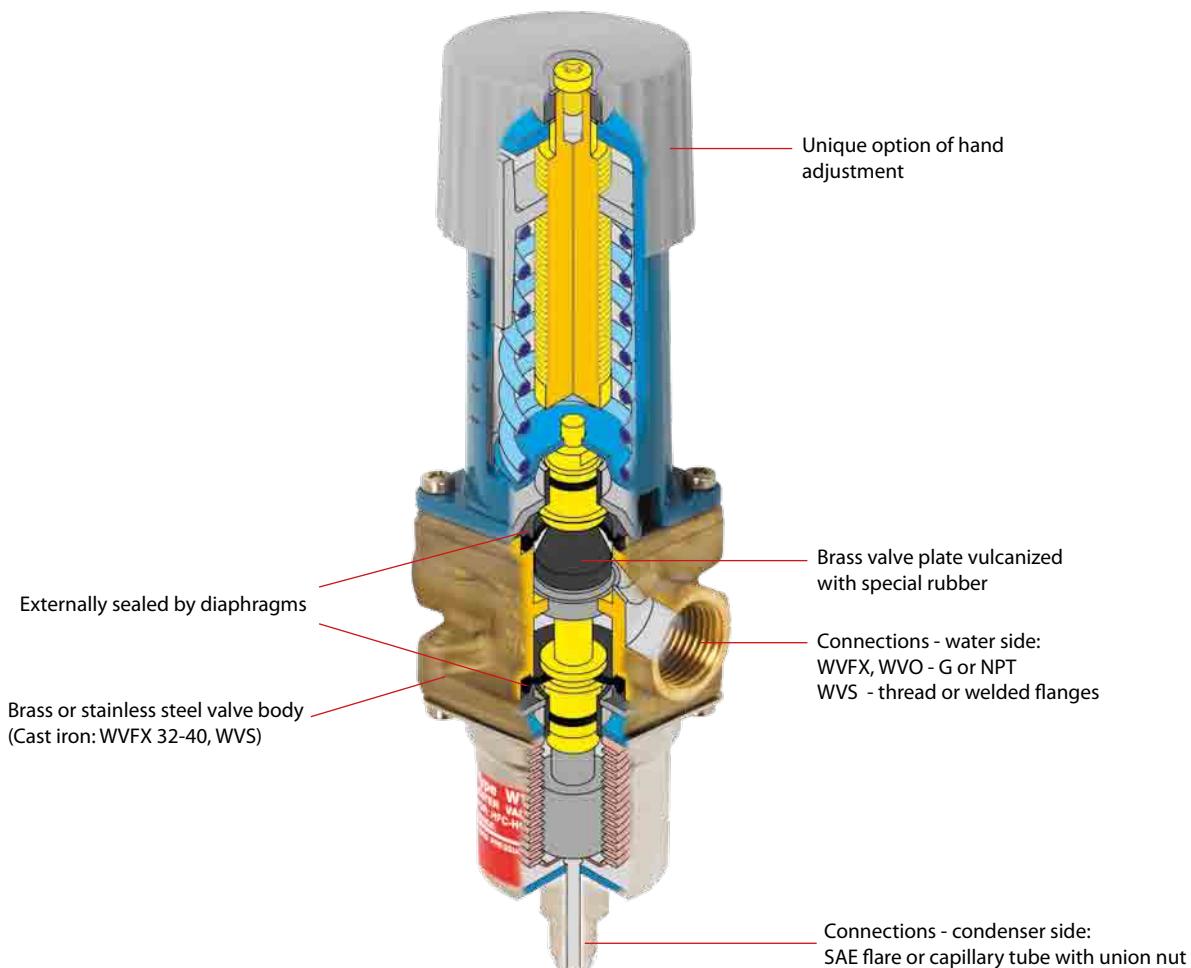


Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Traditional refrigeration</li> <li>Air conditioning units</li> <li>Other applications with water-cooled condenser</li> </ul>	<ul style="list-style-type: none"> <li>WVFX 10 - 25 can be supplied in stainless steel housing for sea water applications.</li> <li>Exact pressure control - high accuracy of WVO valves up to 0.2 bar.</li> <li>Reliable design - factory setting is maintained during whole life cycle</li> <li>Insensitive to dirt - fit and forget solution</li> <li>High permissible water pressure (MWP) - 16 bar - can be used with water towers.</li> <li>Low flow version - 0.63 m³/h (available on request)</li> </ul>	<ul style="list-style-type: none"> <li>Below 20% of max. capacity the WVS valves will act as an on-off regulators.</li> <li>WVFX 10 → 40 are direct actuated valves.</li> <li>WVS 32 → 100 are servo-operated valves.</li> <li>Max. condensing pressure up to 45.2 bar</li> <li>Very wide media temperature range from -25 up to 130 °C</li> <li>Versions with capillary tube available on request</li> </ul>

# Technical data and ordering

## WVFX, commercial applications

Type	Connection		Range (refrigerant) bar	Code no.
	Water side ISO 228-1	Condenser side		
WVFX 10	G 3/8	1/4 in. / 6 mm flare	3.5 - 16	003N1100
WVFX 10	G 3/8	1/4 in. / 6 mm flare	4.0 - 23	003N1105
WVFX 15	G 1/2	1/4 in. / 6 mm flare	3.5 - 16	003N2100
WVFX 15	G 1/2	1/2 in. / 1 mm SAE flare	4.0 - 23	003N2205
WVFX 15	G 1/2	1/4 in. / 6 mm flare	4.0 - 23	003N2105
WVFX 20	G 3/4	1/4 in. / 6 mm flare	3.5 - 16	003N3100
WVFX 20	G 3/4	1/4 in. / 6 mm flare	4.0 - 23	003N3105
WVFX 25	G 1	1/4 in. / 6 mm flare	3.5 - 16	003N4100
WVFX 25	G 1	1/4 in. / 6 mm flare	4.0 - 23	003N4105
WVFX 32	G 1 1/4	1/4 in. / 6 mm flare	4.0 - 17	003F1232
WVFX 40	G 1 1/2	1/4 in. / 6 mm flare	4.0 - 17	003F1240




## WVFX with stainless steel housing

WVFX 15	G 1/2	1/4 in. / 6 mm flare	3.5 - 16	003N2101
WVFX 15	G 1/2	1/4 in. / 6 mm flare	4.0 - 23	003N2104
WVFX 20	G 3/4	1/4 in. / 6 mm flare	4.0 - 23	003N3104
WVFX 25	G 1	1/4 in. / 6 mm flare	3.5 - 16	003N4101
WVFX 25	G 1	1/4 in. / 6 mm flare	4.0 - 23	003N4104

## WVO, commercial applications

WVO 10	G 3/8	1/4 in. / 6 mm flare	8 - 12	003N5203
WVO 10	G 3/8	1/4 in. / 6 mm flare	14 - 18	003N5206
WVO 10	G 3/8	1/4 in. / 6 mm flare	16 - 20	003N5207
WVO 15	G 1/2	1/4 in. / 6 mm flare	14 - 18	003N5216

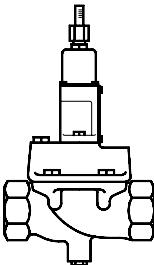

## WVS, parts programme

Type	Connection ISO 228-1	Valve body	Pilot unit <sup>2)</sup>	Code no.		Servo spring for differential pressure range of 1 → 10 bar
				Pilot unit for R410A and R744 (CO <sub>2</sub> ) <sup>3)</sup>	Flange set <sup>3)</sup>	
WVS 32	G 1 1/4	016D5032	016D1017	016D1018		016D1327
WVS 40	G 1 1/2	016D5040	016D1017	016D1018		016D0575
WVS 50	2 weld flange	016D5050 <sup>1)</sup>	016D1017	016D1018	027N3050	016D0576
WVS 65	2 1/2 weld flange	016D5050 <sup>1)</sup>	016D1017	016D1018	027N3065	016D0577
WVS 80	3 weld flange	016D5080 <sup>1)</sup>	016D1017	016D1018	027N3080	016D0578
WVS 100	4 weld flange	016D5100 <sup>1)</sup>	016D1017	016D1018	027N3100	016D0579

<sup>1)</sup> Code numbers cover valve body, flange gaskets, flange bolts and screws for pilot valve.

<sup>2)</sup> Code numbers cover control element and spring housing.

<sup>3)</sup> Code numbers cover an inlet and an outlet flange.

## Accessories

Description	Code no.
1 m capillary tube 1/4 in. (6 mm) flare coupling nuts at each end	060-017166
Bracket for WVFX 10 → 25	003N0388

## Technical data

Type	Refrigerant	Condenser side				Liquid side				k <sub>v</sub> value <sup>1)</sup> m <sup>3</sup> /h
		Control press. adjustable closing press.	Max. working pressure PB bar	Max. test pressure p' bar	Media	Max. working pressure PB bar	Max. test pressure p' bar			
WVO 10		See ordering	26.4	60		16	24	1.4		
WVFX 10		3.5 - 16	26.4	60		16	24	1.4		
WVFX 10		4.0 - 23	26.4	60		16	24	1.4		
WVO 15		See ordering	26.4	60		16	24	1.4		
WVFX 10		15.0 - 29.0	45.2	60		16	24	1.4		
WVFX 15		3.5 - 16.0	26.4	29		16	24	1.9		
WVFX 15		4.0 - 23.0	26.4	29		16	24	1.9		
WVFX 15	HCFC, HFC	15.0 - 29.0	45.2	60	Fresh water, neutral brine, sea water	16	24	1.9		
WVFX 20		3.5 - 16.0	26.4	29		16	24	3.4		
WVFX 20		4.0 - 23.0	26.4	29		16	24	3.4		
WVFX 25		15.0 - 29.0	45.2	60		16	24	5.5		
WVFX 25		3.5 - 16.0	26.4	29		16	24	5.5		
WVFX 25		4.0 - 23.0	26.4	29		16	24	5.5		
WVFX 32		4.0 - 17.0	24.1	26.5		10	10	11.0		
WVFX 40		4.0 - 17.0	24.1	26.5		10	10	11.0		
WVS 32		2.2 - 19.0	26.4	29		10	16	12.5		
WVS 40		2.2 - 19.0	26.4	29		10	16	21.0		
WVS 50	HCFC, HFC	2.2 - 19.0	26.4	29	Fresh water, neutral brine	10	16	32.0		
WVS 65	R717 (NH <sub>3</sub> )	2.2 - 19.0	26.4	29		10	16	45.0		
WVS 80		2.2 - 19.0	26.4	29		10	16	80.0		
WVS 100		2.2 - 19.0	26.4	29		10	16	125.0		

<sup>1)</sup> The k<sub>v</sub> value is the flow of water in m<sup>3</sup>/h at a pressure drop across valve of 1 bar, ρ = 1000 kg/m<sup>3</sup>.

**Media temperature range**  
WVFX 10 - 25: -25 - +130 °C  
WVFX 32 - 40: -25 - +90 °C  
WVS: -25 - +90 °C

**Opening differential pressure**  
WVO 10 - 25: 0 - 10 bar  
WVFX 10 - 40: 0 - 10 bar  
WVS 32 - 40: 0.5 - 4 bar  
WVS 50 - 100: 0.3 - 4 bar




## AVTA – Thermostatic water regulating valves

Thermostatic water regulating valves are used for proportional regulation of water flow quantity, depending on the setting and the sensor temperature.

The valves are self-acting, i.e. they operate without the supply of auxiliary energy such as electricity, or compressed air.


The required temperature is maintained at constant level with lowest possible water consumption in the condenser.

### Features

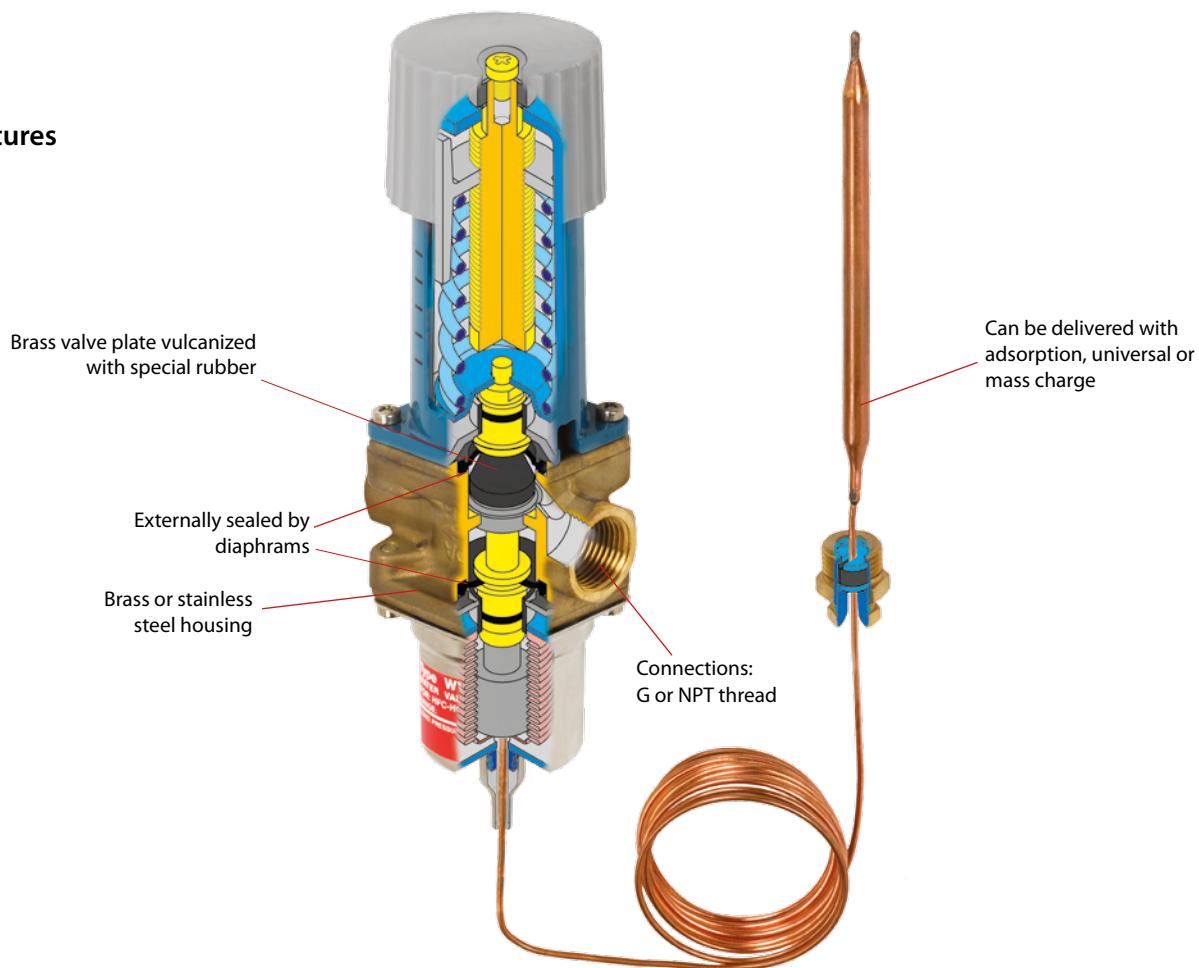

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration with water cooled condenser</li><li>Cooling of industrial processes</li></ul>	<ul style="list-style-type: none"><li>Insensitive to dirt – fit and forget solution</li><li>Insensitive to pressure variations</li><li>Needs no power supply - self acting</li><li>The valve can be placed in any position</li><li>Operates from zero differential pressure</li><li>Unique option of hand regulation</li></ul>	<ul style="list-style-type: none"><li>Differential pressure: 0 to 10 bar</li><li>Max. working pressure: 16 bar</li><li>Max. pressure on sensor: 25 bar</li><li>Opens on rising sensor temperature</li><li>The regulation range is defined for the point at which the valve begins to open</li><li>AVTA are direct actuated valves</li></ul>

## Technical data and ordering




Sensor installation

AVTA with adsorption charge (sensor Ø9.5 × 150 mm)

Connection ISO 228-1	Regulating range [°C]	Max.temp. sensor [°C]	k <sub>v</sub> value (m <sup>3</sup> /h at Δp = 1 bar)	Capillary tube length [m]	Type	Code no. <sup>1)</sup>
G 3/8	+10 - +80 °C	130	1.4	2.3	AVTA 10	003N1144
G 1/2			1.9		AVTA 15	003N0107
G 3/4			3.4		AVTA 20	003N0108
G 1			5.5		AVTA 25	003N0109

1) Code no. covers complete valve incl. capillary tube gland.




Sensor installation

AVTA with universal charge (sensor Ø18 × 210 mm)

Connection ISO 228-1	Regulating range [°C]	Max.temp. sensor [°C]	k <sub>v</sub> value (m <sup>3</sup> /h at Δp = 1 bar)	Capillary tube length [m]	Type	Code no. <sup>1)</sup>
G 3/8	+0 - +30 °C	57	1.4	2.0	AVTA 10	003N1132
G 1/2			1.9		AVTA 15	003N2132
G 3/4			3.4		AVTA 20	003N3132
G 1			5.5		AVTA 25	003N4132
G 3/8			1.4	2.0	AVTA 10	003N1162
G 1/2			1.9	2.0	AVTA 15	003N2162
G 1/2			1.9	2.0 (armoured)	AVTA 15	003N0041
G 3/4			3.4	2.0	AVTA 20	003N3162
G 3/4			3.4	5.0	AVTA 20	003N3165
G 3/4			3.4	2.0 (armoured)	AVTA 20	003N0031
G 1			5.5	2.0	AVTA 25	003N4162
G 1			5.5	2.0 (armoured)	AVTA 25	003N0032
G 1			5.5	5.0	AVTA 25	003N4165
G 3/8	+25 - +65 °C	90	1.4	2.0	AVTA 10	003N1182
G 1/2			1.9	2.0	AVTA 15	003N2182
G 3/4			3.4	2.0	AVTA 20	003N3182
G 1			5.5	2.0	AVTA 25	003N4182
G 3/8	+50 - +90 °C	125	1.4	2.0	AVTA 10	003N1182
G 1/2			1.9	2.0	AVTA 15	003N2182
G 3/4			3.4	2.0	AVTA 20	003N3182
G 1			5.5	2.0	AVTA 25	003N4182

1) Code no. covers complete valve incl. capillary tube gland.




Sensor installation

AVTA with mass charge (sensor Ø9.5 × 180 mm)

Connection ISO 228-1	Regulating range [°C]	Max.temp. sensor [°C]	k <sub>v</sub> value (m <sup>3</sup> /h at Δp = 1 bar)	Capillary tube length [m]	Type	Code no. <sup>1)</sup>
G 1/2	+0 - +30 °C	57	1.9	2.0	AVTA 15	003N0042
G 3/4			3.4		AVTA 20	003N0043
G 1/2			1.9		AVTA 15	003N0045
G 1/2		90	1.9	2.0 (armoured)	AVTA 15	003N0299
G 1/2			1.9	5.0	AVTA 15	003N0034
G 3/4			3.4	2.0	AVTA 20	003N0046
G 1			5.5	2.0	AVTA 25	003N0047
G 1/2			1.9	5.0	AVTA 15	003N0299
G 3/4			3.4	2.0	AVTA 20	003N0046
G 1			5.5	2.0	AVTA 25	003N0047

1) Code no. covers complete valve incl. capillary tube gland.



Sensor installation

AVTA in stainless steel with adsorption charge (sensor Ø9.5 × 150 mm)

Connection ISO 228-1	Regulating range [°C]	Max.temp. sensor [°C]	k <sub>v</sub> value (m <sup>3</sup> /h at Δp = 1 bar)	Capillary tube length [m]	Type	Code no. <sup>1)</sup>
G 1/2	+10 - +80 °C	130	1.9	2.3	AVTA 15	003N2150
G 3/4			3.4		AVTA 20	003N3150
G 1			5.5		AVTA 25	003N4150


1) Code no. covers complete valve incl. capillary tube gland.



## GBC - Ball valves

GBC ball valves are manually operated shut-off valves suitable for bi-directional flow. Ball valves are used in liquid, suction and hot gas lines in refrigeration, freezing and air conditioning systems. The GBC bi-directional ball valves can be delivered with or without external access port. The valves have one-piece wire seal cap to prevent unintentional cap removal or tampering between services.

### Features

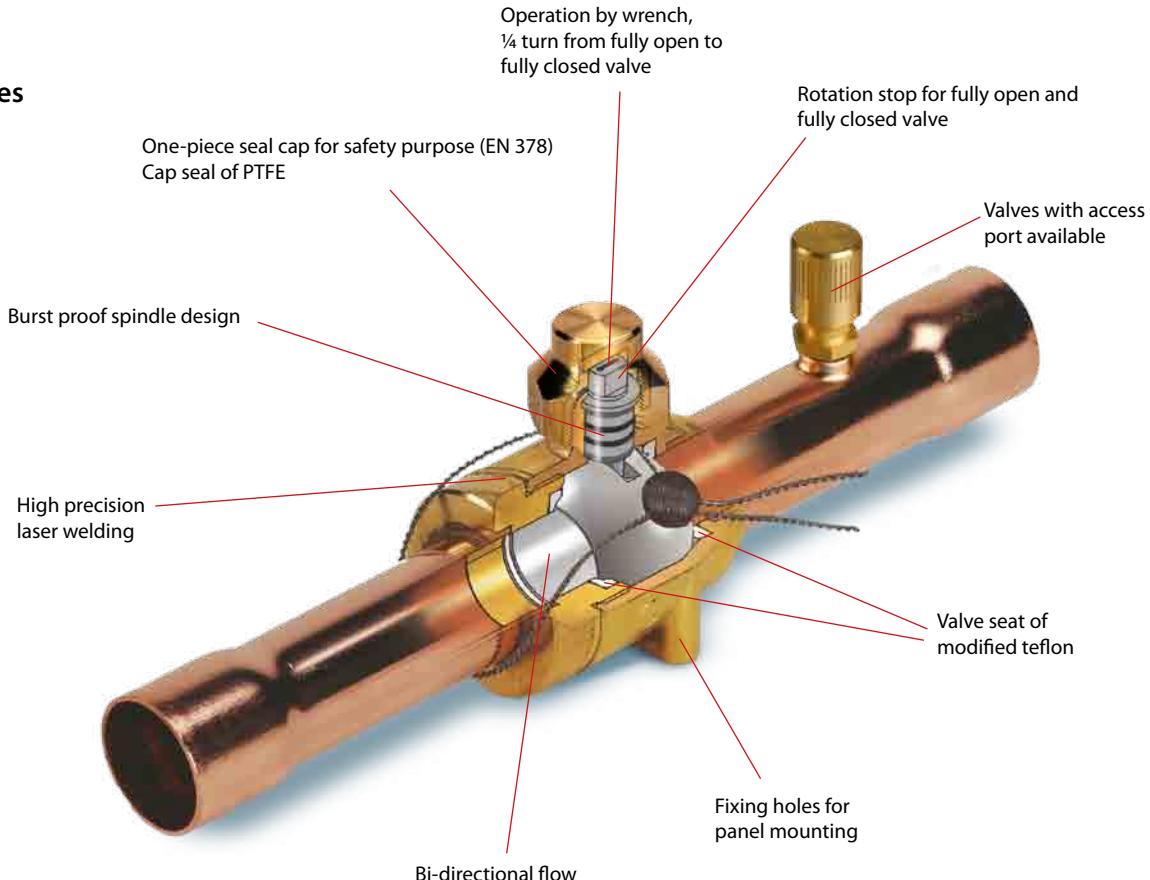


Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>GBC valves are used in liquid, suction and hot gas lines in all refrigeration and air-conditioning systems with fluorinated refrigerants</li> </ul>	<ul style="list-style-type: none"> <li>Full flow with minimum pressure drop</li> <li>Bi-directional flow, i.e. valve orientation is unimportant</li> <li>Slimline design ensures easy operational handling</li> <li>Burst proof spindle design prevents liquid from being trapped internally</li> <li>Valve seat of modified teflon to secure maximum tightness and a long lifetime</li> <li>The available access port helps in reducing cost if service of the system is necessary</li> <li>Ball status indicator on spindle top indicating open or closed position.</li> <li>Laser welded construction.</li> <li>Holes for panel mounting.</li> </ul>	<ul style="list-style-type: none"> <li>GBC can be used for all fluorinated refrigerants (CFC, HCFC, HFC)</li> <li>Temperature range: -40 to +150 °C</li> <li>Max. working pressure (PS/MWP) <ul style="list-style-type: none"> <li>- GBC 6s to 42s with/without access port: 45 bar (650 psig)</li> <li>- GBC 54s without access port: 45 bar (650 psig)</li> <li>- GBC 54s with access port: 35 bar (500 psig)</li> <li>- GBC 67s to 79s with/without access port: 35 bar (500 psig)</li> </ul> </li> <li>Test pressure: 65 bar (940 psig)</li> <li>Approvals: UL, CE</li> </ul>

# Ordering

The product range consists of following valve types: one with and one without access port.

Both versions can be supplied in inch or millimeter sizes from  $\frac{1}{4}$  in. to  $3\frac{1}{8}$  in. (6 mm to 79 mm). All valves have holes for panel mounting.



GBC without access port

*GBC without access port, ODF/ODF*

Type	Solder ODF/ODF connection		Solder ODF/ODF connection		$k_v$ value (calculated value) [m³/h]
	[in.]	Code no.	[mm]	Code no.	
GBC 6s	$\frac{1}{4}$	009G7020	6	009G7030	1.96
GBC 10s	$\frac{3}{8}$	009G7021	10	009G7031	5.68
GBC 12s	$\frac{1}{2}$	009G7022	12	009G7032	10.58
GBC 16s	$\frac{5}{8}$	009G7023	16	009G7023	14.11
GBC 18s	$\frac{3}{4}$	009G7024	18	009G7035	20.42
GBC 22s	$\frac{7}{8}$	009G7025	22	009G7025	28.17
GBC 28s	$1\frac{1}{8}$	009G7026	28	009G7033	51.95
GBC 35s	$1\frac{3}{8}$	009G7027	35	009G7027	80.89
GBC 42s	$1\frac{5}{8}$	009G7028	42	009G7034	121.07
GBC 54s	$2\frac{1}{8}$	009G7029	54	009G7029	224.96
GBC 67s	$2\frac{5}{8}$	009G7959	67	009G7959	310.00
GBC 67s RP	$2\frac{5}{8}$	009G7036	67	009G7036	245.78
GBC 79s	$3\frac{1}{8}$	009G7980	79	009G7980	700.00
GBC 79s RP	$3\frac{1}{8}$	009G7037	79	009G7037	222.52

RP - Reduced Port



GBC with access port

*GBC with access port, ODF/ODF*

Type	Solder ODF/ODF connection		Solder ODF/ODF connection		$k_v$ value (calculated value) [m³/h]
	[in.]	Code no.	[mm]	Code no.	
GBC 6s	$\frac{1}{4}$	009G7050	6	009G7060	1.96
GBC 10s	$\frac{3}{8}$	009G7051	10	009G7061	5.68
GBC 12s	$\frac{1}{2}$	009G7052	12	009G7062	10.58
GBC 16s	$\frac{5}{8}$	009G7053	16	009G7053	14.11
GBC 18s	$\frac{3}{4}$	009G7054	18	009G7065	20.42
GBC 22s	$\frac{7}{8}$	009G7055	22	009G7055	28.17
GBC 28s	$1\frac{1}{8}$	009G7056	28	009G7063	51.95
GBC 35s	$1\frac{3}{8}$	009G7057	35	009G7057	80.89
GBC 42s	$1\frac{5}{8}$	009G7058	42	009G7064	121.07
GBC 54s	$2\frac{1}{8}$	009G7059	54	009G7059	224.96
GBC 67s	$2\frac{5}{8}$	009G7960	67	009G7960	310.00
GBC 67s RP	$2\frac{5}{8}$	009G7066	67	009G7066	245.78
GBC 79s	$3\frac{1}{8}$	009G7981	79	009G7981	700.00
GBC 79s RP	$3\frac{1}{8}$	009G7067	79	009G7067	222.52

RP - Reduced Port



GBC without access port

*GBC without access port, ODF/ODM*

Type	Solder ODF/ODM connection		Solder ODF/ODM connection		$k_v$ value (calculated value) [m³/h]
	[in.]	Code no.	[mm]	Code no.	
GBC 22s	$\frac{7}{8}$	009G7000	22	009G7000	28.20
GBC 28s	$1\frac{1}{8}$	009G7001			52.00
GBC 35s	$1\frac{3}{8}$	009G7002	35	009G7002	80.90
GBC 42s	$1\frac{5}{8}$	009G7003			121.00
GBC 79s	$3\frac{1}{8}$	009G7969	79	009G7969	700.00



GBC with access port

*GBC with access port, ODF/ODM*


Type	Solder ODF/ODM connection		Solder ODF/ODM connection		$k_v$ value (calculated value) [m³/h]
	[in.]	Code no.	[mm]	Code no.	
GBC 79s	$3\frac{1}{8}$	009G7970	79	009G7970	700.0



## GBC – Ball valve for CO<sub>2</sub>

Danfoss ball valves, type GBC for CO<sub>2</sub> are manually operated shut-off valves only for single-flow direction. These ball valves give maximum flow in the fully open position. They are designed for operation within a broad temperature range.


### Features

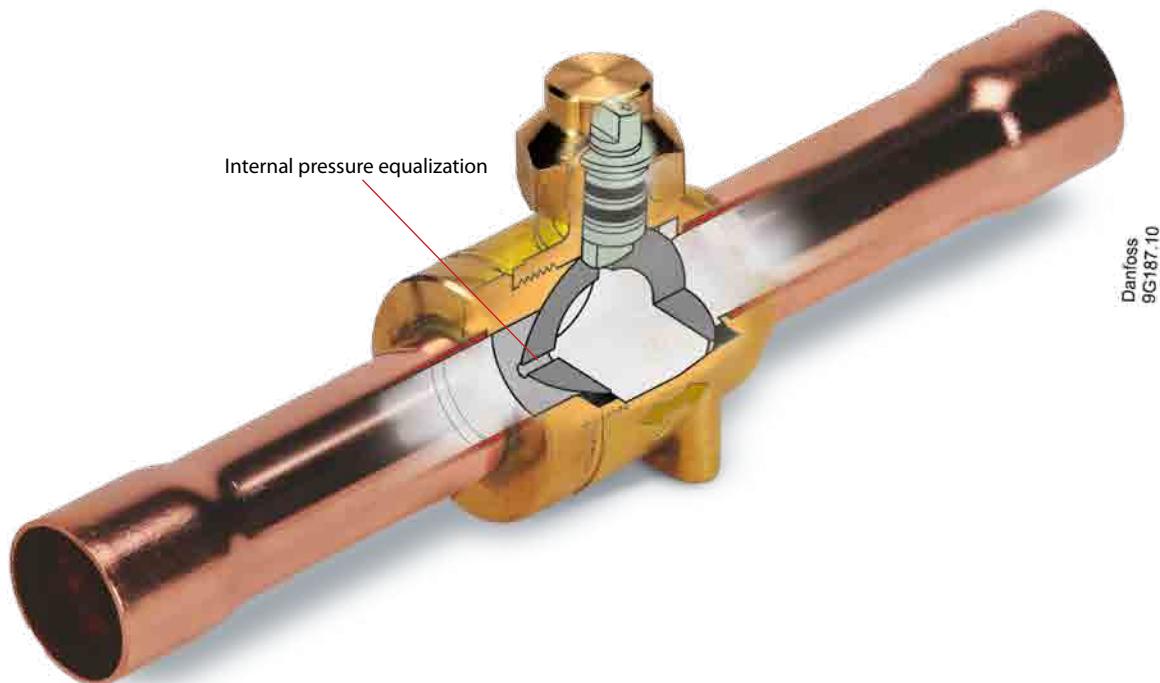

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>The valves can be used for applications in liquid, suction and hot-gas lines in refrigeration and air-conditioning systems.</li></ul>	<ul style="list-style-type: none"><li>Slimline body – easier to install and service</li><li>1/4 turn from fully open to fully closed.</li><li>Rotation stops at fully open and fully closed positions.</li><li>Indicator on spindle top shows degree of opening.</li><li>Precision laser welded construction.</li><li>Burst-proof spindle design.</li><li>Valve seal of low friction, tight-sealing modified PTFE Teflon®.</li><li>Drilled and tapped for panel mounting.</li><li>To release entrapped liquid via hole in the ball.</li></ul>	<ul style="list-style-type: none"><li>Refrigerants R 744 (CO<sub>2</sub>)</li><li>Temperature range -40 → +150 °C (-40 → +300 °F)</li><li>Max. working pressure (PS/MWP) 45 bar (653 psig)</li><li>Max. test pressure 65 bar (943 psig)</li><li>Flow direction: Single-flow</li><li>Approval: UL, CE</li></ul>

## Ordering

The GBC for CO<sub>2</sub> offers the product can be supplied in inch and millimeter sizes from 1/4 in. to 1<sup>5</sup>/<sub>8</sub> in. (6 mm to 42 mm). All valves have holes for panel mounting.

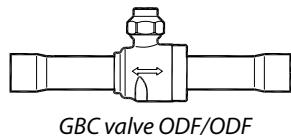

GBC valve ODF/ODF

GBC valve ODF/ODF


Type	Solder ODF/ODF connection				k <sub>v</sub> value (calculated value) [m <sup>3</sup> /h]
	[in.]	Code no.	[mm]	Code no.	
GBC 6s	1/4	009G7520	6	009G7570	1.96
GBC 10s	3/8	009G7521	10	009G7571	5.68
GBC 12s	1/2	009G7522	12	009G7572	10.58
GBC 16s	5/8	009G7523	16	009G7523	14.11
GBC 18s	3/4	009G7524	18	009G7574	20.42
GBC 22s	7/8	009G7525	22	009G7025	28.17
GBC 28s	1 1/8	009G7526	28	009G7576	51.95
GBC 35s	1 3/8	009G7528	35	009G7528	80.89
GBC 42s	1 5/8	009G7529	42	009G7579	121.07



## BM – Shut-off valves

The BM is a manual shut-off valve designed for installation in the liquid, suction and hot gas lines of refrigeration plant.


### Features

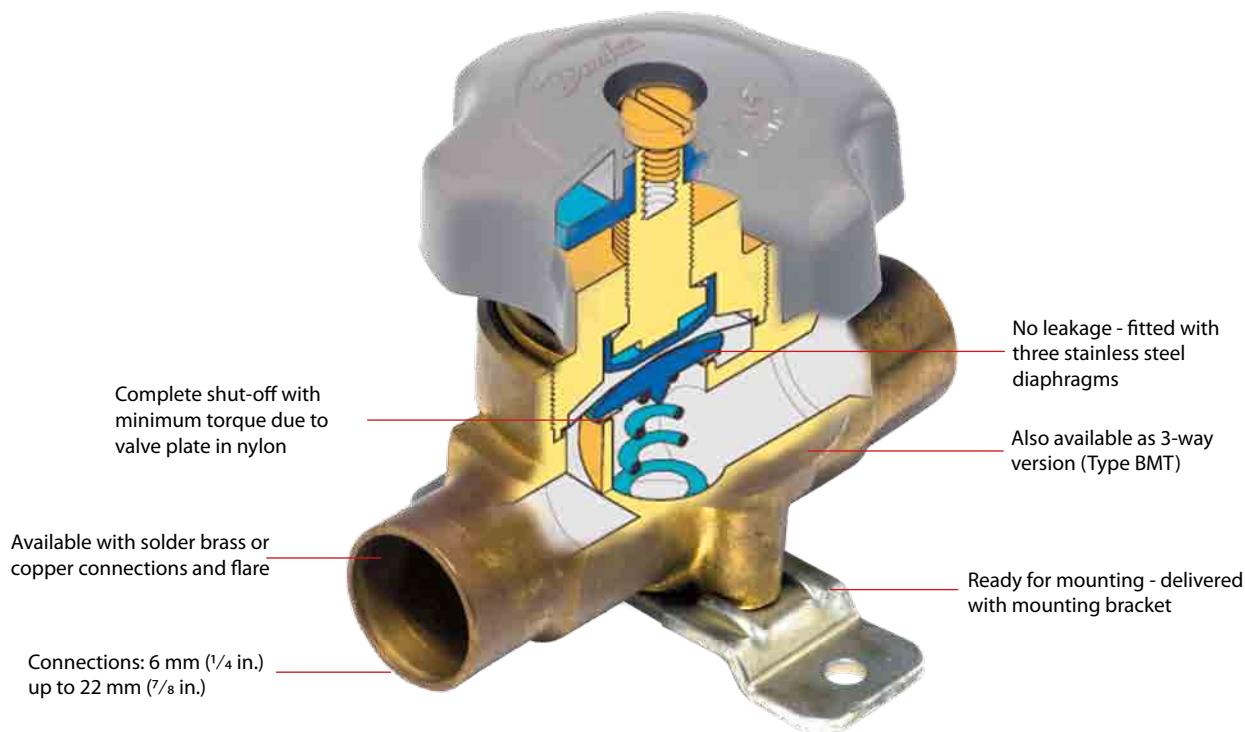

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li></ul>	<ul style="list-style-type: none"><li>Fitted with three stainless steel diaphragms which ensure long operating life.</li><li>Valve plate of polyamide nylon to give complete shut-off with minimum torque.</li><li>Valve cover with counter-seat to prevent the ingress of moisture in fully open position.</li></ul>	<ul style="list-style-type: none"><li>Can be used for all fluorinated refrigerants (CFC, HCFC, HFC)</li><li>Temperature range: -55 °C to +100 °C</li><li>Max. working pressure PS = 28 bar</li><li>Max. test pressure p' = 30.8 bar</li><li>Approvals: UL</li></ul>

## Technical data and ordering

*BM with hand wheel*

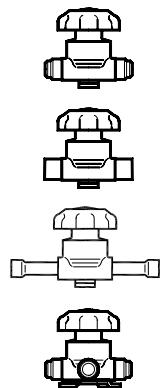


Version	Type	Connection	Code no.			kv-value m³/h
			Flare	ODF solder	ODF extended ends	
<b>Straight way</b>	BML 6	1/4 in. 6 mm	009G0101	009G0102 009G0108	009G0202 009G0208	0.3
	BML 10	3/8 in. 10 mm	009G0127	009G0122 009G0128	009G0222 009G0228	0.84
		1/2 in. 12 mm	009G0141	009G0142 009G0148	009G0242 009G0248	
	BML 15	5/8 in. 16 mm	009G0168	009G0162 009G0170	009G0262	2.2
		3/4 in. 18 mm	009G4004	009G0181 009G0184	009G4009	
	BML 22	7/8 in. 22 mm		009G0191 009G0194	009G0291	2.9
<b>Three-way</b>	BMT 6	1/4 in.	009G0105			0.3



## NRV/NRVH – Check valves



NRV and NRVH check valves can be used in liquid, suction and hot gas lines in refrigeration and air conditioning plants with fluorinated refrigerants. The valves ensure the correct flow direction and prevent back-condensation from a warm part of the system to the cold evaporator. A built-in damping piston makes the valves suitable for installation in lines where pulsation can occur, e.g. in the discharge line from the compressor.

### Features

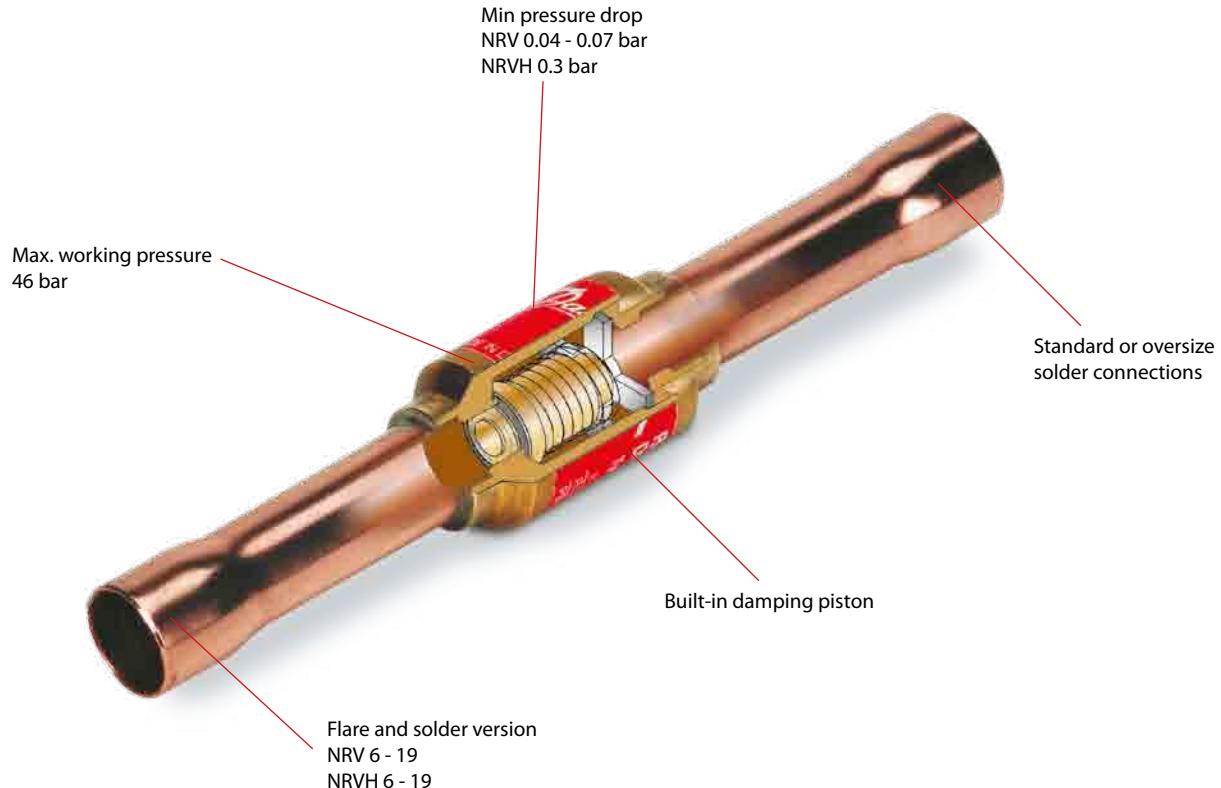

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Heat pump systems</li><li>Air conditioning units</li><li>Liquid coolers</li><li>Transport refrigeration</li><li>UL approved</li></ul>	<ul style="list-style-type: none"><li>For fluorinated refrigerants</li><li>Resonance problems can be avoided at partial load in the refrigeration plant.</li><li>Oversize connections provide flexibility in use.</li><li>Prevents back-condensation from warm to cold system part.</li><li>Ensures correct flow direction.</li></ul>	<ul style="list-style-type: none"><li>In refrigeration plants with compressors connected in parallel, it is advantageous to use NRVH, since the spring is stronger than in NRV.</li><li>Both straightway and angleway versions.</li><li>Max. working pressure PS/MWP = 46 bar</li><li>Max. test pressure <math>p' = 60</math> bar</li><li>Temperature of the medium <math>-50 - 140^\circ\text{C} / -60 - 285^\circ\text{F}</math></li></ul>

# Technical data and ordering



Type	Version	Connection				Pressure drop across valve $\Delta p$ bar <sup>1)</sup>	kv-value <sup>2)</sup> m³/h	Max. working pressure			
		in.		mm							
		Size	Code no.	Size	Code no.						
NRV6	Flare	1/4	020-1040	6	020-1040	0.07	0.56	46 bar			
NRV 10		3/8	020-1041	10	020-1041		1.43				
NRV 12		1/2	020-1042	12	020-1042		2.05				
NRV 16		5/8	020-1043	16	020-1043	0.05	3.60				
NRV 19		3/4	020-1044	19	020-1044		5.50				
NRV 6s		1/4	020-1010	6	020-1014	0.07	1.43				
NRV 6s <sup>3)</sup>		3/8	020-1057	10	020-1050						
NRVH 6s <sup>3)</sup>		3/8	020-1069	10	020-1062	0.30					
NRV 10s		3/8	020-1011	10	020-1015	0.07					
NRVH 10s		3/8	020-1046	10	020-1036	0.30					
NRV 10s <sup>3)</sup>	Straight-way	1/2	020-1058	12	020-1051	0.07	2.05				
NRVH 10s <sup>3)</sup>		1/2	020-1070	12	020-1063	0.30					
NRV 12s		1/2	020-1012	12	020-1016	0.05					
NRVH 12s		1/2	020-1039	12	020-1037	0.30					
NRV 12s <sup>3)</sup>		5/8	020-1052	16	020-1052	0.05					
NRVH 12s <sup>3)</sup>		5/8	020-1064	16	020-1064	0.30					
NRV 16s		5/8	020-1018	16	020-1018	0.05	3.60				
NRVH 16s		5/8	020-1038	16	020-1038	0.30					
NRV 16s <sup>3)</sup>		-	-	18	020-1053	0.05					
NRVH 16s <sup>3)</sup>		-	-	18	020-1065	0.30					
NRV 16s <sup>3)</sup>	Solder ODF	3/4	020-1059	19	020-1059	0.05					
NRVH 16s <sup>3)</sup>		3/4	020-1071	19	020-1071	0.30					
NRV 19s		-	-	18	020-1017	0.05					
NRVH 19s		-	-	18	020-1008	0.30					
NRV 19s		3/4	020-1019	19	020-1019	0.05	5.50				
NRVH 19s		3/4	020-1023	19	020-1023	0.30					
NRV 19s <sup>3)</sup>		7/8	020-1054	22	020-1054	0.05					
NRVH 19s <sup>3)</sup>		7/8	020-1066	22	020-1066	0.30					
NRV 22s		7/8	020-1020	22	020-1020	0.04					
NRVH 22s		7/8	020-1032	22	020-1032	0.30	8.50				
NRV 22s <sup>3)</sup>	Angle-way	1 1/8	020-1060	28	020-1055	0.04					
NRVH 22s <sup>3)</sup>		1 1/8	020-1072	28	020-1067	0.30					
NRV 28s		1 1/8	020-1021	28	020-1025	0.04					
NRVH 28s		1 1/8	020-1029	28	020-1033	0.30	19.00				
NRV 28s <sup>3)</sup>		1 3/8	020-1056	35	020-1056	0.04					
NRVH 28s <sup>3)</sup>		1 3/8	020-1068	35	020-1068	0.30					
NRV 35s		1 3/8	020-1026	35	020-1026	0.04					
NRVH 35s		1 3/8	020-1034	35	020-1034	0.30					
NRV 35s <sup>3)</sup>		1 5/8	020-1061	42	020-1027	0.04	29.00				
NRVH 35s <sup>3)</sup>		1 5/8	020-1073	42	020-1035	0.30					

<sup>1)</sup>  $\Delta p$  = the minimum pressure at which the valve is completely open.

The NRVH with a stronger spring is used in the discharge line from compressors connected in parallel.

<sup>2)</sup> The kv value is the flow of water in m³/h at a pressure drop across valve of 1 bar,  $\rho = 1000 \text{ kg/m}^3$ .


<sup>3)</sup> Oversize connections.



## DCL – Liquid line filter driers

The DCL liquid line filter driers protect refrigeration and air conditioning systems from moisture, acids and solid particles thus, eliminating harmful chemical reactions and abrasive impurities.

### Features

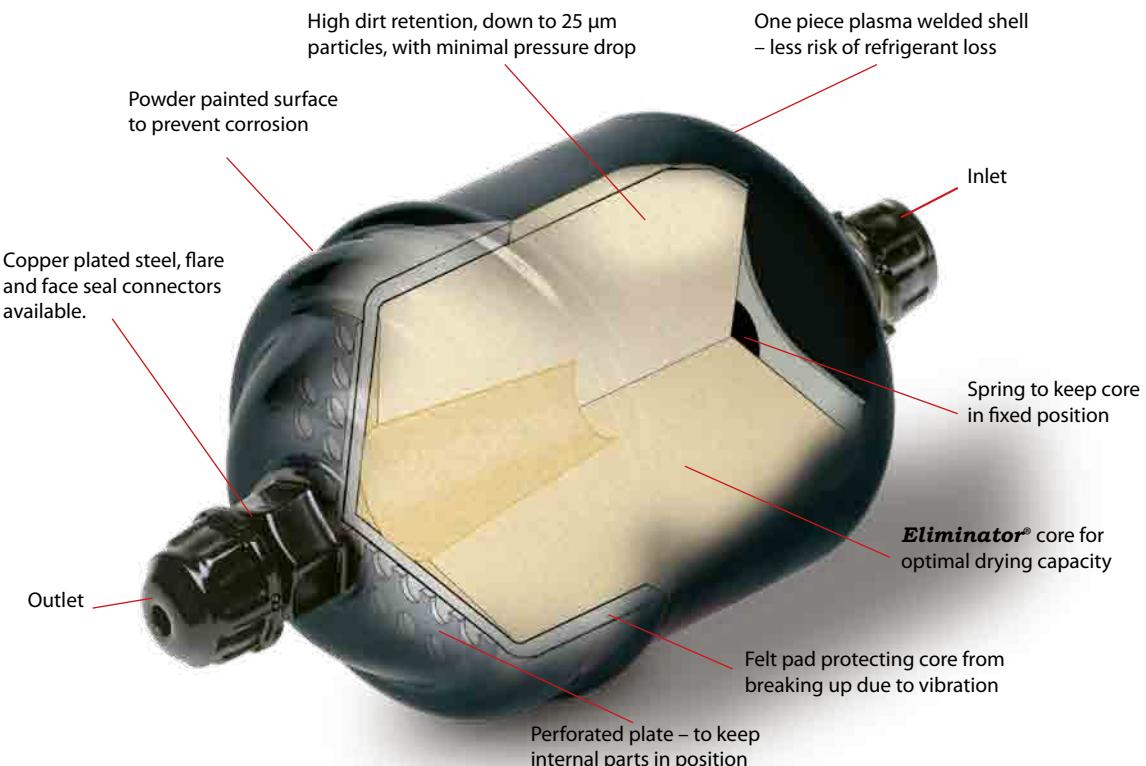

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Air conditioning units</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>4 times better moisture adsorption capacity than traditional filter driers with activated alumina, at both high and low humidity levels.</li><li>High drying capacity avoiding the risk of acid formation in the refrigeration system.</li><li>Copper plated solder connections – no need of wet cloth during installation</li><li>Wide range with sizes from 3 to 75 cubic inches.</li><li>Powder paint surface for 500 hrs in salt spray (shell body)</li></ul>	<ul style="list-style-type: none"><li>80% 3Å molecular sieve with 20% activated alumina core.</li><li>Optimized for HCFC refrigerants with mineral or alkyl benzene oils and compatible with HFC refrigerants (R134a, R404A, R410A, etc.).</li><li>Thermally stable up to 120 °C</li><li>Minimal amount of binder, resistant to systems chemicals, assuring a stable core and long life.</li><li>MWP (PS): 46 bar (667 psig).</li></ul>

# Technical data and ordering

## Liquid line filter drier

Type	Connection		Solid core		Drying capacity [kg refrigerant] <sup>1)</sup>						Liquid capacity in kW <sup>2)</sup>			Solder		Flare Code no.
			Surface [cm <sup>2</sup> ]	Volume [cm <sup>3</sup> ]	R134a		R404A R507		R22 R407C R410A		R134a	R404A R507	R22 R407C R410A	Code no.	Code no.	
	mm	in.			24 °C	52 °C	24 °C	52 °C	24 °C	52 °C				in.	mm	
DCL 032	6	1/4	82	41	4.5	4	7	3.5	4	3.5	7	5	7	023Z4501 <sup>3)</sup>	023Z4500 <sup>3)</sup>	023Z5000 <sup>3)</sup>
DCL 033	10	3/8									17	13	19	023Z4504	023Z4503	023Z5001 <sup>3)</sup>
DCL 052	6	1/4	95	67	6.5	6	10	5.5	6	5.5	7	5	8	023Z4506	023Z4505	023Z5002
DCL 053	10	3/8									18	14	19	023Z4509	023Z4508	023Z5003
DCL 082	6	1/4									7	5	8	023Z4511	023Z4510	023Z5004
DCL 083	10	3/8	131	104	10	9	16	8	9.5	9	19	14	21	023Z4514	023Z4513	023Z5005
DCL 084	12	1/2									26	20	29	023Z4516	023Z4515	023Z5006
DCL 162	6	1/4									7	5	8	023Z4518	023Z4517	023Z5007
DCL 163	10	3/8									22	16	24	023Z4521	023Z4519	023Z5008
DCL 164	12	1/2	220	234	24	22	37	20	22	20	30	22	33	023Z4523	023Z4522	023Z5009
DCL 165	16	5/8									43	30	47	023Z4524	023Z4524	023Z5010
DCL 166	19	3/4									43	30	47	023Z4525	023Z4525	023Z5011
DCL 303	10	3/8									21	15	23	023Z4528	023Z4527	023Z0012
DCL 304	12	1/2									31	22	34	023Z4530	023Z4529	023Z0013
DCL 305	16	5/8	378	494	47	44	77	41	44	41	45	33	49	023Z4531	023Z4531	023Z0014
DCL 306	19	3/4									62	45	68	023Z4533	023Z4533	023Z0156
DCL 307	22	7/8									62	45	68	023Z4534	023Z4534	-
DCL 414	12	1/2									32	23	35	023Z4538	-	023Z0102
DCL 415	16	5/8	510	681	65	61	106	56	61	56	53	37	58	023Z4539	023Z4539	023Z0103
DCL 417	22	7/8									91	65	100	023Z4540	023Z4540	-
DCL 604	12	1/2									27	20	31	023Z4544	-	-
DCL 607	22	7/8	756	988	94	76	150	82	89	82	75	54	82	023Z4545	023Z4545	-
DCL 609	28	1 1/8									87	64	92	-	023Z4546	-
DCL 757	22	7/8									82	60	90	023Z4548	023Z4548	-
DCL 759	28	1 1/8	1019	1363	130	128	212	114	121	112	94	68	102	023Z4550	-	-

<sup>1)</sup> Drying capacity is based on following moisture content test standards before and after drying:

R134a: From 1050 ppm W to 75 ppm W.

If drying to 50 ppm W is required, reduce stated capacities by 15%.

R404A, R507: From 1020 ppm W to 30 ppm W.


R407C: From 1020 ppm W to 30 ppm W.

R410A: From 1050 ppm W to 60 ppm W.


R22: From 1050 ppm W to 60 ppm W in accordance with ARI 710-86

<sup>2)</sup> Given in accordance with ARI 710-86 for t<sub>e</sub> = -15 °C (5°F), t<sub>c</sub> = 30 °C (85°F) and Δp = 0.07 bar (1 psig).

<sup>3)</sup> Wire mesh in filter drier outlet



Solder version



Flare version

## Flare / solder adapter

Type	Connection Solder, ODF mm	Code no. for 1 pc	Code no. for 2 pcs.	Type	Connection Solder, ODF mm	Code no. for 1 pc	Code no. for 2 pcs.
FSA 22	1/4 × 1/4	023U801266	023U800266	FSA 26m	1/4 × 6	023U8011	023U8001
FSA 32	3/8 × 1/4	023U802266	-	FSA 36m	3/8 × 6	023U8021	-
FSA 33	3/8 × 3/8	023U801466	023U800466	FSA 310m	3/8 × 10	023U8013	023U8003
FSA 44	1/2 × 1/2	023U801666	023U800666	FSA 412m	1/2 × 12	023U8015	023U8005
FSA 516m	5/8 × 5/8	023U801766	023U800766	FSA 516m	5/8 × 16	023U8017	023U8007
FSA 66	3/4 × 3/4	023U802066	023U801066	FSA 618m	3/4 × 18	023U8019	023U8009

## Accessories

Caps	Size	Qty.	Code no.	Caps	Size	Qty.	Code no.
Gasket B2 - 4 spec.	1/4 in (6 mm)	300	011L4025	B2 - 10	5/8 in (16 mm)	100	011L4019
B2 - 6	3/8 in (10 mm)	300	011L4017	B2 - 12	3/4 in (18 mm)	50	011L4020
B2 - 8	1/2 in (12 mm)	200	011L4018				






## DML – Liquid line filter driers

The DML liquid line filter driers protect refrigeration and air conditioning systems from moisture, acids and solid particles. The 100% solid molecular sieve core assures a high drying capacity and prevents acid formation in the system.

### Features

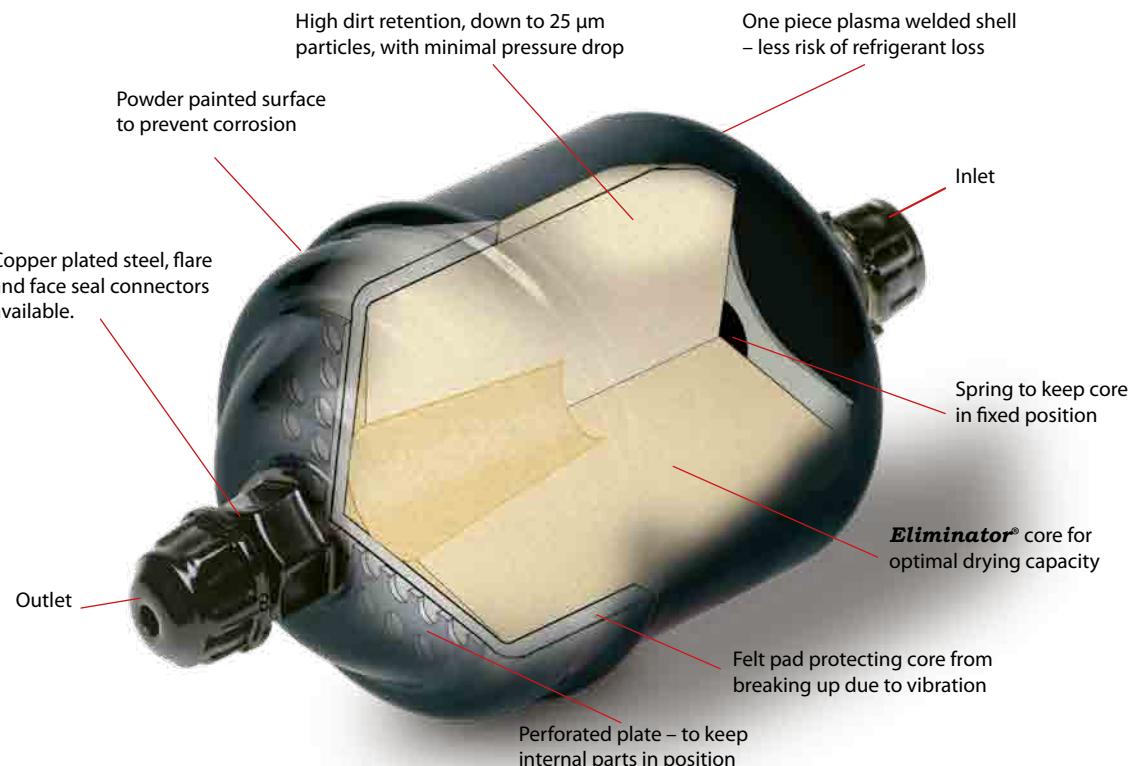

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Air conditioning units</li><li>Transport refrigeration</li></ul>	<ul style="list-style-type: none"><li>High drying capacity avoiding the risk of acid formation in the refrigeration system.</li><li>All Danfoss filter driers have end caps designed for greater protection and easy removal.</li><li>Wide range with sizes from 3 to 75 cubic inches.</li><li>Powder paint surface for 500 hrs in salt spray (shell body)</li></ul>	<ul style="list-style-type: none"><li>100% 3Å molecular sieve core.</li><li>Optimized for HFC refrigerants (R134a, R404A, R410A, etc.) with POE and PAG oils. Compatible with R22.</li><li>MWP (PS): 46 bar (667 psig).</li><li>HCFC &amp; HFC refrigerants.</li><li>Available with flare- or solder connectors (copper-plated steel).</li><li>Wide range with sizes from 3 to 75 cubic inches.</li></ul>

# Technical data and ordering

## Liquid line filter drier

Type	Connection		Solid core		Drying capacity [kg refrigerant] <sup>1)</sup>						Liquid capacity in kW <sup>2)</sup>			Solder		Flare
			Surface [cm <sup>2</sup> ]	Volume [cm <sup>3</sup> ]	R134a		R404A R507		R22 R407C R410A		R134a	R404A R507	R22 R407C R410A	Code no.	Code no.	
	in.	mm			24 °C	52 °C	24 °C	52 °C	24 °C	52 °C				in.	mm	
DML 032	1/4	6	82	41	5.5	5	7.5	4.5	4.5	4	7	5	7	023Z4552 <sup>3)</sup>	023Z4551 <sup>3)</sup>	023Z5035 <sup>3)</sup>
DML 033	3/8	10									17	13	19	023Z4555	023Z4554	023Z5036 <sup>3)</sup>
DML 052	1/4	6	95	67	8.5	8	13	7.5	8	7	7	5	8	023Z4559	023Z4558	023Z5037
DML 053	3/8	10									18	14	19	023Z4562	023Z4561	023Z5038
DML 082	1/4	6									7	5	8	023Z4567	023Z4566	023Z5039
DML 083	3/8	10	131	104	12.5	12	20	11.5	12.5	11	19	14	21	023Z4570	023Z4569	023Z5040
DML 084	1/2	12									26	20	29	023Z4572	023Z4571	023Z5041
DML 085	5/8	16									42	31	46	023Z4573	023Z4573	023Z5073
DML 162	1/4	6	220	234							7	5	8	023Z4575	023Z4574	023Z5042
DML 163	3/8	10									22	16	24	023Z4578	023Z4577	023Z5043
DML 164	1/2	12									30	22	33	023Z4580	023Z4579	023Z5044
DML 165	5/8	16									43	30	47	023Z4581	023Z4581	023Z5045
DML 166	3/4	19									44	31	48	023Z4582	023Z4582	023Z5046
DML 303	3/8	10									21	15	23	023Z4585	023Z4584	023Z0049
DML 304	1/2	12									31	22	34	023Z4587	023Z4586	023Z0050
DML 305	5/8	16	378	494	57	54	92.5	51	57	48.5	45	33	49	023Z4588	023Z4588	023Z0051
DML 306	3/4	19									62	45	68	023Z4589	023Z4589	023Z0193
DML 307	7/8	22									62	45	68	023Z4590	023Z4590	-
DML 414	1/2	12	510	681	80	75	130	70	80	74	32	23	35	023Z4594	023Z4593	023Z0109
DML 415	5/8	16									53	37	58	023Z4595	023Z4595	023Z0110
DML 417	7/8	22									91	65	100	023Z4596	023Z4596	-
DML 606	3/4	19									44	32	48	023Z4601	023Z4601	-
DML 607	7/8	22	756	988	113	107	185	101	114	97	75	54	82	023Z4602	023Z4602	-
DML 609	1 1/8	28									87	64	95	023Z4604	023Z4603	-
DML 757	7/8	22	1019	1363	160	150	260	140	160	148	82	60	90	023Z4605	023Z4605	-
DML 759	1 1/8	28									94	68	102	023Z4607	023Z4606	-

<sup>1)</sup> Drying capacity is based on following moisture content test standards before and after drying:

R134a: From 1050 ppm W to 75 ppm W. If drying to 50 ppm W is required, reduce stated capacities by 15%.

R404A, R507: From 1020 ppm W to 30 ppm W.



R407C: From 1020 ppm W to 30 ppm W.

R410A: From 1050 ppm W to 60 ppm W.

R22: From 1050 ppm W to 60 ppm W in accordance with ARI 710-86.

<sup>2)</sup> Given in accordance with ARI 710-86 for t<sub>e</sub> = -15 °C (5°F), t<sub>c</sub> = 30 °C (85°F) and Δp = 0.07 bar (1 psig).

<sup>3)</sup> Wire mesh in filter drier outlet.



## Flare / solder adapter

Type	Connection Solder, ODF mm	Code no. for 1 pc	Code no. for 2 pcs.	Type	Connection Solder, ODF mm	Code no. for 1 pc	Code no. for 2 pcs.
FSA 22	1/4 × 1/4	023U801266	023U800266	FSA 26m	1/4 × 6	023U8011	023U8001
FSA 32	3/8 × 1/4	023U802266	-	FSA 36m	3/8 × 6	023U8021	-
FSA 33	3/8 × 3/8	023U801466	023U800466	FSA 310m	3/8 × 10	023U8013	023U8003
FSA 44	1/2 × 1/2	023U801666	023U800666	FSA 412m	1/2 × 12	023U8015	023U8005
FSA 516m	5/8 × 5/8	023U801766	023U800766	FSA 516m	5/8 × 16	023U8017	023U8007
FSA 66	3/4 × 3/4	023U802066	023U801066	FSA 618m	3/4 × 18	023U8019	023U8009

## Accessories

Caps	Size	Qty.	Code no.	Caps	Size	Qty.	Code no.
Gasket B2 - 4 spec.	1/4 in (6 mm)	300	011L4025	B2 - 10	5/8 in (16 mm)	100	011L4019
B2 - 6	3/8 in (10 mm)	300	011L4017	B2 - 12	3/4 in (18 mm)	50	011L4020
B2 - 8	1/2 in (12 mm)	200	011L4018				






## DCR – with replaceable solid core

DCR filter driers protect refrigeration, freezing and air conditioning systems from moisture, acids and solid particles. DCR filter driers, with exchangeable solid core, are for use in liquid and/or suction lines. DCR filter driers are available both in high-pressure versions suitable for plants with R410A and CO<sub>2</sub> refrigerants, and in standard-pressure versions for use with fluorinated refrigerants.

### Features

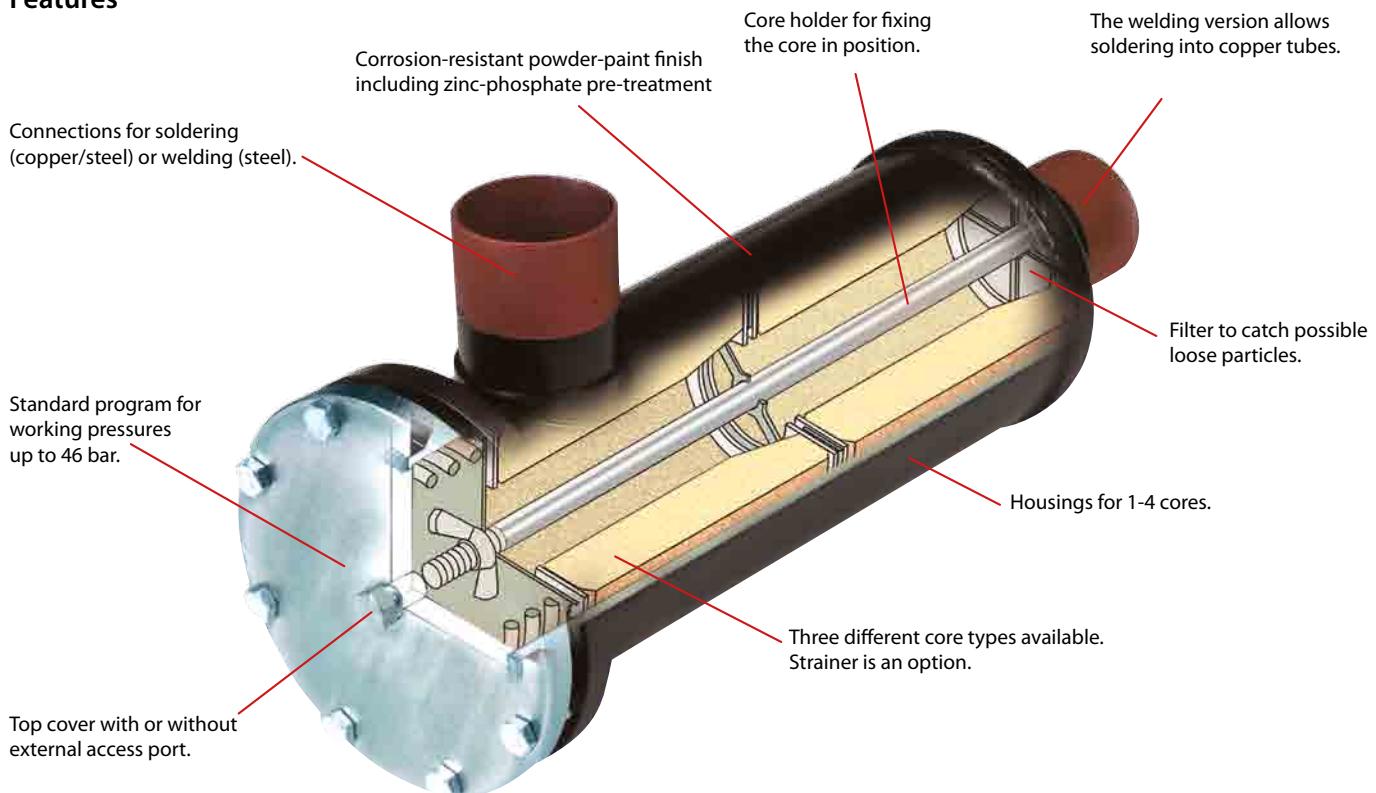

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>For refrigeration plants with fluorinated refrigerants or CO<sub>2</sub>.</li> </ul>	<ul style="list-style-type: none"> <li>Highly efficient dirt retaining capabilities on both the suction and the liquid line.</li> <li>Can be used in all environments, corrosion resistant powder-painted finish in shell (body) for 500 hrs in salt spray, according to ASTM B117, ISO 12944-6 (Blistering).</li> <li>The core holder requires minimum free space to remove the core for replacement.</li> <li>For convenient filter drier commissioning, cover is designed to remain in place while cores, cover and housing are assembled.</li> <li>Can be installed in any position.</li> </ul>	<ul style="list-style-type: none"> <li><b>48 - DM</b> core for liquid line application (100% molecular sieve for HFC). Provides high moisture adsorption at low and high condensing temperatures. Effective protection against impurities.</li> <li><b>48 - DC</b> core for liquid line application (80% molecular sieve and 20% activated alumina for HCFC). Effectively adsorbs moisture and acid in the system.</li> <li><b>48 - DA</b> core for suction line after a compressor burn-out (30% molecular sieve and 70% activated alumina for HCFC/HFC).</li> <li><b>48 - F</b> strainer - compatible with all refrigerants: <ul style="list-style-type: none"> <li>- Retains dirt particles larger than 15 µm.</li> <li>- For use direct in DCR housings.</li> <li>- Utilized in the suction or liquid line.</li> </ul> </li> </ul>

# Capacities

## DCR with 48-DM core

Type	Number of cores	Drying capacity [kg refrigerant] <sup>1)</sup>						Liquid capacity [kW] <sup>2)</sup>		
		R134a		R404A/R507		R407C/R410A		R134a	R404A/R507	R407C/ R410A
		24 °C	52 °C	24 °C	52 °C	24 °C	52 °C			
DCR 0485	1							79	57	88
DCR 0487								139	99	153
DCR 0489								186	133	206
DCR 04811		82.5	78.5	135.0	74.0	83.0	71.0	227	162	259
DCR 04813								227	162	259
DCR 04817								227	162	259
DCR 04821								227	162	259
DCR 0967	2							140	100	155
DCR 0969								217	155	240
DCR 09611		165.0	157.0	270.0	148.0	166.0	142.0	295	211	326
DCR 09613								358	256	396
DCR 09617								358	256	396
DCR 1449	3							226	162	250
DCR 14411		247.5	235.5	405.0	222.0	249.0	213.0	356	255	394
DCR 14413								356	255	394
DCR 14417								356	255	394
DCR 19211	4	330.0	314.0	540.0	296.0	332.0	284.0	372	266	411
DCR 19213								460	329	509
DCR 19217								460	329	509

## DCR with 48-DC core

Type	Number of cores	Drying capacity [kg refrigerant] <sup>1)</sup>								Liquid capacity [kW] <sup>2)</sup>		
		R22		R134a		R404A/R507		R407C/R410A		R22	R134a	R404A/ R507
		24 °C	52 °C	24 °C	52 °C	24 °C	52 °C	24 °C	52 °C			
DCR 0485	1									88	79	57
DCR 0487										153	139	99
DCR 0489										206	186	133
DCR 04811		67.0	62.0	71.0	67.5	115.0	62.0	70.5	60.0	259	227	162
DCR 04813										259	227	162
DCR 04817										259	227	162
DCR 04821										259	227	162
DCR 0967	2									155	140	100
DCR 0969										240	217	155
DCR 09611		134.0	124.0	142.0	135.0	230.0	124.0	141.0	120.0	326	295	211
DCR 09613										396	358	256
DCR 09617										396	358	256
DCR 1449	3									250	226	162
DCR 14411		201.0	186.0	213.0	202.5	345.0	186.0	211.5	180.0	394	356	255
DCR 14413										394	356	255
DCR 14417										394	356	255
DCR 19211	4	268.0	248.0	284.0	270.0	460.0	248.0	282.0	240.0	411	372	266
DCR 19213										509	460	329
DCR 19217										509	460	329
DCR 19221										509	460	329

<sup>1)</sup> Drying capacity is based on the following moisture contents before and after drying:

R22: From 1050 ppm W to 60 ppm W in accordance with ARI 710-86.

R134a: From 1050 ppm W to 75 ppm W. If refrigerant is to be dried to 50 ppm W, reduce the stated capacities by 15%.

R404A, R407C & R507: From 1020 ppm W to 30 ppm W.

R410A: From 1050 ppm W to 60 ppm W.

<sup>2)</sup> Liquid capacity given in accordance with ARI 710-2002 evaporating temperature  $t_e = -15^\circ\text{C}$ , condensing temperature  $t_c = +30^\circ\text{C}$  and pressure drop across filter drier  $\Delta p = 0.07 \text{ bar}$ .

# Capacities

Drying capacity [g of water]<sup>3)</sup>

48-DA

Type	Number of cores	Evaporating temperature $t_e$ [°C]												Acid capacity <sup>4)</sup> [g]
		-40	-20	4.4	-30	-20	4.4	-40	-20	4.4	-40	-20	4.4	
		R22			R134a			R404A/R507			R407C/R410A			
DCR 048	1	28	19	12	45	38	27	47	30	19	42	35	25	26.6
DCR 096	2	56	37	24	90	77	54	94	60	37	84	70	50	53.3
DCR 144	3	84	56	36	135	115	81	142	90	56	126	105	75	79.9
DCR 192	4	112	74	48	180	153	108	189	120	75	168	140	100	106.5

<sup>3)</sup> Drying capacity is expressed during drying in:

R22: EPD = 10 ppm W, corresponding to a dew point temperature = -50 °C

R134a: EPD = 50 ppm W, corresponding to a dew point temperature = -37 °C

R404A: EPD = 10 ppm W, corresponding to a dew point temperature = -40 °C

R407C: EPD = 10 ppm W, corresponding to a dew point temperature = -40 °C

<sup>4)</sup> Adsorption capacity of oleic acid at 0.05 TAN (Total Acid Number).

Recommended plant capacity [kW]<sup>5)</sup> in suction line - burn-out

48-DA

Type	Evaporating temperature $t_e$ [°C]												Acid capacity <sup>4)</sup> [g]	
	-40	-20	4.4	-30	-20	4.4	-40	-20	4.4	-40	-20	4.4		
	Pressure drop [ $\Delta p$ bar]													
	0.04	0.10	0.21	0.04	0.07	0.14	0.04	0.10	0.21	0.04	0.10	0.21		
	R22			R134a			R404A/R507			R407C/R410A				
DCR 0485	3.1	8.9	21.0	3.0	5.4	13.0	2.4	7.1	17.5	3.1	8.9	21.0		
DCR 0487	5.8	16.1	37.8	5.6	9.9	23.4	4.5	12.9	31.2	5.8	16.1	37.8		
DCR 0489	7.8	21.6	50.7	7.5	13.3	31.5	6.0	17.2	41.8	7.8	21.6	50.7		
DCR 04811	10.0	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10.0	27.3	63.3		
DCR 04813	10.0	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10.0	27.3	63.3		
DCR 04817	10.0	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10.0	27.3	63.3		
DCR 04821	10.0	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10.0	27.3	63.3		
DCR 0965	3.3	9.1	21.4	3.2	5.7	13.4	2.5	7.4	18.0	3.3	9.2	21.6		
DCR 0967	5.8	16.2	38.1	5.6	9.9	23.6	4.5	12.9	31.4	5.8	16.2	38.1		
DCR 0969	8.7	24.6	58.3	8.4	15.0	35.9	6.8	19.7	48.1	8.7	24.6	58.3		
DCR 09611	11.9	33.4	79.3	11.4	20.4	48.9	9.3	26.8	65.4	11.9	33.4	79.3		
DCR 09613	14.1	39.9	95.2	13.6	24.3	58.5	11.0	32.0	78.7	14.1	39.9	95.2		
DCR 09617	14.1	39.9	95.2	13.6	24.3	58.5	11.0	32.0	78.7	14.1	39.9	95.2		
DCR 09621	14.1	39.9	95.2	13.6	24.3	58.5	11.0	32.0	78.7	14.1	39.9	95.2		
DCR 1445	3.5	10.0	22.8	3.4	6.0	14.0	2.7	7.7	18.9	3.5	10.0	22.8		
DCR 1447	6.6	18.9	42.9	6.3	11.2	26.4	5.1	14.5	35.6	6.6	18.9	42.9		
DCR 1449	8.8	25.1	57.2	8.4	15.0	35.2	6.8	19.4	47.5	8.8	25.1	57.2		
DCR 14411	13.2	38.1	92.2	12.7	23.0	56.2	10.3	30.7	76.6	13.2	38.1	92.2		
DCR 14413	13.2	38.1	92.2	12.7	23.0	56.2	10.3	30.7	76.6	13.2	38.1	92.2		
DCR 14417	13.2	38.1	92.2	12.7	23.0	56.2	10.3	30.7	76.6	13.2	38.1	92.2		
DCR 14421	13.2	38.1	92.2	12.7	23.0	56.2	10.3	30.7	76.6	13.2	38.1	92.2		
DCR 1925	4.2	11.5	27.3	4.0	7.1	16.8	3.2	9.2	22.7	4.2	11.5	27.3		
DCR 1927	7.9	21.6	51.4	7.6	13.4	31.6	6.1	17.4	42.7	7.9	21.6	51.4		
DCR 1929	10.6	28.9	68.9	10.2	18.0	42.1	8.2	23.3	57.2	10.6	28.9	68.9		
DCR 19211	14.8	41.8	99.4	14.3	25.5	61.2	11.6	33.6	82.2	14.8	41.8	99.4		
DCR 19213	18.0	51.1	122.1	17.4	31.1	75.0	14.1	41.1	101.0	18.0	51.1	122.1		
DCR 19217	18.0	51.1	122.1	17.4	31.1	75.0	14.1	41.1	101.0	18.0	51.1	122.1		
DCR 19221	18.0	51.1	122.1	17.4	31.1	75.0	14.1	41.1	101.0	18.0	51.1	122.1		

<sup>5)</sup> Recommended plant capacity is given in accordance with ARI-Standard 710-2002 at:

Evaporating temperature  $t_e$  = 4.4 °C

Condensing temperature  $t_c$  = 32.2 °C

Strainer mounted in suction line

48-F

Refrigerant	R22			R134a			R404A/R507			R407C/R410A		
Evaporating temperature [°C]	-40	-20	4.4	-30	-20	4.4	-40	-20	4.4	-40	-20	4.4
Pressure drop [ $\Delta p$ bar]	0.04	0.10	0.21	0.04	0.07	0.14	0.04	0.10	0.21	0.04	0.10	0.21
Recommended plant capacity [kW]	15	47	113	15	28	69	12	38	93	15	47	113

Strainer mounted in liquid line<sup>6)</sup>

Refrigerant	R22			R134a			R404A/R507			R407C/R410A		
Recommended plant capacity [kW]	390			350			260			390		

<sup>6)</sup> Recommended plant capacity is given in accordance with ARI-Standard 710-2002 at:

Evaporating temperature  $t_e$  = -15 °C

Condensing temperature  $t_c$  = +30 °C


Pressure drop across filter drier  $\Delta p$  = 0.07 bar

The data given apply to DCR 04811 with 48-F core.



Diameter: 23.965 mm

# Technical data and ordering

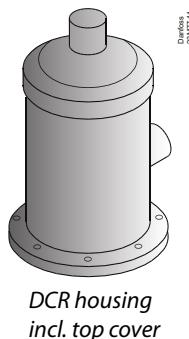

## DCR with steel connections

Type	Number of cores	Solder		Butt weld in.	Code no.	Max. working pressure (PS/MWP)
		ODF in.	ODF mm			
DCR 0485	1	5/8	16	1/2	023U7050	46 bar / 667 psig
DCR 0487		7/8	22	3/4	023U7051	
DCR 0489		1 1/8	-	1	023U7053	
DCR 04811		1 3/8	35	1 1/4	023U7054	
DCR 04813		1 5/8	-	1 1/2	023U7055	
DCR 04817		2 1/8	54	2	023U7057	
DCR 04821		2 5/8	-	2 1/2	023U7076	
DCR 0969		-	28	1	023U7059	
DCR 0969		1 1/8	-	1	023U7060	
DCR 09611		1 3/8	35	1 1/4	023U7061	
DCR 09613	2	1 5/8	-	1 1/2	023U7062	46 bar / 667 psig
DCR 09613		-	42	1 1/2	023U7063	
DCR 09617		2 1/8	54	2	023U7064	
DCR 1449		-	28	1	023U7065	
DCR 1449		1 1/8	-	1	023U7066	
DCR 14413		1 5/8	35	1 1/4	023U7068	
DCR 14413		-	42	1 1/2	023U7069	
DCR 14417		2 1/8	54	2	023U7070	
DCR 19211		1 3/8	35	1 1/4	023U7071	
DCR 19213	4	1 5/8	-	1 1/2	023U7072	46 bar / 667 psig
DCR 19213		-	42	1 1/2	023U7073	

## DCR with copper connections

DCR 0485s	1	5/8	16	-	023U7250	46 bar / 667 psig
DCR 0487s		7/8	22	-	023U7251	
DCR 0489s		-	28	-	023U7252	
DCR 0489s		1 1/8	-	-	023U7253	
DCR 04811s		1 3/8	35	-	023U7254	
DCR 04813s		1 5/8	-	-	023U7255	
DCR 04813s		-	42	-	023U7256	
DCR 04817s		2 1/8	54	-	023U7257	
DCR 04821s	2	2 5/8	-	-	023U7276	46 bar / 667 psig
DCR 0969s		-	28	-	023U7259	
DCR 09611s		1 3/8	35	-	023U7261	
DCR 09613s		-	42	-	023U7263	
DCR 09617s		2 1/8	54	-	023U7264	
DCR 1449s		-	28	-	023U7265	
DCR 14413s		-	42	-	023U7269	
DCR 14417s		2 1/8	54	-	023U7270	
DCR 19213s	4	-	42	-	023U7273	

## DCR with high-pressure steel connections

DCR 0487	1	7/8	22	3/4	023U7451	46 bar / 667 psig
DCR 0489		-	28	1	023U7452	
DCR 0489		1 1/8	-	1	023U7453	
DCR 04811		1 3/8	35	1 1/4	023U7454	
DCR 04813		1 5/8	-	1 1/2	023U7455	
DCR 048117		2 1/8	54	2	023U7457	
DCR 0967	2	7/8	22	3/4	023U7458	46 bar / 667 psig
DCR 0969		-	28	1	023U7459	
DCR 09611		1 3/8	35	1 1/4	023U7461	
DCR 09613		1 5/8	-	1 1/2	023U7462	
DCR 09617		2 1/8	54	2	023U7464	

## DCR inserts with gasket

Type	Material	Code no. 8 pcs.	Code no. 455 pcs.
48-DM solid core	100% molecular sieve	023U1392	023U1394
48-DC solid core	80% molecular sieve & 20% Al <sub>2</sub> O <sub>3</sub>	023U4381	023U4383
48-DA solid core	30% molecular sieve & 70% Al <sub>2</sub> O <sub>3</sub>	023U5381	-
48-F strainer	Strainer Insert	023U1921	-






## DMB – Bi-flow filter driers

Bi-flow filter driers have built-in check valves which ensure that refrigerant liquid always flows through the filter driers from the outer side of the filter core towards the center. Thus all dirt particles are retained irrespective of flow direction.

DMB filter driers ensure fast and effective adsorption of moisture as well as organic and inorganic acids.

### Features

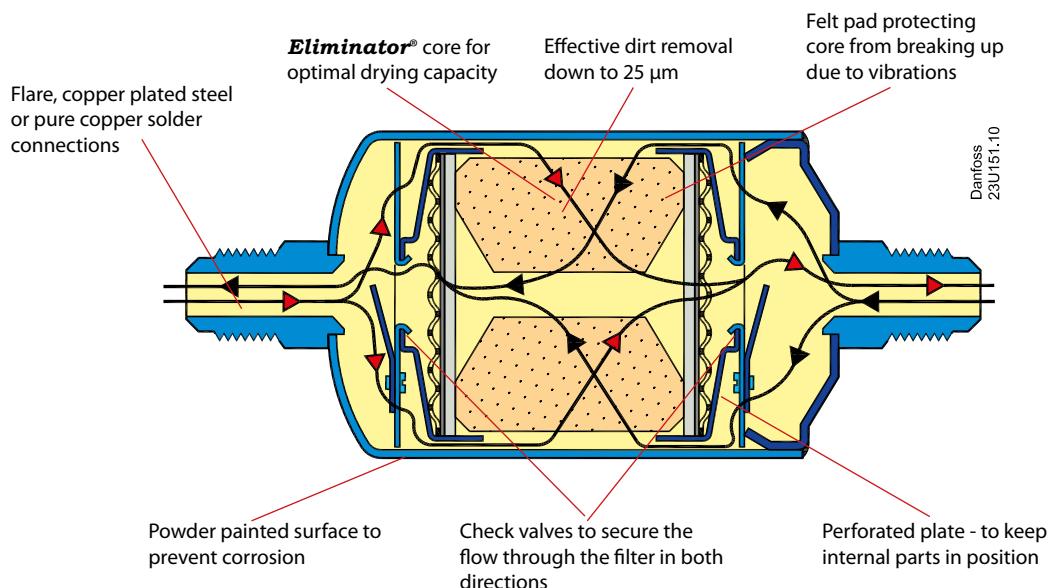

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Traditional refrigeration</li><li>Heat pumps</li><li>Air conditioning units</li></ul>	<ul style="list-style-type: none"><li>No dirt released by reversing the flow direction</li><li>The check valves are not sensitive to dirt and give minimum restriction, irrespective of flow direction</li><li>When building heat pump systems, the use of Bi-flow filters can, save up to ten solder connections. This reduces production costs and the number of potential leakage points.</li></ul>	<ul style="list-style-type: none"><li>DMB filter driers contain a solid core consisting of 100% 3Å Molecular Sieve.</li><li>DMB filter driers are especially suitable for heat pumps with HFC refrigerant and polyolester oil with additives</li><li>Optimum flow characteristics and dirt retention</li><li>Optimized for HFC refrigerants.</li></ul>

# Technical data and ordering

## Solder, ODF (Cu-plated)

Type	Conn. in.	Code no.	Conn. mm	Code no.
DMB 082s	1/4	023Z1473	6	023Z1461
DMB 083s	3/8	023Z1472	10	023Z1459
DMB 084s	1/2	023Z1471	12	023Z1457
DMB 163s	3/8	023Z1476	10	023Z1455
DMB 164s	1/2	023Z1475	12	023Z1453
DMB 165s	5/8	023Z1474	16	023Z1474
DMB 304s	1/2	023Z1479	12	023Z1451
DMB 305s	5/8	023Z1478	16	023Z1478
DMB 307s	7/8	023Z1477	22	023Z1477

## Flare

Type	Conn. in.	mm	Code no.
DMB 082	1/4	6	023Z1412
DMB 083	3/8	10	023Z1411
DMB 084	1/2	12	023Z1410
DMB 162	1/4	6	-
DMB 163	3/8	10	023Z1415
DMB 164	1/2	12	023Z1414
DMB 165	5/8	16	023Z1413
DMB 303	3/8	10	023Z1419
DMB 304	1/2	12	023Z1418
DMB 305	5/8	16	023Z1417

## Drying and liquid capacity

Type	Drying capacity [kg refrigerant] <sup>1)</sup>								Liquid capacity [kW] <sup>2)</sup>			Max Working Pressure PS [bar]	
	R134a		R404A R507		R407C R410A		R22		R134a	R404A R507	R22 R407C R410A		
	24 °C	52 °C	24 °C	52 °C	24 °C	52 °C	24 °C	52 °C					
DMB 082 / 082s	9.2	8.5	8.7	8.1	8.0	7.3	8.7	8.0	3.9	2.8	4.3	46	
DMB 083 / 083s									7.4	5.3	8.2	46	
DMB 084 / 084s									8.3	6.0	9.2	46	
DMB 162									7.6	5.3	8.8	46	
DMB 163 / 163s	17.8	16.5	16.8	15.7	15.4	14.1	16.8	15.6	18	13	20	46	
DMB 164 / 164s									28	20	32	46	
DMB 165 / 165s									37	29	40	46	
DMB 303									19	15	21	46	
DMB 304 / 304s	43.5	40.4	41.4	38.4	37.8	34.6	41.2	38.1	28	20	31	46	
DMB 305 / 305s									38	28	42	46	
DMB 307s									43	32	47	46	

<sup>1)</sup> Drying capacity is based on following moisture content test standards before and after drying:

R134a: From 1050 ppm W to 75 ppm W. If drying to 50 ppm W is required, reduce stated capacities by 15%.

R404A, R507: From 1020 ppm W to 30 ppm W.

R407C: From 1020 ppm W to 30 ppm W.

R410A: From 1050 ppm W to 60 ppm W.

R22: From 1050 ppm W to 60 ppm W in accordance with ARI 710-86.

<sup>2)</sup> Capacity given in accordance with ARI 710-86

$t_e = -15^\circ\text{C}$  (5°F)

$t_c = 30^\circ\text{C}$  (86°F)


$\Delta p = 0.07 \text{ bar}$  (1 psig).



## DMC – Combined filter driers and receivers

DMC is a combined receiver and filter drier, and is optimized to systems where the condenser is incapable of containing the total quantity of refrigerants.  
DMC filters contain a solid core consisting of 100% Molecular Sieve, and are especially suitable for A/C systems with HFC refrigerant and polyolester oil with additives.

### Features

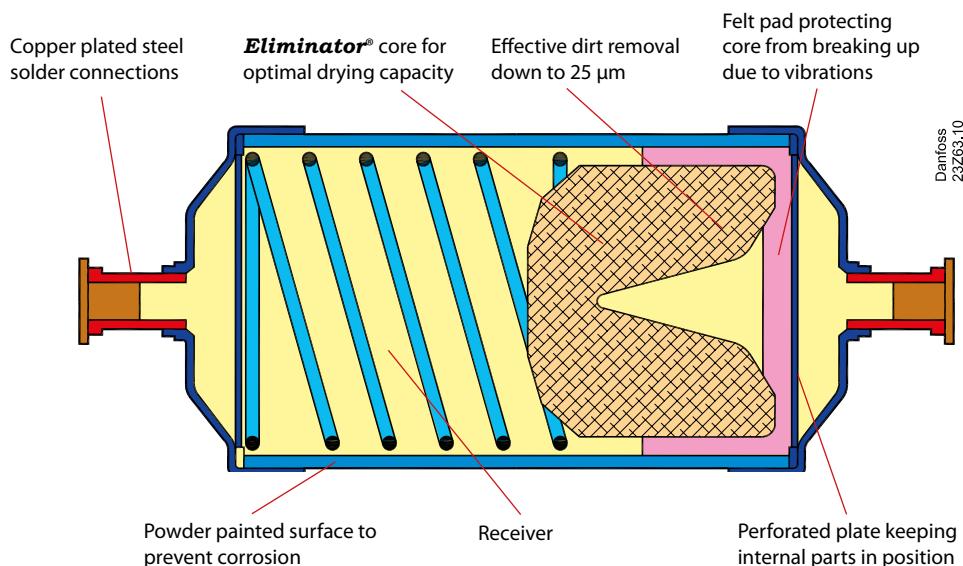

Applications	Advantages	Facts
<ul style="list-style-type: none"><li>Air conditioning systems</li><li>Heat pumps</li></ul>	<ul style="list-style-type: none"><li>Combined filter drier and receiver to keep down number of components</li><li>Space-saving</li><li>Fast installation</li><li>High drying capacity at high and low liquid temperatures</li></ul>	<ul style="list-style-type: none"><li>DMC filter driers contain a solid core consisting of 100% 3Å Molecular Sieve.</li><li>Available with solder connections (Cu-plated steel connectors).</li><li>Optimum flow characteristics and dirt retention.</li><li>Optimized for HFC refrigerants.</li><li>Approved as HP container according to PED 97/23/EC - a3p3.</li></ul>

## Technical data and ordering

Type	Solder, ODF (Cu-plated)	Industrial pack		Type	Solder, ODF (Cu-plated)	Multi pack	
		Code no.	Qty.			Code no.	Qty.
DMC 2032s	6 mm	023Z7007	10	DMC 0432s	6 mm	023Z7019	24
DMC 2032s		023Z7008	10	DMC 0732s	6 mm	023Z7020	24
DMC 2033s		023Z7009	10	DMC 2032s	6 mm	023Z7021	18
DMC 2034s		023Z7010	10	DMC 2032s	-	023Z7022	18
DMC 40164s		023Z7011	6	DMC 2033s	10 mm	023Z7023	18
DMC 0432s	6 mm	023Z7012	16	DMC 2033s	-	023Z7024	18
DMC 0732s	6 mm	023Z7013	16	DMC 2034s	-	023Z7026	18
DMC 2033s	10 mm	023Z7014	10	DMC 40163s	-	023Z7028	8
DMC 2034s	12 mm	023Z7015	10	DMC 40164s	12 mm	023Z7029	8
DMC 40163s	10 mm	023Z7016	6	DMC 40164s	-	023Z7030	8
DMC 40163s		023Z7017	6		-	-	-
DMC 40164s	12 mm	023Z7018	6		-	-	-
DMC 2032.5s		023Z7044	10		-	-	-
DMC 0732s		023Z7045	16		-	-	-

### Capacity

#### Drying and liquid capacity

R134a, R507, R404A, R407C, R410A, R22

Type	Drying Capacity (kg of refrigerant) <sup>1)</sup>								Liquid Capacity (kW) <sup>2)</sup>			Max. Working Pressure PS [bar]
	R410A R407C		R22		R134a		R404A R507		R22 R410A R407C	R134a	R404A R507	
	24 °C	52 °C	24 °C	52 °C	24 °C	52 °C	24 °C	52 °C				
DMC 0432s	5.9	5.4	6.4	5.9	6.4	5.9	6.3	6.0	7.5	7.0	5.0	42
DMC 0732s	5.9	5.4	6.4	5.9	6.4	5.9	6.3	6.0	7.5	7.0	5.0	42
DMC 2032s									7.5	7.0	5.0	
DMC 2033s									21.0	19.0	14.0	42
DMC 2034s									26.5	24.0	18.5	
DMC 40163s	25.8	23.7	28.1	26.0	28.3	26.0	27.8	26.2	23.0	21.0	15.0	
DMC 40164s									28.5	26.0	19.5	42

<sup>1)</sup> Drying capacity is based on following moisture content in the refrigerant before and after drying:

R22: From 1050 ppm W to 60 ppm W in accordance with ARI 710-86.

R134a: From 1050 ppm W to 75 ppm W. If drying of refrigerant to 50 ppm W is required, this can be achieved with a 15% reduction of the stated capacities.

R404A, R407C og R507: From 1020 ppm W to 30 ppm W.

R410A: From 1050 ppm W to 60 ppm W.

<sup>2)</sup> Given in accordance with

ARI 710-86 for

$t_e = -15^\circ\text{C}$  ( $5^\circ\text{F}$ ),

$t_c = 30^\circ\text{C}$  ( $86^\circ\text{F}$ ) and

$\Delta p = 0.07 \text{ bar}$  (1 psig).




## DAS – Burn-out suction line filter driers

**Eliminator®** burn-out filter driers type DAS are used in the suction line to clean up refrigeration and AC-systems with fluorinated refrigerants after a compressor motor burn-out.

The solid core, which is composed of 70% activated alumina and 30% Molecular Sieve, adsorbs harmful acids as well as moisture. By adsorbing these acids, the DAS burn-out filter drier protects the new compressor against failure.


### Features

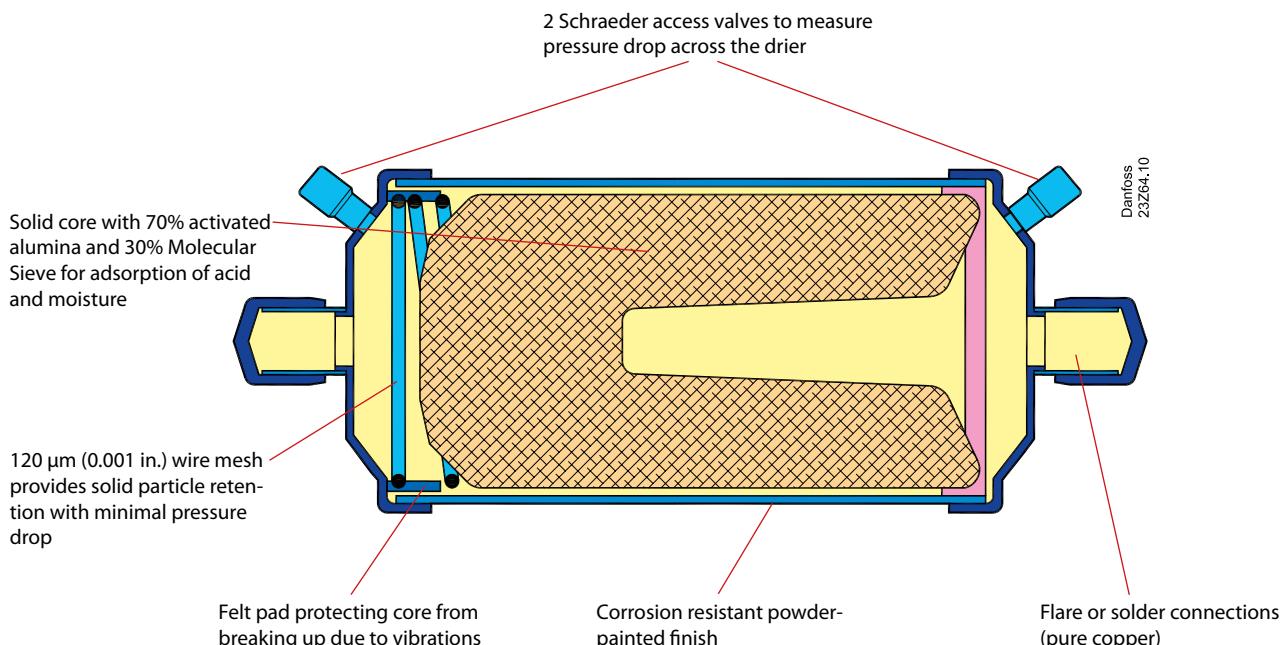

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Traditional refrigeration</li> <li>Air conditioning units</li> <li>Transport refrigeration</li> </ul>	<ul style="list-style-type: none"> <li>The large diameter of the burn-out filter drier means that flow velocity is suitably low and the pressure drop minimal.</li> <li>Bonded solid core grains eliminate powder formation.</li> <li>Corrosion resistant powder-painted finish (shell for 500 hrs in salt spray chamber)</li> </ul>	<ul style="list-style-type: none"> <li>Installation with any orientation provided the flow is in the arrow direction</li> <li>Available in sizes from 8 to 60 cubic inches</li> <li>For use with HCFC and HFC refrigerants</li> </ul>

# Technical data and ordering

## Ordering



## Flare

Type	Connection in.	Code no.
DAS 083	3/8	023Z1001
DAS 084	1/2	023Z1002
DAS 164	1/2	023Z1007
DAS 165	5/8	023Z1008

## Solder (pure copper)

Type	Connection in.	Code no.
DAS 083	3/8	023Z1003
DAS 084	1/2	023Z1004
DAS 085	5/8	023Z1005
DAS 086	3/4	023Z1006
DAS 164	1/2	023Z1009
DAS 165	5/8	023Z1010
DAS 166	3/4	023Z1011
DAS 167	7/8	023Z1012
DAS 305	5/8	023Z1013
DAS 306	3/4	023Z1014
DAS 307	7/8	023Z1015
DAS 309	1 1/8	023Z1016
DAS 417	7/8	023Z1017
DAS 419	1 1/8	023Z1018
DAS 607	7/8	023Z1019
DAS 609	1 1/8	023Z1020

## Capacities

	Rated capacity, Q <sub>n</sub> <sup>1)</sup>						Acid capacity <sup>2)</sup>	
	R22/R407C/R410A		R134a		R404A/R507			
	[TR]	[kW]	[TR]	[kW]	[TR]	[kW]		
DAS 083	1.7	6.0	1.0	3.5	1.3	4.5		
DAS 084	2.9	10.0	1.6	5.5	2.3	8.0	3.8	
DAS 085	4.1	14.5	2.6	9.0	3.6	12.5		
DAS 086	5.4	19.0	3.3	11.5	4.7	16.5		
DAS 164	3.0	10.5	1.7	6.0	2.4	8.5		
DAS 165	4.3	15.0	2.7	9.5	3.7	13.0	8.6	
DAS 166	5.7	20.0	3.4	12.0	4.9	17.0		
DAS 167	6.3	22.0	3.9	13.5	5.4	19.0		
DAS 305	5.1	18.0	3.1	11.0	4.3	15.0		
DAS 306	6.3	22.0	4.0	14.0	5.4	19.0	18.2	
DAS 307	7.4	26.0	4.6	16.0	6.3	22.0		
DAS 309	8.9	31.0	5.7	20.0	7.7	27.0		
DAS 417	8.6	30.0	5.1	18.0	7.1	25.0		
DAS 419	10.0	35.0	6.3	22.0	8.6	30.0	24.3	
DAS 607	5.7	20.0	3.4	12.0	4.9	17.0	36.5	

<sup>1)</sup> Rated capacity is stated at:  
evaporating temperature t<sub>e</sub> = 4 °C  
pressure drop Δp = 0.21 bar

<sup>2)</sup> Adsorption capacity of oleic acid at  
0.05 TAN (Total Acid Number).

Capacities for other temperatures than 4 °C are calculated by use of correction factors. Divide your actual evaporator capacity with the correction factor given for your actual evaporating temperature.

Look up the capacity table for the necessary rated capacity.

$$Q_e / F_e = Q_n$$

Q<sub>e</sub> = Actual evaporator capacity

Q<sub>n</sub> = Nominal capacity

F<sub>e</sub> = Correction factor

## Correction factors, F<sub>e</sub> evaporating temperatures [°C]

[°C]	4	0	-5	-10	-15	-20	-25	-30	-35	-40
F <sub>e</sub>	1	0.9	0.75	0.6	0.5	0.4	0.35	0.25	0.2	0.15

### Example

To select a burn-out filter drier for a R22 plant with an evaporator capacity at 8.5 kW at -20 °C you may use a burn-out filter drier with a rated capacity of 8.5/0.4 = 21.25 kW or bigger.

For example DAS 306.




## SG+ – High pressure sight glasses

SG+ are sight glasses for commercial refrigeration applications. They are made in stainless steel and are available in versions with flare and solder connections.

The SGM+ are mainly used to indicate the condition of the refrigerant as well as the liquid level in the receiver or the oil level in the compressor.

The SGN+ are equipped with sensitive indicators that reflects a colour, depending on the moisture content in the refrigerant.

### Features

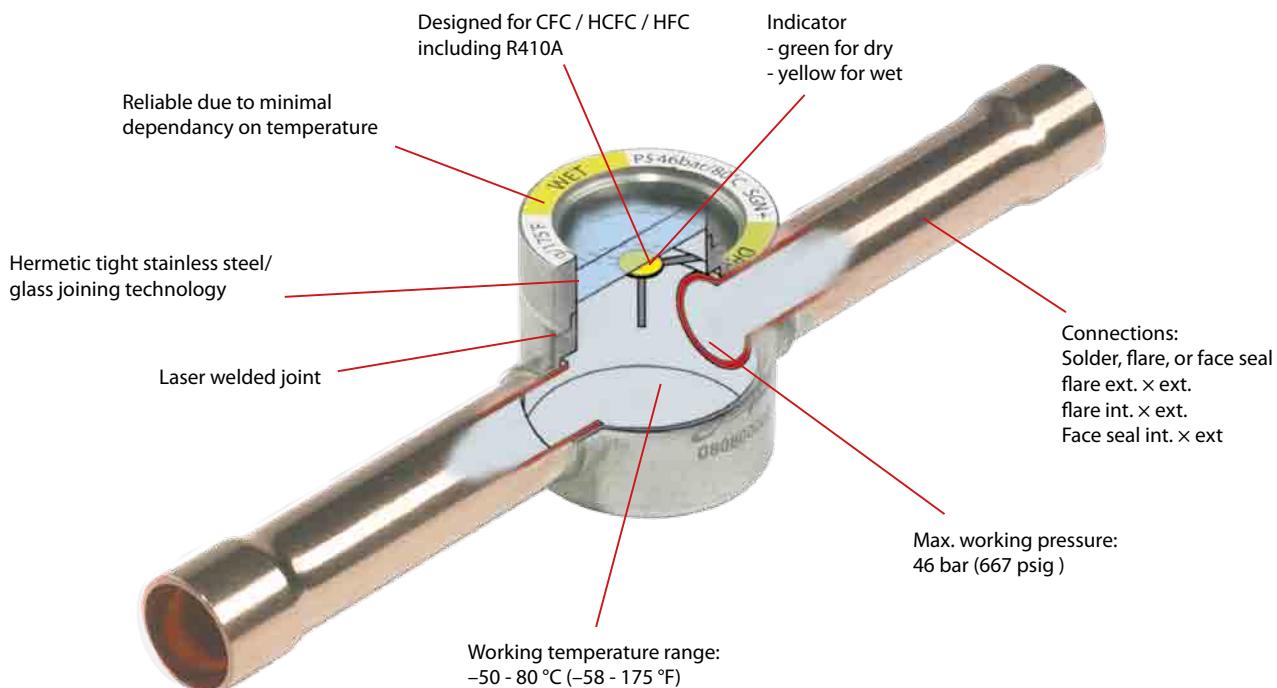


Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Traditional refrigeration</li> <li>Heat pump systems</li> <li>Air conditioning units</li> <li>Liquid coolers</li> <li>Transport refrigeration</li> </ul>	<ul style="list-style-type: none"> <li>Visual indication of moisture: <ul style="list-style-type: none"> <li>Minimum dependence of temperature.</li> <li>Quick and clear colour change.</li> </ul> </li> <li>The flare ext. x int. version can be screwed together with filter drier (reduction of assembly costs).</li> <li>Flare connections are 4-sided for quick installation.</li> <li>All solder versions are with extended ends.</li> <li>Designed for high working pressures.</li> </ul>	<ul style="list-style-type: none"> <li>Designed for CFC/HCFC/HFC refrigerants.</li> <li>Connections: <ul style="list-style-type: none"> <li>Solder x solder</li> <li>Flare ext. x ext.</li> <li>Flare int. x ext.</li> <li>Face seal int. x ext.</li> </ul> </li> <li>Wide range with sizes from 6 to 22 mm.</li> <li>Max. working pressure: 46 bar (667 psig)</li> <li>Working temperature: -50 - 80 °C (-58 - 175 °F)</li> <li>Approvals: UL, CE.</li> </ul>

## Available types

	<b>SGM+:</b> Without moisture indicator		<b>SGN+:</b> With HFC moisture indicator
	Flare version		Flare version

## Ordering

	Type	Version	Connection in.	Connection mm	Code no.	Code no. (Industrial pack for OEM)
	SGM+ 10	Flare ext. x ext.	$\frac{3}{8} \times \frac{3}{8}$	10 x 10	014F0080	
	SGM+ 12s SGM+ 16s	Solder ODF x ODF	$\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$	16 x 16	014F0086 014F0087	

	Type	Version	Connection in.	Connection mm	Code no.	Code no. (Industrial pack for OEM)
	SGN+ 6 SGN+ 10 SGN+ 12 SGN+ 16 SGN+ 19	Flare ext. x ext.	$\frac{1}{4} \times \frac{1}{4}$	6 x 6	014F0161	014F1131
			$\frac{3}{8} \times \frac{3}{8}$	10 x 10	014F0162	014F0250
			$\frac{1}{2} \times \frac{1}{2}$	12 x 12	014F0163	
			$\frac{5}{8} \times \frac{5}{8}$	16 x 16	014F0165	
			$\frac{3}{4} \times \frac{3}{4}$	19 x 19	014F0166	
	SGN+ 6 SGN+ 10 SGN+ 12 SGN+ 16 SGN+ 19	Flare int. x ext. <sup>1)</sup>	$\frac{1}{4} \times \frac{1}{4}$	6 x 6	014F0171	014F1132
			$\frac{3}{8} \times \frac{3}{8}$	10 x 10	014F0172	014F0124
			$\frac{1}{2} \times \frac{1}{2}$	12 x 12	014F0173	014F1128
			$\frac{5}{8} \times \frac{5}{8}$	16 x 16	014F0174	014F1129
			$\frac{3}{4} \times \frac{3}{4}$	19 x 19	014F0175	
	SGN+ 6s SGN+ 10s SGN+ 12s SGN+ 16s SGN+ 19s SGN+ 22s SGN+ 22s	Solder ODF x ODF	$\frac{1}{4} \times \frac{1}{4}$		014F0181	014F0148
			$\frac{3}{8} \times \frac{3}{8}$		014F0182	014F1224
			$\frac{1}{2} \times \frac{1}{2}$		014F0183	014F0117
			$\frac{5}{8} \times \frac{5}{8}$	16 x 16	014F0184	014F0199
			$\frac{3}{4} \times \frac{3}{4}$	19 x 19	014F0185	
			$\frac{7}{8} \times \frac{7}{8}$	22 x 22	014F0186	014F0200
			$1\frac{1}{8} \times 1\frac{1}{8}$		014F0187	
	SGN+ 6s SGN+ 10s SGN+ 12s SGN+ 18s	Solder ODF x ODF		6 x 6	014F0191	014F1020
				10 x 10	014F0192	
				12 x 12	014F0193	014F1130
				18 x 18	014F0195	
	SGN+ 6s SGN+ 10s SGN+ 12s SGN+ 16s SGN+ 22s	Solder ODM x ODM	$\frac{1}{4} \times \frac{1}{4}$		014F0201	014F1201
			$\frac{3}{8} \times \frac{3}{8}$		014F0202	014F1202
			$\frac{1}{2} \times \frac{1}{2}$		014F0203	014F1203
			$\frac{5}{8} \times \frac{5}{8}$	16 x 16	014F0204	014F1204
			$\frac{7}{8} \times \frac{7}{8}$	22 x 22	014F0206	014F1206

<sup>1)</sup> Can be screwed directly into the filter drier.

## Accessories

Cap Cover		
Sight glasses	Code no.	
size 6 - 10		014F5481
size 12 - 22		014F5480

*Sight glasses – SG+*




## SG – Standard sight glasses

SG are sight glasses for commercial refrigeration applications. They are made in brass and are available in versions with flare, solder, face seal or socket connections.

The SG and SGR are mainly used to indicate the condition of the refrigerant as well as the liquid level in the receiver or the oil level in the compressor.

The SGI/SGN and SGRI/SGRN are equipped with sensitive indicators that change colour depending on the moisture content in the refrigerant.

### Features

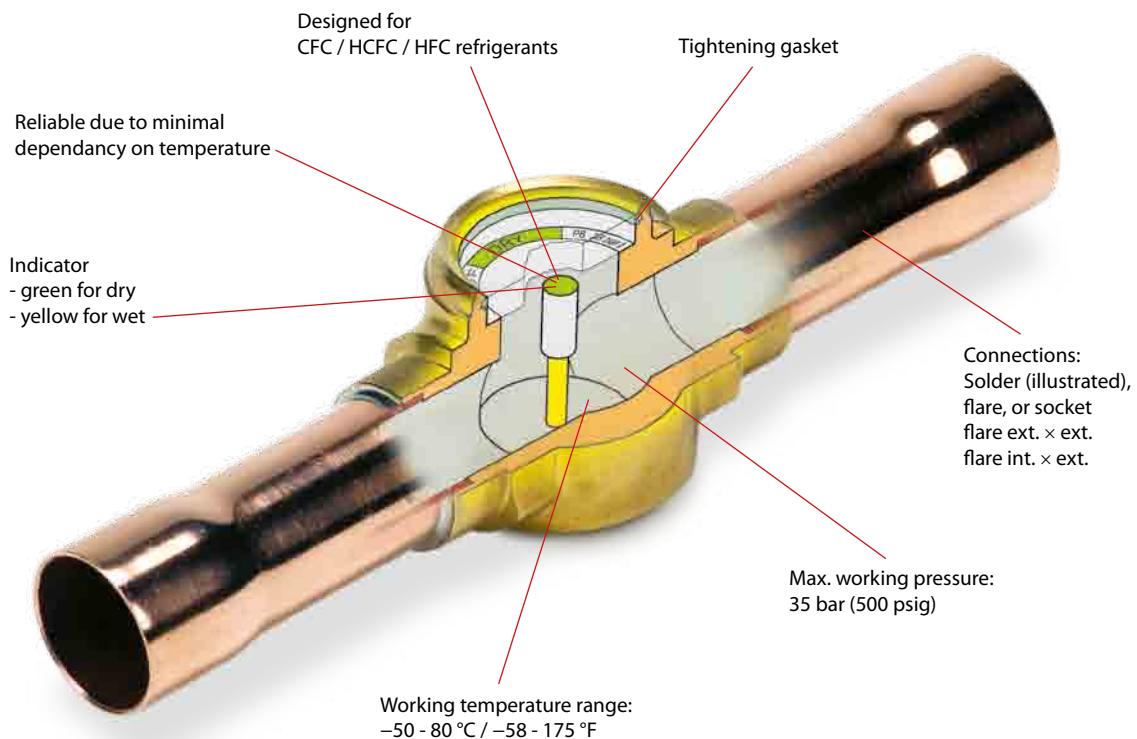

Applications	Advantages	Facts
<ul style="list-style-type: none"> <li>Traditional refrigeration</li> <li>Heat pump systems</li> <li>Air conditioning units</li> <li>Liquid coolers</li> <li>Transport refrigeration</li> </ul>	<ul style="list-style-type: none"> <li>Visual indication of moisture (minimal dependence on temperature).</li> <li>The flare ext. x int. version can be screwed together with filter drier (reduction of assembly costs).</li> <li>Flare connections are 4-sided for quick installation.</li> <li>Solder versions available with extended ends.</li> <li>Designed for high working pressures.</li> </ul>	<ul style="list-style-type: none"> <li>Designed for CFC/HCFC/HFC refrigerants.</li> <li>Connections: <ul style="list-style-type: none"> <li>Connections:</li> <li>- Solder x solder</li> <li>- Flare ext. x ext.</li> <li>- Flare int. x ext.</li> <li>- Socket</li> </ul> </li> <li>Wide range with connection sizes from 6 - 22 mm.</li> <li>Max. working pressure: 35 bar (500 psig).</li> <li>Working temperature: -50 - 80 °C (-58 - 175 °F).</li> </ul>

## Available types

	<b>SG:</b> Sight glass, no indicator
Solder version	

	<b>SGR:</b> Socket sight glass, no indicator
Socket	

	<b>SGI:</b> for refrigerants with mineral oils (CFC/HCFC), with indicator
Solder version	

	<b>SGN:</b> for refrigerants with POE oils (HFC), with indicator
Flare version	

	<b>SGRI:</b> Saddle sight glass for refrigerants with mineral oils (CFC/HCFC), with indicator
Socket	







	<b>SGRN:</b> Saddle sight glass for refrigerants with POE oils (HFC), with indicator
Saddle	

## Ordering

	Type	Version	Connection in.	Connection mm	Code no.
	SG 10	Flare ext. x ext.	$\frac{3}{8} \times \frac{3}{8}$	10 x 10	014-0080
	SG 12s SG 16s	Solder ODF x ODF	$\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$	16 x 16	014-0086 014-0087
	SGI 6 SGI 10 SGI 12 SGI 16 SGI 19	Flare ext. x ext.	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{3}{4} \times \frac{3}{4}$	6 x 6 10 x 10 12 x 12 16 x 16 19 x 19	014-0007 014-0008 014-0009 014-0024 014-0028
	SGI 6 SGI 10 SGI 12 SGI 16 SGI 19	Flare int. x ext. <sup>1)</sup>	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{3}{4} \times \frac{3}{4}$	6 x 6 10 x 10 12 x 12 16 x 16 19 x 19	014-0021 014-0022 014-0025 014-0026 014-0043
	SGI 6s SGI 10s SGI 12s SGI 16s SGI 19s SGI 22s	Solder ODF x ODF	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{3}{4} \times \frac{3}{4}$ $\frac{7}{8} \times \frac{7}{8}$	16 x 16 19 x 19 22 x 22	014-0034 014-0035 014-0036 014-0044 014-0047 014-0039
	SGI 6s SGI 10s SGI 12s SGI 18s	Solder ODF x ODF		6 x 6 10 x 10 12 x 12 18 x 18	014-0040 014-0041 014-0042 014-0045
	SGI 6s SGI 10s SGI 12s SGI 16s SGI 22s	Solder ODF x ODM	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{7}{8} \times \frac{7}{8}$	16 x 16 22 x 22	014-0125 014-0126 014-0127 014-0128 014-0130
	SGN 6 SGN 10 SGN 12 SGN 16 SGN 19	Flare ext. x ext.	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{3}{4} \times \frac{3}{4}$	6 x 6 10 x 10 12 x 12 16 x 16 19 x 19	014-0161 014-0162 014-0163 014-0165 014-0166
	SGN 6 SGN 10 SGN 12 SGN 16 SGN 19	Flare int. x ext. <sup>1)</sup>	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{3}{4} \times \frac{3}{4}$	6 x 6 10 x 10 12 x 12 16 x 16 19 x 19	014-0171 014-0172 014-0173 014-0174 014-0175
	SGN 6s SGN 10s SGN 12s SGN 16s SGN 19s SGN 22s SGN 22s	Solder ODF x ODF	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{3}{4} \times \frac{3}{4}$ $\frac{7}{8} \times \frac{7}{8}$ $1\frac{1}{8} \times 1\frac{1}{8}$	16 x 16 19 x 19 22 x 22	014-0181 014-0182 014-0183 014-0184 014-0185 014-0186 014-0187
	SGN 6s SGN 10s SGN 12s SGN 18s	Solder ODF x ODF		6 x 6 10 x 10 12 x 12 18 x 18	014-0191 014-0192 014-0193 014-0195
	SGN 6s SGN 10s SGN 12s SGN 16s SGN 22s	Solder ODF x ODM	$\frac{1}{4} \times \frac{1}{4}$ $\frac{3}{8} \times \frac{3}{8}$ $\frac{1}{2} \times \frac{1}{2}$ $\frac{5}{8} \times \frac{5}{8}$ $\frac{7}{8} \times \frac{7}{8}$	16 x 16 22 x 22	014-0201 014-0202 014-0203 014-0204 014-0206

<sup>1)</sup> Can be screwed directly into the filter drier.

## Ordering



Type	Version	Connection		Code no.	Socket type
		1	2		
SGR	SGR for saddle	G <sup>3</sup> / <sub>4</sub> A <sup>1)</sup>		014-0004	
	NPT	¾ -14 NPT <sup>2)</sup>		014-0005	
	NPT	½ -14 NPT <sup>2)</sup>		014-0002	
SGRI	SGRI for saddle	½ - 14 NPT <sup>2)</sup> M24 × 1		014-0131	
				014-1154	
SGRN	SGRN for saddle	½ -14 NPT <sup>2)</sup> M24 × 1		014-0006	
				014-1155	
Sight glass saddle	Tube fitting	M24 × 1		7/8	014-1059
				1 1/8	014-1056
				1 3/8	014-1057
				1 5/8	014-1058
				2 1/8	014-1067
				3 1/8	014-1068
				4 1/8	014-1069
SGRN	SGRN for saddle	M20 × 1.5		014-1603	
Sight glass saddle	Tube fitting	M20 × 1.5	3 1/8	014-1072	

<sup>1)</sup> ISO 228/1


<sup>2)</sup> ANSI/ASME B1.20.1



## SVA-S and SVA-L – Flexline™ Stop valves

SVA Stop valves are available in angleway and straightway versions and with Standard neck (SVA-S) and Long neck (SVA-L).

The stop valves are designed to meet all industrial refrigeration application requirements and are designed to give favourable flow characteristics and are easy to dismantle and repair when necessary.

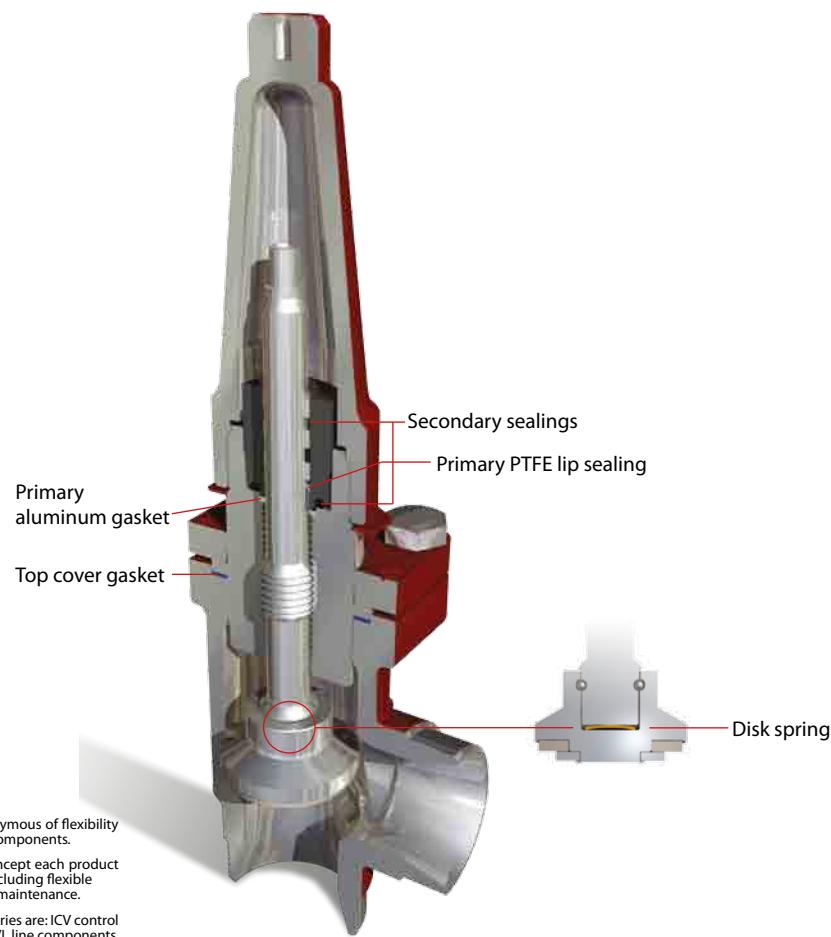

The Flexline™ platform is synonymous of flexibility within industrial refrigeration components.

Based on a modular design concept each product features a variety of benefits, including flexible selection, easy installation and maintenance.

The products in the Flexline™ series are: ICV control valves, ICF valve stations and SVL line components.

### Advantages and features

- Applicable to all common refrigerants including flammable hydrocarbons and all non-corrosive gases/liquids.  
Can be used in chemical and petro-chemical applications.
- Optional accessories:
  - Heavy duty industrial hand wheel for frequent operation.
  - Cap for infrequent operation.
- Available in angleway and straightway versions with Standard neck or Long neck (DN 15 to DN 40) for insulated systems.
- Each valve type is clearly marked with type, size and performance range.
- The valves and caps are prepared for sealing, to prevent operation by unauthorized persons, using a seal wire.
- Internal metal backseating:
  - DN 6 - 65 (1/4 - 2 1/2 in.)
- Internal PTFE backseating:
  - DN 80 - 200 (3 - 8 in.)
- Can accept flow in both directions.
- Housing and bonnet material is low temperature steel according to requirements of the Pressure Equipment Directive and other international classification authorities.

- Equipped with stainless steel bolts.
- Max. working pressure: 52 bar g (754 psi g)  
Temperature range: -60/+150°C (-76/+302°F)
- Classification: DNV, CRN, BV etc.

# Technical data and code numbers

## Technical data

- Refrigerants**  
Applicable to all common refrigerants including flammable hydrocarbons and all non-corrosive gases/liquids.
- For further information please see installation instruction for SVA.
- Temperature range** -60/+150°C (-76/+302°F).
- Pressure range** The valves are designed for max. working pressure 52 bar g (754 psi g).

## Ordering

Available connection sizes

SVA-S:

The **S** means Standard bonnet length (sizes from DN50 to DN200 are insulation friendly)

SVA-L:

The **L** means Long bonnet length (insulation friendly)

Size	SVA-S	SVA-L
6	x	-
10	x	-
15	x	x
20	x	x
25	x	x
32	x	x
40	x	x
50		x
65		x
80		x
100		x
125		x
150		x

Please note that the type codes only serve to identify the valves, some of which may not form part of the standard product range.

## Type codes

Valve type	SVA	Stop valve			
		A/D	SOC	FPT	T
(valve size measured on the connection diameter)	6	DN 6 (1/4)	x		x
	10	DN 10 (3/8)	x		x
	15	DN 15 (1/2)	x	x	x
	20	DN 20 (3/4)	x	x	x
	25	DN 25 (1)	x	x	x
	32	DN 32 (1 1/4)	x	x	x
	40	DN 40 (1 1/2)	x	x	
	50	DN 50 (2)	x	x	
	65	DN 65 (2 1/2)	x		
	80	DN 80 (3)	x		
	100	DN 100 (4)	x		
	125	DN 125 (5)	x		
	150	DN 150 (6)	x		
	200	DN 200 (8)	x		
Connections	A	Butt-weld connection: ANSI B 36.10 schedule 80, DN 15 - 40 (1/2 - 1 1/2 in.) Butt-weld connection: ANSI B 36.10 schedule 40, DN 50 - 200 (2 - 8 in.)			
	D	Butt-weld connection: DIN EN 10220			
	SOC	Socket weld: ANSI B 16.11			
	FPT	Female Pipe Thread NPT: ANSI/ASME B 1.20.1			
	T	Outside threaded connections ISO 228/1 Pipe thread			
Valve housing	ANG STR	Angle flow Straight flow			
Other equipment	H-WHEEL CAP	Hand wheel Cap			

## Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.

## Ordering SVA-S

Example:  
SVA-S 20 DIN angleway with  
hand wheel = 148B5300

### Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.

## SVA-S Angleway

Size	Type	MWP	Code
mm	in.	bar	psi

### Butt-weld DIN (EN 10220)

6	1/4	SVA-S 6 D ANG H-WHEEL	52	754	148B5000
6	1/4	SVA-S 6 D ANG CAP	52	754	148B5001
10	3/8	SVA-S 10 D ANG H-WHEEL	52	754	148B5100
10	3/8	SVA-S 10 D ANG CAP	52	754	148B5101
15	1/2	SVA-S 15 D ANG H-WHEEL	52	754	148B5200
15	1/2	SVA-S 15 D ANG CAP	52	754	148B5201
20	3/4	SVA-S 20 D ANG H-WHEEL	52	754	148B5300
20	3/4	SVA-S 20 D ANG CAP	52	754	148B5301
25	1	SVA-S 25 D ANG H-WHEEL	52	754	148B5400
25	1	SVA-S 25 D ANG CAP	52	754	148B5401
32	1 1/4	SVA-S 32 D ANG H-WHEEL	52	754	148B5500
32	1 1/4	SVA-S 32 D ANG CAP	52	754	148B5501
40	1 1/2	SVA-S 40 D ANG H-WHEEL	52	754	148B5600
40	1 1/2	SVA-S 40 D ANG CAP	52	754	148B5601
50	2	SVA-S 50 D ANG H-WHEEL	52	754	148B5700
50	2	SVA-S 50 D ANG CAP	52	754	148B5701
65	2 1/2	SVA-S 65 D ANG H-WHEEL	52	754	148B5800
65	2 1/2	SVA-S 65 D ANG CAP	52	754	148B5801
80	3	SVA-S 80 D ANG H-WHEEL	52	754	148B5900
80	3	SVA-S 80 D ANG CAP	52	754	148B5901
100	4	SVA-S 100 D ANG H-WHEEL	52	754	148B6000
100	4	SVA-S 100 D ANG CAP	52	754	148B6001
125	5	SVA-S 125 D ANG H-WHEEL	52	754	148B6100
125	5	SVA-S 125 D ANG CAP	52	754	148B6101
150	6	SVA-S 150 D ANG H-WHEEL	52	754	148B6200
150	6	SVA-S 150 D ANG CAP	52	754	148B6201
200	8	SVA-S 200 D ANG H-WHEEL	52	754	148B6300
200	8	SVA-S 200 D ANG CAP	52	754	148B6301

### Butt-weld ANSI (B 36.10 Schedule 80)

6	1/4	SVA-S 6 A ANG H-WHEEL	52	754	148B5020
6	1/4	SVA-S 6 A ANG CAP	52	754	148B5021
10	3/8	SVA-S 10 A ANG H-WHEEL	52	754	148B5120
10	3/8	SVA-S 10 A ANG CAP	52	754	148B5121
15	1/2	SVA-S 15 A ANG H-WHEEL	52	754	148B5220
15	1/2	SVA-S 15 A ANG CAP	52	754	148B5221
20	3/4	SVA-S 20 A ANG H-WHEEL	52	754	148B5320
20	3/4	SVA-S 20 A ANG CAP	52	754	148B5321
25	1	SVA-S 25 A ANG H-WHEEL	52	754	148B5420
25	1	SVA-S 25 A ANG CAP	52	754	148B5421
32	1 1/4	SVA-S 32 A ANG H-WHEEL	52	754	148B5520
32	1 1/4	SVA-S 32 A ANG CAP	52	754	148B5521
40	1 1/2	SVA-S 40 A ANG H-WHEEL	52	754	148B5620
40	1 1/2	SVA-S 40 A ANG CAP	52	754	148B5621

### Butt-weld ANSI (B 36.10 Schedule 40)

50	2	SVA-S 50 A ANG H-WHEEL	52	754	148B5720
50	2	SVA-S 50 A ANG CAP	52	754	148B5721
65	2 1/2	SVA-S 65 A ANG H-WHEEL	52	754	148B5820
65	2 1/2	SVA-S 65 A ANG CAP	52	754	148B5821
80	3	SVA-S 80 A ANG H-WHEEL	52	754	148B5920
80	3	SVA-S 80 A ANG CAP	52	754	148B5921
100	4	SVA-S 100 A ANG H-WHEEL	52	754	148B6020
100	4	SVA-S 100 A ANG CAP	52	754	148B6021
125	5	SVA-S 125 A ANG H-WHEEL	52	754	148B6120
125	5	SVA-S 125 A ANG CAP	52	754	148B6121
150	6	SVA-S 150 A ANG H-WHEEL	52	754	148B6220
150	6	SVA-S 150 A ANG CAP	52	754	148B6221
200	8	SVA-S 200 A ANG H-WHEEL	52	754	148B6320
200	8	SVA-S 200 A ANG CAP	52	754	148B6321

### Socket welding ANSI (B 16.11)

15	1/2	SVA-S 15 SOC ANG H-WHEEL	52	754	148B5222
15	1/2	SVA-S 15 SOC ANG CAP	52	754	148B5223
20	3/4	SVA-S 20 SOC ANG H-WHEEL	52	754	148B5322
20	3/4	SVA-S 20 SOC ANG CAP	52	754	148B5323
25	1	SVA-S 25 SOC ANG H-WHEEL	52	754	148B5422
25	1	SVA-S 25 SOC ANG CAP	52	754	148B5423
32	1 1/4	SVA-S 32 SOC ANG H-WHEEL	52	754	148B5522
32	1 1/4	SVA-S 32 SOC ANG CAP	52	754	148B5523
40	1 1/2	SVA-S 40 SOC ANG H-WHEEL	52	754	148B5622
40	1 1/2	SVA-S 40 SOC ANG CAP	52	754	148B5623
50	2	SVA-S 50 SOC ANG H-WHEEL	52	754	148B5722
50	2	SVA-S 50 SOC ANG CAP	52	754	148B5723

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1)

15	1/2	SVA-S 15 FTP ANG H-WHEEL	52	754	148B5224
15	1/2	SVA-S 15 FTP ANG CAP	52	754	148B5225
20	3/4	SVA-S 20 FTP ANG H-WHEEL	52	754	148B5324
20	3/4	SVA-S 20 FTP ANG CAP	52	754	148B5325
25	1	SVA-S 25 FTP ANG H-WHEEL	52	754	148B5424
25	1	SVA-S 25 FTP ANG CAP	52	754	148B5425
32	1 1/4	SVA-S 32 FTP ANG H-WHEEL	52	754	148B5524
32	1 1/4	SVA-S 32 FTP ANG CAP	52	754	148B5525

### Outside pipe thread, ISO 228/1

6	1/4	SVA-S 6 T ANG CAP	52	754	148B5032
---	-----	-------------------	----	-----	----------

## SVA-S Straightway

Size	Type	MWP	Code
mm	in.	bar	number

### Butt-weld DIN (EN 10220)

6	1/4	SVA-S 6 D STR H-WHEEL	52	754	148B5010
6	1/4	SVA-S 6 D STR CAP	52	754	148B5011
10	3/8	SVA-S 10 D STR H-WHEEL	52	754	148B5110
10	3/8	SVA-S 10 D STR CAP	52	754	148B5111
15	1/2	SVA-S 15 D STR H-WHEEL	52	754	148B5210
15	1/2	SVA-S 15 D STR CAP	52	754	148B5211
20	3/4	SVA-S 20 D STR H-WHEEL	52	754	148B5310
20	3/4	SVA-S 20 D STR CAP	52	754	148B5311
25	1	SVA-S 25 D STR H-WHEEL	52	754	148B5410
25	1	SVA-S 25 D STR CAP	52	754	148B5411
32	1 1/4	SVA-S 32 D STR H-WHEEL	52	754	148B5510
32	1 1/4	SVA-S 32 D STR CAP	52	754	148B5511
40	1 1/2	SVA-S 40 D STR H-WHEEL	52	754	148B5610
40	1 1/2	SVA-S 40 D STR CAP	52	754	148B5611
50	2	SVA-S 50 D STR H-WHEEL	52	754	148B5710
50	2	SVA-S 50 D STR CAP	52	754	148B5711
65	2 1/2	SVA-S 65 D STR H-WHEEL	52	754	148B5810
65	2 1/2	SVA-S 65 D STR CAP	52	754	148B5811
80	3	SVA-S 80 D STR H-WHEEL	52	754	148B5910
80	3	SVA-S 80 D STR CAP	52	754	148B5911
100	4	SVA-S 100 D STR H-WHEEL	52	754	148B6010
100	4	SVA-S 100 D STR CAP	52	754	148B6011
125	5	SVA-S 125 D STR H-WHEEL	52	754	148B6110
125	5	SVA-S 125 D STR CAP	52	754	148B6111
150	6	SVA-S 150 D STR H-WHEEL	52	754	148B6210
150	6	SVA-S 150 D STR CAP	52	754	148B6211
200	8	SVA-S 200 D STR H-WHEEL	52	754	148B6310
200	8	SVA-S 200 D STR CAP	52	754	148B6311

### Butt-weld ANSI (B 36.10 Schedule 80)

6	1/4	SVA-S 6 A STR H-WHEEL	52	754	148B5030
6	1/4	SVA-S 6 A STR CAP	52	754	148B5031
10	3/8	SVA-S 10 A STR H-WHEEL	52	754	148B5130
10	3/8	SVA-S 10 A STR CAP	52	754	148B5131
15	1/2	SVA-S 15 A STR H-WHEEL	52	754	148B5230
15	1/2	SVA-S 15 A STR CAP	52	754	148B5231
20	3/4	SVA-S 20 A STR H-WHEEL	52	754	148B5330
20	3/4	SVA-S 20 A STR CAP	52	754	148B5331
25	1	SVA-S 25 A STR H-WHEEL	52	754	148B5430
25	1	SVA-S 25 A STR CAP	52	754	148B5431
32	1 1/4	SVA-S 32 A STR H-WHEEL	52	754	148B5530
32	1 1/4	SVA-S 32 A STR CAP	52	754	148B5531
40	1 1/2	SVA-S 40 A STR H-WHEEL	52	754	148B5630
40	1 1/2	SVA-S 40 A STR CAP	52	754	148B5631
50	2	SVA-S 50 A STR H-WHEEL	52	754	148B5730
50	2	SVA-S 50 A STR CAP	52	754	148B5731

### Socket welding ANSI (B 16.11)

15	1/2	SVA-S 15 SOC STR H-WHEEL	52	754	148B5232
15	1/2	SVA-S 15 SOC STR CAP			

## Ordering SVA-L

Example:  
SVA-L 20 DIN angleway with  
hand wheel = 148B5340

### Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.

## SVA-L Angleway

Size	Type	MWP	Code	
mm	in.	bar	psi	number

### Butt-weld DIN (EN 10220)

15	1/2	SVA-L 15 D ANG H-WHEEL	52	754	148B5240
15	1/2	SVA-L 15 D ANG CAP	52	754	148B5241
20	3/4	SVA-L 20 D ANG H-WHEEL	52	754	148B5340
20	3/4	SVA-L 20 D ANG CAP	52	754	148B5341
25	1	SVA-L 25 D ANG H-WHEEL	52	754	148B5440
25	1	SVA-L 25 D ANG CAP	52	754	148B5441
32	1 1/4	SVA-L 32 D ANG H-WHEEL	52	754	148B5540
32	1 1/4	SVA-L 32 D ANG CAP	52	754	148B5541
40	1 1/2	SVA-L 40 D ANG H-WHEEL	52	754	148B5640
40	1 1/2	SVA-L 40 D ANG CAP	52	754	148B5641

### Butt-weld ANSI (B 36.10 Schedule 80)

15	1/2	SVA-L 15 A ANG H-WHEEL	52	754	148B5260
15	1/2	SVA-L 15 A ANG CAP	52	754	148B5261
20	3/4	SVA-L 20 A ANG H-WHEEL	52	754	148B5360
20	3/4	SVA-L 20 A ANG CAP	52	754	148B5361
25	1	SVA-L 25 A ANG H-WHEEL	52	754	148B5460
25	1	SVA-L 25 A ANG CAP	52	754	148B5461
32	1 1/4	SVA-L 32 A ANG H-WHEEL	52	754	148B5560
32	1 1/4	SVA-L 32 A ANG CAP	52	754	148B5561
40	1 1/2	SVA-L 40 A ANG H-WHEEL	52	754	148B5660
40	1 1/2	SVA-L 40 A ANG CAP	52	754	148B5661

### Socket welding ANSI (B 16.11)

15	1/2	SVA-L 15 SOC ANG H-WHEEL	52	754	148B5262
15	1/2	SVA-L 15 SOC ANG CAP	52	754	148B5263
20	3/4	SVA-L 20 SOC ANG H-WHEEL	52	754	148B5362
20	3/4	SVA-L 20 SOC ANG CAP	52	754	148B5363
25	1	SVA-L 25 SOC ANG H-WHEEL	52	754	148B5462
25	1	SVA-L 25 SOC ANG CAP	52	754	148B5463
32	1 1/4	SVA-L 32 SOC ANG H-WHEEL	52	754	148B5562
32	1 1/4	SVA-L 32 SOC ANG CAP	52	754	148B5563
40	1 1/2	SVA-L 40 SOC ANG H-WHEEL	52	754	148B5662
40	1 1/2	SVA-L 40 SOC ANG CAP	52	754	148B5663

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1)

15	1/2	SVA-L 15 FTP ANG H-WHEEL	52	754	148B5264
15	1/2	SVA-L 15 FTP ANG CAP	52	754	148B5265
20	3/4	SVA-L 20 FTP ANG H-WHEEL	52	754	148B5364
20	3/4	SVA-L 20 FTP ANG CAP	52	754	148B5365
25	1	SVA-L 25 FTP ANG H-WHEEL	52	754	148B5464
25	1	SVA-L 25 FTP ANG CAP	52	754	148B5465
32	1 1/4	SVA-L 32 FTP ANG H-WHEEL	52	754	148B5564
32	1 1/4	SVA-L 32 FTP ANG CAP	52	754	148B5565

## SVA-L Straightway

Size	Type	MWP	Code	
mm	in.	bar	psi	number

### Butt-weld DIN (EN 10220)

15	1/2	SVA-L 15 D STR H-WHEEL	52	754	148B5250
15	1/2	SVA-L 15 D STR CAP	52	754	148B5251
20	3/4	SVA-L 20 D STR H-WHEEL	52	754	148B5350
20	3/4	SVA-L 20 D STR CAP	52	754	148B5351
25	1	SVA-L 25 D STR H-WHEEL	52	754	148B5450
25	1	SVA-L 25 D STR CAP	52	754	148B5451
32	1 1/4	SVA-L 32 D STR H-WHEEL	52	754	148B5550
32	1 1/4	SVA-L 32 D STR CAP	52	754	148B5551
40	1 1/2	SVA-L 40 D STR H-WHEEL	52	754	148B5650
40	1 1/2	SVA-L 40 D STR CAP	52	754	148B5651

### Butt-weld ANSI (B 36.10 Schedule 80)

15	1/2	SVA-L 15 A STR H-WHEEL	52	754	148B5270
15	1/2	SVA-L 15 A STR CAP	52	754	148B5271
20	3/4	SVA-L 20 A STR H-WHEEL	52	754	148B5370
20	3/4	SVA-L 20 A STR CAP	52	754	148B5371
25	1	SVA-L 25 A STR H-WHEEL	52	754	148B5470
25	1	SVA-L 25 A STR CAP	52	754	148B5471
32	1 1/4	SVA-L 32 A STR H-WHEEL	52	754	148B5570
32	1 1/4	SVA-L 32 A STR CAP	52	754	148B5571
40	1 1/2	SVA-L 40 A STR H-WHEEL	52	754	148B5670
40	1 1/2	SVA-L 40 A STR CAP	52	754	148B5671

### Socket welding ANSI (B 16.11)

15	1/2	SVA-L 15 SOC STR H-WHEEL	52	754	148B5272
15	1/2	SVA-L 15 SOC STR CAP	52	754	148B5273
20	3/4	SVA-L 20 SOC STR H-WHEEL	52	754	148B5372
20	3/4	SVA-L 20 SOC STR CAP	52	754	148B5373
25	1	SVA-L 25 SOC STR H-WHEEL	52	754	148B5472
25	1	SVA-L 25 SOC STR CAP	52	754	148B5473
32	1 1/4	SVA-L 32 SOC STR H-WHEEL	52	754	148B5572
32	1 1/4	SVA-L 32 SOC STR CAP	52	754	148B5573
40	1 1/2	SVA-L 40 SOC STR H-WHEEL	52	754	148B5672
40	1 1/2	SVA-L 40 SOC STR CAP	52	754	148B5673

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1)

15	1/2	SVA-L 15 FTP STR H-WHEEL	52	754	148B5274
15	1/2	SVA-L 15 FTP STR CAP	52	754	148B5275
20	3/4	SVA-L 20 FTP STR H-WHEEL	52	754	148B5374
20	3/4	SVA-L 20 FTP STR CAP	52	754	148B5375
25	1	SVA-L 25 FTP STR H-WHEEL	52	754	148B5474
25	1	SVA-L 25 FTP STR CAP	52	754	148B5475
32	1 1/4	SVA-L 32 FTP STR H-WHEEL	52	754	148B5574
32	1 1/4	SVA-L 32 FTP STR CAP	52	754	148B5575

## Accessories

### 6T and 10-15T Nipple Kit solution

Code no.	
148B4244	ACCESSORY WELD.NIPPLE DN10 D + UNION NUT
148B4245	ACCESSORY WELD.NIPPLE DN6 A + UNION NUT
148B4246	ACCESSORY WELD.NIPPLE DN10 A + UNION NUT
148B4247	ACCESSORY WELD.NIPPLE DN15 A + UNION NUT
148B4184	ACCESSORY WELD.NIPPLE DN6 D + UNION NUT
148B4185	ACCESSORY WELD.NIPPLE DN15 D + UNION NUT



## SNV-ST/SNV-SS – Stop needle valves

SNV valves are designed to meet all industrial refrigeration application requirements. Designed as service valves they provide favourable flow characteristics. Available in standard version with normal or extended tube.



Advantages and features	
<ul style="list-style-type: none"><li>Applicable to all common refrigerants including R717 and R744 (CO<sub>2</sub>) and non corrosive gases/liquids.</li><li>Suitable for "heavy duty" industrial applications having a very sturdy and safe design including high pressures and wide temperature range.</li><li>The SNV-ST and SNV-SS valves have backseating (metal to metal).</li><li>Compact and light valve for easy handling and installation</li><li>No special flow direction required.</li><li>Provide high flow characteristics.</li><li>Each valve type is clearly marked with type and size.</li></ul>	<ul style="list-style-type: none"><li>Housing and bonnet material is low temperature steel (stainless steel for SNV-SS) according to requirements of the Pressure Equipment Directive and other international classification authorities.</li><li>Valve safety is enhanced with the spindle being secured such that it cannot be unscrewed.</li><li>Max. operating pressure: 52 bar g ( 754 psig) Valves for higher operating pressure available on request</li><li>Full temperature range: –60/+150°C (–76/+302°F)</li></ul>

# Technical data and code numbers

## Technical data

### Refrigerants

Applicable to all common refrigerants including R 717 and R744 (CO<sub>2</sub>) and non corrosive gases/liquids. For further information please see installation instruction for SNV-ST.

### Temperature range

-60/+150°C (-76/+302°F).

### Maximum working pressure

The valve is designed for: Maximum operating pressure of 52 bar g ( 754 psig). Valves for higher operating pressure available on request.


## Code numbers

### How to order

The table below is used to identify the valve required. Please note that the type codes only serve to identify the valves, some of which may not form part of the standard product range.

### Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.

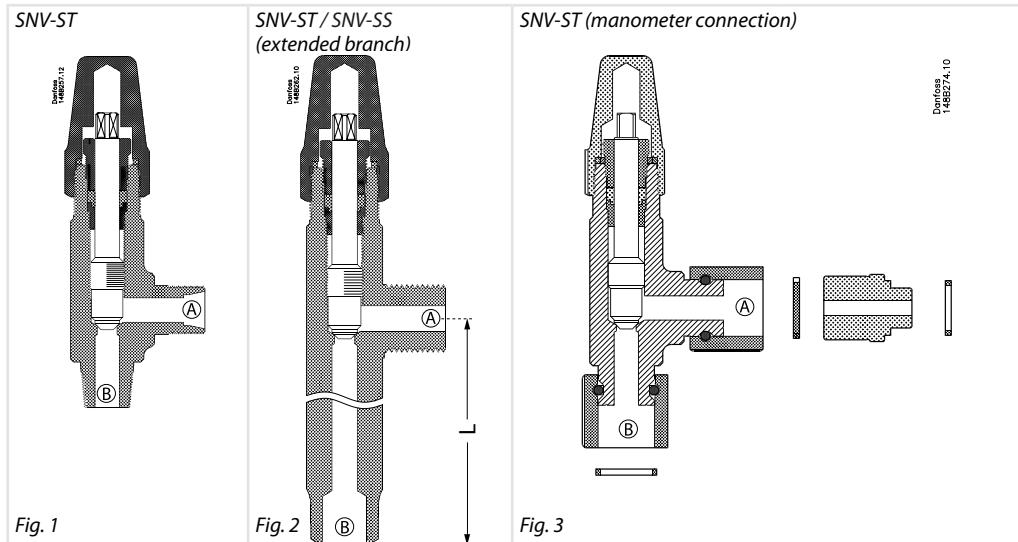

### See figure 1

Side branch connection A	Bottom branch connection B	Type	Quantity	Code no.
CD 10	CD 10	SNV-ST CD10-CD10	1 pc.	148B3740
CD 10	CD 10	SNV-ST CD10-CD10	30 pcs.	148B4177
CD 10	1/4 MPT	SNV-ST CD10-1/4MPT	1 pc.	148B3741
CD 6	1/4 MPT	SNV-ST CD6-1/4MPT	1 pc.	148B3742
CD 10	3/8 MPT	SNV-ST CD10-3/8MPT	1 pc.	148B3743
CD 6	3/8 MPT	SNV-ST CD6-3/8MPT	1 pc.	148B3744
G 1/2 (external)	G 1/2 (external)	SNV-ST G1/2-G1/2	1 pc.	148B3745
G 1/2 (external)	G 1/2 (external)	SNV-ST G1/2-G1/2	30 pcs.	148B4179
1/4 FPT	1/4 MPT	SNV-ST 1/4FPT-1/4MPT	1 pc.	148B3746
1/4 FPT	1/4 MPT	SNV-ST 1/4FPT-1/4MPT	30 pcs.	148B4180
3/8 FPT	3/8 MPT	SNV-ST 3/8FPT-3/8MPT	1 pc.	148B3747
3/8 FPT	3/8 MPT	SNV-ST 3/8FPT-3/8MPT	30 pcs.	148B4181
3/8 FPT	1/2 MPT	SNV-ST 3/8FPT-1/2MPT	30 pcs.	148B4233
1/4 FPT	1/4 FPT	SNV-ST 1/4FPT-1/4FPT	30 pcs.	148B4223
1/2 MPT	1/2 MPT	SNV-ST 1/2MPT-1/2MPT	30 pcs.	148B4224
3/8 FPT	3/8 FPT	SNV-ST 3/8FPT-3/8FPT	30 pcs.	148B4225
1/2 MPT	3/8 FPT	SNV-ST 1/2MPT-3/8FPT	30 pcs.	148B4226
CD 6	1/4 MPT	SNV-ST CD6-1/4MPT*	30 pcs.	148B4216
7/16 UNF	1/4 MPT	SNV-ST 7/16UNF-1/4MPT	30 pcs.	148B4230

\* With handwheel

### Extended Branch

### See figure 2

L50 = 50 mm (2 in.)  
L100 = 100 mm (4 in.)  
L125 = 125 mm (5 in.)  
L150 = 150 mm (6 in.)

Side branch connection A	Bottom branch connection B	Type	Quantity	Code no.
CD10	W½ L100	SNV-ST CD10-W1/2 L100	1 pc.	148B3768
CD10	W½ L100	SNV-ST CD10-W1/2 L100	30 pcs.	148B4210
G 1/2 (external)	W½ L100	SNV-ST G1/2-W1/2 L100	1 pc.	148B3769
G 1/2 (external)	W½ L100	SNV-ST G1/2-W1/2 L100	30 pcs.	148B4211
G 1/2 (external)	W½ L125	SNV-ST G1/2-W1/2 L125	30 pcs.	148B4219
G 1/2 (external)	W½ L50	SNV-ST G1/2-W1/2 L50	30 pcs.	148B4218
G ¼ (internal)	R½ L50 (external)	SNV-ST G1/4-R1/4 L50	30 pcs.	148B4231
1/4 FPT	1/4 MPT L100	SNV-ST 1/4FPT-1/4MPT L100	30 pcs.	148B4232
G 1/2 (external)	W½ L50	SNV-SS G1/2-W1/2 L50	1 pc.	148B4265
G 1/2 (external)	W½ L150	SNV-SS G1/2-W1/2 L150	1 pc.	148B4266
G (external)	W½ L125	SNV-ST G3/8-W1/2 L125	30 pcs.	148B4336

### Manometer connection

### See figure 3

Side branch connection	Bottom branch connection	Type	Quantity	Code no.
G ½	G ½	SNV-ST G½ Man	1 pc.	148B3778**

\*\* Including adaptor for connection to ICS/PM valve



## FIA – Flexline™ Filters (SVL platform)

FIA filters are a range of angleway and straightway filters, which are carefully designed to give favourable flow conditions. The design makes the filter easy to install, and ensures quick filter inspection and cleaning.



The Flexline™ platform is synonymous of flexibility within industrial refrigeration components.

Based on a modular design concept each product features a variety of benefits, including flexible selection, easy installation and maintenance.

The products in the Flexline™ series are: ICV control valves, ICF valve stations and SVL line components.

### Advantages and features

- Housing is standard SVA angleway or straightway housing allowing other inserts from the SVL platform to be installed.
- Applicable to all common refrigerants including flammable hydrocarbons and all non-corrosive gases/liquids. Can be used in chemical and petro-chemical applications.
- Filter net of stainless steel mounted direct without extra gaskets means easy servicing.
- Two types of filter inserts are available:
  - A plain insert of stainless steel.
  - A pleated insert (DN 15-200) with extra large surface, which ensures long intervals between cleaning and low pressure drop.
- FIA 15-40 (½ – 1 ½ in.):  
A special insert (50µ) can be used in combination with a standard version when cleaning a plant during commissioning.
- FIA 50-200 (2 - 8 in.):  
A large capacity filter bag (50µ) can be inserted for cleaning plant during commissioning.

- FIA 50-200 (2 - 8 in.) can be equipped with a magnetic insert for detention of iron particles and other magnetic particles.
- Each filter clearly marked with type, size and performance range
- Housing and bonnet of low temperature steel in accordance with the requirements of the Pressure Equipment Directive and those of other international classification authorities
- Temperature range:  
-60/+150°C (-76/+302°F)
- Max. working pressure:  
52 bar g (754 psi g)

# Technical data, code numbers and accessories

## Technical data

### Refrigerants

Applicable to all common refrigerants including flammable refrigerants and all non-corrosive gases/liquids. For further information please see installation instruction for FIA.

### Temperature range

-60°C/+150°C (-76°F/+302°F).

### Max. working pressure:

52 bar g (754 psi g).

## Code numbers

The table below is used to identify the filter required. Please note that you have to order **FIA filter without element, a filter element and accessories**.

### Example:

FIA 50 D ANG + FIA-X 50 150µ Filter Element + Filter Bag =  
**148H5912 + 148H3130 + 148H3150**

Size	Type	FIA Without Filter Element	Filter Element 100µ 150 mesh	Filter Element 150µ 100 mesh	Filter Element 250µ 72 mesh	Filter Element 500µ 38 mesh	Pleated filter element 150µ 100 mesh	Pleated filter element 250µ 72 mesh	Pleated filter element 500µ 38 mesh
mm	in.								

### Butt-weld DIN (EN 10220) - Angleway

15	½	FIA 15 D ANG	148B5242
20	¾	FIA 20 D ANG	148B5342
25	1	FIA 25 D ANG	148B5442
32	1¼	FIA 32 D ANG	148B5543
40	1½	FIA 40 D ANG	148B5624
50	2	FIA 50 D ANG	148B5712
65	2½	FIA 65 D ANG	148B5812
80	3	FIA 80 D ANG	148B5905
100	4	FIA 100 D ANG	148B6006
125	5	FIA 125 D ANG	148B6105
150	6	FIA 150 D ANG	148B6202
200	8	FIA 200 D ANG	148B6302

148H3122	148H3124	148H3126	148H3128	148H3303	-	-
148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-
148H3157	148H3130	148H3138	148H3144	148H3179	148H3184	148H3189
-	148H3131	148H3139	148H3145	148H3180	148H3185	148H3190
-	148H3119	148H3120	148H3121	148H3181	148H3186	148H3191
-	148H3132	148H3140	148H3146	148H3182	148H3187	148H3192
-	148H3133	148H3141	148H3147	148H3183	148H3188	148H3193
-	148H3134	148H3142	148H3148	148H3226	-	-
-	148H3135	148H3143	148H3149	-	-	-

### Butt-weld DIN (EN 10220) - Straightway

15	½	FIA 15 D STR	148B5243
20	¾	FIA 20 D STR	148B5343
25	1	FIA 25 D STR	148B5443
32	1¼	FIA 32 D STR	148B5544
40	1½	FIA 40 D STR	148B5625
50	2	FIA 50 D STR	148B5713
65	2½	FIA 65 D STR	148B5813
80	3	FIA 80 D STR	148B5906
100	4	FIA 100 D STR	148B6007
125	5	FIA 125 D STR	148B6106
150	6	FIA 150 D STR	148B6203
200	8	FIA 200 D STR	148B6303

148H3122	148H3124	148H3126	148H3128	148H3303	-	-
148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-
148H3157	148H3130	148H3138	148H3144	148H3179	148H3184	148H3189
-	148H3131	148H3139	148H3145	148H3180	148H3185	148H3190
-	148H3119	148H3120	148H3121	148H3181	148H3186	148H3191
-	148H3132	148H3140	148H3146	148H3182	148H3187	148H3192
-	148H3133	148H3141	148H3147	148H3183	148H3188	148H3193
-	148H3134	148H3142	148H3148	148H3226	-	-
-	148H3135	148H3143	148H3149	-	-	-

### Butt-weld ANSI (B 36.10 Schedule 80) - Angleway

15	½	FIA 15 A ANG	148B5244
20	¾	FIA 20 A ANG	148B5344
25	1	FIA 25 A ANG	148B5444
32	1¼	FIA 32 A ANG	148B5545
40	1½	FIA 40 A ANG	148B5642

148H3122	148H3124	148H3126	148H3128	148H3303	-	-
148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-

### Butt-weld ANSI (B 36.10 Schedule 80) - Straightway

15	½	FIA 15 A STR	148B5247
20	¾	FIA 20 A STR	148B5347
25	1	FIA 25 A STR	148B5447
32	1¼	FIA 32 A STR	148B5552
40	1½	FIA 40 A STR	148B5644

148H3122	148H3124	148H3126	148H3128	148H3303	-	-
148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-

### Butt-weld ANSI (B 36.10 Schedule 40) - Angleway

50	2	FIA 50 A ANG	148B5714
65	2½	FIA 65 A ANG	148B5814
80	3	FIA 80 A ANG	148B5907
100	4	FIA 100 A ANG	148B6008
125	5	FIA 125 A ANG	148B6107
150	6	FIA 150 A ANG	148B6204
200	8	FIA 200 A ANG	148B6304

148H3157	148H3130	148H3138	148H3144	148H3179	148H3184	148H3189
-	148H3131	148H3139	148H3145	148H3180	148H3185	148H3190
-	148H3119	148H3120	148H3121	148H3181	148H3186	148H3191
-	148H3132	148H3140	148H3146	148H3182	148H3187	148H3192
-	148H3133	148H3141	148H3147	148H3183	148H3188	148H3193
-	148H3134	148H3142	148H3148	148H3226	-	-
-	148H3135	148H3143	148H3149	-	-	-

## Code numbers (continued)

Size	Type	FIA Without Filter Element	Filter Element 100µ 150 mesh	Filter Element 150µ 100 mesh	Filter Element 250µ 72 mesh	Filter Element 500µ 38 mesh	Pleated filter element 150µ 100 mesh	Pleated filter element 250µ 72 mesh	Pleated filter element 500µ 38 mesh
mm	in.								

### Butt-weld ANSI (B 36.10 Schedule 40) - Straightway

50	2	FIA 50 A STR	148B5716	148H3157	148H3130	148H3138	148H3144	148H3179	148H3184	148H3189
65	2½	FIA 65 A STR	148B5815	-	148H3131	148H3139	148H3145	148H3180	148H3185	148H3190
80	3	FIA 80 A STR	148B5908	-	148H3119	148H3120	148H3121	148H3181	148H3186	148H3191
100	4	FIA 100 A STR	148B6009	-	148H3132	148H3140	148H3146	148H3182	148H3187	148H3192
125	5	FIA 125 A STR	148B6108	-	148H3133	148H3141	148H3147	148H3183	148H3188	148H3193
150	6	FIA 150 A STR	148B6205	-	148H3134	148H3142	148H3148	148H3226	-	-
200	8	FIA 200 A STR	148B6305	-	148H3135	148H3143	148H3149	-	-	-

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1) - Angleway

15	½	FIA 15 FTP ANG	148B5246	148H3122	148H3124	148H3126	148H3128	148H3303	-	-
20	¾	FIA 20 FTP ANG	148B5346	148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-
25	1	FIA 25 FTP ANG	148B5446							
32	1¼	FIA 32 FTP ANG	148B5547							

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1) - Straightway

15	½	FIA 15 FTP STR	148B5249	148H3122	148H3124	148H3126	148H3128	148H3303	-	-
20	¾	FIA 20 FTP STR	148B5349	148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-
25	1	FIA 25 FTP STR	148B5449							
32	1¼	FIA 32 FTP STR	148B5549							

### Socket welding ANSI (B 16.11) - Angleway

15	½	FIA 15 SOC ANG	148B5245	148H3122	148H3124	148H3126	148H3128	148H3303	-	-
20	¾	FIA 20 SOC ANG	148B5345	148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-
25	1	FIA 25 SOC ANG	148B5445							
32	1¼	FIA 32 SOC ANG	148B5546							
40	1½	FIA 40 SOC ANG	148B5643							
50	2	FIA 50 SOC ANG	148B5715	148H3157	148H3130	148H3138	148H3144	148H3179	148H3184	148H3189

### Socket welding ANSI (B 16.11) - Straightway

15	½	FIA 15 SOC STR	148B5248	148H3122	148H3124	148H3126	148H3128	148H3303	-	-
20	¾	FIA 20 SOC STR	148B5348	148H3123	148H3125	148H3127	148H3129	148H3304	148H3269	-
25	1	FIA 25 SOC STR	148B5448							
32	1¼	FIA 32 SOC STR	148B5548							
40	1½	FIA 40 SOC STR	148B5645	148H3157	148H3130	148H3138	148H3144	148H3179	148H3184	148H3189
50	2	FIA 50 SOC STR	148B5717							

SOC = Socket welding

FPT = Inside pipe thread

ANG = Angleway

STR = Straightway

The products are also available in stainless steel.

Please refer to the Danfoss brochure DKRCI.PD.K00.A for further details or contact your local Danfoss sales office.

## Accessories

Part	Accessory for	Code number
Magnet insert	FIA 65-100 FIA 125-200	148H3447 148H3448
Filter element µ150 with removable element µ50 for the first start up	FIA 15-20 FIA 25-40	148H3301 148H3302
Filter bag	FIA 50 FIA 65 FIA 80 FIA 100 FIA 125 FIA 150 FIA 200	148H3150 148H3151 148H3152 148H3153 148H3154 148H3155 148H3156
Purge valve complete Blind nut with gasket	FIA 50 - 300	148B3745 148H3450


## Notes



## REG-SA and REG-SB – Flexline™ Regulating valves

REG-SA and REG-SB are angleway and straightway hand regulating valves, which act as normal stop valves in closed position.

The valves are available in two different versions – REG-SA is for use in expansion lines (cone type A), while REG-SB is designed for regulation purposes in liquid lines (cone type B).

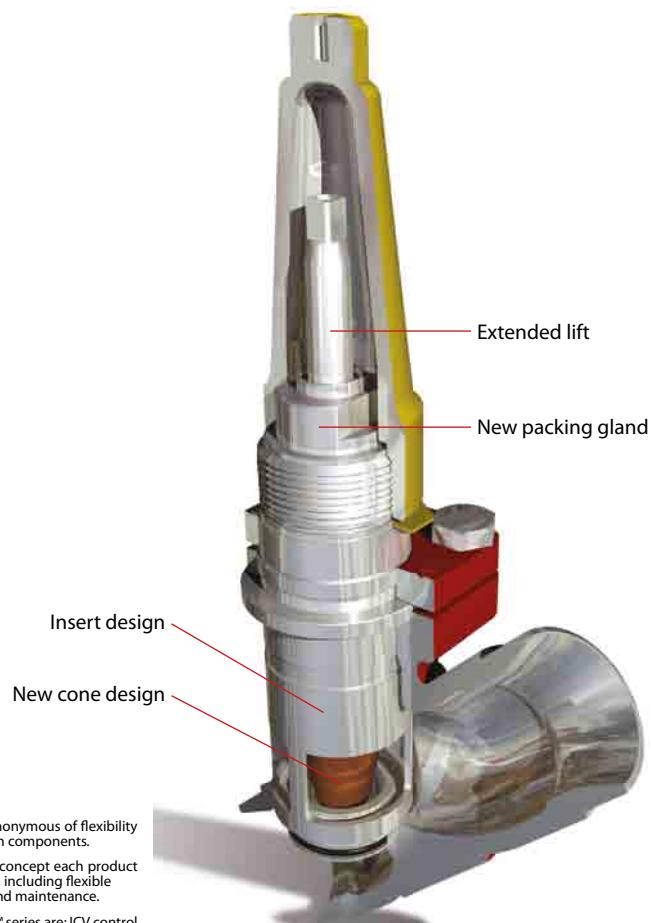

The Flexline™ platform is synonymous of flexibility within industrial refrigeration components.

Based on a modular design concept each product features a variety of benefits, including flexible selection, easy installation and maintenance.

The products in the Flexline™ series are: ICV control valves, ICF valve stations and SVL line components.

Advantages and features	
<ul style="list-style-type: none"><li>Housing is Standard SVL angleway or straightway housing allowing other inserts from the SVL platform to be installed. Applicable to all common non-flammable refrigerants and all non-corrosive gases/liquids.</li><li>Can be used in chemical and petro-chemical applications.</li><li>Designed to ensure perfect regulation</li><li>Internal backseating enables replacement of the spindle seal whilst the valve is active, i.e. under pressure.</li><li>Easy to disassemble for inspection and possible repair.</li></ul>	<ul style="list-style-type: none"><li>Max. operating pressure: 52 bar g (754 psi g)</li><li>Temperature range: -60/+150°C (-76/+302°F)</li><li>Acts as a normal stop valve in closed position.</li><li>Housing and bonnet material is low temperature steel according to requirements of the Pressure Equipment Directive and other international classification authorities.</li></ul>

# Technical data and code numbers

## Technical data

- Refrigerants**  
Applicable to all common non-flammable refrigerants and all non-corrosive gases/liquids.
- Can be used in chemical and petro-chemical applications.
- Temperature range**  
-60/+150°C (-76/+302°F)

- Max working pressure**  
52 bar g (754 psi g)
- Flow coefficients**  
Flow coefficients for fully opened valves from  $k_v = 0.15$  to  $80 \text{ m}^3/\text{h}$  ( $C_v = 0.17$  to 92.5 USgal/min).

## Code numbers

Example:

REG-SA (Cone A) 15 DIN  
angleway = **148B5226**

## REG-SA (Cone type A)

### Butt-weld DIN (EN 10220)

Size		Type	Code no.
mm	in.		

#### Angleway - REG-SA with cone type A

10	3/8	REG-SA 10 D ANG	148B5102
15	1/2	REG-SA 15 D ANG	148B5226
20	3/4	REG-SA 20 D ANG	148B5326
25	1	REG-SA 25 D ANG	148B5426
32	1 1/4	REG-SA 32 D ANG	148B5527
40	1 1/2	REG-SA 40 D ANG	148B5627

### Butt-weld ANSI (B 36.10 Schedule 80)

Size		Type	Code no.
mm	in.		

#### Angleway - REG-SA with cone type A

10	3/8	REG-SA 10 A ANG	148B5106
15	1/2	REG-SA 15 A ANG	148B5202
20	3/4	REG-SA 20 A ANG	148B5302
25	1	REG-SA 25 A ANG	148B5402
32	1 1/4	REG-SA 32 A ANG	148B5502
40	1 1/2	REG-SA 40 A ANG	148B5602

### Socket welding ANSI (B 16.11)

Size		Type	Code no.
mm	in.		

#### Angleway - REG-SA with cone type A

15	1/2	REG-SA 15 SOC ANG	148B5204
20	3/4	REG-SA 20 SOC ANG	148B5304
25	1	REG-SA 25 SOC ANG	148B5404
32	1 1/4	REG-SA 32 SOC ANG	148B5504
40	1 1/2	REG-SA 40 SOC ANG	148B5604

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1)

Size		Type	Code no.
mm	in.		

#### Angleway - REG-SA with cone type A

15	1/2	REG-SA 15 FTP ANG	148B5206
20	3/4	REG-SA 20 FTP ANG	148B5306
25	1	REG-SA 25 FTP ANG	148B5406
32	1 1/4	REG-SA 32 FTP ANG	148B5506

D = Butt-weld DIN  
A = Butt-weld ANSI  
SOC = Socket weld  
FTP = Inside pipe thread

## Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.

### Butt-weld DIN (EN 10220)

Size		Type	Code no.
mm	in.		

#### Straightway - REG-SA with cone type A

10	3/8	REG-SA 10 D STR	148B5104
15	1/2	REG-SA 15 D STR	148B5228
20	3/4	REG-SA 20 D STR	148B5328
25	1	REG-SA 25 D STR	148B5428
32	1 1/4	REG-SA 32 D STR	148B5528
40	1 1/2	REG-SA 40 D STR	148B5629

### Butt-weld ANSI (B 36.10 Schedule 80)

Size		Type	Code no.
mm	in.		

#### Straightway - REG-SA with cone type A

10	3/8	REG-SA 10 A STR	148B5116
15	1/2	REG-SA 15 A STR	148B5212
20	3/4	REG-SA 20 A STR	148B5312
25	1	REG-SA 25 A STR	148B5412
32	1 1/4	REG-SA 32 A STR	148B5512
40	1 1/2	REG-SA 40 A STR	148B5612

### Socket welding ANSI (B 16.11)

Size		Type	Code no.
mm	in.		

#### Straightway - REG-SA with cone type A

15	1/2	REG-SA 15 SOC STR	148B5214
20	3/4	REG-SA 20 SOC STR	148B5314
25	1	REG-SA 25 SOC STR	148B5414
32	1 1/4	REG-SA 32 SOC STR	148B5514
40	1 1/2	REG-SA 40 SOC STR	148B5614

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1)

Size		Type	Code no.
mm	in.		

#### Straightway - REG-SA with cone type A

15	1/2	REG-SA 15 FTP STR	148B5216
20	3/4	REG-SA 20 FTP STR	148B5316
25	1	REG-SA 25 FTP STR	148B5416
32	1 1/4	REG-SA 32 FTP STR	148B5516

## Code numbers (continued)

### Example:

REG-SB (Cone B) 15 DIN  
angleway = **148B5227**

## REG-SB (Cone type B)

### Butt-weld DIN (EN 10220)

Size		Type	Code no.
mm	in.		
<b>Angleway - REG-SB with cone type B</b>			
10	3/8	REG-SB 10 D ANG	148B5103
15	1/2	REG-SB 15 D ANG	148B5227
20	3/4	REG-SB 20 D ANG	148B5327
25	1	REG-SB 25 D ANG	148B5427
32	1 1/4	REG-SB 32 D ANG	148B5526
40	1 1/2	REG-SB 40 D ANG	148B5626
50	2	REG-SB 50 D ANG	148B5726
65	2 1/2	REG-SB 65 D ANG	148B5826

### Butt-weld ANSI (B 36.10 Schedule 80)

Size		Type	Code no.
mm	in.		

### Angleway - REG-SB with cone type B

10	3/8	REG-SB 10 A ANG	148B5107
15	1/2	REG-SB 15 A ANG	148B5203
20	3/4	REG-SB 20 A ANG	148B5303
25	1	REG-SB 25 A ANG	148B5403
32	1 1/4	REG-SB 32 A ANG	148B5503
40	1 1/2	REG-SB 40 A ANG	148B5603

### Butt-weld ANSI (B 36.10 Schedule 40)

Size		Type	Code no.
mm	in.		

### Angleway - REG-SB with cone type B

50	2	REG-SB 50 A ANG	148B5706
65	2 1/2	REG-SB 65 A ANG	148B5806

### Socket welding ANSI (B 16.11)

Size		Type	Code no.
mm	in.		

### Angleway - REG-SB with cone type B

15	1/2	REG-SB 15 SOC ANG	148B5205
20	3/4	REG-SB 20 SOC ANG	148B5305
25	1	REG-SB 25 SOC ANG	148B5405
32	1 1/4	REG-SB 32 SOC ANG	148B5505
40	1 1/2	REG-SB 40 SOC ANG	148B5605
50	2	REG-SB 50 SOC ANG	148B5727

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1)

Size		Type	Code no.
mm	in.		

### Angleway - REG-SB with cone type B

15	1/2	REG-SB 15 FTP ANG	148B5207
20	3/4	REG-SB 20 FTP ANG	148B5307
25	1	REG-SB 25 FTP ANG	148B5407
32	1 1/4	REG-SB 32 FTP ANG	148B5507

D = Butt-weld DIN  
A = Butt-weld ANSI  
SOC = Socket weld  
FPT = Inside pipe thread

ANG = Angleway  
STR = Straightway

### Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.

### Butt-weld DIN (EN 10220)

Size		Type	Code no.
mm	in.		

### Straightway - REG-SB with cone type B

10	3/8	REG-SB 10 D STR	148B5105
15	1/2	REG-SB 15 D STR	148B5229
20	3/4	REG-SB 20 D STR	148B5329
25	1	REG-SB 25 D STR	148B5429
32	1 1/4	REG-SB 32 D STR	148B5529
40	1 1/2	REG-SB 40 D STR	148B5628

### Butt-weld ANSI (B 36.10 Schedule 80)

Size		Type	Code no.
mm	in.		

### Straightway - REG-SB with cone type B

10	3/8	REG-SB 10 A STR	148B5117
15	1/2	REG-SB 15 A STR	148B5213
20	3/4	REG-SB 20 A STR	148B5313
25	1	REG-SB 25 A STR	148B5413
32	1 1/4	REG-SB 32 A STR	148B5513
40	1 1/2	REG-SB 40 A STR	148B5613

### Butt-weld ANSI (B 36.10 Schedule 40)

Size		Type	Code no.
mm	in.		

### Angleway - REG-SB with cone type B

50	2	REG-SB 50 A STR	148B5724
65	2 1/2	REG-SB 65 A STR	148B5809

### Socket welding ANSI (B 16.11)

Size		Type	Code no.
mm	in.		

### Straightway - REG-SB with cone type B

15	1/2	REG-SB 15 SOC STR	148B5215
20	3/4	REG-SB 20 SOC STR	148B5315
25	1	REG-SB 25 SOC STR	148B5415
32	1 1/4	REG-SB 32 SOC STR	148B5515
40	1 1/2	REG-SB 40 SOC STR	148B5615
50	2	REG-SB 50 SOC STR	148B5725

### FPT inside pipe thread, NPT (ANSI/ASME B 1.20.1)

Size		Type	Code no.
mm	in.		

### Straightway - REG-SB with cone type B

15	1/2	REG-SB 15 FTP STR	148B5217
20	3/4	REG-SB 20 FTP STR	148B5317
25	1	REG-SB 25 FTP STR	148B5417
32	1 1/4	REG-SB 32 FTP STR	148B5517

## Notes



## SCA-X – Flexline™ Stop check valves and CHV-X – check valves

SCA-X are check valves with a built-in stop valve function. CHV-X are check valves only. SCA-X/CHV-X are available in angleway versions.

The valves are designed to open at very low differential pressures, allow favourable flow conditions and are easy to disassemble for inspection and service.



The Flexline™ platform is synonymous of flexibility within industrial refrigeration components.

Based on a modular design concept each product features a variety of benefits, including flexible selection, easy installation and maintenance.

The products in the Flexline™ series are: ICV control valves, ICF valve stations and SVL line components.

### Advantages and features

- Applicable to all common non-flammable refrigerants and all non-corrosive gases/liquids.  
Can be used in chemical and petro-chemical applications.
- Housing is Standard SVL angleway housing allowing other inserts from the SVL platform to be installed.
- Designed to open at a very low differential pressure of 0.04 bar (0.58 psig).
- Designed with a built-in damping chamber preventing valve flutter in case of low refrigerant velocity and/or low density.
- Each valve is clearly marked with type, size and performance range.
- Easy to disassemble for inspection and service.
- Internal backseating enables replacement of the spindle seal whilst the valve is active, i.e. under pressure.

- Optimal flow characteristics ensuring quick opening to the fully open position.
- Protection against pulsation by built-in damping facility.
- Housing and bonnet material is low temperature steel according to requirements of the Pressure Equipment Directive and other international classification authorities.
- Equipped with Stainless steel bolts.
- Max. working pressure:  
52 bar g (754 psi g)
- Temperature range:  
-60°C/+150° (-76°F/+302°F)

# Technical data and code numbers

## Technical data

- Refrigerants**  
Applicable to all common non-flammable refrigerants and all non-corrosive gases/liquids.  
For further information refer to the product instruction for SCA-X/CHV-X.

- Temperature range**  
–60/+150°C (–76/+302°F).
- Max. working pressure**  
52 bar g (754 psig).

## Code numbers

### How to order

The table below is used to identify the valve required.  
Please note that the type codes only serve to identify the valves, some of which may not form part of the standard product range.

Valve type	SCA-X CHV-X	Stop Check Valve Check Valve		
(valve size measured on the connection diameter)		ANSI	DIN	SOC
	15	DN 15	x	x
	20	DN 20	x	x
	25	DN 25	x	x
	32	DN 32	x	x
	40	DN 40	x	x
	50	DN 50	x	x
	65	DN 65	x	x
	80	DN 80	x	x
	100	DN 100	x	x
Connections	125	DN 125	x	x
	A	Welding branches: ANSI B 31.5 schedule 80 DN 15 - 40 (½ - 1½ in.) Welding branches: ANSI B 31.5 schedule 40 DN 50 - 125 (2 - 5 in.)		
Valve housing	D	Welding branches: EN 10220		
	ANG	Angle flow		

### Important!

Where products need to be certified according to specific certification societies, or where higher pressures are required, the relevant information should be included at the time of order.

SCA-X Butt-weld DIN (EN 10220)

Size		Type	Code no.
mm	in.		
15	½	SCA-X 15 D ANG	148B5208
20	¾	SCA-X 20 D ANG	148B5308
25	1	SCA-X 25 D ANG	148B5408
32	1¼	SCA-X 32 D ANG	148B5508
40	1½	SCA-X 40 D ANG	148B5608
50	2	SCA-X 50 D ANG	148B5702
65	2½	SCA-X 65 D ANG	148B5803
80	3	SCA-X 80 D ANG	148B5902
100	4	SCA-X 100 D ANG	148B6002
125	5	SCA-X 125 D ANG	148B6102

SCA-X Butt-weld ANSI (B 36.10 Schedule 80)

Size		Type	Code no.
mm	in.		
15	½	SCA-X 15 A ANG	148B5209
20	¾	SCA-X 20 A ANG	148B5309
25	1	SCA-X 25 A ANG	148B5409
32	1¼	SCA-X 32 A ANG	148B5509
40	1½	SCA-X 40 A ANG	148B5609

SCA-X Butt-weld ANSI (B 36.10 Schedule 40)

Size		Type	Code no.
mm	in.		
50	2	SCA-X 50 A ANG	148B5703
65	2½	SCA-X 65 A ANG	148B5802
80	3	SCA-X 80 A ANG	148B5903
100	4	SCA-X 100 A ANG	148B6004
125	5	SCA-X 125 A ANG	148B6103

SCA-X Socket welding ANSI (B 16.11)

Size		Type	Code no.
mm	in.		
50	2	SCA-X 50 SOC ANG	148B5704

ANG = Angleway

The products are also available in stainless steel.

Please refer to the Danfoss brochure DKRCI.PD.K00.A for further details  
or contact your local Danfoss sales office.

CHV-X Butt-weld DIN (EN 10220)

Size		Type	Code no.
mm	in.		
15	½	CHV-X 15 D ANG	148B5236
20	¾	CHV-X 20 D ANG	148B5336
25	1	CHV-X 25 D ANG	148B5436
32	1¼	CHV-X 32 D ANG	148B5536
40	1½	CHV-X 40 D ANG	148B5636
50	2	CHV-X 50 D ANG	148B5736
65	2½	CHV-X 65 D ANG	148B5838
80	3	CHV-X 80 D ANG	148B5936
100	4	CHV-X 100 D ANG	148B6036
125	5	CHV-X 125 D ANG	148B6136

CHV-X Butt-weld ANSI (B 36.10 Schedule 80)

Size		Type	Code no.
mm	in.		
15	½	CHV-X 15 A ANG	148B5237
20	¾	CHV-X 20 A ANG	148B5337
25	1	CHV-X 25 A ANG	148B5437
32	1¼	CHV-X 32 A ANG	148B5537
40	1½	CHV-X 40 A ANG	148B5637

CHV-X Butt-weld ANSI (B 36.10 Schedule 40)

Size		Type	Code no.
mm	in.		
50	2	CHV-X 50 A ANG	148B5737
65	2½	CHV-X 65 A ANG	148B5837
80	3	CHV-X 80 A ANG	148B5937
100	4	CHV-X 100 A ANG	148B6037
125	5	CHV-X 125 A ANG	148B6137

CHV-X Socket welding ANSI (B 16.11)


Size		Type	Code no.
mm	in.		
32	1¼	CHV 32 SOC ANG	148B5539
50	2	CHV 50 SOC ANG	148B5740



## NRVA – Check valves

Check valve type NRVA can be used in liquid, suction and hot gas lines in refrigeration and air conditioning plant with ammonia.

NRVA can also be used in refrigerating systems with fluorinated refrigerants.

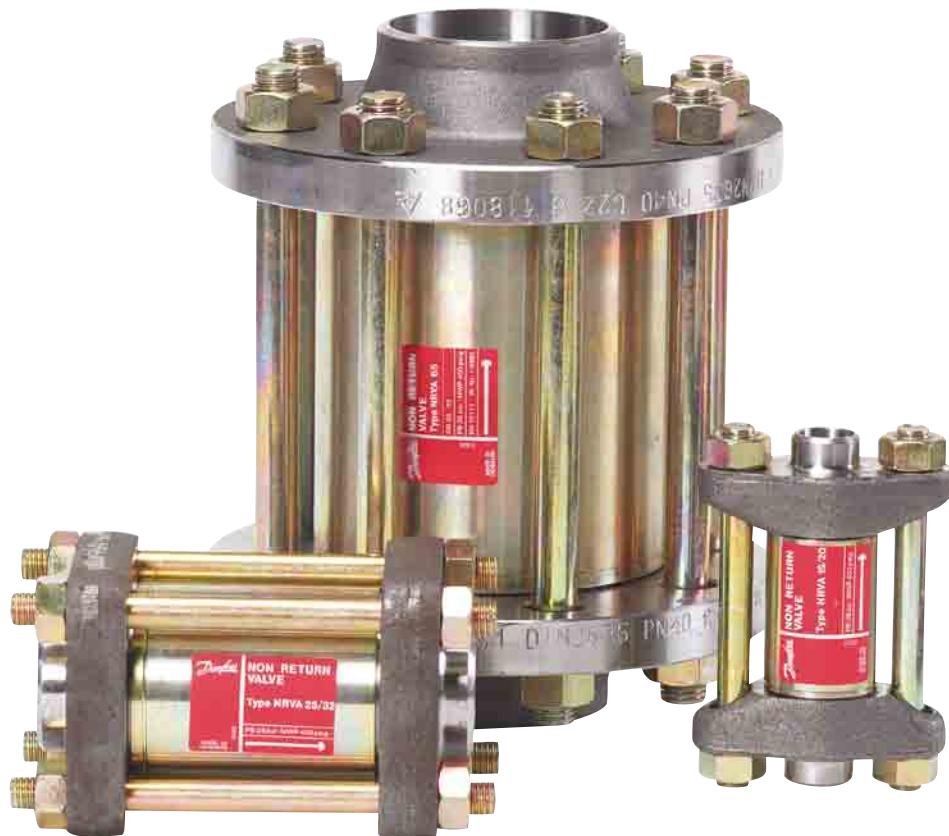

### Advantages and features

- Ensures correct direction of flow.
- Valve housing made of steel.
- Available for 40 bar g (580 psig) working pressure.
- Large range of flanges with connection dimensions in accordance with standards: DIN, ANSI, SOC, SA and FPT.

- Fitted with damping piston that makes the valves suitable for installation in lines where pulsation can occur, e.g. in the discharge line from the compressor.

# Technical data and code numbers

## Technical data

### Refrigerants

Can be used for all normal, non-flammable refrigerants, including R 717, and non-corrosive gases/liquids – assuming seals of the correct material are used. For further information please see installation instruction for NRVA.


Use with flammable hydrocarbons cannot be recommended.

### Temperature range: -50°C / +140°C (-58°F / +284°F).

Pressure range The valve is designed for: Max. working pressure: 40 bar g (580 psig).

## Code numbers

Complete valves incl. DIN 2448 flange:



Type	Weld flange connection in.	Code no.		Dp <sup>2)</sup>				k <sub>v</sub> value <sup>3)</sup> m <sup>3</sup> /h	C <sub>v</sub> value <sup>4)</sup> gal/min
		Valve	Spec. spring <sup>1)</sup>	With standard spring		With spec. spring <sup>1)</sup>			
				bar	psig	bar	psig		
NRVA 15	1/2	020-2000	020-2307	0.12	1.7	0.3	4.4	5	6
NRVA 20	3/4	020-2001	020-2307	0.12	1.7	0.3	4.4	6	7
NRVA 25	1	020-2002	020-2317	0.12	1.7	0.3	4.4	19	22
NRVA 32	1 1/4	020-2003	020-2317	0.12	1.7	0.3	4.4	20	23
NRVA 40	1 1/2	020-2004	020-2327	0.07	1.0	0.4	5.8	44	51
NRVA 50	2	020-2005	020-2327	0.07	1.0	0.4	5.8	44	51
NRVA 65	2 1/2	020-2006	020-2337	0.07	1.0	0.4	5.8	75	87



<sup>1)</sup> A special type spring can be supplied to replace the standard valve spring.

<sup>2)</sup> Δp = the minimum pressure differential at which the valve is completely open.

<sup>3)</sup> The k<sub>v</sub> value is the flow of water in m<sup>3</sup>/h at a pressure drop across valve of 1 bar, ρ = 1000 kg/m<sup>3</sup>.

<sup>4)</sup> The C<sub>v</sub> value is the flow of water in gal/min at a pressure drop across valve of 1 psig, ρ = 10 lbs/gal.

Valve body without flanges:



Type	Code no.
NRVA 15	020-2020
NRVA 20	020-2020
NRVA 25	020-2022
NRVA 32	020-2022
NRVA 40	020-2024
NRVA 50	020-2024
NRVA 65	020-2026

Staybolts and gaskets:

Type	Dimensions	Code no.
NRVA 15 / 20	M 12 × 115 mm	006-1107
NRVA 25 / 32	M 12 × 148 mm	006-1135
NRVA 40 / 50	M 12 × 167 mm	006-1137
NRVA 65	M 16 × 200 mm	006-1138



## SFA 15 – Safety relief valves

SFA 15 are standard, back pressure dependent safety relief valves in angle-way execution, specially designed for protection of vessels and other components against excessive pressure. The valve is designed to meet the strict quality demands and safety requirements for refrigeration installations, specified by the international classification societies. The inlet flow diameters of the valves are: 13 mm (½ in.) for SFA 15. The valves can be delivered with set pressures between 10 and 40 bar g (145 and 580 psi g).



Advantages and features	
<ul style="list-style-type: none"><li>Applicable for the refrigerants R717 (ammonia, NH<sub>3</sub>), HFC, HCFC (e.g. R22, R134a, R404A) and other refrigerants (dependent on sealing materials compatibility) within a temperature range of -30°C/+100°C (-22°F/+212°F).</li></ul>	

# Technical data and code numbers

## Technical data

- Refrigerants**  
Applicable for the refrigerants R717 (ammonia, NH<sub>3</sub>), HFC, HCFC (e.g. R22, R134a, R404A) and other refrigerants dependent on sealing material compatibility within a temperature range of -30°C/+100°C (-22°F/+212°F).  
Flammable hydrocarbons are not recommended.
- Pressure**  
Pressure setting range: 10 - 40 bar g (145 - 580 psi g).

**Important:** The SFA safety relief valve is dependent on the back pressure (if the back pressure is higher than the atmospheric pressure, the opening pressure will be higher than stated set pressure).

Special circumstances such as vibrations (which should be avoided) and oscillating pressure may require an increased difference between the operational pressure and the closing pressure.

- Pressure setting**  
The operating pressure of the plant should be at least 15% below the set pressure. This allows a perfect re-seating of the safety relief valve after having been activated.
- Temperature range**  
-30/+100°C (-22/+212°F)

## Code numbers

Certified SFA valves with standard set pressure

Size		Type	Set pressure bar g (psi g)	Code number
mm	in.			
15	1/2	SFA 15 T 210	10 (145)	148F3210
15	1/2	SFA 15 T 211	11 (160)	148F3211
15	1/2	SFA 15 T 212	12 (174)	148F3212
15	1/2	SFA 15 T 213	13 (189)	148F3213
15	1/2	SFA 15 T 214	14 (203)	148F3214
15	1/2	SFA 15 T 215	15 (218)	148F3215
15	1/2	SFA 15 T 216	16 (232)	148F3216
15	1/2	SFA 15 T 217	17 (247)	148F3217
15	1/2	SFA 15 T 218	18 (261)	148F3218
15	1/2	SFA 15 T 219	19 (276)	148F3219
15	1/2	SFA 15 T 220	20 (290)	148F3220
15	1/2	SFA 15 T 221	21 (305)	148F3221
15	1/2	SFA 15 T 222	22 (319)	148F3222
15	1/2	SFA 15 T 223	23 (334)	148F3223
15	1/2	SFA 15 T 224	24 (348)	148F3224
15	1/2	SFA 15 T 225	25 (363)	148F3225
15	1/2	SFA 15 T 226	26 (377)	148F3226
15	1/2	SFA 15 T 227	27 (392)	148F3227
15	1/2	SFA 15 T 228	28 (406)	148F3228
15	1/2	SFA 15 T 229	29 (421)	148F3229
15	1/2	SFA 15 T 230	30 (435)	148F3230
15	1/2	SFA 15 T 231	31 (450)	148F3231
15	1/2	SFA 15 T 232	32 (464)	148F3232
15	1/2	SFA 15 T 233	33 (479)	148F3233
15	1/2	SFA 15 T 234	34 (493)	148F3234
15	1/2	SFA 15 T 235	35 (508)	148F3235
15	1/2	SFA 15 T 236	36 (522)	148F3236
15	1/2	SFA 15 T 237	37 (537)	148F3237
15	1/2	SFA 15 T 238	38 (551)	148F3238
15	1/2	SFA 15 T 239	39 (566)	148F3239
15	1/2	SFA 15 T 240	40 (580)	148F3240

Certified SFA valves with standard set pressure and TÜV pressure setting certificate with each valve

Size		Type	Set pressure bar g (psi g)	Code number
mm	in.			
15	1/2	SFA 15 T 310	10 (145)	148F3310
15	1/2	SFA 15 T 311	11 (160)	148F3311
15	1/2	SFA 15 T 312	12 (174)	148F3312
15	1/2	SFA 15 T 313	13 (189)	148F3313
15	1/2	SFA 15 T 314	14 (203)	148F3314
15	1/2	SFA 15 T 315	15 (218)	148F3315
15	1/2	SFA 15 T 316	16 (232)	148F3316
15	1/2	SFA 15 T 317	17 (247)	148F3317
15	1/2	SFA 15 T 318	18 (261)	148F3318
15	1/2	SFA 15 T 319	19 (276)	148F3319
15	1/2	SFA 15 T 320	20 (290)	148F3320
15	1/2	SFA 15 T 321	21 (305)	148F3321
15	1/2	SFA 15 T 322	22 (319)	148F3322
15	1/2	SFA 15 T 323	23 (334)	148F3323
15	1/2	SFA 15 T 324	24 (348)	148F3324
15	1/2	SFA 15 T 325	25 (363)	148F3325
15	1/2	SFA 15 T 326	26 (377)	148F3326
15	1/2	SFA 15 T 327	27 (392)	148F3327
15	1/2	SFA 15 T 328	28 (406)	148F3328
15	1/2	SFA 15 T 329	29 (421)	148F3329
15	1/2	SFA 15 T 330	30 (435)	148F3330
15	1/2	SFA 15 T 331	31 (450)	148F3331
15	1/2	SFA 15 T 332	32 (464)	148F3332
15	1/2	SFA 15 T 333	33 (479)	148F3333
15	1/2	SFA 15 T 334	34 (493)	148F3334
15	1/2	SFA 15 T 335	35 (508)	148F3335
15	1/2	SFA 15 T 336	36 (522)	148F3336
15	1/2	SFA 15 T 337	37 (537)	148F3337
15	1/2	SFA 15 T 338	38 (551)	148F3338
15	1/2	SFA 15 T 339	39 (566)	148F3339
15	1/2	SFA 15 T 340	40 (580)	148F3340



## SFV – Safety relief valves

SFV 20-25 are standard, back pressure dependent safety relief valves in angle-way execution, specially designed for protection of vessels and other components against excessive pressure.

The valve is designed to meet the strict quality demands and safety requirements for refrigeration installations, specified by the international classification societies. The inlet flow diameters of the valves are: 18 mm (3/4 in.) for SFV 20, and 23 mm (1 in.) for SFV 25. The valves can be delivered with set pressures between 10 and 25 bar g (145 and 363 psi g).



Advantages and features	
<ul style="list-style-type: none"><li>Applicable for the refrigerants R717 (ammonia, NH<sub>3</sub>), HFC, HCFC (e.g. R22, R134a, R404A) and other refrigerants (dependent on sealing materials compatibility) within a temperature range of -30°C/+100°C (-22°F/+212°F).</li></ul>	

# Technical data and code numbers

## Technical data

### Refrigerants

Applicable for the refrigerants R717 (ammonia, NH<sub>3</sub>), HFC, HCFC (e.g. R22, R134a, R404A) and other refrigerants dependent on sealing material compatibility within a temperature range of -30°C/+100°C (-22°F/+212°F). Flammable hydrocarbons are not recommended.

### Pressure

Pressure setting range: 10 - 25 bar g (145 - 363 psi g).

The valves are designed for:

Strength test: 43 bar g (624 psi g)

Leakage safety: Same as set pressure

**Important:** The SFV safety relief valve is dependent on the back pressure (if the back pressure is higher than the atmospheric pressure, the opening pressure will be higher than stated set pressure).

Special circumstances such as vibrations (which should be avoided) and oscillating pressure may require an increased difference between the operational pressure and the closing pressure.

### Pressure setting

The operating pressure of the plant should be at least 15% below the set pressure. This allows a perfect re-seating of the safety relief valve after having been activated.

### Temperature range

-30/+100°C (-22/+212°F)

## Code numbers

### Certified SFV valves with standard set pressure

Size		Construction and test facilities are approved by TÜV		
mm	in.	Type	bar g (psi g)	Part no.
20	3/4	SFV20 T 210	10 (145)	2416+254
20	3/4	SFV20 T 211	11 (160)	2416+255
20	3/4	SFV20 T 212	12 (174)	2416+256
20	3/4	SFV20 T 213	13 (189)	2416+150
20	3/4	SFV20 T 214	14 (203)	2416+257
20	3/4	SFV20 T 215	15 (218)	2416+258
20	3/4	SFV20 T 216	16 (232)	2416+259
20	3/4	SFV20 T 217	17 (247)	2416+260
20	3/4	SFV20 T 218	18 (261)	2416+151
20	3/4	SFV20 T 219	19 (276)	2416+261
20	3/4	SFV20 T 220	20 (290)	2416+262
20	3/4	SFV20 T 221	21 (305)	2416+152
20	3/4	SFV20 T 222	22 (319)	2416+241
20	3/4	SFV20 T 223	23 (334)	2416+263
20	3/4	SFV20 T 224	24 (348)	2416+264
20	3/4	SFV20 T 225	25 (363)	2416+183

### Certified SFV valves with standard set pressure and TÜV pressure setting certificate with each valve

Size		Each valve is certified by a representative from TÜV		
mm	in.	Type	bar g (psi g)	Part no.
20	3/4	SFV20 T 310	10 (145)	2416+285
20	3/4	SFV20 T 311	11 (160)	2416+286
20	3/4	SFV20 T 312	12 (174)	2416+287
20	3/4	SFV20 T 313	13 (189)	2416+160
20	3/4	SFV20 T 314	14 (203)	2416+288
20	3/4	SFV20 T 315	15 (218)	2416+289
20	3/4	SFV20 T 316	16 (232)	2416+290
20	3/4	SFV20 T 317	17 (247)	2416+291
20	3/4	SFV20 T 318	18 (261)	2416+161
20	3/4	SFV20 T 319	19 (276)	2416+292
20	3/4	SFV20 T 320	20 (290)	2416+293
20	3/4	SFV20 T 321	21 (305)	2416+162
20	3/4	SFV20 T 322	22 (319)	2416+294
20	3/4	SFV20 T 323	23 (334)	2416+295
20	3/4	SFV20 T 324	24 (348)	2416+296
20	3/4	SFV20 T 325	25 (363)	2416+186

### Certified SFV valves with standard set pressure

Size		Construction and test facilities are approved by TÜV		
mm	in.	Type	bar g (psi g)	Part no.
25	1	SFV25 T 210	10 (145)	2416+265
25	1	SFV25 T 211	11 (160)	2416+266
25	1	SFV25 T 212	12 (174)	2416+267
25	1	SFV25 T 213	13 (189)	2416+153
25	1	SFV25 T 214	14 (203)	2416+268
25	1	SFV25 T 215	15 (218)	2416+269
25	1	SFV25 T 216	16 (232)	2416+270
25	1	SFV25 T 217	17 (247)	2416+271
25	1	SFV25 T 218	18 (261)	2416+154
25	1	SFV25 T 219	19 (276)	2416+272
25	1	SFV25 T 220	20 (290)	2416+273
25	1	SFV25 T 221	21 (305)	2416+155
25	1	SFV25 T 222	22 (319)	2416+242
25	1	SFV25 T 223	23 (334)	2416+274
25	1	SFV25 T 224	24 (348)	2416+275
25	1	SFV25 T 225	25 (363)	2416+184

### Certified SFV valves with standard set pressure and TÜV pressure setting certificate with each valve

Size		Each valve is certified by a representative from TÜV		
mm	in.	Type	bar g (psi g)	Part no.
25	1	SFV25 T 310	10 (145)	2416+297
25	1	SFV25 T 311	11 (160)	2416+298
25	1	SFV25 T 312	12 (174)	2416+299
25	1	SFV25 T 313	13 (189)	2416+163
25	1	SFV25 T 314	14 (203)	2416+300
25	1	SFV25 T 315	15 (218)	2416+301
25	1	SFV25 T 316	16 (232)	2416+302
25	1	SFV25 T 317	17 (247)	2416+303
25	1	SFV25 T 318	18 (261)	2416+164
25	1	SFV25 T 319	19 (276)	2416+304
25	1	SFV25 T 320	20 (290)	2416+305
25	1	SFV25 T 321	21 (305)	2416+165
25	1	SFV25 T 322	22 (319)	2416+306
25	1	SFV25 T 323	23 (334)	2416+307
25	1	SFV25 T 324	24 (348)	2416+308
25	1	SFV25 T 325	25 (363)	2416+187



## DSV – Double stop valves

DSV 1 and DSV 2 are 3-way valves, which are designed to meet all industrial refrigeration application requirements. They are designed specifically for use with double safety valve systems. The valves are designed to give favourable flow characteristics and are easy to dismantle for servicing. The valve cone is designed to ensure perfect closing, even with minimum torque the valve will close effectively.



Advantages and features	
<ul style="list-style-type: none"><li>Applicable to all common non flammable refrigerants including R717 and non corrosive gases/liquids dependent on sealing material compatibility.</li><li>Each valve type is clearly marked with type, size and performance range.</li><li>The valves and caps are prepared for sealing, to prevent operation by unauthorised persons, using a seal wire.</li><li>Can accept flow in both directions.</li><li>Housing and bonnet are made from low temperature steel according to requirements of the Pressure Equipment Directive and other international classification authorities.</li></ul>	<ul style="list-style-type: none"><li>Max. operating pressure: DSV 1 and DSV 2: 40 bar g (580 psi g)</li><li>Temperature range: DSV 1 and DSV 2: -50/+100°C (-58/+212°F)</li><li><b>DSV 1</b> when fitted with 2 × SFA 15 or <b>DSV 2</b> when fitted with a combination of either 2 × SFA 15, or 2 × SFV 20, or 2 × FV 25, meet the requirements according to EN13136 "Safety Valves Calculations" regarding max. 3% pressure drop in upstream line.</li></ul>

# Technical data and code numbers

## Technical data

### Refrigerants

Applicable to all common non-flammable refrigerants, including R717 and non corrosive gases/liquids, dependent on sealing material compatibility. Flammable hydrocarbons are not recommended. The valve is only recommended for use in closed circuits.

- Temperature range  
-50/+100°C (-58/+212°F).

### Pressure

The valves are designed for:

Max. operating pressure: 40 bar g (580 psig)


Valves for higher design pressure are available on request.

### Capacity

Type	K <sub>v</sub> -value m <sup>3</sup> /h	C <sub>v</sub> -value Usgal/min
DSV 1	17.5	20.3
DSV 2	30.0	34.8

### Installation

DSV are used as changeover valves between two SFA/SFV safety valves. When the spindle is turned clockwise (fig. 1) the inlet port C is connected to B. When the spindle is turned anticlockwise (fig. 1) the inlet port C is connected to A. For further information refer to installation instruction for DSV.

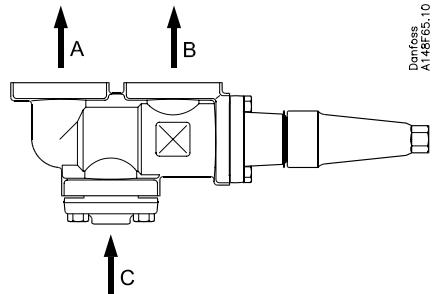

## Code numbers

Please note that the type codes only serve to identify the valves, some of which may not form part of the standard product range.

### Type codes

Valve type	DSV inlet connection	DSV outlet connection	SFV outlet connection	Safety valve combination	Code no.
DSV 1	D25 (1 in.)	G 3/4" Union	ND20 (3/4 in.)	SFA15	148F3005
DSV 2	FD20 (3/4 in.)	G 3/4" thread flange	ND20 (3/4 in.)	SFA15	148F3006
DSV 2	FD25 (1 in.)	G 3/4" thread flange	ND20 (3/4 in.)	SFA15	148F3007
DSV 2	FD32 (1 1/4 in.)	G 3/4" thread flange	ND20 (3/4 in.)	SFA15	148F3008
DSV 2	FD25 (1 in.)	G 1 1/4" thread flange	FD25 (1 in.)	SFV20	148F3009
DSV 2	FD32 (1 1/4 in.)	G 1 1/4" thread flange	FD25 (1 in.)	SFV20	148F3010
DSV 2	FD32 (1 1/4 in.)	G 1 1/4" thread flange	FD32 (1 1/4 in.)	SFV25	148F3011
Connection fittings: Connection fittings: Connection fittings:	D	Weld branches DIN 2448	DSV valves are supplied c/w DSV inlet connection fittings, DSV outlet connection fittings, and SFA/SFV outlet connection fittings.		
	ND	Weld nipples DIN 2448			
	FD	Weld flanges DIN 2448			

### Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.



## QDV – Quick closing oil drain valves

QDV is a quick closing oil drain valve, designed particularly for draining oil from systems containing refrigerant (ammonia) under pressure.

The valve will close immediately on release of the handle, thus protecting user and environment against unnecessary refrigerant leaks.



Advantages and features	
<ul style="list-style-type: none"><li>• QDV is generally used with R717 (ammonia) but the valve is also applicable to all other common non flammable refrigerants and non corrosive gases/liquids dependent on sealing material compatibility</li><li>• Meets the safety demands within industrial refrigeration</li><li>• Handle can be positioned 360°</li><li>• Built-in integral relief device opening over 25 bar g (proventing hydraulic pressure building up between stop valve and QDV).</li></ul>	<ul style="list-style-type: none"><li>• Can be supplied together with a stop valve for quick on site mounting</li><li>• Max. operating pressure: 40 bar g (580 psi g).</li><li>• Temperature range: -50/+150°C (-58/+302°F).</li></ul>

# Technical data and code numbers

## Technical data

- Refrigerants  
QDV is generally used with R717 (ammonia) but the valve is also applicable to all other common non flammable refrigerants and non corrosive gases/liquids dependent on sealing material compatibility.
- QDV is a backpressure dependent valve. If any tube or hose is mounted on the outlet of the QDV it has to be calculated to prevent backpressure building up when relieving.
- For further information please see installation instruction for QDV.  
Flammable hydrocarbons are not recommended.
- Temperature range  
–50/+150°C (–58/+302°F).
- Pressure  
The valve is designed for:  
Maximum operating pressure of 40 bar g  
(580 psi g)

## Code numbers

### How to order

The table below is used to identify the valve required.

Type	Inlet	Outlet	Code no.
QDV 15 DN 15	DN 15	G 3/4 in.	148H3272
QDV 15 1/2 in. FPT	1/2 in. FPT	1/2 in. FPT	148H3273
QDV 15 3/4 in. FPT	3/4 in. FPT	3/4 in. FPT	148H3274
QDV 15 DN 15 + SVA-ST DN 15 H-WHEEL*	DN 15	G 3/4 in.	148H3310
QDV 15 1/2 in. FPT + SVA-ST SOC 1/2 in. H-WHEEL*	1/2 in. SOC	1/2 in. FPT	148H3311
Fittings for hose connection - G 3/4"			148H3451
Fittings for welding connection - G 3/4"			148H3452

\* Two valves are supplied in one box and should be mounted on site.  
The indicated inlet is for the stop valve - The indicated outlet is for the oil drain valve.

### Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.



## LLG – Liquid level glasses

LLG are liquid level glasses made of ductile steel which meets the strictest requirements on industrial and marine refrigeration installations

LLG has sufficient flow areas to secure the highest possible degree of synchronous operation, and have a specially hardened reflection glass for quick reading. The LLG are delivered with stop valves, which ensures easy insulation on site as well as easy inspection and service, if any.



Advantages and features	
<ul style="list-style-type: none"><li>All LLG liquid level glasses are equipped as standard with a built-in safety system (non return device). If a glass is damaged, the pressure of the refrigerant will activate the safety system and refrigerant loss will be limited to an absolute minimum.</li><li>Refrigerants Applicable to all common non flammable refrigerants including R717 and non corrosive gases/liquids dependent on sealing material compatibility.</li><li>Temperature range -10/+100 °C or -50/+30 °C</li><li>Maximum operating pressure: 25 bar g Equipped with boron-silicate glass, hardened by an accurately controlled heat treatment process.</li></ul>	<ul style="list-style-type: none"><li>The range of liquid level glasses is based on 3 basic liquid level glasses: LLG 185, LLG 335 and LLG 740. The other standard lengths are combined by using variations of basic glass lengths.</li><li>The liquid level glasses are offered in 4 different versions:<ul style="list-style-type: none"><li>- with welding nipples (LLG).</li><li>- with stop valves equipped with caps (LLG S).</li><li>- with sight adapter in acrylic glass ready for insulation on site (LLG F).</li><li>- with stop valves and sight adapter in acrylic glass ready for insulation on site (LLG SF).</li></ul></li></ul>

### NOTE:

The LLG liquid level glass can only be placed in CE approved applications with the stop valves in front i.e. LLG S or LLG SF.

# Technical data and code numbers

## Technical data

	LLG
<b>Refrigerants</b>	The liquid level glasses are applicable to all common non flammable refrigerants including R717 and non corrosive gases/liquids. Flammable hydrocarbons are not recommended.
<b>Temperatur range</b>	LLG S: -10/+100 °C LLG SF: -50/+30 °C
<b>Pressure range</b> <b>Max. operating pressure</b>	25 bar g
<b>Pressure range Strength test</b>	50 bar g
<b>Pressure range Leakage test</b>	at 25 bar g

## Code numbers

### Liquid level glasses - LLG S With safety system and stop valves (SNV-ST)

Length		Type	Code no.
mm	in.		
185	7 1/4	LLG 185 S	2512+056
335	13 1/4	LLG 335 S	2512+057
590	23 1/4	LLG 590 S	2512+058
740	29 1/4	LLG 740 S	2512+059
995	39 1/4	LLG 995 S	2512+060
1145	45	LLG 1145 S	2512+061
1550	61	LLG 1550 S	2512+062

### Liquid level glasses for insulating - LLG SF With safety system, stop valves (SNV-ST) and sight adapter

Length		Type	Code no.
mm	in.		
185	7 1/4	LLG 185 SF	2512+066
335	13 1/4	LLG 335 SF	2512+067
590	23 1/4	LLG 590 SF	2512+068
740	29 1/4	LLG 740 SF	2512+069
995	39 1/4	LLG 995 SF	2512+070
1145	45	LLG 1145 SF	2512+071
1550	61	LLG 1550 SF	2512+072

#### Important!

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.



## GD – Gas Detectors

Danfoss Gas Detectors, type GD are a range of products designed to meet all industrial refrigeration and air conditioning application requirements.

GD detects a wide range of commonly used refrigerants including Ammonia, Carbon Dioxide, Halo-Carbons and Hydro-Carbons.



Advantages and features	
<ul style="list-style-type: none"><li>GD is specifically developed for refrigeration applications</li><li>Interchangeable precalibrated sensors</li><li>Optional models: LCD display, IP65 enclosure, EExd (Explosion Protected)</li><li>Can operate as stand alone product</li><li>Linear analog outputs, current (mA)/volt (V) proportional to the gas concentration</li><li>Two digital outputs. Low Level and High Level Alarm</li><li>Adjustable setting for alarm levels and output contacts with optional NO or NC switches</li><li>Manual or automatic alarm reset optional</li></ul>	<ul style="list-style-type: none"><li>Alarm levels can be set locally.</li><li>GD can be connected directly to a Danfoss monitoring unit system</li><li>Available with a range of different sensor technologies to monitor industrial refrigeration gases:<ul style="list-style-type: none"><li>- Electro-Chemical</li><li>- Semi-Conductor</li><li>- Catalytic</li><li>- Infra-Red</li></ul></li></ul>

# Technical data and code numbers

## Technical data

<b>Refrigerants</b>	<b>Ammonia (R 717)</b> Type GDA: 0-100 ppm, 0-300 ppm, 0-1,000 ppm, 0-10,000 ppm, 0-30,000 ppm <b>Carbon Dioxide (R 744)</b> Type GDC: 0-10,000 ppm, 0-20,000 ppm, 0-40,000 ppm <b>Halo-Carbon - HCFC (R 22, R 123)</b> Type GDHC: 0-1,000 ppm <b>HFC (R 404A, R410A, R134a, R 407C, R 507)</b> Type GDHF: 0-1,000 ppm <b>Hydro-carbon - Propane (R 290), R 600, R 600a, R 1270</b> Type GDH: 0-5,000 ppm
<b>Versions/temperature range</b>	Standard, LCD display, IP65 and EExd: -20 °C/+50 °C Low temperature model: -40 °C/+50 °C
<b>Cable connection</b>	1 gland for 6-13 mm cable (0.2"-0.5") 1 Ø 20 mm (0.8") hole with blanking plug. 1 extra gland can be fitted (only Standard, LCD display and EExd).
<b>Approvals</b>	<b>CE:</b> EN55011: 1998, EN61326: 1996 Following the provisions of 89/336/EEC, EMC directives and, Cenelec EN61010-2 : 2001 <b>ATEX for EExd model:</b> Directive 94/9/EC Group 2, Category2, G and D, Zones 1 and 2.

## Code numbers

Type of gas	All models		Standard	With LCD display	EExd	IP56 Low Temp.	EExd Low. Temp.	IP66 with remote IP65 sensor	IP66 with remote IP65 EExd sensor	IP56	
	Danfoss Type	Range [PPM]									
<b>Ammonia - NH<sub>3</sub></b>											
<b>R 717</b>	GDA EC 100	0-100	148H5000	148H5001	148H5003	148H5005	148H5006			148H5009	
	GDA EC 300	0-300			148H5063						
	GDA EC 1000	0-1000	148H5010	148H5011	148H5013	148H5015	148H5016			148H5019	
	GDA EC 1000	0-1000	148H5050	148H5051	148H5053	148H5055				148H5059	
	GDA SC 1000	0-1000	148H5040							148H5049	
	GDA SC 10000	0-10000	148H5020	148H5021	148H5023	148H5025	148H5026	148H5027	148H5028	148H5029	
<b>Carbon Dioxide - CO<sub>2</sub></b>	GDA CT 30000	0-30000	148H5030	148H5031	148H5033	148H5035				148H5039	
	GDC IR 10000	0-10000	148H5070	148H5071	148H5073	148H5075				148H5072	
	GDC IR 20000	0-20000				148H5085				148H5082	
	GDC IR 40000	0-40000								148H5092	
	<b>Halo-Carbon</b>										
	<b>HCFC (R 22, R 123)</b>	GDHC SC 1000	0-1000	148H5100	148H5101		148H5105		148H5107		148H5109
<b>R 744</b>	<b>HFC (R 404A, R410A, R 134a, R 407C, R 507)</b>	GDHF SC 1000	0-1000	148H5110	148H5111		148H5115		148H5117		148H5119
	<b>HFC (R 134a)</b>	GDHF-R3 SC 1000	0-1000	148H5120	148H5121		148H5125		148H5127		148H5129

EC = Electro-chemical, SC = Semi-chemical, CT = Catalytic, IR = Infrared

## Accessories

Description	Code no.
GD Test Kit	148H5230
- GD Tester all models. To test mother PCB at Sensor PCB replacement	
- Beaker M42	
- EC/SC/CT-Adapter. Fit Beaker M42	
- M35 Adapter. Fit Beaker M42	
GD Repeater all models. Between GD and Danfoss Monitoring System	148H5231
GD mother PCB all models	148H5232
GD Ampoules 10 pcs. 100 ppm ammonia.	148H5234
GD Ampoules 10 pcs. 1000 ppm ammonia.	148H5235
GD Ampoules 10 pcs 2000 ppm CO <sub>2</sub>	148H5236
Remote LCD display IP41	148H5238

## Electronic controls – overview

Type		Code Nr.	Relay / temperature sensor	Defrost heating	Cooling or heating function	Rail heat	Fan	Alarm / light / misc. (choosable)	2nd compressor	DI / DO / AI / AO	Batterie for clock (optional)	HACCP via system / HACCP integrated	Application modul	Definition and waiting of thermostat sensors	Defrost / defrost on demand/ defrost on demand via bus	Voltage 230 V	Voltage 115 V	Voltage 24 V
<b>Case controller</b>																		
EKC 102A		084B8500	1/1	x						-/x/-					x			
EKC 102A		084B8503	1/1	x						-/x/-					x			
EKC 102B		084B8501	2/2			x/-	x	-/x/-						x/-	x			
EKC 102C		084B8502	2/2	x			x/-	-/x/-						x/-	x			
EKC 102C		084B8505	2/2	x			x/-	-/x/-						x/-	x			
EKC 102D		084B8506	3/2	x		x	x/-	x/x/-						x				
EKC 202A		084B8521	3/2	x		x/-		x/x/-	x	x/-				x/-x	x			
EKC 202B		084B8522	4/2	x		x	x/-	x/x/-	x	x/-				x/-x	x			
EKC 202C		084B8523	4/2	x		x	x/x/-	x/x/-	x	x/-				x/-x	x			
EKC 202C-MS		084B8543	4/2	x		x	x/x/-	x/x/-	x	-/-				x/-x	x			
EKC 302A		084B4162	2/2		x/-			x/x/-						x/-x	x			
EKC 302B		084B4163	3/2	x		x		x/x/-						x/-x	x			
EKC 302D		084B4164	4/3	x	x	x	x/x/x	x/x/-	x	x/-	x			x/-x	x			
AK-CC 210		084B8520	4/3	x	x	x	x/x/x	x	x/x/-	x	x/x	x	x	x/x/x	x			
AK-CC 250A		084B8528	4/3	x	x	x	x/x/x	x	x/x/-	x	x/x	x	x	x/x/x	x			
AK-CC 250B		084B8529	4/3	x	x	x	x/x/x	x	x/x/-	x	-/-	x	x	x/x/x	x			
AK-CC 350		084B4165	4/3	x	x	x	x/x/x	x	x/x/-		x/x	x	x	x/x/x	x			
AK-CC 450		084B8022	6/5	x	x	x	x/x/x		x/x/-		x/x	x	x	x/x/x	x			
AK-CC 550A		084B8030	6/5	x	x	x	x/x/x		x/x/-		x/-	x	x	x/x/x	x			
AK-CC 750		080Z0121	9/5	x	x	x	x/x/x		x/x/x/x		x/-	x	x	x/x/x	x		x	
AK-CC 750		080Z0122	9/5	x	x	x	x/x/x		x/x/x/x		x/-	x	x	x/x/x	x		x	
AK-CC 750		080Z0125	9/5	x	x	x	x/x/x		x/x/x/x		x/-	x	x	x/x/x	x		x	
<b>Superheat Controller</b>																		
EKC 315A		084B7086	2/2			x/-									x			
EKC 312		084B7250	1/2			x/-									x			
EKC 316A		084B7079	2/2			x/-									x			
EKD 316		084B8040	1/2			x/-									x			
<b>Temperature Controller</b>																		
EKC 368		084B7079	4/2	x		x	x/-											
<b>Liquid level Controller</b>																		
EKC 347		084B7067																
<b>Capacity Controller</b>																		
EKC 331T		084B7105	5/2			x/-	2x	x/x/-						x				
AK-PC 530		084B8007	10/2			4x	x/-	2x	x/x/-					x				
AK-PC 781		080Z0186	8/11			8x			x/x/x					x				
		080Z0187	8/11			8x			x/x/x					x				
		080Z0188	8/11			8x			x/x/x					x				
<b>Condensing unit Controller</b>																		
AK-RC 101		080Z3200																
AK-RC 103		080Z3201																
		080Z3202																
		080Z3206																
		080Z3207																

			With screw terminals	With plug connection	Valve control	Room thermostat	UPS connection	Pressure controls	0-10 V / 4-20 mA Input	0-10 V / 4-20 mA Output	Superheat regulation	Reference displacement	External display	Data communication opt./ on board	Note / Language	
<b>Case controller</b>																
EKC 102A		084B8500	TEV	x												
EKC 102A		084B8503	TEV	x												
EKC 102B		084B8501	TEV	x							x					
EKC 102C		084B8502	TEV	x						x						
EKC 102C		084B8505	TEV	x						x						
EKC 102D		084B8506	TEV	x						x						
EKC 202A		084B8521	TEV	x					x		x/-					
EKC 202B		084B8522	TEV	x					x		x/-					
EKC 202C		084B8523	TEV	x					x		x/-					
EKC 202C-MS		084B8543	TEV	x					x		x/-	NTC				
EKC 302A		084B4162	x	TEV	x						x/+					
EKC 302B		084B4163	x	TEV	x						x/+					
EKC 302D		084B4164	x	TEV	x						x/+					
AK-CC 210		084B8520	TEV	x					x		x/-					
AK-CC 250A		084B8528	TEV	x					x		-/x					
AK-CC 250B		084B8529	TEV	x					x		-/x	NTC				
AK-CC 350		084B4165	x	TEV	x				x		+/-					
AK-CC 450		084B8022	x		TEV	x					x	+/-				
AK-CC 550A		084B8030	x		AKV	x			x		x	+/-				
AK-CC 750		080Z0121	x	4x AKV	x				x		x	-/x	EN, DE, FR, IT, NL			
AK-CC 750		080Z0122	x	4x AKV	x				x		x	-/x	EN, ES, PT			
AK-CC 750		080Z0125	x	4x AKV	x				x		x	-/x	EN, DK, SW, FI			
<b>Superheat Controller</b>																
EKC 315A		084B7086	x		AKV/ICM	x	x	x	-/x	-/x	x	x	x/-			
EKC 312		084B7250	x		ETS		x	-/-	-/-	x			x/-			
EKC 316A		084B7079	x		ETS	x	x	x	-/x	-/x	x	x	x/-			
EKD 316		084B8040	x		ETS		x	x	x/x	-/-	x		x/-			
<b>Temperature Controller</b>																
EKC 368		084B7079	x		KVS		x		x/-		x		x/-			
<b>Liquid level Controller</b>																
EKC 347		084B7067	x										x/-			
<b>Capacity Controller</b>																
EKC 331T		084B7105	x				x	x/x	x/x		x		x/-			
AK-PC 530		084B8007	x				x	x/x	x/x		x	x	x/-			
AK-PC 781		080Z0186	x										EN, DE, FR, IT, NL			
		080Z0187	x										EN, ES, PT			
		080Z0188	x										EN, DK, FI			
<b>Condensing unit Controller</b>																
AK-RC 101		080Z3200	Single-phase													
AK-RC 103		080Z3201	Three-phase (3 kW), 4.5-6.3 A													
		080Z3202	Three-phase (3 kW), 7-10 A													
		080Z3206	Three-phase (5 kW), 11-16 A													
		080Z3207	Three-phase (5 kW), 14-20 A													



## EKC 102 – Temperature controller

EKC 102 controllers for panel mounting are used for temperature and defrost control via pump-down or start/stop of compressor.



Functions	Advantages
<p><b>Thermostat</b></p> <ul style="list-style-type: none"><li>ON/OFF thermostat</li><li>Sensors: Danfoss Pt1000, PTC1000 or NTC5000</li><li>Calibration of sensors</li><li>Day/night control</li><li>Alarm thermostat with delays</li></ul> <p><b>Defrost</b></p> <ul style="list-style-type: none"><li>Electrical or natural defrost</li><li>Start via DI input, time interval or display</li><li>Defrost on demand</li><li>Stop on time or temperature</li></ul> <p><b>Compressor</b></p> <ul style="list-style-type: none"><li>Anti cycle timers for optimum compressor protection</li><li>High-effect 16A relays for connection of compressors without use of intermediate relay</li><li>Control of 2 compressors (version 102B)</li></ul> <p><b>Multipurpose DI input</b></p> <ul style="list-style-type: none"><li>Multipurpose DI input for defrost start, day/night control, dooralarm or main switch</li></ul> <p><b>Other functions</b></p> <ul style="list-style-type: none"><li>The S5 sensor can be used for monitoring of condenser temperature or as product sensor (version 102B+102D)</li><li>Door function with alarm monitoring</li><li>Manual control of outputs</li><li>Delay of outputs at power up</li></ul> <p><b>Display &amp; Programming</b></p> <ul style="list-style-type: none"><li>High-efficient LED display with icons for indication of operational status. Parameter settings/readouts and alarm conditions can be read on the display.</li><li>"Copy key" programming key with room for 25 different controller setups</li></ul> <p><b>Fan (102D only)</b></p> <ul style="list-style-type: none"><li>Fan delay during defrost</li><li>Fan stop when compressor cuts out</li><li>Fan stop at high S5 temperature</li></ul>	<ul style="list-style-type: none"><li>Integrated refrigeration-technical functions</li><li>Defrost on demand in 1:1 systems</li><li>Buttons and seal imbedded in the front</li><li>IP65 density from the front panel</li><li>Can control two compressors</li><li>Digital input for either:<ul style="list-style-type: none"><li>- Door alarm</li><li>- Defrost start</li><li>- Start/stop of regulation</li><li>- Night operation</li><li>- Change-over between two temperature reference</li><li>- Case cleaning function</li></ul></li><li>Instant programming via programming key</li><li>HACCP</li></ul> <p>Factory calibration that will guarantee a better measuring accuracy than stated in the standard EN 441-13 without subsequent calibration (Pt 1000 ohm sensor)</p>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	230 V a.c.(115 V) +10/-15 %. 1.5 VA		
<b>Sensors</b>	Pt 1000 or PTC (1000 ohm/25 °C) or NTC-M2020 (5000 ohm/25 °C)		
<b>Accuracy</b>	Measuring range	-60 to +99 °C	
	Controller	±1 K below -35 °C ±0.5 K between -35 to +25 °C ±1 K above +25 °C	
	Pt 1000 sensor	±0.3 K at 0 °C ±0.005 K per grad	
<b>Display</b>	LED, 3 digits		
<b>Digital inputs</b>	Signal from contact functions Requirements to contacts: Gold plating Cable length must be max. 15 m Use auxiliary relays when the cable is longer		
<b>Electrical connection cable</b>	Max.1.5 mm <sup>2</sup> multi-core cable on supply and relays. Max. 1 mm <sup>2</sup> on sensors - and DI inputs. Terminals are mounted on the circuit board		
<b>Relays*</b>	CE (250 V a.c.)		UL ** (240 V a.c.)
	DO1. Refrigeration	10 (6) A	10 A Resistive 5FLA, 30LRA
	DO2. Alarm/ Defrost/ Refrigeration	10 (6) A	10 A Resistive 5FLA, 30LRA
	DO3. Fan	6 (3) A	6 A Resistive 3FLA, 18LRA 131 VA Pilot duty
<b>Environments</b>	0 to +55 °C, During operations -40 to +70 °C, During transport 20 - 80% Rh, not condensed No shock influence/vibrations		
<b>Enclosure</b>	IP65 from front. Buttons and packing are imbedded in the front.		
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with LVD tested acc. EN 60730-1 og EN 60730-2-9, A1, A2 EMC tested acc. EN50082-1 og EN 60730-2-9, A2		

\* DO1 and DO2 are 16 A relays. DO3 is a 8 A relay. Max. load must be kept.

\*\* UL-approval based on 30000 couplings

## Ordering

Type	Description	Supply	Code no.
<b>EKC 102A</b>	Temperature controller	230 V a.c.	084B8500
		115 V a.c.	084B8503
<b>EKC 102B</b>	Temperature controller with alarm function	230 V a.c.	084B8501
		230 V a.c.	084B8502
<b>EKC 102D</b>	Temperature controller for electric defrost	230 V a.c.	084B8505
<b>EKC 102D</b>	Controller for refrigeration with fan function	230 V a.c.	084B8506
<b>Accessories</b>			
<b>EKA 182A</b>	Copy key EKC - EKC		084B8567
<b>AKS 12</b>	Pt 1000 Sensor	1.5 m	084N0036
<b>EKS 111</b>	PTC 1000 Sensor	1.5 m	084N1178
<b>EKS 211</b>	NTC 5000 Sensor	1.5 m	084N1220



## EKC 202 – Refrigeration controller

The series of EKC 202 controllers can be used for a wide range of different refrigeration applications – from control of air temperatures and defrost to more advanced applications, including control of light and fans.



Functions	Advantages
<p><b>Thermostat</b></p> <ul style="list-style-type: none"><li>ON/OFF heating or cooling thermostat</li><li>Sensors: Danfoss Pt1000, PTC1000 or NTC</li><li>Day/night control</li><li>Thermostat band</li><li>Alarm thermostat with delay</li></ul> <p><b>Defrost</b></p> <ul style="list-style-type: none"><li>Electrical, natural or hot gas defrost</li><li>Start via DI input, time interval or schedule (RTC)</li><li>Defrost on demand</li><li>Stop on time or temperature</li><li>Coordinated defrost</li></ul> <p><b>Compressor</b></p> <ul style="list-style-type: none"><li>Anti cycle timers for optimum protection</li><li>High-effect 16A relays for connection of compressors without use of intermediate relays</li></ul> <p><b>DI input</b></p> <ul style="list-style-type: none"><li>Multi purpose DI input for defrost start, door function, night setback, main switch, appliance cleaning, general alarm, defrost coordination and thermostat band.</li></ul> <p><b>Fan</b></p> <ul style="list-style-type: none"><li>Fan delay during defrost</li><li>Fan stop when compressor cuts out</li><li>Fan stop at high S5 temperature</li></ul> <p><b>Light control</b></p> <ul style="list-style-type: none"><li>Light control of day/night, door, or via network</li></ul>	<ul style="list-style-type: none"><li>Integrated refrigeration-technical functions</li><li>Defrost on demand in 1:1 systems</li><li>Buttons and seal imbedded in the front</li><li>IP65 density from the front panel</li><li>Digital input for either:<ul style="list-style-type: none"><li>- Door contact function with alarm</li><li>- Defrost start</li><li>- Start/stop of regulation</li><li>- Night operation</li><li>- Change-over between two temperature reference</li><li>- Case cleaning function</li></ul></li><li>Instant programming via programming key</li><li>HACCP</li></ul> <p>Factory calibration that will guarantee a better measuring accuracy than stated in the standard EN 441-13 without subsequent calibration (Pt 1000 ohm sensor)</p>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	230 V a.c. +10/-15 %. 1.5 VA		
<b>Sensors for EKC 202A, 202B, 202C</b>	Pt 1000 ohm (0 °C) PTC 1000 ohm (25 °C) or NTC 5000 ohm (25 °C) M 2020		
<b>Sensors for EKC 202C-MS</b>	NTC 2000 ohm (25 °C) NTC 2500 ohm (0 °C) NTC 3000 ohm (25 °C) NTC 5000 ohm (25 °C) M 2020 NTC 10000 ohm (25 °C) NTC 10000 ohm (25 °C) Beta 3435		
<b>Accuracy</b>	Measuring range -60 to +99 °C Controller ±1 K below -35 °C ±0,5 K between -35 to +25 °C ±1 K above +25 °C		
	Pt 1000 sensor ±0,3 K at 0 °C ±0,005 K per grad		
<b>Display</b>	LED, 3 digits		
<b>Digital inputs</b>	Signal from contact functions Requirements to contacts: Gold plating Cable length must be max. 15 m Use auxiliary relays when the cable is longer		
<b>Electrical connection cable</b>	Max. 1,5 mm <sup>2</sup> multi-core cable on supply and relays. Power current terminals are mounted on the circuit board. Max. 1 mm <sup>2</sup> on sensors - and DI inputs.		
		CE (250 V a.c.)	UL *** (240 V a.c.)
<b>Relays*</b>	DO1. Refrigeration	10 (6) A	10 A Resistive 5FLA, 30LRA
	DO2. Defrost	10 (6) A	10 A Resistive 5FLA, 30LRA
	DO3. Fan	6 (3) A	6 A Resistive 3FLA, 18LRA 131 VA Pilot duty
	DO4. Alarm or light	4 (1) A Min. 100 mA**	4 A Resistive 131 VA Pilot duty
<b>Environments</b>	0 to +55 °C, During operations -40 to +70 °C, During transport 20 - 80% Rh, not condensed No shock influence/vibrations		
<b>Enclosure</b>	IP65 front from front. Buttons and packing are imbedded in the front.		
<b>Escapement reserve for the clock</b>	4 hours		
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with LVD tested acc. EN 60730-1 og EN 60730-2-9, A1, A2 EMC tested acc. EN50082-1 og EN 60730-2-9, A2		

\* DO1 and DO2 are 16 A relays. DO3 and DO4 are 8 A relays. Max. load must be kept.

\*\* Gold plating ensures make function with small contact loads

\*\*\* UL-approval based on 30000 couplings

## Ordering

Type	Description	Code no.
EKC 202A	Refrigeration controller	084B8521
EKC 202B	Refrigeration controller with fan function	084B8522
EKC 202C	Refrigeration controller for electric defrost	084B8523
EKC 202C-MS	Refrigeration controller multi sensor (only NTC)	084B8543
<b>Accessories</b>		
EKA 178A	Data communication module MODBUS	084B8564
EKA 179A	RS485 LON	084B8565
EKA 181A	Battery & Buzzer	084B8566
EKA 181C	Battery module that will protect the clock in case of lengthy power failure	084B8577
EKA 182A	Copy key EKC - EKC	084B8567
EKA 183A	Programming key EKC	084B8582
AKS 12	Pt 1000 Sensor 1.5 m	084N0036
EKS 111	PTC 1000 Sensor 1.5 m	084N1178
EKS 211	NTC 5000 Sensor 1.5 m	084N1220
EKS 221	NTC 10000 Beta 3435 Sensor 3.5 m	084N3206



## EKC 302 – Refrigeration controller

The series of EKC 302 controllers can be used for a wide range of different refrigeration applications – from control of air temperatures and defrost to more advanced applications, including control of light and fans.

For DIN rail mounting.



Functions	Advantages
<p><b>Thermostat</b></p> <ul style="list-style-type: none"><li>ON/OFF heating or cooling thermostat</li><li>Sensors: Danfoss Pt1000, PTC1000 or NTC</li><li>Day/night control</li><li>Thermostat band</li><li>Alarm thermostat with delay</li></ul> <p><b>Defrost</b></p> <ul style="list-style-type: none"><li>Electrical, natural or hot gas defrost</li><li>Start via DI input, time interval or schedule (RTC)</li><li>Defrost on demand</li><li>Stop on time or temperature</li><li>Coordinated defrost</li></ul> <p><b>Compressor</b></p> <ul style="list-style-type: none"><li>Anti cycle timers for optimum protection</li><li>High-effect 16A relays for connection of compressors without use of intermediate relays</li></ul> <p><b>DI input</b></p> <ul style="list-style-type: none"><li>Multi purpose DI input for defrost start, door function, night setback, main switch, appliance cleaning, general alarm, defrost coordination and thermostat band.</li></ul> <p><b>Fan</b></p> <ul style="list-style-type: none"><li>Fan delay during defrost</li><li>Fan stop when compressor cuts out</li><li>Fan stop at high S5 temperature</li></ul> <p><b>Light control</b></p> <ul style="list-style-type: none"><li>Light control of day/night, door, or via network</li></ul>	<ul style="list-style-type: none"><li>Integrated refrigeration-technical functions</li><li>Defrost on demand in 1:1 systems</li><li>Buttons and seal imbedded in the front</li><li>Digital input for either:<ul style="list-style-type: none"><li>Door contact function with alarm</li><li>Defrost start</li><li>Start/stop of regulation</li><li>Night operation</li><li>Change-over between two temperature reference</li><li>Case cleaning function</li></ul></li><li>Fixed MODBUS data communication</li><li>Instant programming via programming key</li><li>HACCP</li></ul> <p>Factory calibration that will guarantee a better measuring accuracy than stated in the standard EN 441-13 without subsequent calibration (Pt 1000 ohm sensor)</p> <ul style="list-style-type: none"><li>AKC 302D: Several applications in the same unit.</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	230 V a.c. +10/-15 %. 1.5 VA		
<b>Sensors for EKC 302</b>	Pt 1000 ohm (0 °C) PTC 1000 ohm (25 °C) or NTC 5000 ohm (25°C) M 2020		
<b>Accuracy</b>	Measuring range	-60 to +99 °C	
	Controller	±1 K below -35 °C ±0,5 K between -35 to +25 °C ±1 K above +25 °C	
	Pt 1000 sensor	±0,3 K at 0 °C ±0,005 K per grad	
<b>Display</b>	LED, 3 digits		
<b>Digital inputs</b>	Signal from contact functions Requirements to contacts: Gold plating Cable length must be max. 15 m Use auxiliary relays when the cable is longer		
<b>Electrical connection cable</b>	Max.1,5 mm <sup>2</sup> multi-core cable on supply and relays. Power current terminals are mounted on the circuit board. Max. 1 mm <sup>2</sup> on sensors - and DI inputs.		
<b>Relays*</b>			IEC 60 730
	DO1. Refrigeration	10 (6) A & (5 FLA, 30 LRA)	1)
		16 (8) A & (10 FLA, 60 LRA)	2)
	DO2. Defrost	6 (3) A & (3 FLA, 18 LRA)	1)
		10 (6) A & (3 FLA, 30 LRA)	2)
<b>Environments</b>	DO3. Fan	6 (3) A & (3FLA, 18 LRA)	1)
		10 (6) A & (5 FLA, 30 LRA)	2)
<b>Enclosure</b>	DO4. Alarm	4 (1) A Min. 100 mA**	
<b>Escapement reserve for the clock</b>	0 to +55 °C, During operations -40 to +70 °C, During transport 20 - 80% Rh, not condensed No shock influence/vibrations		
<b>Approvals</b>	IP 20		
	4 hours		
	EU Low Voltage Directive and EMC demands re CE-marking complied with LVD tested acc. EN 60730-1 og EN 60730-2-9, A1, A2 EMC tested acc. EN50082-1 og EN 60730-2-9, A2		

\* DO1 is a 20 A relay. DO2 and DO3 are 16 A relays. DO4 is a 10 A relay. The max. load listed above must be observed when connecting without zero-crossing control.  
When connecting with zero-crossing, the load must be increased to the value indicated by 2).

\*\* Gold plating ensures make function with small contact loads.

## Ordering

Type	Description	Code no.
EKC 302A	Refrigeration controller	084B4162
EKC 302B	Refrigeration controller with fan and defrost function	084B4163
EKC 302D	Refrigeration controller with fan and defrost function	084B4164

## Accessories

EKA 178B	Data communication module MODBUS	084B8571
EKA 175	RS485 LON	084B8579
EKA 183A	Programming key EKC	084B8582
AKS 12	Pt 1000 Sensor	1.5 m 084N0036
EKS 111	PTC 1000 Sensor	1.5 m 084N1178
EKS 211	NTC 5000 Sensor	1.5 m 084N1220



## AK-CC 210 – Universal refrigeration controller

The controller is used for evaporator control refrigeration appliances in supermarkets. With many predefined applications one unit will offer you many options. Flexibility has been planned both for new installations and for service in the refrigeration trade.



Functions	Advantages
<b>Thermostat</b> <ul style="list-style-type: none"><li>ON/OFF heating or cooling thermostat</li><li>Sensors: Danfoss Pt1000, PTC1000 or NTC5000</li><li>Day/night control</li><li>Thermostat band</li><li>Alarm thermostat with delay</li></ul>	<ul style="list-style-type: none"><li>Many applications in the same unit</li><li>The controller has integrated refrigeration-technical functions, so that it can replace a whole collection of thermostats and timers</li><li>Buttons and seal imbedded in the front</li><li>Can control two compressors</li><li>Easy to remount data communication</li><li>Quick setup</li><li>Two temperature references</li><li>Digital inputs for various functions</li><li>Clock function with backup</li><li>HACCP (Hazard Analysis and Critical Control Points)<ul style="list-style-type: none"><li>Temperature monitoring and registration of period with too high temperature</li><li>Factory calibration that will guarantee a better measuring accuracy than stated in the standard EN 441-13 without subsequent calibration (Pt 1000 ohm sensor)</li></ul></li></ul>
<b>Defrost</b> <ul style="list-style-type: none"><li>Electrical, natural or hot gas defrost</li><li>Start via DI input, time interval or schedule (RTC)</li><li>Defrost on demand</li><li>Stop on time or temperature</li><li>Coordinated defrost</li></ul>	
<b>Compressor</b> <ul style="list-style-type: none"><li>Anti cycle timers for optimum protection</li><li>High-effect 16A relays for connection of compressors without use of intermediate relays</li></ul>	
<b>DI input</b> <ul style="list-style-type: none"><li>Multi purpose DI input for defrost start, door function, night setback, main switch, appliance cleaning, general alarm, defrost coordination and thermostat band.</li></ul>	
<b>Fan</b> <ul style="list-style-type: none"><li>Fan delay during defrost</li><li>Fan stop when compressor cuts out</li><li>Fan stop at high S5 temperature</li></ul>	
<b>Light control</b> <ul style="list-style-type: none"><li>Light control of day/night, door, or via network</li><li>Other functions</li><li>S5 sensor can be used for monitoring of condenser temperature or as product sensor</li><li>Door function with alarm monitoring</li><li>Manual control of outputs</li><li>Case cleaning function</li></ul>	
<b>Supplementary options</b> <ul style="list-style-type: none"><li>RS 485 network card for connection to network</li><li>Battery back-up card for real time clock</li><li>"Copy key" programming key</li></ul>	

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	230 V a.c. +10/-15 %. 2.5 VA		
<b>Sensors 3 pcs off either</b>	Pt 1000 ohm (0 °C)PTC (1000 ohm/25 °C) or NTC-M2020 (5000 ohm/25 °C)		
<b>Accuracy</b>	Measuring range	-60 to +99 °C	
	Controller	±1 K below -35 °C ±0.5 K between -35 to +25 °C ±1 K above +25 °C	
	Pt 1000 sensor	±0.3 K at 0 °C ±0.005 K per grad	
<b>Display</b>	LED, 3-digits		
<b>External display</b>	EKA 163A		
<b>Digital inputs</b>	Signal from contact functions Requirements to contacts: Gold plating Cable length must be max. 15 m Use auxiliary relays when the cable is longer		
<b>Electrical connection cable</b>	Max.1,5 mm <sup>2</sup> multi-core cable		
<b>Relays*</b>	CE (250 V a.c.)		UL *** (240 V a.c.)
	DO1. Refrigeration	10 (6) A	10 A Resistive 5FLA, 30LRA
	DO2. Defrost	10 (6) A	10 A Resistive 5FLA, 30LRA
	DO3. Fan	6 (3) A	6 A Resistive 3FLA, 18LRA 131 VA Pilot duty
	DO4. Alarm	4 (1) A Min. 100 mA**	4 A Resistive 131 VA Pilot duty
<b>Environments</b>	0 to +55 °C, During operations -40 to +70 °C, During transport 20 - 80% Rh, not condensed No shock influence/vibrations		
<b>Enclosure</b>	IP65 from front. Buttons and packing are embedded in the front.		
<b>Escapement reserve for the clock</b>	4 hours		
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with LVD tested acc. EN 60730-1 og EN 60730-2-9, A1, A2 EMC tested acc. EN50082-1 og EN 60730-2-9, A2		

\* DO1 and DO2 are 16 A relays. DO3 and DO4 are 8 A relays. Max. load must be kept.

\*\* Gold plating ensures make function with small contact loads

\*\*\* UL-approval based on 30000 couplings

## Ordering

Type	Description	Code no.
<b>AK-CC 210</b>	Refrigeration controller without data communication but prepared for a module	084B8520
<b>Accessories</b>		
<b>EKA 163A</b>	External display for AK-CC 210	084B8562
<b>EKA 178A</b>	Data communication module MODBUS	084B8564
<b>EKA 179A</b>	Data communication module Lon RS 485	084B8565
<b>EKA 181A</b>	Battery & Buzzer	084B8566
<b>EKA 181C</b>	Battery module that will protect the clock in case of lengthy power failure	084B8577
<b>EKA 182A</b>	Copy key EKC - EKC	084B8567
<b>AKS 12</b>	Pt 1000 Sensor	1.5 m
<b>EKS 111</b>	PTC 1000 Sensor	1.5 m
<b>EKS 211</b>	NTC 5000 Sensor	1.5 m



## AK-CC 350 – Universal refrigeration controller


The controller is used for evaporator control refrigeration appliances in supermarkets. With many predefined applications one unit will offer you many options. Flexibility has been planned both for new installations and for service in the refrigeration trade.  
For DIN rail mounting.



Functions	Advantages
<p><b>Thermostat</b></p> <ul style="list-style-type: none"><li>ON/OFF heating or cooling thermostat</li><li>Sensors: Danfoss Pt1000, PTC1000, NTC</li><li>Day / night control</li><li>Thermostat band</li><li>Alarm thermostat with delay</li></ul> <p><b>Defrost</b></p> <ul style="list-style-type: none"><li>Electrical, natural or hot gas defrost</li><li>Start via DI input, time interval or schedule (RTC)</li><li>Defrost on demand</li><li>Stop on time or temperature</li><li>Coordinated defrost</li></ul> <p><b>Compressor</b></p> <ul style="list-style-type: none"><li>Anti cycle timers for optimum protection</li><li>High-effect 20A relay for connection of compressor without use of intermediate relays</li></ul> <p><b>DI input</b></p> <ul style="list-style-type: none"><li>Multi purpose DI input for defrost start, door function, night setback, main switch, appliance cleaning, general alarm, defrost coordination and thermostat band.</li></ul> <p><b>Fan</b></p> <ul style="list-style-type: none"><li>Fan delay during defrost</li><li>Fan stop when compressor cuts out</li><li>Fan stop at high S5 temperature</li></ul> <p><b>Light control</b></p> <ul style="list-style-type: none"><li>Light control of day/night, door, or via network</li><li>Other functions</li><li>S5 sensor can be used for monitoring of condenser temperature or as product sensor</li><li>Door function with alarm monitoring</li><li>Manual control of outputs</li><li>Case cleaning function</li></ul> <p><b>Supplementary options</b></p> <ul style="list-style-type: none"><li>Programming key</li></ul>	<ul style="list-style-type: none"><li>Many applications in the same unit</li><li>The controller has integrated refrigeration-technical functions, so that it can replace a whole collection of thermostats and timers</li><li>Buttons and seal imbedded in the front</li><li>Can control two compressors</li><li>Fixed MODBUS data communication</li><li>Quick setup</li><li>Two temperature references</li><li>Digital inputs for various functions</li><li>Clock function with backup</li><li>HACCP (Hazard Analysis and Critical Control Points)<ul style="list-style-type: none"><li>Temperature monitoring and registration of period with too high temperature</li><li>Factory calibration that will guarantee a better measuring accuracy than stated in the standard EN 441-13 without subsequent calibration (Pt 1000 ohm sensor)</li></ul></li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	230 V a.c. +10/-15 %. 2.5 VA		
<b>Sensors for AK-CC 250A, 3 pcs off either</b>	Pt 1000 or PTC (1000 ohm / 25°C)		
<b>Sensors for AK-CC 250B</b>	NTC 2000 ohm (25 °C) NTC 2500 ohm (0 °C) NTC 3000 ohm (25 °C) NTC 5000 ohm (25 °C) M 2020 NTC 10000 ohm (25 °C) NTC 10000 ohm (25 °C) Beta 3435		
<b>Accuracy</b>	Measuring range	-60 to +99°C	
	Controller	±1 K below -35°C ±0.5 K between -35 to +25°C ±1 K above +25°C	
	Pt 1000 sensor	±0.3 K at 0°C ±0.005 K per grad	
<b>Display</b>	LED, 3-digits		
<b>External display</b>	EKA 163A (only in stand alone)		
<b>Digital inputs</b>	Signal from contact functions Requirements to contacts: Gold plating Cable length must be max. 15 m Use auxiliary relays when the cable is longer		
<b>Electrical connection cable</b>	Max. 1,5 mm <sup>2</sup> multi-core cable		
<b>Relays*</b>		IEC 60 730	
	DO1. Refrigeration	10 (6) A & (5 FLA, 30 LRA)	1)
		16 (8) A & (10 FLA, 60 LRA)	2)
	DO2. Defrost	6 (3) A & (3 FLA, 18 LRA)	1)
		10 (6) A & (3 FLA, 30 LRA)	2)
	DO3. Fan	6 (3) A & (3FLA, 18 LRA)	1)
		10 (6) A & (5 FLA, 30 LRA)	2)
	DO4. Alarm	4 (1) A Min. 100 mA**	
<b>Environments</b>	0 to +55°C, During operations -40 to +70°C, During transport 20 - 80% Rh, not condensed No shock influence / vibrations		
<b>Enclosure</b>	IP 20		
<b>Escapement reserve for the clock</b>	4 hours		
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with LVD tested acc. EN 60730-1 og EN 60730-2-9, A1, A2 EMC tested acc. EN50082-1 og EN 60730-2-9, A2		

\* DO1 is a 20 A relay. DO2 and DO3 are 16 A relays. DO4 is a 10 A relay. The max. load listed above must be observed when connecting without zero-crossing control.  
When connecting with zero-crossing, the load must be increased to the value indicated by 2).

\*\* Gold plating ensures make function with small contact loads.

## Ordering

Type	Description	Code no.
<b>AK-CC 350</b>	Refrigeration controller with MODBUS data communication	084B4165
<b>Accessories</b>		
<b>EKA 163A</b>	External display for AK-CC 350	084B8562
<b>EKA 183A</b>	Programming key	084B8582
<b>AKS 12</b>	Pt 1000 Sensor	1.5 m 084N0036
<b>EKS 111</b>	PTC 1000 Sensor	1.5 m 084N1178



## AK-CC 550A – Controller for appliance control

AK-CC 550A is a complete refrigeration appliance control with great flexibility to adapt to all types of refrigeration appliances and cold storage rooms.



Functions	Advantages
<ul style="list-style-type: none"><li>Day/night thermostat with ON/OFF or modulating principle</li><li>Product sensor S6 with separate alarm limits</li><li>Switch between thermostat settings via digital input</li><li>Adaptive control of superheat</li><li>Adaptive defrosting based on evaporator performance</li><li>Start of defrost via schedule, digital input or network</li><li>Natural, electric or hot gas defrost</li><li>Stop of defrost on time and/or temperature</li><li>Coordination of defrosting among several controls</li><li>Pulsing of fans when thermostat is satisfied</li><li>Case cleaning function for documentation of HACCP procedure</li><li>Rail heat control via day/night load or dew point</li><li>Door function</li><li>Control of two compressors</li><li>Control of night blinds</li><li>Light control</li><li>Heat thermostat</li><li>Factory calibration that will ensure a better measuring accuracy than stated in the standard EN 441-13 without subsequent calibration (Pt 1000 ohm sensor)</li><li>Integrated MODBUS communication with the option of mounting a LonWorks or Ethernet communication card</li></ul>	<ul style="list-style-type: none"><li>Energy optimisation of the whole refrigeration appliance</li><li>One controller for several different refrigeration appliances</li><li>Integrated display at the front of the controller</li><li>Quick set-up with predefined settings</li><li>Built-in data communication</li><li>Built-in clock function with power reserve</li><li>Can be used on CO<sub>2</sub> systems</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	230 V a.c. +10/-15%, 5 VA	
<b>Sensor S2</b>	Pt 1000	
<b>Sensor S3, S4, S5, S6</b>	Pt 1000 PTC 1000 ohm/25 °C (All 4 must be of the same type)	
<b>Accuracy</b>	Measuring range	-60 to +120 °C
	Controller	±1 K below -35 °C ±0.5 K between -35 to +25 °C ±1 K above +25 °C
	Pt 1000 sensor	±0.3 K at 0 °C ±0.005 K per grad
<b>Measuring of Pe</b>	Pressure transmitter	AKS 32R
<b>Display</b>	LED, 3-digits	
<b>External display</b>	EKA 163B or 164B. (any EKA 163A or 164A)	
<b>Digital inputs</b> <b>DI1, D2</b>	Signal from contact functions Requirements to contacts: Gold plating Cable length must be max. 15 m Use auxiliary relays when the cable is longer	
<b>Digital input DI3</b>	230 V a.c.	
<b>Electrical connection cable</b>	Max. 1.5 mm <sup>179</sup> multi-core cable	
<b>Solid state output</b>	DO1 (for AKV coil)	Max. 240 V a.c., Min. 28 V a.c. Max. 0,5 A Leak < 1 mA Max. 1 pcs. AKV
<b>Relays*</b>	DO3, DO4	CE (250 V a.c.)
	DO2, DO5, DO6	4 (3) A
<b>Environments</b>	0 to +55 °C, During operations -40 to +70 °C, During transport 20 - 80% Rh, not condensed No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Mounting</b>	DIN rail or on wall	
<b>Weight</b>	0.4 kg	
<b>Data communication</b>	Fixed	MODBUS
	Extension options	
	The controller cannot be hooked up with a monitoring unit type m2.	
<b>Power reserve for the clock</b>	4 hours	
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN 50081-1 and EN 50082-2	

\*) DO3 and DO4 are 16 A relays. DO2, DO5 and DO6 are 8 A relays. Max. load must be observed.

## Ordering

Type	Description	Code no.
<b>AK-CC 550A</b>	Case controller with MODBUS data communication	084B8030
<b>EKA 175</b>	Data communication module LON RS 485	084B8579
<b>EKA 176</b>	Data communication module DANBUSS	084B8583
<b>EKA 178B</b>	Data communication module MODBUS	084B8571
<b>EKA 163B</b>	External display with plug for direct connection	084B8574
<b>EKA 164B</b>	External display operation buttons and plug for direct connection	084B8575
<b>EKA 163A</b>	External display with screw terminals	084B8562
<b>EKA 164A</b>	External display with operation buttons and screw terminals	084B8563



## AK-CC 750 – Controller for evaporator control

- Multi evaporator controller (1-4 evaporators)
- Preset applications for electronic and thermostatic expansion valves and different defrost methods
- Full energy optimisation functions (dew point, fans, defrost, blinds etc.)
- Remote display connections (up to 4 displays)
- Flexible I/O configuration
- Easy application selection for fast configuration
- Built in RS 485 LON communication



### Energy optimisation

- **Adaptive superheat via the AKV electronic expansion valve**  
Optimum utilisation of evaporator at all load conditions:  
Precondition for major energy savings via optimised suction pressure and floating condensing pressure control
- **Adaptive defrost**  
Intelligent defrost skip based on performance monitoring of evaporator
- **Dew point pulsing of rail heat**  
Pulsing of rail heat according to the actual load condition
- **Pulsing of fans**  
Pulsing of fans at thermostat cut out



### Food quality/HACCP compliance

- **Modulating temperature control**  
Accurate temperature control
- **Measuring accuracy**  
Factory calibration guarantees a better measuring accuracy than required in the EN 12830 and EN 13485 standards without subsequent calibration on site (Pt 1000 ohms sensor)
- **Product temperature**  
Separate product temperature for compliance with EN 12830 and EN 13485
- **Case cleaning**  
Case cleaning function for documentation of case cleanings carried out according to HACCP procedures



### Service and commissioning

- **Easy performance check**  
Provides vital info for performance check
- **Versatile controller**
  - A single controller covering several applications
  - Flexible IO configuration
  - Built-in LON communication
- **Fast and easy commissioning**
  - Preset setup for fast start-up
  - Only 5 settings required

# Technical data and ordering

<b>Supply voltage</b>	24 V d.c./a.c. +/- 20%				
<b>Power consumption</b>	8 VA				
<b>Analogue inputs</b>	Pt 1000 ohm /0 °C	Dissolution: 0.1 °C Accuracy: +/- 0.5°			
	Pressure transmitter type AKS 32R/AKS 32 (1-5 V)	Dissolution 1 mV Accuracy +/- 10 mV			
	Voltage signal 0-10 V	Max. connection of 5 pressure transmitters on one module			
	Contact function (On/Off)	On at R < 20 ohm Off at R > 2K ohm (Gold plated contacts not necessary)			
<b>On/off supply voltage inputs</b>	Low voltage 0/80 V a.c./d.c.	Off: U < 2 V On: U > 10 V			
	High voltage 0/260 V a.c.	Off: U < 24 V On: U > 80 V			
<b>Relay outputs SPDT</b>	AC-1 (ohmic)	5 A			
	AC-15 (inductive)	3 A			
	U	Min. 24 V Max. 230 V Low and high voltage must not be connected to the same output group			
	Fuse	5 A (F)			
<b>Solid state outputs</b>	Can be used for loads that are frequently cut in and out e.g. decompression, rail heating, fans and AKV valve				
		Max. 240 V a.c., Min. 48 V a.c. Max. 0.5 A, Leak < 1 mA Max. 1 AKV			
<b>Ambient temperature</b>	During transport	-40 to 70 °C			
	During operation	-20 to 55 °C, 0 to 95% RH (non condensing) No shock influences/vibrations			
<b>Enclosure</b>	Material	PC/ABS			
	Enclosure	IP10, VBG 4			
	Mounting	For mounting on wall or DIN rail			
<b>Weight with screw terminals</b>	Modules in 100-/200-/controller series				
<b>Approvals</b>	Complies with EU low voltage directive and EMC requirements				
	LVD tested according to EN 60730 EMC tested Immunity according to EN 61000-6-2 Emission according to EN 50081-1				
	UL file number				

## Ordering AK-CC 750

Type	Language	Code no.
AK-CC 750	English, German, French, Italian, Dutch	080Z0121
	English, Spanish, Portuguese	080Z0122
	English, Danish, Swedish, Finnish	080Z0125

## Ordering accessories

Extension modules and survey for inputs and outputs

Type	Analog inputs	On/off outputs		On/off supply voltage (DI signal)		Module with switches	Code no.
	For sensors, pressure transmitters etc.	Relay (SPDT)	Solid state	Low voltage (max. 80 V)	High voltage (max. 260 V)	For override of relay outputs	with screw terminals
Controller	11	4	4	-	-	-	-
AK-XM 101A	8						080Z0007
AK-XM 102A				8			080Z0008
AK-XM 102B					8		080Z0013
AK-XM 204A		8					080Z0011
AK-XM 204B		8				x	080Z0018
AK-XM 205A	8	8					080Z0010
AK-XM 205B	8	8				x	080Z0017

## Software

AK-ST 500	Software for operation of AK controllers	080Z0161
-----------	--	----------

## Remote displays

EKA 163B	Display unit	08088574
EKA 164B	Display unit with operation buttons	08088575

## Miscellaneous

Trafo (AK-PS 075)	080Z0053
Display cable - 2 meters	084B7298
Display cable - 6 meters	084B7299



## EKC 315A – Refrigeration control

The controller and valve can be used where there are requirements to accurate control of superheat and temperature in connection with refrigeration. E.g.:

- Cold store (air coolers)
- Processing plant (water chillers)
- A/C plant



Functions	Advantages
<ul style="list-style-type: none"><li>• Regulation of superheat</li><li>• Temperature control</li><li>• MOP function</li><li>• ON/OFF input for start/stop of regulation</li><li>• Input signal that can displace the superheat reference or the temperature reference</li><li>• Alarm if the set alarm limits are exceeded</li><li>• Relay output for solenoid valve</li><li>• PID regulation</li><li>• Output signal following the temperature showing in the display</li></ul>	<ul style="list-style-type: none"><li>• The evaporator is charged optimally – even when there are great variations of load and suction pressure</li><li>• Energy savings – the adaptive regulation of the refrigerant injection ensures optimum utilisation of the evaporator and hence a high suction pressure</li><li>• Exact temperature control – the combination of adaptive evaporator and temperature control ensures great temperature accuracy for the media</li><li>• The superheating is regulated to the lowest possible value at the same time as the media temperature is controlled by the thermostat function</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	24 V a.c. +/-15% 50/60 Hz, (80 VA) (the supply voltage is galvanically separated from the input and output signals)	
<b>Power consumption</b>	Controller	5 VA
	AKV coil	55 VA
<b>Input signal</b>	Current signal	4-20 mA or 0-20 mA
	Pressure transmitter	4-20 mA from AKS 33
	Digital input from external contact function	
<b>Sensor input</b>	2 pcs. Pt 1000 ohm	
<b>Output signal</b>	Current signal	4-20 mA or 0-20 mA
	Load	Max. 200 ohm
<b>Relay output</b>	1 pcs. SPST	AC-1: 4 A (ohmic)
<b>Alarm relay</b>	1 pcs. SPST	AC-15: 3 A (inductive)
<b>ICAD</b>	ICAD mounted on ICM	Current signal 4-20 mA or 0-20 mA
<b>Data communication</b>	Possible to connect a data communication module	
<b>Environments</b>	-10 to 55 °C, during operations -40 to +70 °C, during transport 20 - 80% Rh, not condensed No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Weight</b>	300 g	
<b>Mounting</b>	DIN rail	
<b>Display</b>	LED, 3 digits	
<b>Terminals</b>	max. 2.5 mm <sup>2</sup> multicore	
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN50081-1 and EN 50082-2	

The installation of data communications must comply with the requirements described in literature sheet no. RC8AC

## Ordering

Type	Description	Code no.
<b>EKC 315A</b>	Superheat controller, AKS 33, standard	084B7086
<b>EKC 315A</b>	Superheat controller, AKS 32R	084B7085
<b>EKC 315A</b>	I-pack of 084B7085	084B7128

## Accessories

<b>EKA 174</b>	Data communication module (accessories), (RS 485 module) with galvanic separation	084B7124
<b>EKA 175</b>	RS485 LON	084B8579
<b>AKS 11</b>	Pt 1000 Sensor	084N0003
<b>AKS 32R</b>	Pressure transmitter -1/12 bar	060G1036
<b>AKS 33</b>	Pressure transmitter -1/12 bar, 0.3%	060G2049
<b>AKS 3000</b>	Pressure transmitter -1/12 bar, 1%	060G1323



## EKC 312 – Superheat controller

The controller and valve can be used where there are requirements to accurate control of superheat and temperature in connection with refrigeration. E.g.:

- Processing plant (water chillers)
- Cold store (air coolers)
- A/C plant



Functions	Advantages
<ul style="list-style-type: none"><li>• Regulation of superheat</li><li>• MOP function</li><li>• ON/OFF input for start/stop of regulation</li><li>• Alarm if the set alarm limits are exceeded</li><li>• PID regulation</li></ul>	<ul style="list-style-type: none"><li>• The evaporator is charged optimally – even when there are great variations of load and suction pressure.</li><li>• Energy savings – the adaptive regulation of the refrigerant injection ensures optimum utilisation of the evaporator and hence a high suction pressure.</li><li>• The superheating is regulated to the lowest possible value.</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	24 V a.c. +/-15% 50/60 Hz, 10 VA (the supply voltage is galvanically separated from the input and output signals)	
<b>Power consumption</b>	Controller	5 VA
	ETS step motor	1,3 VA
<b>Input signal</b>	Current signal	4-20 mA or 0-20 mA
	Pressure transmitter	4-20 mA from AKS 33
	Digital input from external contact function	
<b>Sensor input</b>	2 pcs. Pt 1000 ohm	
<b>Alarm relay</b>	1 pcs. SPST	AC-1: 4 A (ohmic) AC-15: 3 A (inductive)
<b>Step motor output</b>	Pulsating 100 mA	
<b>Data communication</b>	Possible to connect a data communication module	
<b>Environments</b>	-10 to +55 °C, during operations -40 to +70 °C, during transport 20 - 80% Rh, not condensed No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Weight</b>	300 g	
<b>Mounting</b>	DIN rail	
<b>Display</b>	LED, 3 digits	
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN50081-1 and EN 50082-2	

## Ordering

Type	Description	Code no.
<b>EKC 312</b>	Superheat controller	084B7250
<b>Accessories</b>		
<b>EKA 175</b>	Data communication module (accessories), (RS 485 module)	084B8579
<b>EKA 174</b>	Data communicationsmodule (accessories), (RS 485 module) with galvanic separation	084B7124

Temperature sensor Pt 1000 ohm/Pressure transmitter type AKS 33:



## EKC 316A – Superheat controller

The controller and valve can be used where there are requirements to accurate control of superheat and temperature in connection with refrigeration. E.g.:

- Processing plant (water chillers)
- Cold store (air coolers)
- A/C plant



Functions	Advantages
<ul style="list-style-type: none"><li>• Regulation of superheat</li><li>• Temperature control</li><li>• MOP function</li><li>• ON/OFF input for start/stop of regulation</li><li>• Alarm if the set alarm limits are exceeded</li><li>• Relay output for solenoid valve</li><li>• PID regulation</li></ul>	<ul style="list-style-type: none"><li>• The evaporator is charged optimally – even when there are great variations of load and suction pressure.</li><li>• Energy savings – the adaptive regulation of the refrigerant injection ensures optimum utilisation of the evaporator and hence a high suction pressure.</li><li>• The superheating is regulated to the lowest possible value at the same time as the media temperature is controlled by the thermostat function.</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	24 V a.c. +/-15% 50/60 Hz, 10 VA (the supply voltage is galvanically separated from the input and output signals)	
<b>Power consumption</b>	Controller	5 VA
	ETS step motor	1,3 VA
	Current signal	4-20 mA or 0-20 mA
<b>Input signal</b>	Pressure transmitter	4-20 mA from AKS 33
	Digital input from external contact function	
<b>Sensor input</b>	2 pcs. Pt 1000 ohm	
<b>Thermostat relay</b>	1 pcs. SPST	AC-1: 4 A (ohmic)
<b>Alarm relay</b>	1 pcs. SPST	AC-15: 3 A (inductive)
<b>Step motor output</b>	Pulsating 100 mA	
<b>Data communication</b>	Possible to connect a data communication module	
<b>Environments</b>	0 to +55 °C, during operations -40 to +70 °C, during transport 20 - 80% Rh, not condensed No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Weight</b>	300 g	
<b>Mounting</b>	DIN rail	
<b>Display</b>	LED, 3 digits	
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN50081-1 and EN 50082-2	

If battery backup is used:

Battery requirements: 18 V d.c. min. 100 mAh

## Ordering

Type	Description	Code no.
<b>EKC 316A</b>	Superheat controller	084B7088
<b>Accessories</b>		
<b>EKA 175</b>	Data communication module (accessories), (RS 485 module)	084B8579
<b>EKA 174</b>	Data communicationsmodule (accessories), (RS 485 module) with galvanic separation	084B7124

Temperature sensor Pt 1000 ohm/Pressure transmitter type AKS 33:



## EKD 316 – Superheat controller

The controller and valve can be used where there are requirements to accurate control of superheat and temperature in connection with refrigeration. E.g.:

- Processing plant (water chillers)
- Cold store (air coolers)
- A/C plant



Functions	Advantages
<ul style="list-style-type: none"><li>• Regulation of superheat</li><li>• MOP function</li><li>• ON/OFF input for start/stop of regulation</li><li>• Alarm if the set alarm limits are exceeded</li><li>• PID regulation</li></ul>	<ul style="list-style-type: none"><li>• The evaporator is charged optimally – even when there are great variations of load and suction pressure.</li><li>• Energy savings – the adaptive regulation of the refrigerant injection ensures optimum utilisation of the evaporator and hence a high suction pressure.</li><li>• The superheating is regulated to the lowest possible value.</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	24 V a.c. +/-15% 50/60 Hz, 10 VA (the supply voltage is galvanically separated from the input and output signals)	
<b>Power consumption</b>	Controller	5 VA
	ETS step motor	1,3 VA
	Current signal <sup>1)</sup>	4-20 mA or 0-20 mA
<b>Input signal</b>	Voltage signal <sup>1)</sup>	0-10 V or 1-5 V
	Pressure transmitter	AKS 32R
	Digital input from external contact function	
<b>Sensor input</b>	2 pcs. Pt 1000 ohm	
<b>Alarm relay</b>	1 pcs. SPST	AC-1: 4 A (ohmic) AC-15: 3 A (inductive)
<b>Step motor output</b>	Pulsating 30-300 mA	
<b>Data communication</b>	Mounted with MODBUS data communication	
<b>Environments</b>	0 to +55 °C, during operations -40 to +70 °C, during transport 20 - 80% Rh, not condensed No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Weight</b>	300 g	
<b>Mounting</b>	DIN rail	
<b>Display</b>	No, external Display optional (LED, 3 digits)	
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN50081-1 and EN 50082-2	

<sup>1)</sup> Ri: mA 400 ohm V: 50 kohm

If battery backup is used:

Battery requirements: 18-24 V d.c. min. 120 mAh

## Ordering

Type	Description	Code no.
<b>EKD 316</b>	Superheat controller <sup>2)</sup>	084B8040
<b>Accessories</b>		
<b>EKA 164A</b>	Display with buttons to change settings (with MODBUS communication) <sup>2)</sup>	084B8563

<sup>2)</sup> In order to change settings either display EKA 164A or software AK-ST 500 (Plus accessories) is needed

Temperature sensor Pt 1000 ohm/Pressure transmitter type AKS 32R:



## EKC 347 – Liquid level controller

The controller is used for regulation of the refrigerant level in pump reservoirs, separators, intermediate coolers, economisers, condensers or receivers.

A signal transmitter (AKS 4100/4100U) will constantly measure the refrigerant liquid level in the reservoir – the controller will receive the signal and subsequently control the valve, in order to control the refrigerant liquid level according to liquid level setpoint.



Functions	Advantages
<ul style="list-style-type: none"><li>Liquid level control</li><li>Alarm if the set alarm limits are exceeded</li><li>Relay outputs for upper and lower level limits and for alarm level</li><li>Analog input signal which can displace the reference</li><li>PI control</li><li>Low or High side control</li><li>When AKV/A is selected, a MASTER/SLAVE system can run up to 3 AKV/A with distributed Opening Degree</li><li>Manual control of output</li><li>Limitation of Opening degree possible</li><li>ON/OFF operation with hysteresis</li></ul>	<ul style="list-style-type: none"><li>Dedicated controller with easy setup for pumped refrigerant liquid systems</li><li>With the AKS 4100/4100U liquid level transmitter it is possible to set the refrigerant level within a wide range.</li><li>Flexible and can be used with ICM or AKV/A expansion valves ICM - ICM are direct operated motorized valves driven by digital stepper motor type ICAD AKV/A - AKVA or AKV are pulse-width modulating expansion valves.</li><li>PC operation (extra option) The controller can be provided with data communication, so that it may be hooked up with other products in the ADAP-KOOL® range of refrigeration controls. Operation, monitoring and data collection can then be performed from a PC.</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	24 V a.c. +/-15% 50/60 Hz, 60 VA (the supply voltage is galvanically separated from the input and output signals. Input/output are not individual galvanic isolated)	
<b>Power consumption</b>	Controller 20 W coil for AKV	5 VA 55 VA
<b>Input signal</b>	Level signal	4-20 mA or 0-10 V
	Reference displacement	4-20 mA, 0-20 mA, 2-10 V or 0-10 V
	ICM valve feedback signal	From ICAD 0/4-20 mA
<b>Relay output</b>	2 pcs. SPST	AC-1: 4 A (ohmic)
<b>Alarm relay</b>	1 pcs. SPST	AC-15: 3 A (inductive)
<b>Current output</b>	0-20 mA or 4-20 mA Max. load: 500 ohm	
<b>Valve connection</b>	ICM - via current output AKV/A- via 24 a.c. Pulse-Width Modulating output	
<b>Data communication</b>	Possible to connect a data communication module	
<b>Environments</b>	-10 - 55 °C, during operation -40 - 70 °C, during transport	
	20 - 80% Rh, not condensed	
	No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Weight</b>	300 g	
<b>Mounting</b>	DIN rail	
<b>Display</b>	LED, 3-digits	
<b>Terminals</b>	max. 2.5 mm <sup>2</sup> multicore	
<b>Approvals</b>	EU Low Voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN50081-1 and EN 50082-2	

## Ordering

Type	Description	Code no.
<b>EKC 347</b>	Liquid level controller	084B7067
<b>Accessories</b>		
<b>EKA 174</b>	Data communicationsmodule (accessories), (RS 485 module) with galvanic separation	084B7124



## EKC 331T – Capacity controller

The controller is used for capacity regulation of compressors or condensers in small refrigerating systems.

Regulation can be carried out with up to four identical capacity steps.



Functions	Advantages
<ul style="list-style-type: none"><li><b>Regulation</b> Regulation with up to four relay outputs can be carried out. Regulation takes place with a set reference which is compared to a signal from a pressure transmitter or a temperature sensor.</li><li><b>Relay module</b> It is possible to use the controller as relay module, so that the relays are cut in or out by means of an external voltage signal.</li><li><b>Alarmfunction</b> A relay becomes activated when the set alarm limits are exceeded.</li><li><b>Digital input</b> The digital input can be used for:<ul style="list-style-type: none"><li>- night operation where the suction pressure is raised</li><li>- heat recovery where the condensing pressure is raised</li><li>- external start/stop of the regulation.</li><li>- Monitoring of safety circuit</li></ul></li><li><b>Possibility of data communication</b></li></ul>	<ul style="list-style-type: none"><li>Patented neutral zone regulation</li><li>Sequential or cyclic operation</li></ul>

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	230 V a.c. +/-15% 50/60 Hz, 5 VA	
<b>Input signal</b>	Pressure transmitter*) with 4-20 mA or temperature sensor Pt 1000 ohm or temperature sensor PTC 1000 ohm or voltage signal (0 - 5 V, 0 - 10 V or 5 - 10 V)	
	Digital input to external contact function	
<b>Relay output</b>	4 pcs. SPST	AC-1: 4 A (ohmic) AC-15: 3 A (inductive)
<b>Alarmrelay</b>	1 pcs. SPST	AC-1: 4 A (ohmic) AC-15: 1 A (inductive)
<b>Data communication</b>	Possible to connect a data communication module	
<b>Environments</b>	-10 - 55 °C, during operation -40 - 70 °C, during transport 20 - 80% Rh, not condensed No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Weight</b>	300 g	
<b>Mounting</b>	DIN rail	
<b>Display</b>	LED, 3 digits	
<b>Terminals</b>	max. 2.5 mm <sup>2</sup> multicore	
<b>Approvals</b>	EU Low voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN50081-1 and EN 50082-2	

\*) As pressure transmitter can be used AKS 32R or AKS 33.

The installation of data communications must comply with the requirements described in literature sheet no. RC8AC

## Ordering

Type	Function	Ordering
<b>EKC 331T</b>	Capacity controller	084B7105
<b>EKA 175</b>	Data communication module (accessories), (RS 485 module)	084B8579




## AK-PC 530 – Capacity controller

The controller is used for capacity regulation of compressors or condensers in small refrigerating systems.

Numbers of compressors and condensers can be connected, as required.

There are eight outputs and more can be added via an external relay module.

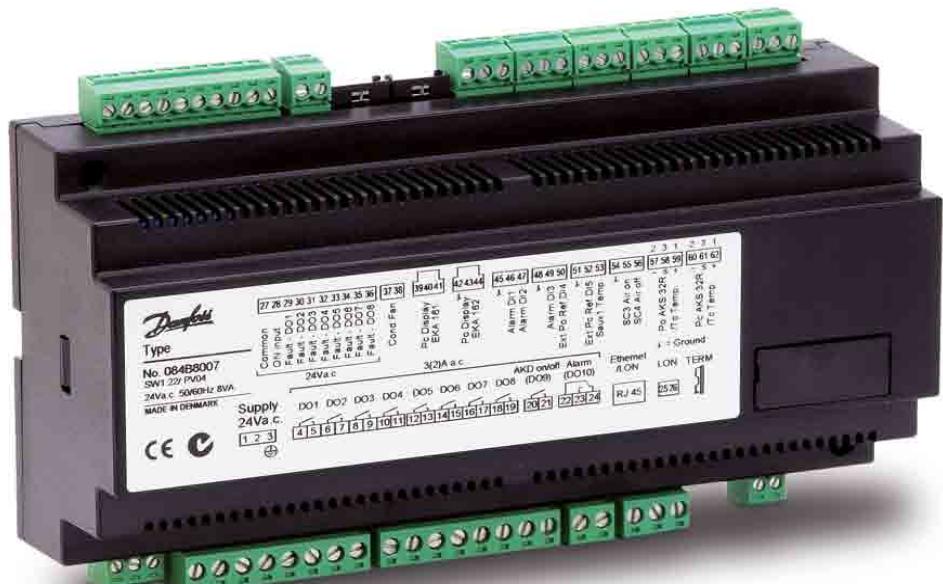

### Functions

- Relays for compressor and condenser regulation
- Voltage output for capacity regulation of condenser
- Status inputs. An interrupted signal indicates that the safety circuit has been activated and the respective circuit stopped
- Contact inputs for indication of alarms
- Contact inputs for displacement of references or for indication of alarms
- Alarm relay
- External start/stop of regulation
- Possibility of data communication

### Advantages

- Patented neutral zone regulation
- Many possible combinations for compressor constellations
- Sequential or cyclic operation
- Possibility of suction pressure optimization via the data communication

# Technical data and ordering

## Technical data

<b>Supply voltage</b>	24 V a.c. +/-15% 50/60 Hz, 5 VA	
<b>Input signal</b>	2 pcs. pressure transmitters type AKS 32R (temperature sensors in brine systems) 3 pcs. temperature sensor input for PT 1000 ohm/0 °C or PTC 1000 ohm/25 °C	
<b>Digitale input from contact function</b>	1 pcs. for Start/stop of regulation 8 pcs. for monitoring of safety circuits 3 pcs. for alarm function 2 pcs. for alarm function or for displacement of references	
<b>Relay output for capacity regulation</b>	8 pcs. SPST	AC-1: 3 A (ohmic) AC-15: 2 A (inductive)
"AKD start/stop" relay	1 pcs. SPST	
<b>Alarm relay</b>	1 pcs. SPDT	AC-1: 6 A (ohmic) AC-15: 3 (inductive)
<b>Voltage output</b>	0-10 V d.c.	
<b>Display outputs</b>	EKA 163 EKA 165(164)	Pc display Operation, Po display and LED
<b>Data communication</b>	Possible to connect a data communication module	
<b>Environments</b>	0 - 55 °C, during operation -40 - 70 °C, during transport 20 - 80% Rh, not condensing No shock influence/vibrations	
<b>Enclosure</b>	IP20	
<b>Weight</b>	0.4 kg	
<b>Mounting</b>	DIN rail or on wall	
<b>Terminals</b>	max. 2.5 mm <sup>2</sup> multicore	
<b>Approvals</b>	EU Low voltage Directive and EMC demands re CE-marking complied with. LVD-tested acc. to EN 60730-1 and EN 60730-2-9 EMC-tested acc. to EN61000-6-2 and 3	

## Ordering

Type	Function	Code no.
<b>AK-PC 530</b>	Capacity controller	084B8007
<b>Accessories</b>		
<b>EKA 163B</b>	Display unit	084B8574
<b>EKA 164B</b>	Display unit with operation buttons	084B8575
<b>EKA 165</b>	Display unit with operation buttons and light-emitting diodes for input and output	084B8573
<b>EKA 175</b>	Data communication module, RS 485	084B8579
<b>Cables</b>	Cable for display unit 2 m, 1 pcs. Cable for display unit 6 m, 1 pcs.	084B7298 084B7299



## AKS 4100/4100U – Liquid level sensors

The AKS 4100/4100U liquid level sensor is designed specifically to measure liquid levels in a wide range of refrigeration applications.

The liquid level sensor is based on a proven technology called Time Domain Reflectometry (TDR) or Guided Micro Wave.

AKS 4100/4100U liquid level sensor can be used to measure the liquid level of many different refrigerants in vessels, accumulators, receivers, standpipes, etc.



### Advantages and features

- Approved and qualified by Danfoss for refrigeration applications
- One product covering several probe lengths (cable version)
- A single product for all commonly used refrigerants (cable version)
- Cable version requires less top-end clearance for installation and service
- Proven operation with all refrigerants in combination with oil
- No need to clean cable version when fully covered by oil

- The cable version is very compact and easy to handle, ship, install and use with different lengths and refrigerants
- Changes of the liquid dielectric constant ( $\epsilon_r$ ) do not affect operation.
- 5000 mm (197 in.) probe length with cable version
- 2-wire loop powered; no separate transformer needed
- Multi language HMI.  
Level and setting readout in mm,cm,m ( ft, in.)

## Technical data

Supply Voltage	14-30 V d.c. Min/Max. Value for an output of 22 mA at the terminal.			
Ambient temperature supply voltage limitations	-40°C/+80°C(-40°F / +176°F) : 16-30 V d.c. -20°C/+80°C(-4°F / +176°F) : 14-30 V d.c.			
Load	RL [Ω] ≤ ((Uext -14 V)/20 mA) – Default (Error output set to 3.6 mA) RL [Ω] ≤ ((Uext -14 V)/22 mA) – (Error output set to 22 mA)			
Cable gland	AKS 4100 PG 13, M20×1.5 ; (cable diameter: 6-8 mm (0.24-0.31in.) AKS 4100U ½ in. NPT			
Refrigerant temperature	-60°C/100°C (-76°F/212°F)			
Ambient temperature	-40°C / +80°C (-40°F / +176°F) For HMI : -20°C / +60°C (-4°F / +140°F)			
Process pressure	-1 barg / 100 barg (-14.5 psig / 1450 psig)			
Terminals (spring loaded)	0.5-1.5 mm <sup>2</sup> (~20-15 AWG)			
Enclosure:	IP66/67 (~NEMA type 4X)			
Mechanical connection	AKS 4100: Cable version/Coaxial version	G1 in. pipe thread. Aluminium gasket included		
AKS 4100U:		¾ in. NPT		
Refrigerants	The listed refrigerants are qualified and approved by Danfoss			
R717 / NH <sub>3</sub>	-40°C / +50°C (-40°F / +122°F)			
R744 / CO <sub>2</sub>	-50°C / +15°C (-58°F / +59°F)			
HCFC:	R22 -50°C / +48°C (-58°F / +118°F)			
HFC:	R404A -50°C / +15°C (-58°F / +59°F) R410A -50°C / +15°C (-58°F / +59°F) R134a -40°C / +50°C (-40°F / +122°F)			
The listed refrigerants may be used in the complete temperature range of AKS 4100/4100U, however, the accuracy may be affected if the above listed temperature range is exceeded.				
Other refrigerants within the groups of HCFC and HFC can be detected and measured if the following conditions are fulfilled:				
Reference conditions	Dielectric constant Cable version to be used in R717 / NH <sub>3</sub> , HCFC and HFC ε <sub>r</sub> , liquid > 5.6			
The coaxial version is mandatory for R744 / CO <sub>2</sub> ε <sub>r</sub> , liquid > 1.3 and marine applications.				
The coaxial version can also be used R717 / NH <sub>3</sub> , HCFC and HFC.				

# Ordering

## Cable version - AKS 4100/4100U



Description	Code number With HMI	Code number Without HMI*
<b>AKS 4100</b> with 5 m (197 in.) Ø2 mm (Ø0.08 in.) stainless cable and counterweight	084H4501	084H4500
<b>AKS 4100U</b> with 5 m (197 in.) Ø2 mm (Ø0.08 in.) stainless cable and counterweight	084H4521	084H4520

## Coaxial version - AKS 4100/4100U (available in predefined lengths, with or without HMI)



Description	Probe length		Code number With HMI	Code number Without HMI*
	mm	in.		
<b>AKS 4100</b> - Coaxial	500		084H4510	084H4503
<b>AKS 4100</b> - Coaxial	800		084H4511	084H4504
<b>AKS 4100</b> - Coaxial	1000		084H4512	084H4505
<b>AKS 4100</b> - Coaxial	1200		084H4513	084H4506
<b>AKS 4100</b> - Coaxial	1500		084H4514	084H4507
<b>AKS 4100</b> - Coaxial	1700		084H4515	084H4508
<b>AKS 4100</b> - Coaxial	2200		084H4516	084H4509
<b>AKS 4100U</b> - Coaxial		19.2	084H4530	084H4524
<b>AKS 4100U</b> - Coaxial		30	084H4531	084H4525
<b>AKS 4100U</b> - Coaxial		45	084H4532	084H4526
<b>AKS 4100U</b> - Coaxial		55	084H4533	084H4527
<b>AKS 4100U</b> - Coaxial		65	084H4534	084H4528
<b>AKS 4100U</b> - Coaxial		85	084H4535	084H4529

## Accessories



Description	Code number
<b>AKS 4100/4100U</b> HMI Service/Display unit with rear cover and mounting bracket	084H4540
<b>AKS 4100/4100U</b> HMI Display	084H4548




Description	Code number
<b>AKS 4100/4100U</b> Signal Converter <b>without</b> HMI, excluding cable gland	084H4541

\* When ordering without HMI please observe:  
Each AKS 4100/AKS 4100 must always be programmed via the HMI display unit.

The HMI display unit can be ordered separately and there are two possibilities:

- 084H4540 AKS 4100/4100U HMI display unit with rear cover and mounting bracket. The mounting bracket is very useful when the AKS 4100/4100U have to be programmed. The same AKS 4100/4100U HMI display unit can be used to programme more AKS 4100/4100U and both Cable and Coaxial versions.
- 084H4548 AKS 4100/4100U HMI display unit (usually spare part).

# Notes

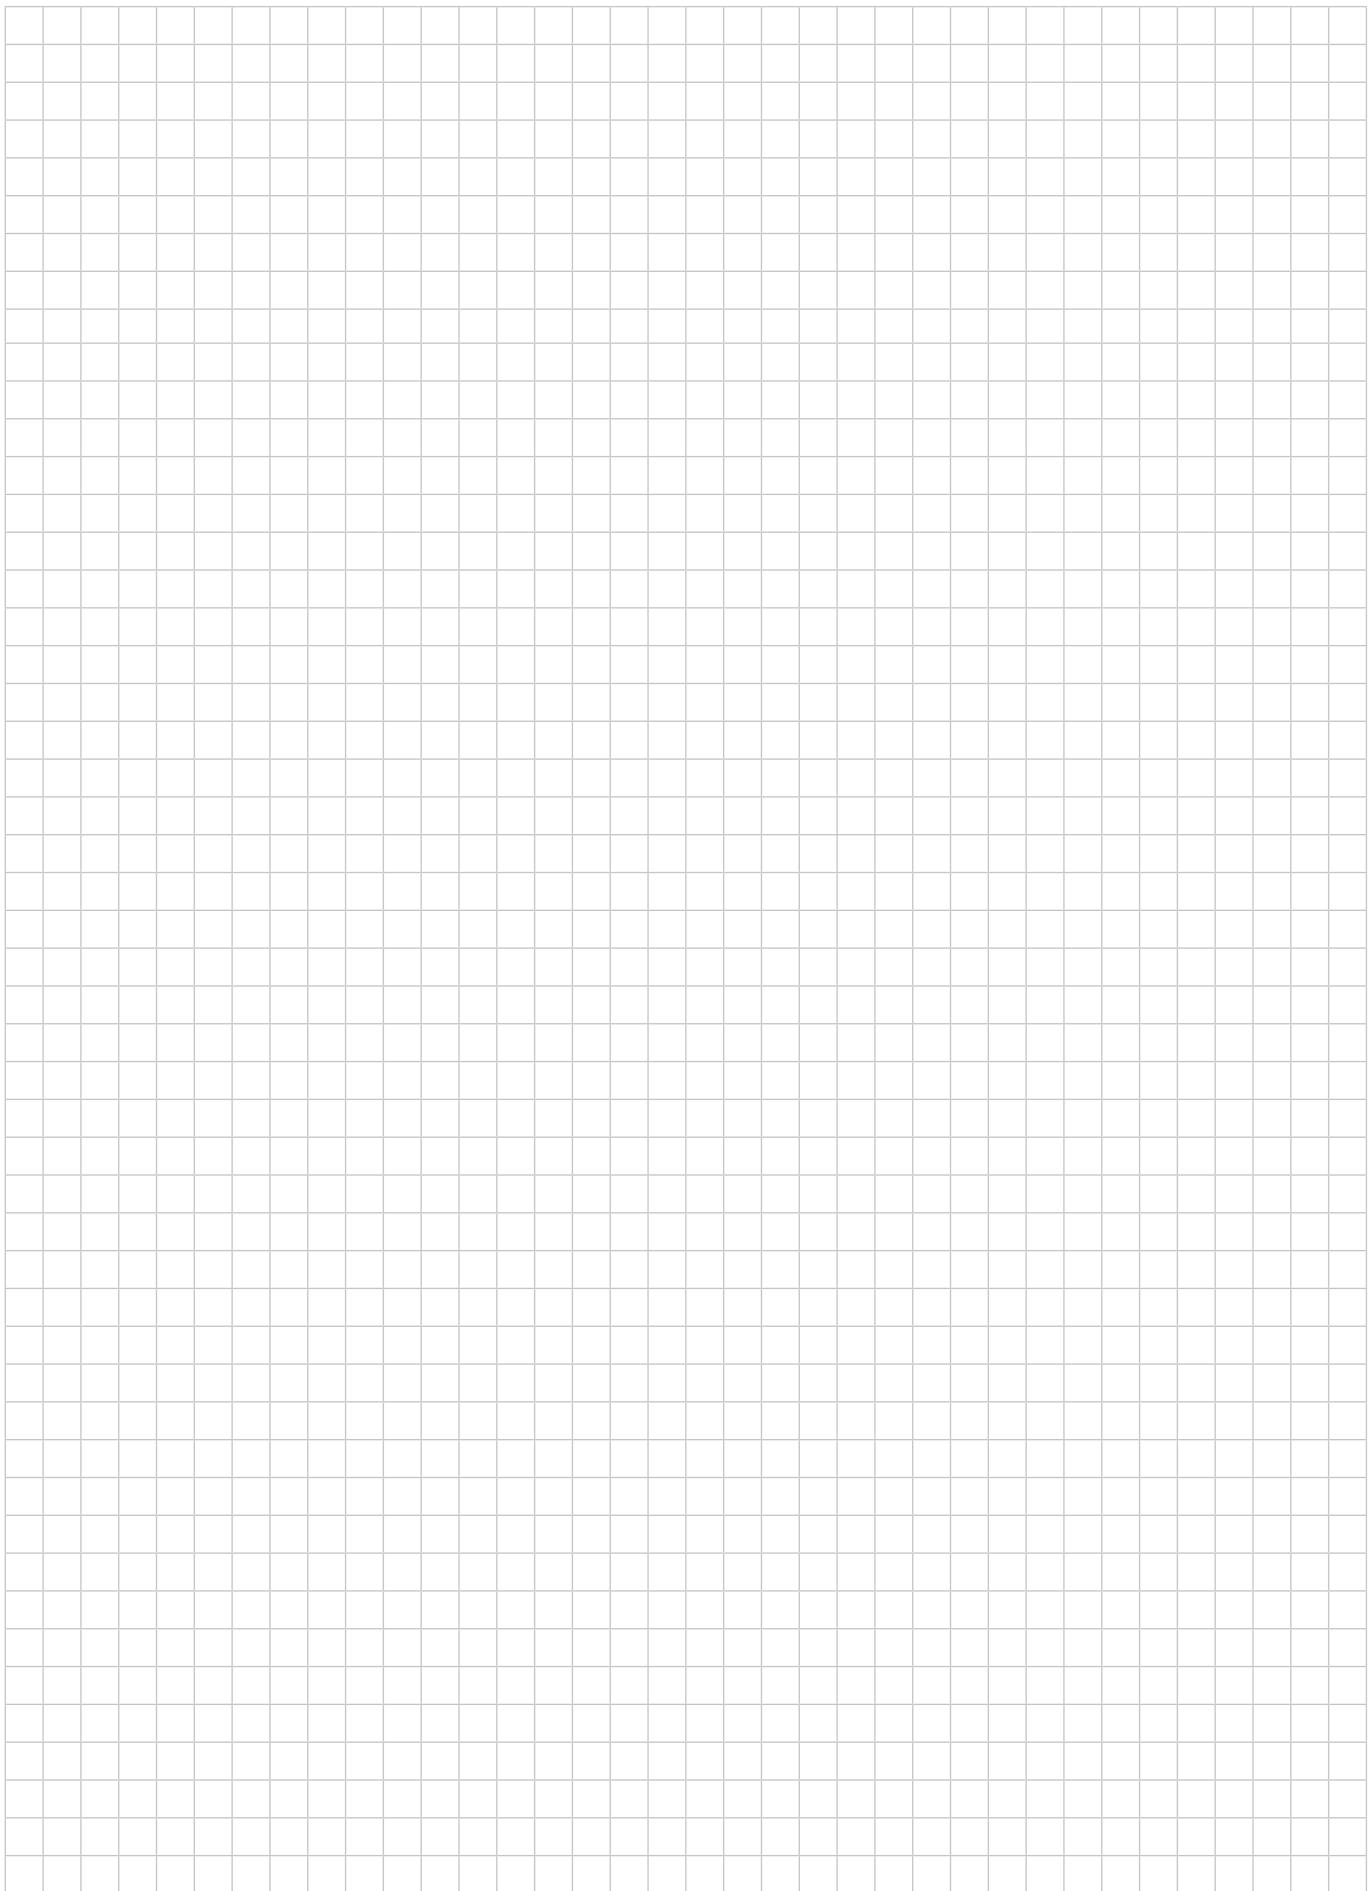A large grid of empty squares, intended for handwritten notes.




## EKS/AKS – Sensors, transmitters and level controls

Danfoss can supply a wide range of sensors and transmitters for electronic control of refrigeration applications.



Temperature sensors	Pressure transmitters
<ul style="list-style-type: none"><li>The AK-HS 1000 sensor is based on a high - accuracy PT 1000 element and developed for temperature monitoring and data logging in HACCP systems. It has been designed to simulate a product placed in a refrigeration application. Hereby a realistic HACCP report is achieved.</li><li>Temperature sensors are temperature dependent resistance sensors.</li><li>Sensors in the AKS series are mainly for use in commercial and industrial refrigeration plants where the requirements on grade of enclosure and temperature range are high.</li><li>The sensors are adjusted and meet the tolerance requirements of DIN IEC 751 class B.</li><li>Sensors in the EKS series are mainly for use in air conditioning and comfort applications where there is a focus on the design of the unit and where the requirements to the temperature regulation are less demanding.</li><li>The EKS sensors consist of a PTC element (1000 ohm at 25 °C).</li></ul>	<ul style="list-style-type: none"><li>AKS pressure transmitters are designed for precise and energy optimized control.</li><li>The robust design makes AKS suitable for a wide range of applications, such as:<ul style="list-style-type: none"><li>Air conditioning systems-Refrigeration plants</li><li>Process control applications</li><li>Laboratory applications</li></ul></li><li>Product range:<ul style="list-style-type: none"><li>- 4 - 20 mA (AKS 33, AKS 3000)</li><li>- 1 - 5 V d.c.</li><li>- 1 - 6 V d.c.</li><li>- 0 - 10 V d.c. (AKS 32)10</li><li>- 90% ratiometric output (AKS 32R)</li></ul></li></ul>

# Technical data and code numbers



**HACCP**  
certified by EAL

## Product Temperature Sensor

Type	Code number	Signal	Temperature range	Measuring accuracy	Enclosure	Cable length
<b>AKS 1000</b>	084N1007	PT1000	-30 → 50 °C	EN 60751 Class B	IP54	5.5 m



EKS 111, 211  
AKS 12, 21M



AKS 11



AKS 21W



AKS 21D


## Temperature sensors

Type	Code number	Signal	Measure range	Sensor tube	Electrical connection	Cable length
<b>EKS 111</b>	084N1178	PTC1000	-55 → 100 °C	Round	Cable with pins	1.5 m
<b>EKS 111</b>	084N1179	PTC1000	-55 → 100 °C	Round	Cable with pins	3.5 m
<b>EKS 111</b>	084N1182	PTC1000	-55 → 100 °C	Round	AMP Plug	3.5 m
<b>EKS 211</b>	084B4404	NTC5000	-40 → 80 °C	Round	Cable	3.5 m
<b>EKS 211</b>	084N1220	NTC5000	-40 → 80 °C	Round	Cable	1.5 m
<b>AKS12</b>	084N0036	PT1000	-40 → 80 °C	Round	Cable	1.5 m
<b>AKS12</b>	084N0045	PT1000	-40 → 80 °C	Round	AMP Plug	5.5 m
<b>AKS 11</b>	084N0003	PT1000	-50 → 100 °C	Concave	Cable	3.5 m
<b>AKS 11</b>	084N0005	PT1000	-50 → 100 °C	Concave	Cable	5.5 m
<b>AKS 11</b>	084N0008	PT1000	-50 → 100 °C	Concave	Cable	8.5 m
<b>AKS 21 M</b>	084N2003	PT1000	-70 → 180 °C	Round	Cable	2.5 m
<b>AKS 21 W</b>	084N2017	PT1000	-70 → 180 °C	Sensor pipe	Cable	2.5 m
<b>AKS 21 D</b>	084N2035	PT1000	-40 → 80 °C	Channel bulb	Terminal socket/ Type B	-

## Pressure transmitters

Type	Code number	Signal	Measure range	Max. working pressure	Electrical connection	Connection
------	-------------	--------	---------------	-----------------------	-----------------------	------------

### AKS 32R, 10-90% rated output signal, 4.75-8 V d.c. supply voltage, 0.3% FS



AKS 32  
AKS 2050

<b>AKS 32R</b>	060G0090		-1/34 bar	55 bar		7/16-20 UNF flare
<b>AKS 32R</b>	060G1036		-1/12 bar	33 bar	DIN 43650-A	
	060G5750	10-90% supply voltage	-1/59 bar	100 bar	Connection without plug	G3/8 EN 837
<b>AKS 2050</b>	060G5751		-1/99 bar	150 bar		
	060G5752		-1/159 bar	250 bar		
<b>Cable with plug for AKS32R</b>	060G1034				Plug 3 + E (female)	5 m

### AKS 32, 1-5 V output signal, 9-30 V d.c. supply voltage, 0.3% FS

<b>AKS 32</b>	060G2069	1 → 5 V	-1/12 bar	33 bar	DIN 43650-A	7/16-20 UNF flare
<b>AKS 32</b>	060G2071	1 → 5 V	-1/34 bar	55 bar	Plug Pg 9	



AKS 33

### AKS 33, 4-20 mA output signal, 10-30 V d.c. supply voltage, 0.3% FS

<b>AKS 33</b>	060G2048	4 → 20 mA	-1/6 bar	33 bar		7/16-20 UNF flare
<b>AKS 33</b>	060G2049	4 → 20 mA	-1/12 bar	33 bar	DIN 43650-A	
<b>AKS 33</b>	060G2045	4 → 20 mA	0/25 bar	33 bar	Plug Pg 9	G3/8 EN 837
<b>AKS 33</b>	060G2051	4 → 20 mA	-1/34 bar	55 bar		
<b>AKS 33</b>	060G2104	4 → 20 mA	-1/6 bar	33 bar		
<b>AKS 33</b>	060G2105	4 → 20 mA	-1/12 bar	33 bar		
<b>AKS 33</b>	060G2107	4 → 20 mA	-1/34 bar	55 bar		



AKS 3000

### AKS 3000, 4-20 mA output signal, 10-30 V d.c. supply voltage, 1.0% FS

<b>AKS 3000</b>	060G1323	4 → 20 mA	-1/12 bar	33 bar	DIN 43650-A	7/16-20 UNF flare
<b>AKS 3000</b>	060G1327	4 → 20 mA	0/30 bar	55 bar	Plug Pg 9	G3/8 EN 837
<b>AKS 3000</b>	060G1896	4 → 20 mA	-1/12 bar	33 bar		G3/8 EN 837
<b>AKS 3000</b>	060G1041	4 → 20 mA	0/25 bar	40 bar		
<b>AKS 3000</b>	060G1066	4 → 20 mA	0/40 bar	100 bar		



## Compressors

### Danfoss Compressors



#### Constant innovation, constant progress

Throughout the last 50 years Danfoss Compressors has built a strong position as a global leader in the refrigeration and air conditioning industry. By constantly listening to the needs of our customers and the daily users of our products, we continue to develop innovative solutions that are energy-efficient and environmentally responsible.

With the most complete range of products for virtually any refrigeration or air-conditioning application, we are proud to offer solutions that are famous and trusted by customers all over the world for their reliability, efficiency and high quality.

#### Extensive product and application range

Our product range covers all common HC, HFC and HCFC refrigerants. Customers can choose from small, direct current hermetic compressors for mobile applications to large scroll compressors for commercial air conditioning or industrial applications.

#### Pushing technology further

We were the first to market with R134a. We can also cater for needs with energy optimised, including models with variable speed and monitoring as well as models developed for the solar energy industry. Proof of our constant focus on providing value through maximum efficiency, environmental safety and low noise levels.

## Scroll Compressors

Danfoss scroll compressors cover a full range of capacities, perfect for any application from light commercial to large commercial systems. Available in a large variety of single and tandem models for refrigerants R407C, R134a, R410A and R22, the compressors combine high energy efficiency with low sound and minimal vibration.

Special features	Benefits	Applications
<ul style="list-style-type: none"> <li>Simple, compact and lightweight construction</li> <li>Optimised scroll, motor and shell design</li> <li>100% suction gas cooled and shielded motor</li> <li>Large refrigerant capacity</li> <li>Large oil reserve</li> </ul>	<ul style="list-style-type: none"> <li>Easy to install and service</li> <li>Energy efficiency with long lifetime expectancy and low noise</li> <li>Works in high temperature environments</li> <li>Reliable operation in all conditions</li> </ul>	<ul style="list-style-type: none"> <li>Water chillers</li> <li>Self contained air conditioning units</li> <li>Split systems</li> <li>Central air handling units</li> <li>Heat pumps</li> <li>Residential air conditioning</li> </ul>

## Reciprocating Compressors (commercial)

Designed for refrigeration as well as air conditioning applications with refrigerants R22, R407C, R134a, R404A and R507A, the Danfoss Maneurop range of compressors covers all requirements in the 1.5-26 HP range. The compressors are available with rotoblock connections, suitable for parallel mounting as well as factory made units.

Special features	Benefits	Applications
<ul style="list-style-type: none"> <li>Large internal volume, large oil sump, sturdy design</li> <li>100% suction gas-cooled motor</li> <li>Internal motor protection</li> <li>High efficiency circular valve design</li> </ul>	<ul style="list-style-type: none"> <li>operation under extreme conditions</li> <li>versatile</li> <li>no need for air circulation around the compressor</li> <li>long lifetime expectancy and reliability</li> </ul>	<ul style="list-style-type: none"> <li>Walk-in freezers &amp; cold rooms</li> <li>Frozen food processing and storage</li> <li>Blast freezers</li> <li>Low temperature racks</li> <li>Ice cream machines</li> <li>Display cabinets</li> <li>Water chillers</li> <li>Large packaged air conditioners</li> </ul>

## Reciprocating Compressors (household & light commercial)

Specially optimised for use in household and light commercial applications, hermetic reciprocating compressors from Danfoss provide high cooling capacity in an energy saving design. The compressor series can be used with refrigerants R134a, R290, R404A/R507A, R407C and R600a perfect for cooling needs from 20 W to 6 kW.

Special features	Benefits	Applications
<ul style="list-style-type: none"> <li>Compact construction</li> <li>Durable housing</li> <li>Optimised motor technology</li> <li>Wide voltage range</li> <li>Low GWP refrigerant</li> <li>Variable speed</li> </ul>	<ul style="list-style-type: none"> <li>Easy installation at lower cost</li> <li>Low noise and high energy efficiency</li> <li>Robust in tough operating conditions</li> <li>Immune to unstable power supply</li> <li>Environmentally friendly solutions</li> </ul>	<ul style="list-style-type: none"> <li>Laboratory and medical equipment</li> <li>Compressed air dryers</li> <li>Glass door merchandisers</li> <li>Display cabinets</li> <li>Fridges and freezers</li> <li>Ice cream cabinets</li> <li>Vending machines</li> <li>Drink dispensers</li> <li>Ice making machines</li> <li>Bottle coolers</li> <li>Heat pumps</li> <li>Milk cooling tanks</li> <li>Wine cellars</li> </ul>

# Variable Speed Solutions for Light Commercial Refrigeration

## Cut a slice out of your energy bill with variable speed control

### Optimise cabinet display cooling with SLV compressors

SLV Variable Speed Drive Compressor with intelligent 220 V 50/60 Hz controller is the natural choice when you need a versatile package for a wide range of light commercial LBP applications like freezers and cabinets. You will thus secure both high food quality and a low energy bill in a single solution.

System performance monitoring with built-in data logging function, use of one, intelligent controller for control and alarm management integrated in a compact, reliable and easy to install unit – and many other important enhancements that place SLV compressors far ahead of optimised compressors.

The integrated design of the compressors helps reduce system costs, enabling of more than 30% energy reduction in supermarket and convenience store cabinets, compared to non-optimised compressors.

SLV compressors are available for R404A/R507 and the environmentally friendly refrigerant, R290.

Product advantages	Customer benefits
<ul style="list-style-type: none"><li>Integrated variable speed and adaptive temperature control</li><li>High Temperature Stability</li><li>Wide voltage range</li><li>Uses R290 (other refrigerants possible)</li><li>Built-in data logging and failure detection</li><li>Remote monitoring option</li><li>Lower average compressor speed</li><li>Compressor, speed control, cabinet control functions, display and monitoring – all in one integrated solution</li></ul>	<ul style="list-style-type: none"><li>Reduces energy consumption of more than 30%</li><li>Reduced food loss and increased food quality</li><li>High efficiency and reliability</li><li>Allows shop owners to comply with future legal refrigerant requirements now</li><li>Environmentally friendly</li><li>Enables shop owners to comply with the HACCP standard on food quality</li><li>Easy integration in existing and new monitoring systems, e.g. Retail Care®</li><li>Lower acoustic noise</li><li>Simpler installation, less room for errors, easier field service</li></ul>

## Reciprocating Compressors (Direct current)

### Tailored for cooling on the move

The excellent performance of the BD series safeguards food, medical and telecommunication. Use:

- BD35F/50F/80F compressors for 12/24V DC, R134a in mobile refrigerators and freezers
- BD220CL compressors for 12V DC, R404A LBP/MBP for bigger van cooling boxes
- BD250GH / BD350GH compressors for 12/24V DC, R134a HBP for mobile spot cooling systems
- BD250GH / BD350GH compressors for 48 V DC, R 134a HBP for telecommunication.

All the compressors are equipped with an electronic control unit with built in speed control, thermostat signal, thermal protection, safety against destructive battery discharge, electronic thermostat and fan speed control on selected.

Product advantages	Customer benefits
<ul style="list-style-type: none"><li>Efficient and reliable</li><li>Lasting performance</li><li>Low weight</li><li>Silent operation</li><li>Ideal for solar energy supply</li><li>Compact design</li><li>Energy optimisation</li><li>Speed/capacity control</li><li>Energy optimisation, high COP</li></ul>	<ul style="list-style-type: none"><li>Operation under extreme conditions</li><li>Minimal energy consumption</li><li>Portable beyond traditional limits</li><li>Low sound emission</li><li>Application possible at extreme voltage rate</li><li>Fits virtually anywhere</li><li>Safeguard for your food</li></ul>

# Reciprocating compressors – BD Direct current



## BD35F Multivoltage

R134a, -30°C, +10°C evap. temp.

All mobile applications for portable boxes, boats, trucks etc., can be powered with AC and DC, 85-265 V AC 50/60 Hz, 12-24 V DC, automatic selection of AC when available, 26-150 W cooling capacity.

## BD35F/50F/80F Basic

R134a, -30°C, +10°C evap. temp.

All mobile applications for portable boxes, boats, trucks etc., 26-150/36-190/55-270 W cooling capacity.

## BD35F with EMI Electronic

R134a, -30°C, +10°C evap. temp.

Designed for boats and trucks if risk of electric interference with radio or other electrical equipment, 26-150 W cooling capacity.

Applications	Compressors		
	BD35F	BD50F	BD80F
Truck refrigerators	✓		
Boat refrigerators	✓	✓	✓
Bus refrigerators	✓		
Portable boxes	✓	✓	✓
Car minibars (high end)	✓		
Car minibars (SUV, MPV)	✓		
Spot cooling (e.g. trucks)			
Self-contained van boxes		✓	✓
Battery cooling - telecommunication			
Solar chest cabinets	✓	✓	
Heatpumps			

Compressors R134a	Code numbers	Electronic units (voltages & code numbers)										AC/DC conv. 12-24 V DC & 100-240 V AC	Automotive 12-24 V DC 101N0600 101N0630	Extended EMI 12-24 V DC 101N0900
		Standard 12-24 V DC 101N0210	EMI 12-24 V DC 101N0220	High Start 12-24 V DC 101N0230	High Speed 12-24 V DC 101N0290	AEO EMI 12-24 V DC 101N0320	Solar 10-45 V DC 101N0400							
BD35F (mm con.)	101Z0200	✓	✓			✓	✓			✓	✓			✓
BD35F (inch con.)	101Z0204	✓	✓			✓	✓			✓	✓			✓
BD50F (mm con.)	101Z1220	✓	✓	✓		✓				✓		✓		✓
BD50F (inch con.)	101Z0203	✓	✓	✓		✓				✓		✓		✓
BD80F	101Z0280				✓									

Compressors R134a	Capacity [W] at max. speed EN12900 Household/CECOMAF   ASHRAE														
	Evaporating temperature [°C]														
-40	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15		
BD35F		26.2   32.2	35.9   44.2	40.4   49.7	50.5   62.2	69.8   86.0	93.6   115	122   150							
BD50F		36.7   45.2	52.2   64.4	58.3   71.9	71.4   88.2	94.9   117	123   152	157   194							
BD80F		54.8   67.6	78.0   96.1	86.7   107	105   130	138   170	176   218	221   274							

Compressors R134a	Code numbers	Power consumption [W] at max. speed													
		Evaporating temperature [°C]													
-40	-35	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15		
BD35F	101Z0200		36.0	42.8	45.4	50.8	59.5	68.9	78.5						
BD50F	101Z1220		47.0	59.0	63.0	70.7	82.6	95.0	108						
BD80F	101Z0280		69.0	87.0	93.0	105	123	144	168						

### Test condition

EN 12900-CECOMAF / ASHRAE LBP

Condensing temperature: 55 °C / 54.4 °C  
Ambient temperature: 32 °C / 32 °C

Suction gas temperature: 32 °C / 32 °C  
Liquid temperature: 32 °C

# Reciprocating compressors – Household & Light commercial

## Hermetic compressors R134a

Application	Compressor	Code numbers			Capacity [W] conditions as listed														Power consumption [W]				
		Compressor on pallet	Compressor-single pack with HST equipment	Compressor with oil cooling	Evaporating temperature [C°]												Evaporating temperature [C°]						
					-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	-35	-25	-10	5	
	PL35G	101G0250	195B0245						28	39	53	69	89	112	140	172	209			48	67	90	
	TL2.5G	102G4251	195B0268					11	22	36	51	69	90	116	145	179	219	264		48	60	84	113
	TL3G	102G4350	195B0006					25	41	59	81	106	136	170	211	258	312			66	96	133	
	TL4G	102G4452	195B0008					41	58	80	107	140	180	226	280	342	413			83	118	154	
	TL5G	102G4550	195B0011					56	79	107	139	178	224	278	341	414	497			100	149	205	
	FR6G	103G6660	195B0191					48	83	124	171	226	290	365	452	552			109	172	241		
	FR7.5G	103G6680	195B0024	103G6690				62	99	142	193	254	325	408	505	618			126	194	272		
	FR8.5G	103G6780	195B0026	103G6790				85	123	171	228	298	381	478	592	722			151	231	321		
	FR10G	103G6880	195B0027	103G6890				92	136	188	250	324	412	516	638	779			179	265	362		
	FR11G	103G6980	195B0028					115	170	233	307	395	501	628	780			202	317	445			
	SC10G	104G8000	195B0043					23	60	113	183	268	369	486	618	764	925	1100		93	181	290	383
	SC12G	104G8240	195B0050	104G8250				65	113	175	252	348	464	603	768	960	1182	1437		148	227	355	493
	SC15G	104G8520	195B0053	104G8530					164	290	424	568	728	908	1110	1340	1600			233	440	595	
	SC18G	104G8820	195B0059	104G8830					283	394	526	684	870	1087	1337	1624	1950			331	507	695	
	SC21G	104G8140	195B0048						333	453	606	792	1012	1268	1560	1889	2256			382	575	789	
	SC12/12G	104G8280	195B0051					129	226	350	505	696	928	1206	1535	1920	2364	2875		296	454	710	986
	SC15/15G	104G8580	195B0056						328	581	847	1137	1457	1815	2220	2679	3201			465	879	1190	
	SC18/18G	104G8880	195B0060						566	788	1052	1368	1740	2174	2674	3248	3900			662	1014	1390	
	SC21/21G	104G8180	195B0049						667	907	1212	1584	2025	2536	3120	3778	4511			771	1156	1581	
	PL50F	101G0222	195B0001						40	56	74	95	120	148						58	84		
	TLS3FT	102G4324	195B0484					21	34	50	69	92	120						45	62	92		
	TLS4FT	102G4424	195B0463					27	43	63	88	117	152						68	87	123		
	TLS5FT	102G4524	195B0321					48	71	98	131	170	216						84.5	114	165		
	TLES5.7FT.3	102G4615						66	90	120	156	200	253						90	120	170		
	TLES6.5FT.3	102G4703	on request					72	100	134	176	228	290						107	142	200		
	NL6FT	105G6628	195B0296					60	84	115	152	198	253						93	123	184		
	NL6.1FT	105G6620	195B0440					60	84	115	152	198	253						93	123	184		
	NL7.3FT	105G6726	195B0441	105G6731				71	100	136	181	235	299						108	145	220		
	NL8.4FT	105G6865	195B0442	105G6866				87	120	162	213	275	350						127	169	252		
	NL10FT	105G6829	195B0327	105G6839				113	158	213	281	361	455						159	217	327		
	SC12FT	104G8205	195B0282 (O)	104G8215				103	163	233	314	408	517	645					184	265	380		
	SC15FT	104G8505	195B0407					126	197	280	376	489	620	772					223	311	451		
	SC18FTX	104G8805	195B0408					144	229	325	437	567	719	896					257	365	517		
	SC21FTX	104G8105	195B0514					192	296	415	553	713	901	1119					296	428	613		
	TL4FX	102G4400	195B0007					31	44	61	81	107	137						60	81	122		
	TL5FX	102G4501	195B0241					43	60	82	110	144	183						70	101	154		
	TLS5FX	102G4520	195B0010					48	71	98	131	170	216						82	112	162		
	TLS6FX	102G4620	195B0235					58	77	104	139	183	235						84	119	181		
	TLS7FX	102G4720	195B0255					66	89	120	160	208	264						97	136	207		
	NL7FX	105G6706	195B0176					71	99	136	182	238	303						71	136	303		
	NL9FX	105G6802	195B0178					74	111	155	207	268	340						109	167	260		
	NL11FX	105G6900	195B0182					102	146	200	268	351	453						137	212	331		
	SC15FX	104G8500	195B0052					100	155	230	325	439	573	726					186	275	432		
	SC18FX	104G8800	195B0057					129	194	280	388	518	669	842					206	313	492		
	SC21FX	104G8100	195B0047					186	246	335	454	602	780	987					275	380	600		
	NL6.1MF	105G6660	195B0411						141	189	245	312	390	482	588	709				187	243		
	NL7.3MF	105G6772	195B0370						179	236	304	385	480	591	719	867				227	298		
	NL8.4MF	105G6879	195B0371						213	277	353	445	553	679	825	994				261	349		
	NL10MF	105G6885	195B0276	105G6887					266	346	441	554	687	843	1023	1231				323	435		
	NL11MF	105G6151	195B0432						292	380	485	609	756	927	1125	1354				360	495		
	NLE10MF	105G6888	195B0566					88	137	194	262	343	440	554	688	845			134	198	308	426	
	SC18MFX	104G8804	on request						430	563	722	912	1137	1400						507	657		
	SC21MFX	104G8120	195B0478						530	682	866	1085	1343	1645	1996					594	784		
	GS26MFX	107B0700	195B0433						754	989	1266	1591	1970	2411						696	942		
	GS34MFX	107B0701	195B0435						998	1296	1648	2063	2550	3115						909	1234		
	TL4GH	102G4455	195B0122							104	140	182	230	287	353	429					121	159	
	FR7GH	103G6683	195B0167	103G6692						199	255	327	417	525	655	807					192	258	
	SC10GH	104G8041	195B0142						233	352	478	613	762	927	1113	1323					281	395	
	SC10GHH	104G8071	on request	104G8071						259	352	467	604	762	942	1144					260	345	
	SC12GH	104G8261	195B0249							429	577	752	957	1196	1471	1787					356	487	
	SC15GH	104G8561	195B0144							559	723	915	1139	1398	1698	2041					424	565	
	SC15GHH	104G8055	195B0055	104G8571						435	570	726	911	1135	1405	1731					377	505	
	SC18GH	104G																					

Displacement [cm³]	Recommended compressor cooling at ambient temperatures								Voltage and frequencies	Electrical equipment						Compressor	Dimensions									
	32°C				38°C					LST (RSIR)		HST (CSIR)		HST (CSR)		LST/HST			Height [mm]	Connectors location/I.D. [mm]						
	LBP	MBP	HBP	LBP	MBP	HBP	LBP	MBP	HBP			spades		spades		spades	Cord relief	Cover	A	B	C	D	E	F		
2.00		F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>				1/5	103N0011 103N0018 117U6021 117U5014					103N1010 103N0491	PL35G	137	135	6.2	6.2	5.0				
2.61	S	S	S	S	S	S	S	S	F <sub>2</sub>	1/2/3/4	103N0011 103N0018 117U6007 117U5014					103N1010	103N2011	TL2.5G	163	159	6.2	6.2	5.0			
3.13	S	-	F <sub>2</sub>	S	S	F <sub>2</sub>	S	S	F <sub>2</sub>	1/2/3	103N0011 103N0018 117U6009 117U5014					103N1010	103N2010	TL3G	163	159	6.2	6.2	5.0			
3.86	S	-	F <sub>2</sub>	S	S	F <sub>2</sub>	S	S	F <sub>2</sub>	1/2/3	103N0011 103N0018 117U6004 117U5014					103N1010	103N2010	TL4G	173	169	6.2	6.2	5.0			
5.08	S	S	F <sub>2</sub>	S	S	F <sub>2</sub>	S	S	F <sub>2</sub>	1/2/3	103N0011 103N0018 117U6000 117U5014					103N1010	103N2010	TL5G	173	169	6.2	6.2	5.0			
6.23	S	S	F <sub>2</sub>	S	S	F <sub>2</sub>	S	S	F <sub>2</sub>	1/2/3	103N0011 103N0018 117U6000 117U5015					103N1010	103N2010	FR6G	196	191	8.2	6.2	6.2			
6.93	S	F <sub>2</sub>	F <sub>2</sub>	S	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	1/2/3	103N0011 103N0018 117U6001 117U5015					103N1010	103N2010	FR7.5G	196	191	8.2	6.2	6.2			
7.95	S	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	1/2/3	103N0011 103N0018 117U6015 117U5015					103N1010	103N2010	FR8.5G	196	191	8.2	6.2	6.2			
9.05	S	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	1/2/3	103N0011 103N0018 117U6010 117U5015					103N1010	103N2010	FR10G	196	191	8.2	6.2	6.2			
11.15	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	1/2	103N0011 103N0018 117U6010 117U5015					103N1010	103N2010	FR11G	196	191	8.2	6.2	6.2			
10.29	F <sub>1</sub>	F <sub>1</sub>	F <sub>1</sub>	F <sub>1</sub>	F <sub>1</sub>	F <sub>1</sub>	F <sub>1</sub>	F <sub>1</sub>	F <sub>2</sub>	1/2/3	103N0002	117U6002 117U5017					103N1004	103N2009	SC10G	199	193	8.2	6.2	6.2		
12.87	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	1/2/3	103N0002	117U6003 117U5017					103N1004	103N2009	SC12G	209	203	8.2	6.2	6.2		
15.28	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	1/2/3		117U6005 117U5017					103N1004	103N2009	SC15G	209	203	10.2	6.2	6.2		
17.69	O/F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	1		117U6019 117U5017					103N1004	103N2009	SC18/18G	259	254	16	6.2	6.2		
2×20.95	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>	1			117-7028					103N1004	103N2009	SC21/21G	259	254	16	6.2	6.2	
2.50		F <sub>2</sub>			F <sub>2</sub>					1		117U6021 117U5014					103N1010	103N0491	PL50F	137	135	6.2	6.2	5.0		
3.13	S		S		S		S			2	103N0011 103N0018 117U6007 117U5014					103N1010	103N2010	TLS3FT	173	169	6.2	6.2	5.0			
3.86	S		S		S		S			2	103N0011 103N0018 117U6004 117U5014					103N1010	103N2010	TLS4FT	173	169	6.2	6.2	5.0			
5.08	S		S		S		S			2	103N0011 103N0018 117U6000 117U5014					103N1010	103N2010	TLS5FT	173	169	6.2	6.2	5.0			
5.70	S		S		S		S			2	103N0011 103N0018 117U6004 117U5014					103N1010	103N2010	TLES5.7FT.3	173	169	6.2	6.2	5.0			
6.49	S		S		S		S			2	103N0011 103N0018 117U6016 117U5014					103N1010	103N2011	TLES6.5FT.3	173	169	6.2	6.2	5.0			
6.13	S		S		S		S			2/3	103N0011 103N0018 117U6000 117U5015					103N1010	103N2010	NL6FT	197	191	6.2	6.2	5.0			
6.13	S		S		S		S			2	103N0011 103N0018 117U6000 117U5015					103N1010	103N2010	NL6.1FT	188	182	6.2	6.2	5.0			
7.27	S		S		O/F <sub>1</sub>					2	103N0011 103N0018 117U6001 117U5015					103N1010	103N2010	NL7.3FT	188	182	6.2	6.2	5.0			
8.35	S		O/F <sub>1</sub>		O/F <sub>1</sub>					2	103N0011 103N0018 117U6001 117U5015					103N1010	103N2010	NL8.4FT	190	184	6.2	6.2	5.0			
10.10	S		O/F <sub>1</sub>		O/F <sub>1</sub>					2	103N0011 103N0018 117U6002 117U5015					103N1010	103N2010	NL10FT	203	197	8.2	6.2	6.2			
12.87	O/F <sub>1</sub>		O/F <sub>1</sub>		F <sub>2</sub>					2/3	103N0002	117U6003 117U5017					103N1004	103N2009	SC12FT	209	203	8.2	6.2	6.2		
15.28	F <sub>1</sub>		F <sub>1</sub>		F <sub>2</sub>					2/3	103N0002	117U6003 117U5017					103N1004	103N2009	SC15FT	209	203	10.2	6.2	6.2		
17.69	F <sub>2</sub>		F <sub>2</sub>		F <sub>2</sub>					2/3		117U6019 117U5017					103N1004	103N2009	SC18FTX	219	213	10.2	6.2	6.2		
20.95	F <sub>2</sub>		F <sub>2</sub>		F <sub>2</sub>					2		117U6019 117U5017					103N1004	103N2009	SC21FTX	219	213	10.2	6.2	6.2		
3.86	S		S							1	103N0011 103N0018 117U6009 117U5014					103N1010	103N2010	TL4FX								
5.08	S		S							1	103N0011 103N0018 117U6004 117U5014					103N1010	103N2010	TL5FX								
5.08	S		S							1	103N0011 103N0018 117U6004 117U5014					103N1010	103N2010	TL5FX								
5.70	S		S							1	103N0011 103N0018 117U6004 117U5014					103N1010	103N2010	TL5FX								
6.49	S		S*							1	103N0011 103N0018 117U6000 117U5014					103N1010	103N2010	TL5FX								
7.27	S		S							1	103N0011 103N0018 117U6000 117U5015					103N1010	103N2010	NL7FX								
8.35	S		S							1	103N0011 103N0018 117U6001 117U5015					103N1010	103N2010	NL9FX								
11.15	O/F <sub>1</sub>									1	103N0011 103N0018 117U6002 117U5015					103N1010	103N2010	NL11FX								
15.28	O/F <sub>1</sub>		O/F <sub>1</sub>							1	103N0002	117U6003 117U5017					103N1004	103N2009	SC15FX							
17.69	O/F <sub>1</sub>		O/F <sub>1</sub>							1		117U6005 117U5017					103N1004	103N2009	SC18FX							
20.95	O/F <sub>1</sub>		O/F <sub>1</sub>							1		117U6019 117U5017					103N1004	103N2009	SC21FX							
6.13	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		7/5	103N0011 103N0018 117U6015 117U5015					103N1010	103N2011	NL6.1MF	190	184	8.2	6.2	6.2			
7.27	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		7/5	103N0011 103N0018 117U6016 117U5015					103N1010	103N2011	NL7.3MF	197	191	8.2	6.2	6.2			
8.35	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		7/5	103N0011 103N0018 117U6016 117U5015					103N1010	103N2011	NL8.4MF	197	191	8.2	6.2	6.2			
10.10	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		7/5	103N0011 103N0018 117U6022 117U5018					103N1010	103N2011	NL10MF	203	197	8.2	6.2	6.2			
11.15	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>		7	103N0011 103N0018 117U6022 117U5018					103N1010	103N2011	NL11MF	203	197	8.2	6.2	6.2			
10.10	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>		1	103N0011 103N0018 117U6003 117U5015					103N1010	103N2011	NLE10MF	203	197	8.2	6.2	6.2			
17.69	F <sub>2</sub>			F <sub>2</sub>			F <sub>2</sub>			7/8																

## Reciprocating compressors R404A/R507

Application	Compressor	Code numbers		Cooling capacity [W] conditions as listed															Power consumption [W]					Displacement	Recommended at ambient (* = Run capacitor)					
		Com-pressor	Com-pressor-single pack with HST equipment	Evaporating temperature [°C]															Evaporating temperature [°C]						32°C					
				-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	-35	-25	-10	5	[cm³]	LBP	MBP	HBP	LBP				
TL4CL	102U2071	195B0021	52	65	84	110	142	182	230	286	352							105	140	198		3.86	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
TL4.5CLX	102U2117	195B0573	80	106	139	181	232	294	366									138	181	252		4.63	F <sub>2</sub>			F <sub>2</sub>				
FR6CL	103U2670	195B0031	77	108	145	189	243	307	383	473	578							180	242	353		6.23	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
FR7.5CL	103U2790	195B0398	86	114	154	202	262	333	418	515	630							197	267	395		6.93	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
FR8.5CL	103U2890	195B0038	99	126	168	222	290	372	468	577								231	315	472		7.95	F <sub>2</sub>			F <sub>2</sub>				
NL7CLX	105F3710	195B0350	102	146	199	263	340	430	536	657	796							214	274	381		7.27	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>				
NL8.4CLX	105F3800	195B0481	111	158	216	287	370	468	583	715	866							238	305	428		8.35	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
SC10CL	104L2523	195B0074			168	258	365	489	634	800	991							243	350	530		10.29	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
SC10CLX	104L2533	195B0151			166	255	360	483	625	789	977	1190	1430					258	352	508	631	10.29	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
SC12CL	104L2623	195B0076	58	140	237	353	490	650	835	1048	1292							316	445	654		12.87	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
SC12CLX.2	104L2697	195B0379	130	205	294	399	522	666	834	1026								365	475	659		12.87	F <sub>2</sub>			F <sub>2</sub>				
SC15CLX.2	104L2896	195B0399	159	250	358	486	637	813	1017	1251	1519							433	565	783		15.28	F <sub>2</sub>			F <sub>2</sub>				
SC18CLX.2	104L2197	195B0332	194	306	439	595	780	995	1245	1532								517	680	949		17.68	F <sub>2</sub>			F <sub>2</sub>				
SCE18CLX.2	104L2196	195B0525	194	306	439	595	780	995	1245	1532								459	621	888		17.68	F <sub>2</sub>			F <sub>2</sub>				
SC21CLX	104L2322	195B0070	226	325	455	617	813	1042	1306	1606								534	702	989		20.95	F <sub>2</sub>			F <sub>2</sub>				
GS26CLX	107B0500	195B0427	325	497	703	949	1240	1580	1974	2427								669	888	1285		26.30	F <sub>2</sub>			F <sub>2</sub>				
GS34CLX	107B0501	195B0439	729	1003	1330	1715	2165	2687	3289									924	1196	1721		33.80	F <sub>2</sub>			F <sub>2</sub>				
SC12/12CL	104L4088	195B0119	115	279	475	706	980	1299	1670	2096	2583							633	891	1308		2x12.87	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
SC15/15CL	104L4089	195B0109	302	599	905	1230	1584	1976	2417	2916								801	1120	1580		2x15.28	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
SC18/18CL	104L4090	195B0110	333	541	789	1083	1430	1836	2307	2849	3469							910	1230	1788		2x17.68	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>				
SC21/21CL	104L4094	195B0114	452	650	910	1235	1626	2084	2613	3213								1068	1404	1978		2x20.95	F <sub>2</sub>			F <sub>2</sub>				
SLV12CLK.2	104L2603	on request			200	370	542	720	909	1116	1339							404	588	731		12.87	F <sub>2</sub>			F <sub>2</sub>				
NL6.1MLX	105F3611	on request					334	425	530	650	789	946							312	375	613			F <sub>2</sub>						
NF7MLX	105F3720	195B0443						511	635	777	940	1125	1336						406	488	727			F <sub>2</sub>						
SC10MLX	104L2506	195B0345						546	687	855	1051	1278	1537						518	633	10.29			F <sub>2</sub>						
SC12MLX	104L2606	195B0323						669	838	1038	1272	1542	1852						620	762	12.87			F <sub>2</sub>						
SC15MLX	104L2869	195B0391							829	1038	1285	1574	1909	2293						780	979	15.28			F <sub>2</sub>					
SC18MLX	104L2139	195B0392							968	1210	1497	1832	2220	2665						860	1080	1768			F <sub>2</sub>					
SC18MLX.3	104L2146	195B0412							1018	1266	1557	1898	2292	2743						878	1096	17.68			F <sub>2</sub>					
GS21MLX	107B0502	195B0436							1096	1394	1748	2164	2650	3211						965	1212	21.20			F <sub>2</sub>					
GS26MLX	107B0503	195B0437								1426	1810	2254	2764	3351	4022						1213	1532	26.30			F <sub>2</sub>				
GS34MLX	107B0504	195B0438								1929	2408	2953	3575	4283	5088						1725	2235	33.80			F <sub>2</sub>				
TL4DL	102U2038	195B0166								196	229	281	349	432	527	631				203	256	3.86			F <sub>2</sub>					
FR6DL	103U2680	195B0032								317	385	471	576	698	840	999	1177				354	456	6.23			F <sub>2</sub>				
SC10DL	104L2525	195B0075								471	611	775	968	1192	1450	1747	2085				479	590	10.29			F <sub>2</sub>				
SC12DL	104L2625	195B0077								609	806	1028	1279	1565	1890	2258	2674				624	750	12.87			F <sub>2</sub>				
SC15DL	104L2856	195B0089								759	964	1207	1493	1825	2210	2652	3156				722	865	15.28			F <sub>2</sub>				
SC15DLX.2	104L2871	on request								774	983	1225	1504	1824	2189	2604	3071				739	870	15.28			F <sub>2</sub>				
SC10/10DL	104L4091	195B0111								943	1222	1550	1935	2383	2900	3494	4169				957	1180	2x10.29			F <sub>2</sub>				
SC12/12DL	104L4092	195B0112								1217	1612	2055	2559	3130	3780	4516	5348				1248	1500	2x12.87			F <sub>2</sub>				
SC15/15DL	104L4093	195B0113								1518	1928	2414	2985	3651	4420	5304	6311				1445	1730	2x15.28			F <sub>2</sub>				

SLV = SC Variable speed Compressor. Performances are displayed at 4.000 rpm

### Test conditions (except GS)

#### EN 12900-CECOMAF

Condensing temperature: 45 °C  
Ambient temperature: 32 °C  
Suction gas temperature: 32 °C  
Liquid temperature: 45°C

### Test condition for GS 21MLX, GS 26MLX and GS 34MLX

#### EN 12900-CECOMAF

Condensing temperature: 45°C  
Ambient temp.: 32°C  
Suction gas temp.: 20°C  
Liquid temperature: 45°C

### Test condition for GS 26CLX and GS 34CLX

#### EN 12900-CECOMAF

Condensing temperature: 40°C  
Ambient temp.: 32°C  
Suction gas temp.: 20°C  
Liquid temperature: 40°C

compressor cooling temperature compulsory)				Voltage and frequen- cies	Electrical Equipment						Dimensions					
38°C		43°C			HST (CSIR)		HST (CSR)		LST/HST		Height [mm]		Connectors location/I.D. [mm]			
MBP	HBP	LBP	MBP	HBP	Starting relay	Starting capacitor	Starting device	Cord relief	Cover	A	B	Suc- tion	Pro- cess	Dis- charge		
					spades	spades	6.3 mm					C	D	E		
F <sub>2</sub>					1	117U6000	117U5014		103N1010	103N2010	173	169	6.2	6.2	5.0	
	F <sub>2</sub>				1	117U6001	117U5014		103N1004	117U1022	173	169	6.2	6.2	5.0	
F <sub>2</sub>					1	117U6015	117U5015		103N1010	103N2010	196	191	8.2	6.2	6.2	
F <sub>2</sub>					1	117U6016	117U5015		103N1010	103N2010	196	191	8.2	6.2	6.2	
F <sub>1</sub>	F <sub>2</sub>	F <sub>2</sub>			1	117U6002	117U5015		103N1010	103N2010	203	197	8.2	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>	F <sub>2</sub>			1	117U6003	117U5015		103N1010	103N2010	203	197	8.2	6.2	6.2	
F <sub>2</sub>					1	117U6003	117U5017		103N1004	103N2009	209	203	8.2	6.2	6.2	
F <sub>2</sub>					1/3	117U6005	117U5017		103N1004	103N2008	209	203	8.2	6.2	6.2	
					1	117U6005	117U5017		103N1004	103N2009	209	203	8.2	6.2	6.2	
					1/4	117U6019	117U5017		103N1004	103N2008	219	213	8.2	6.2	6.2	
	F <sub>2</sub>				1	117U6019	117U5017		103N1004	103N2009	219	213	10.2	6.2	6.2	
	F <sub>2</sub>				1	117U6013	117U5012		103N1004	103N2009	219	213	10.2	6.2	6.2	
	F <sub>2</sub>				1			117-7012	103N1004	103N2009	219	213	10.2	6.2	6.2	
					1			117-7012	103N1004	103N2009	219	213	10.2	6.2	6.2	
	F <sub>2</sub>				1			117-7056	107B9100/9101/9104*		259	247	12.9	6.5	8.2	
					1			117-7074	107B9100/9101/9104*		279	267	12.9	6.5	8.2	
F <sub>2</sub>					1	117U6005	117U5017		103N1004	103N2009	249	244	12	6.2	6.2	
F <sub>2</sub>					1	117U6019	117U5017		103N1004	103N2009	259	254	12	6.2	6.2	
F <sub>2</sub>					1			117-7012	103N1004	103N2009	259	254	16	6.2	6.2	
	F <sub>2</sub>				1			117-7012	103N1004	103N2009	259	254	16	6.2	6.2	
					1	105N46xx series controllers			103N1004	103N2009	199	193	10.2	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				7/8	117U6022	117U5015		103N1010	103N2011	203	197	8.2	6.5	6.5	
F <sub>2</sub>	F <sub>2</sub>				7/8	117U4139	117U5018		2x117U0349	117U1021	203	197	9.7	6.5	6.5	
F <sub>2</sub>	F <sub>2</sub>				7/8	117U6011	117U5017		103N1004	103N2008	209	203	8.2	6.5	6.5	
F <sub>2</sub>	F <sub>2</sub>				7/8	117U6011	117U5017		103N1004	103N2008	219	213	8.2	6.5	6.5	
F <sub>2</sub>					1	117U6013	117U5012		103N1004	103N2009	219	213	10.2	6.2	6.2	
F <sub>2</sub>					1			117-7012	103N1004	103N2009	219	213	10.2	6.2	6.2	
F <sub>2</sub>					1			117-7012	103N1004	103N2009	219	213	10.2	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				1			117-7070	107B9100/9101/9104*		259	247	12.9	6.5	8.2	
F <sub>2</sub>	F <sub>2</sub>				1			117-7072	107B9100/9101/9104*		279	267	16.1	6.5	9.7	
F <sub>2</sub>	F <sub>2</sub>				1			117-7056	107B9100/9101/9104*		279	267	16.1	6.5	9.7	
F <sub>2</sub>	F <sub>2</sub>				1	117U6001	117U5014		103N1010	103N2010	173	169	6.2	6.2	5.0	
F <sub>2</sub>	F <sub>2</sub>				1	117U6010	117U5015		103N1010	103N2010	196	191	8.2	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				1	117U6005	117U5017		103N1004	103N2009	209	203	8.2	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				1	117U6019	117U5017		103N1004	103N2009	219	213	10.2	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				1			117-7028	103N1004	103N2009	219	213	10.2	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				1	117U6019	117U5017		103N1004	103N2009	219	213	10.2	6.2	8.2	
F <sub>2</sub>	F <sub>2</sub>				1	117U6005	117U5017		103N1004	103N2009	249	244	12	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				1	117U6019	117U5017		103N1004	103N2009	249	244	12	6.2	6.2	
F <sub>2</sub>	F <sub>2</sub>				1			117-7028	103N1004	103N2009	259	254	16	6.2	6.2	

## Reciprocating compressors R290

Application	Compressor	Code numbers		EN 12900 (CECOMAF) Capacity [W]															Power consumption (W)					Displacement	Recommended at ambient (* = Run capacitor)			
		Compressor	Compressor single pack with HST equipment	Evaporating temperature [°C]															Evap temp. (°C)						32°C		38°C	
				-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	-35	-25	-10	5	[cm³]	LBP	MBP	HBP	LBP		
LBP / MBP	TL3CN	102H4380	195B0581		38	54	75	99	128	161	200	244	294	351					90	108	135	162	3.13	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	
	TL4CN	102H4490	195B0589		56.5	77.8	103	132	166	205	250	302	360	426					101	127	162	188	3.86	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	
	TL5CN	102H4590	195B0420		81	109	143	183	230	283	345	416	496	586					130	162	211	266	5.08	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	
	NL7CN	105H6756	195B0451		118	166	223	290	368	458	561	679	814	965					174	221	291	372	7.27	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	
	NL9CN	105H6856	195B0265		138	194	259	335	423	526	643	778	930	1102					196	250	334	428	8.35	F <sub>1</sub>	F <sub>1</sub>		F <sub>1</sub>	
	SC10CNX	104H8065	195B0474		126	179	245	325	420	531	660	809	979	1172					208	274	362		10.29	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>	
	SC12CNX	104H8265	195B0333		178	250	331	426	540	678	846	1050	1293	1582					269	344	456		12.87	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>	
	SC15CNX	104H8565	195B0203		195	297	415	550	707	887	1093	1328	1594	1894					315	420	560		15.28	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>	
	SC18CNX	104H8865	195B0414		219	341	480	640	824	1033	1272	1543	1849	2193					370	500	707		17.69	F <sub>2</sub>	F <sub>2</sub>		F <sub>2</sub>	
LBP	SC12CNX.2	104H8266	195B0458		186	258	346	453	578	725	895								298	379	502		12.87	F <sub>2</sub>			F <sub>2</sub>	
	SC15CNX.2	104H8566	195B0505		252	332	434	560	714	900	1120								351	445	610		15.28	F <sub>2</sub>			F <sub>2</sub>	
LBP	SC18CNX.2	104H8866	195B0489		244	384	531	689	863	1057	1273								417	541	682		17.69	F <sub>2</sub>			F <sub>2</sub>	
	SC21CNX.2	104H8166	195B0459		339	492	654	828	1020	1233	1471								491	623	855		20.95	F <sub>2</sub>			F <sub>2</sub>	
SLV15CNK.2	104L8541	195B0505			325	460	615	792	996	1228	1494								436	583	771		15.28	F <sub>2</sub>			F <sub>2</sub>	
	SLV15CNK.2	104L8541	195B0505																									

SLV = SC Variable speed Compressor. Performances are displayed at 4.000 rpm

**Test condition**  
EN 12900/CECOMAF LBP  
Condensing temperature: 45 °C  
Ambient temperature: 32 °C  
Suction gas temperature: 32 °C  
Liquid temperature no subcooling

## Reciprocating compressors R600a

Application	Compressor	Code numbers		EN 12900 (CECOMAF) Capacity [W]															Power consumption (W)					Displacement	Recommended at ambient (* = Run capacitor)				
		Compressor	Compressor single pack with LST equipment	Evaporating temperature [°C]															Evap temp. (°C)						32°C		38°C		
				-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	-35	-25	-10	5	[cm³]	LBP	MBP	HBP	LBP			
LBP / MBP	PLE35K	101H0360	195B0542																						3.00	S*	S	S*	
	TLES4KK.2	102H4435	on request		18	28	40	55	74	96	123	154							35	45	61		3.86	S			S		
	TLES5KK.2	102H4535	on request		28	41	57	76	99	126	159	196							44	57	80		5.08	S			S		
	TLX4.8KK.3	102H4541	195B0565		29	42.1	57	74.2	94.2	117									34.5	46.5	65.5		4.78	S*			S*		
	TLES5.7KK.3	102H4638	195B0366		36.4	50.7	68	89	114	144									50.1	66.5	93.4		5.70	S			S		
	TLX8.7KK.3	102H4947	195B0361		64.8	87.9	115	146	184	227									65.7	87.7	123		8.67	S*			S*		
	NLX10KK.2	105H6101	195B0405		74.5	101	133	171	217	271									63.5	89.5	134		10.09	S*			S*		
	NLE10KK.2	105H6851	195B0409		67	91	120	155	198	249									82	109	157		10.09	S			S		
	NLE10KK.4	105H6867	195B0517		73.9	98.3	128	164	207	257									81.3	108	161		10.09	S			S		



**Test condition**  
EN 12900/CECOMAF LBP  
Condensing temperature: 45 °C  
Ambient temperature: 32 °C  
Suction gas temperature: 20 °C  
Liquid temperature no subcooling


Application	Compressor	Code numbers		EN 12900 (CECOMAF) Capacity [W]															Power consumption (W)					Displacement							
		Compressor	Compressor single pack with HST equipment	Evaporating temperature [°C]															Evap temp. (°C)												
				-45	-40	-35	-30	-20	-15	-10	-5	0	5	10	15	20	-35	-25	-10	5	[cm³]	LBP	MBP	HBP	LBP						
LBP	TL4F	102G4400																31	44	81	107	137					3.86				
	TL5F	102G4501																43	60	110	144	183					5.08				
	TLS5F	102G4520																48	71	131	170	216					5.08				
	TLS6F	102G4620																58	77	139	183	235					5.70				
	TLS7F	102G4720																66	89	160	208	264					6.49				
	NL6F	105G6606																52	77	151	200	258					6.13				
	NL7F	105G6706																71	99	182	238	303					7.27				
	NL8F	105G6822																82	112	194	249	317					7.95				
	NL9F	105G6802																74	111	207	268	340					8.35				
LBP	NL11F	105G690																													

compressor cooling temperature compulsory)					Voltage and frequencies	Electrical Equipment								Dimensions							
38°C		43°C				LST (RSIR)		LST (RSCR)		Run capacitor		HST (CSIR)	HST (CSR)	LST/HST		Height [mm]		Connectors location/I.D. [mm]			
MBP	HBP	LBP	MBP	HBP		PTC Starting device w/o run capacitor connector	PTC device with run capacitor connector	1 optional 2 compulsory	Starting relay	Starting capacitor	Starting unit	Cord relief	Cover	A	B	Suction	Process	Discharge			
						spades	spades	spades	spades	spades	spades										
6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			A	B	C	D	E			
F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>	1	103N0011	103N0018				117U7004	117U5014	103N1010	103N2010	163	159	6.2	6.2	5.0			
F <sub>1</sub>		F <sub>1</sub>	F <sub>1</sub>	1	103N0011	103N0018				117U7004	117U5014	103N1010	103N2010	173	169	6.2	6.2	5.0			
F <sub>1</sub>		F <sub>1</sub>	F <sub>2</sub>	1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>1</sup>	117-7119 <sup>1</sup>	117U7000	117U5014	103N1010	103N2010	173	169	6.2	6.2	5.0		
F <sub>1</sub>		F <sub>2</sub>	F <sub>2</sub>	1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>1</sup>	117-7119 <sup>1</sup>	117U7002	117U5015	103N1010	103N2010	203	197	8.2	6.2	6.2		
F <sub>1</sub>		F <sub>2</sub>	F <sub>2</sub>	1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>1</sup>	117-7119 <sup>1</sup>	117U7002	117U5015	103N1010	103N2010	203	197	8.2	6.2	6.2		
F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>	1								117-7049	103N1004	103N2009	209	203	8.2	6.2	6.2		
F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>	1								117-7049	103N1004	103N2009	209	203	8.2	6.2	6.2		
F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>	1								117-7051	103N1004	103N2009	209	203	8.2	6.2	6.2		
F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>	1								117-7034	103N1004	103N2009	219	213	10.2	6.2	6.2		
F <sub>2</sub>		F <sub>2</sub>	F <sub>2</sub>	1								105N46xx series controllers	103N1004	103N2009	209	203	8.2	6.2	6.2		
													103N1004	103N2009	209	203	8.2	6.2	6.2		
													103N1004	103N2009	209	203	8.2	6.2	6.2		
													103N1004	103N2009	209	203	8.2	6.2	6.2		
													103N1004	103N2009	219	213	10.2	6.2	6.2		
													103N1004	103N2009	219	213	10.2	6.2	6.2		
													103N1004	103N2009	199	193	10.2	6.2	6.2		

compressor cooling temperature compulsory)					Voltage and frequencies	Electrical Equipment								Dimensions							
38°C		43°C				LST (RSIR)		LST (RSCR)		Run capacitor		HST (CSIR)	HST (CSR)	LST/HST		Height [mm]		Connectors location/I.D. [mm]			
MBP	HBP	LBP	MBP	HBP		spades	spades	spades	spades	spades	spades	spades	spades	Cord relief	Cover	A	B	Suction	Process	Discharge	
6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm		6.3 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm								
S				1	103N0016	103N0021	117-7117 <sup>2</sup>	117-7119 <sup>2</sup>						103N1010	103N0491	137	135	6.2	6.2	5.0	
				1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>1</sup>	117-7119 <sup>1</sup>				103N1010	103N2010	173	169	6.2	6.2	5.0	
				1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>1</sup>	117-7119 <sup>1</sup>				103N1010	103N2010	173	169	6.2	6.2	5.0	
		S*		1	103N0011	103N0018	103N0016	103N0021	117-7131 <sup>2</sup>	117-7132 <sup>2</sup>				103N1010	103N2010	173	169	6.2	6.2	5.0	
		S*		1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>2</sup>	117-7119 <sup>2</sup>				103N1010	103N2010	173	169	6.2	6.2	5.0	
		S*		1		103N0016	103N0021			117-7136 <sup>2</sup>					103N1010	103N2010	203	197	6.2	6.2	5.0
		S*		1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>1</sup>	117-7119 <sup>1</sup>				103N1010	103N2010	197	191	6.2	6.2	5.0	
		S		1	103N0011	103N0018	103N0016	103N0021	117-7117 <sup>1</sup>	117-7119 <sup>1</sup>				103N1010	103N2010	190	183	6.2	6.2	5.0	

PL/PLE	TL	TLS/TLES/ TLX	SLV
NL/NLE/NLX	NF	FR	
SC	GS	BD	
	<p><b>Note:</b> On GS34CLX compressors suction and process connectors are interchanged.</p>		

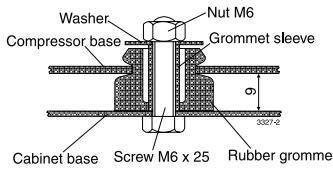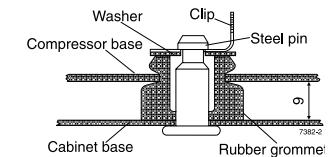Mounting accessories		Protection Screen for PTC
 <p><b>Bolt joint for one compressor:</b> 118-1917 in quantities: 118-1918</p>		<p><b>Note:</b> To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.</p>
<p><b>Bolt joint for one GS compressor:</b> 107B9150 (M8 x 40, base plate distance: 17 mm)</p>		 <p><b>Snap-on</b> in quantities: 118-1919</p>

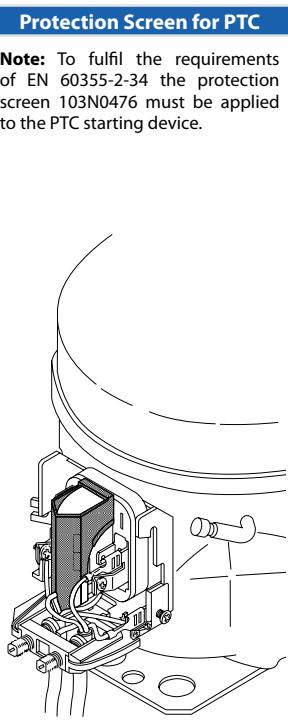


Model designation					
Compressor design	Optimization level	Compressor size	Application range	Start characteristics	Generation
PL			CL R404A/ R507 LBP		
TL			CN R290 LBP (MBP)		
NL	Blank Standard energy level	Nominal displacement in cm <sup>3</sup>	DL R404A/ R507 HBP		Blank => first generation
FR	S Semi-direct intake	Exception: For PL compressors the capacity at rating point is stated.	F R134a LBP / (MBP)		.2 => second generation
SC	E Energy- optimized		FT R134a LBP tropical	Blank => universal (principal rule)	.3 => third generation
GS			G R134a LBP/ MBP/HBP	X = HST characteristics (expansion valve)	etc.
			GH R134a Heat Pumps		
			GHH R134a Heat Pumps optimized		
			K R600a, LBP / (MBP)		
			MF R134a MBP		
			ML R404A/ R507 MBP		

#### Examples


TL	ES	5.7	FT		.3
NL	E	10	MF		
SC		15	CN	X	.2

### LST - RSIR


**PL**

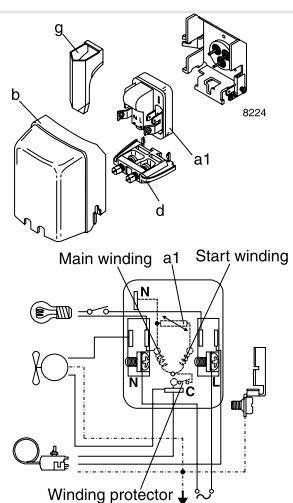

**TL-TLS-TLES-NL-NLE-FR**

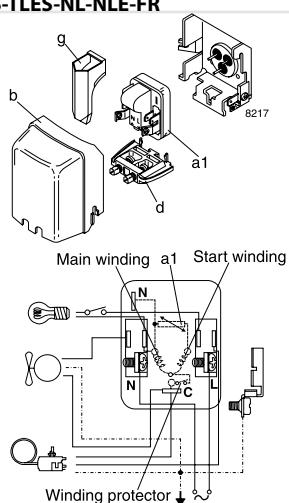


**SC**

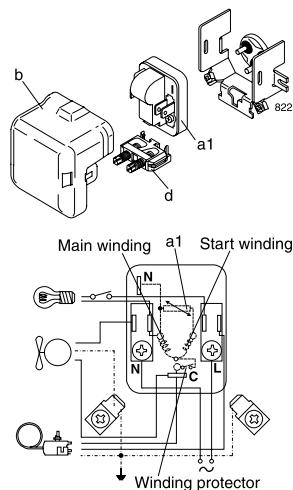


### HST - CSIR


**PL**

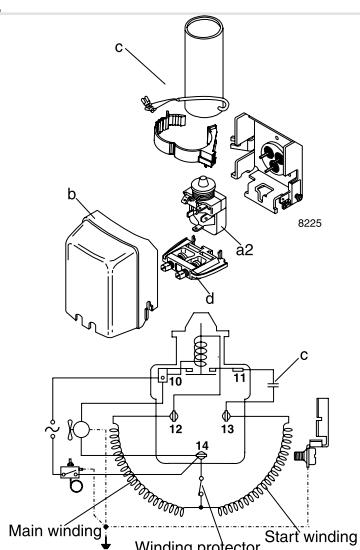

**TL-TLS-TLES-NL-NLE-FR**

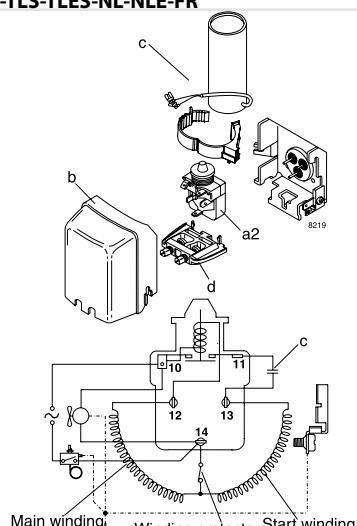


**SC**

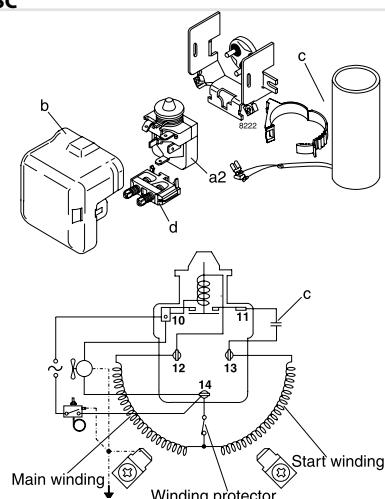


### HST - CSR

**NF**

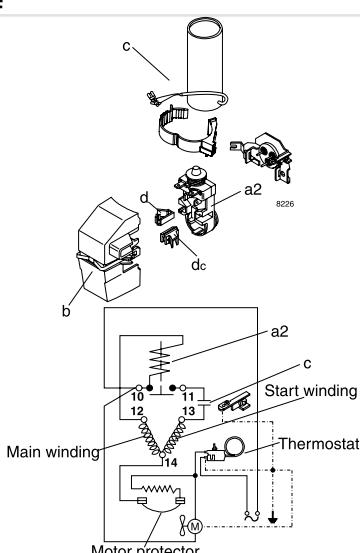


**SC**

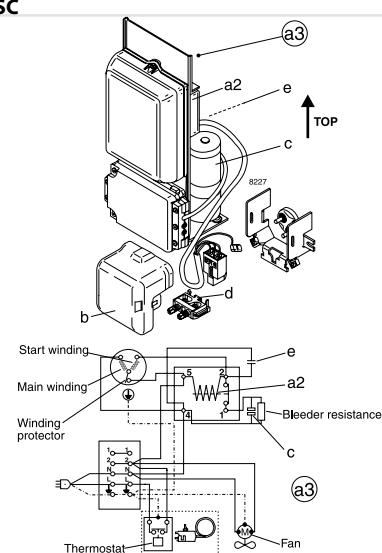

### HST - CSR

**GS**

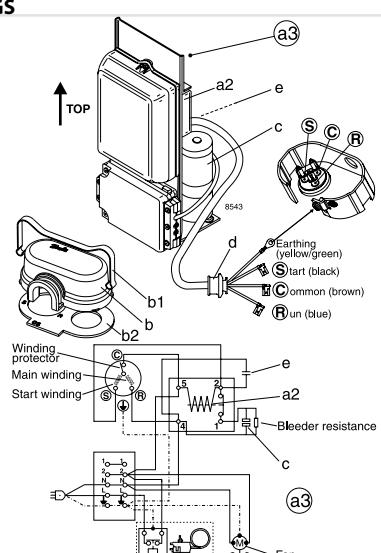

### Legend

**a1:** PTC starting device  
**a2:** Starting relay  
**a3:** Starting device

**b:** Cover  
**b1:** Clamp (part of compressor)  
**b2:** Gasket (part of compressor)

**c:** Starting capacitor  
**d:** Cord relief  
**e:** Run capacitor  
**g:** Protection screen for PTC

SC Twin	Accessories for SC Twin
	<b>SC10/10, SC12/12 and SC15/15:</b> Service valve for 12 mm tube 118-7350 Solder connector for 12 mm tube 104B0584
	<b>SC18/18 and SC21/21:</b> Service valve for 16 mm tube 118-7351 Solder connector for 16 mm tube 118-7405
	<b>SC10/10, SC12/12, SC15/15, SC18/18 and SC21/21:</b> Seal ring for service valve and solder connector 118-3638 Time-delay relay 117N0001 Check valve (to be used with time-delay relay) 020-1014
HST - CSR	HST - CSIR
<b>SC Twin</b>	<b>SC Twin</b>

#### Applications

**LBP:** Low Back Pressure  
**MBP:** Medium Back Pressure  
**HPB:** High Back Pressure

#### Motor types

**RSIR:** Resistant Start Induction Run  
**RSCR:** Resistant Start Capacitor Run  
**CSIR:** Capacitor Start Induction Run  
**CSR:** Capacitor Start Run

#### Starting devices

**LST:** Low Starting Torque

LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.

**HST:** High Starting Torque

HST consisting of relay and starting capacitor, is used for expansion valve control or for capillary tube control without pressure equalizing.

#### Test conditions EN 12900 (CECOMAF)

Application	R134a	R404A/R507
R290		

Condensing temperature	55°C	45°C
Ambient temperature	32°C	32°C
Suction gas temperature	32°C	32°C
No subcooling		
PL/TL/TLS/NL/FR/SC/BD:	220 V 50 Hz	
BD:	12 V, 24 V or 56 V DC	

#### Test conditions ASHRAE

##### BD

Application	R600a	R404A/R507
R134a		R290
Condensing temperature	54.4°C	45°C
Ambient temperature	32°C	32°C
Suction gas temperature	32°C	32°C
Liquid temperature	32°C	32°C
12 V, 24 V or 56 V DC		

#### Test conditions EN 12900

##### GS

Application	LBP	MBP	HPB
Condensing temperature	40°C	45°C	50°C
Ambient temperature	32°C	32°C	32°C
Suction gas temperature	20°C	20°C	20°C
Liquid temperature	no subcooling		
220 V 50 Hz			

#### Electrical equipment GS compressors

\* = Gasket/cover/clamp  
are parts of compressor

#### Compressor cooling

**S** = Static cooling normally sufficient  
**O** = Oil cooling  
**F<sub>1</sub>** = Fan cooling 1.5 m/s  
(compressor compartment temp.  
equal to ambient temperature)  
**F<sub>2</sub>** = Fan cooling 3.0 m/s necessary  
**\*\*** = run capacitor 4 µF compulsory

#### Voltages and frequencies

1 = 198-254 V, 50 Hz  
 2 = 187-254 V, 50 Hz, LBP  
 3 = 198-254 V, 60 Hz, LBP  
 4 = 198-254 V, 60 Hz, HBP  
 5 = 198-254 V, 60 Hz, MBP  
 6 = 207-254 V, 60 Hz, HBP  
 7 = 187-254 V, 50 Hz, MBP  
 8 = 187-254 V, 60 Hz, MBP  
 9 = 187-254 V, 60 Hz, LBP

1 Watt = 0.86 kcal/h

1 Watt = 3.41 Btu/h

# Reciprocating compressors – Commercial

## Performance data

Model	To	-45		-40		-35		-30		-25		-20		-15		-10	
	Tc	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe
	NTZ R404A / R507A	45	230	0.40	500	0.71	850	1.02	1 480	1.33	2 040	1.62	2 690	1.89	3 440	2.13	4 310
NTZ048	45	930	1.18	960	1.45	1370	1.73	2200	2.02	2 920	2.34	3 810	2.68	4 900	3.07	6 210	3.49
NTZ068	45	-	-	890	1.40	1 630	1.96	2 960	2.54	4 160	3.12	5 560	3.70	7 190	4.24	9 050	4.75
NTZ096	45	-	-	1 240	2.04	2 040	2.51	3 530	3.04	4 860	3.62	6 440	4.24	8 290	4.88	10 460	5.53
NTZ108	45	-	-	1 690	2.65	2 720	3.31	4 620	4.03	6 260	4.80	8 170	5.60	10 380	6.44	12 920	7.31
NTZ136	45	1 460	2.84	2 650	3.81	4 180	4.86	7 120	5.98	9 720	7.14	12 840	8.34	16 530	9.57	20 860	10.80
NTZ215	45	2 110	3.92	3 730	5.15	5 840	6.55	9 930	8.11	13 540	9.78	17 840	11.56	22 900	13.41	28 780	15.30
NTZ271	45	2 920	5.67	5 300	7.62	8 360	9.72	14 240	11.96	19 440	14.28	25 680	16.68	33 060	19.14	41 720	21.60
NTZ542	45	4 220	7.84	7 460	10.30	11 680	13.11	19 860	16.22	27 080	19.56	35 680	23.12	45 800	26.82	57 560	30.60

Legend: To: Evaporating temperature in °C  
Tc: Condensing temperature in °C  
Qo: Cooling capacity in W  
Pe: Power input in kW  
Superheat = 10K; Subcooling = 0 K  
Suction temp. = 20°C; Subcooling = 0 K  
Voltage: 460 V / 3 / 60 Hz

Model	To	-25		-20		-15		-10		-5		0		5		10		15	
	Tc	Qo	Pe	Qo	Pe	Qo	Pe												
	MT R22	45	690	0.77	1 070	0.92	1 560	1.06	2 170	1.20	2 940	1.32	3 860	1.43	4 980	1.51	6 310	1.57	7 860
MT018	45	890	0.92	1 540	1.14	2 310	1.35	3 210	1.54	4 250	1.72	5 470	1.88	6 860	2.00	8 450	2.08	10 250	2.11
MT022	45	1 750	1.46	2 630	1.71	3 640	1.95	4 800	2.18	6 110	2.37	7 590	2.53	9 260	2.64	11 140	2.70	13 220	2.69
MT028	45	1 870	1.75	2 770	2.02	3 830	2.28	5 080	2.54	6 520	2.77	8 190	2.97	10 110	3.12	12 290	3.23	14 760	3.28
MT032	45	2 350	2.01	3 470	2.28	4 740	2.55	6 180	2.82	7 800	3.07	9 620	3.31	11 660	3.51	13 920	3.68	16 410	3.80
MT036	45	2 460	2.12	3 700	2.50	5 110	2.86	6 710	3.21	8 510	3.52	10 540	3.78	12 800	3.98	15 310	4.11	18 090	4.14
MT040	45	2 820	2.18	3 880	2.56	5 200	2.92	6 820	3.27	8 770	3.57	11 100	3.83	13 860	4.01	17 100	4.12	20 840	4.13
MT044	45	2 170	1.98	3 390	2.39	4 840	2.74	6 550	3.04	8 560	3.31	10 900	3.53	13 590	3.73	16 670	3.90	20 170	4.05
MT045	45	3 080	2.38	4 240	2.77	5 690	3.16	7 480	3.54	9 650	3.90	12 270	4.24	15 380	4.54	19 040	4.80	23 290	4.99
MT050	45	2 950	2.43	4 260	2.86	5 830	3.24	7 700	3.56	9 900	3.85	12 460	4.10	15 430	4.31	18 850	4.50	22 740	4.66
MT056	45	3 200	2.65	4 780	3.16	6 640	3.66	8 780	4.12	11 260	4.54	14 100	4.88	17 330	5.13	21 000	5.28	25 120	5.30
MT057	45	3 280	2.68	4 820	3.14	6 640	3.56	8 770	3.93	11 250	4.27	14 110	4.57	17 400	4.85	21 150	5.09	25 400	5.32
MT064	45	3 710	3.08	5 410	3.62	7 430	4.16	9 830	4.67	12 650	5.14	15 940	5.55	19 740	5.89	24 120	6.13	29 110	6.26
MT065	45	4 260	3.24	5 790	3.65	7 680	4.05	9 980	4.43	12 720	4.80	15 960	5.15	19 730	5.48	24 080	5.80	29 050	6.10
MT072	45	4 160	3.68	6 090	4.16	8 340	4.66	10 960	5.15	13 990	5.63	17 470	6.09	21 450	6.52	25 970	6.91	31 070	7.24
MT073	45	4 720	3.39	6 560	3.97	8 800	4.51	11 500	5.03	14 700	5.52	18 460	5.97	22 830	6.39	27 850	6.76	33 580	7.09
MT080	45	4 740	4.15	6 940	4.69	9 510	5.25	12 500	5.81	15 960	6.36	19 930	6.88	24 460	7.37	29 610	7.81	35 420	8.20
MT081	45	5 420	3.97	7 600	4.59	10 180	5.19	13 240	5.76	16 820	6.30	21 000	6.83	25 820	7.35	31 350	7.86	37 640	8.36
MT100	45	5 490	4.87	7 980	5.59	10 980	6.29	14 570	6.95	18 830	7.52	23 840	7.99	29 680	8.33	36 430	8.51	44 180	8.50
MT125	45	8 030	6.57	11 230	7.41	15 060	8.24	19 620	9.06	25 020	9.82	31 340	10.51	38 690	11.09	47 180	11.55	56 880	11.86
MT144	45	9 240	7.39	12 790	8.32	17 080	9.25	22 220	10.16	28 320	11.01	35 510	11.78	43 910	12.43	53 630	12.95	64 790	13.31
MT160	45	10 400	8.31	14 300	9.35	19 020	10.38	24 680	11.39	31 410	12.34	39 350	13.20	48 620	13.94	59 360	14.52	71 700	14.93
MTM200	45	10 970	9.75	15 960	11.19	21 960	12.59	29 140	13.89	37 660	15.05	47 680	15.99	59 360	16.67	72 870	17.02	88 360	17.00
MTM250	45	16 060	13.14	22 460	14.81	30 120	16.49	39 240	18.11	50 030	19.64	62 680	21.01	77 390	22.18	94 350	23.10	113 770	23.72
MTM288	45	18 470	14.79	25 580	16.65	34 160	18.51	44 430	20.32	56 640	22.02	71 020	23.55	87 820	24.87	107 260	25.91	129 590	26.61
MTM320	45	20 790	16.63	28 610	18.69	38 040	20.77	49 350	22.78	62 820	24.68	78 690	26.40	92 240	27.87	118 720	29.04	143 400	29.85

Legend: To: Evaporating temperature in °C  
Tc: Condensing temperature in °C  
Qo: Cooling capacity in W  
Pe: Power input in kW  
Superheat = 11.1 K  
Subcooling = 8.3 K  
Voltage: 460 V / 3 / 60 Hz

Model	To	-15		-10		-5		0		5		10		15			
	Tc	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe
	MTZ R407C	45	1 690	1.03	2 420	1.20	3 260	1.32	4 250	1.42	5 380	1.49	6 680	1.54	8 170	1.57	
MTZ018	45	2 320	1.32	3 170	1.52	4 170	1.68	5 340	1.82	6 710	1.93	8 290	2.02	10 120	2.10		
MTZ022	45	3 160	1.77	4 190	1.96	5 430	2.14	6 910	2.30	8 680	2.45	10 760	2.58	13 190	2.71		
MTZ028	45	3 590	1.94	4 700	2.17	6 030	2.37	7 620	2.57	9 510	2.74	11 730	2.89	14 320	3.02		
MTZ032	45	3 900	2.21	5 130	2.54	6 630	2.86	8 450	3.15	10 620	3.41	13 180	3.63	16 160	3.80		
MTZ036	45	4 310	2.45	5 890	2.81	7 740	3.18	9 890	3.54	12 400	3.90	15 290	4.23	18 610	4.52		
MTZ040	45	4 350	2.55	6 060	2.91	8 130	3.24	10 590	3.52	13 480	3.76	16 870	3.93	20 780			

## Performance data

MTZ	R134a	Model	To	-15		-10		-5		0		5		10		15		20	
			Tc	Qo	Pe	Qo	Pe												
MTZ018		45	1 070	0.73	1 480	0.82	2 010	0.91	2 670	0.99	3 470	1.06	4 440	1.12	5 600	1.16	6 960	1.17	
MTZ022		45	1 430	0.90	2 000	1.03	2 700	1.15	3 550	1.26	4 580	1.36	5 790	1.43	7 220	1.48	8 890	1.50	
MTZ028		45	1 890	1.14	2 680	1.32	3 600	1.50	4 670	1.66	5 900	1.80	7 320	1.91	8 940	1.98	10 770	2.02	
MTZ032		45	2 050	1.37	2 880	1.58	3 870	1.78	5 040	1.96	6 430	2.12	8 030	2.24	9 890	2.31	12 010	2.34	
MTZ036		45	2 580	1.53	3 530	1.79	4 660	2.04	5 980	2.27	7 530	2.47	9 310	2.64	11 350	2.77	13 680	2.84	
MTZ040		45	3 120	1.68	4 190	1.99	5 440	2.28	6 900	2.56	8 590	2.82	10 530	3.04	12 740	3.22	15 250	3.35	
MTZ044		45	2 840	1.90	3 950	2.14	5 350	2.37	7 080	2.60	9 190	2.81	11 730	3.00	14 730	3.15	18 240	3.27	
MTZ045		45	2 790	1.60	4 030	1.89	5 520	2.14	7 290	2.34	9 380	2.51	11 820	2.64	14 650	2.74	17 900	2.82	
MTZ050		45	3 400	2.14	4 720	2.43	6 330	2.71	8 280	2.97	10 600	3.22	13 350	3.44	16 560	3.63	20 280	3.77	
MTZ051		45	3 090	1.97	4 460	2.25	6 110	2.49	8 080	2.69	10 400	2.87	13 120	3.01	16 280	3.12	19 910	3.20	
MTZ056		45	3 870	2.32	5 350	2.64	7 120	2.95	9 220	3.25	11 680	3.53	14 550	3.78	17 860	3.99	21 640	4.14	
MTZ057		45	3 420	2.20	5 010	2.56	6 910	2.87	9 170	3.15	11 850	3.38	14 970	3.57	18 590	3.72	22 750	3.84	
MTZ064		45	4 730	2.71	6 520	3.10	8 620	3.48	11 070	3.85	13 900	4.19	17 150	4.49	20 850	4.74	25 050	4.93	
MTZ065		45	4 040	2.42	5 820	2.81	7 950	3.15	10 480	3.44	13 440	3.69	16 890	3.91	20 870	4.09	25 430	4.24	
MTZ072		45	5 330	2.96	7 320	3.38	9 630	3.81	12 290	4.24	15 330	4.65	18 790	5.04	22 710	5.41	27 100	5.73	
MTZ073		45	4 670	2.78	6 680	3.19	9 060	3.58	11 880	3.93	15 170	4.25	19 000	4.54	23 420	4.78	28 490	4.99	
MTZ080		45	6 170	3.47	8 400	3.94	10 970	4.43	13 940	4.92	17 330	5.40	21 190	5.87	25 540	6.31	30 420	6.71	
MTZ081		45	5 540	3.17	7 710	3.63	10 310	4.06	13 410	4.46	17 070	4.82	21 370	5.17	26 350	5.51	32 080	5.85	
MTZ100		45	6 010	3.80	8 650	4.37	11 810	4.92	15 570	5.41	20 010	5.83	25 200	6.16	31 200	6.36	38 090	6.43	
MTZ125		45	7 680	4.33	10 880	5.02	14 740	5.71	19 340	6.37	24 780	6.98	31 140	7.53	38 510	7.99	46 990	8.35	
MTZ144		45	11 010	6.06	14 700	6.84	19 030	7.56	24 060	8.21	29 850	8.74	36 490	9.14	44 040	9.36	52 580	9.37	
MTZ160		45	12 270	6.52	16 380	7.40	21 180	8.26	26 740	9.07	33 120	9.82	40 410	10.48	48 690	11.02	58 010	11.43	
MTZ200		45	12 030	7.59	17 290	8.75	23 620	9.84	31 150	10.83	40 030	11.67	50 400	12.32	62 400	12.73	76 190	12.86	
MTZ250		45	15 370	8.65	21 770	10.04	29 480	11.42	38 690	12.73	49 560	13.96	62 280	15.05	77 030	15.98	93 980	16.70	
MTZ288		45	22 010	12.12	29 410	13.67	38 060	15.12	48 110	16.42	59 710	17.49	72 990	18.27	88 090	18.71	105 160	18.75	
MTZ320		45	24 540	13.05	32 770	14.79	42 360	16.51	53 470	18.14	66 240	19.64	80 830	20.96	97 370	22.05	116 030	22.86	


MTZ	R404A / R507A	Model	To	-30		-25		-20		-15		-10		-5		0		5		10	
			Tc	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe		
MTZ018		45	400	0.78	840	1.06	1 370	1.29	2 000	1.48	2 750	1.63	3 630	1.76	4 650	1.85	5 830	1.91	7 190	1.96	
MTZ022		45	950	1.08	1 480	1.30	2 110	1.51	2 880	1.70	3 800	1.87	4 880	2.03	6 160	2.17	7 650	2.29	9 370	2.39	
MTZ028		45	1 440	1.42	2 120	1.71	2 920	1.98	3 860	2.23	4 970	2.45	6 250	2.66	7 740	2.84	9 440	2.99	11 390	3.13	
MTZ032		45	1 570	1.52	2 290	1.84	3 150	2.15	4 190	2.44	5 420	2.72	6 880	2.97	8 590	3.19	10 580	3.37	12 880	3.51	
MTZ036		45	1 630	1.67	2 490	2.01	3 530	2.35	4 780	2.69	6 250	3.03	8 000	3.35	10 040	3.67	12 410	3.97	15 130	4.24	
MTZ040		45	1 930	1.93	2 910	2.32	4 080	2.69	5 480	3.05	7 140	3.42	9 100	3.77	11 380	4.12	14 030	4.47	17 060	4.82	
MTZ044		45	1 850	2.25	2 900	2.65	4 180	3.05	5 730	3.46	7 600	3.86	9 820	4.25	12 450	4.60	15 520	4.92	19 070	5.18	
MTZ045		45	1 170	1.85	2 810	2.33	4 140	2.78	5 720	3.19	7 590	3.55	9 780	3.87	12 340	4.15	15 290	4.38	18 680	4.56	
MTZ050		45	2 340	2.62	3 560	3.07	5 030	3.53	6 800	3.99	8 900	4.45	11 380	4.89	14 290	5.29	17 650	5.66	21 530	5.97	
MTZ051		45	2 290	2.29	3 540	2.80	5 020	3.27	6 790	3.69	8 880	4.06	11 330	4.38	14 180	4.66	17 480	4.90	21 250	5.10	
MTZ056		45	2 570	2.88	4 000	3.40	5 690	3.93	7 680	4.47	10 010	5.01	12 710	5.52	15 830	6.01	19 400	6.45	23 460	6.84	
MTZ057		45	2 510	2.41	3 960	3.07	5 680	3.64	7 730	4.14	10 120	4.58	12 920	4.98	16 150	5.34	19 850	5.69	24 070	6.03	
MTZ064		45	3 140	3.18	4 740	3.77	6 620	4.39	8 820	5.01	11 390	5.63	14 370	6.22	17 790	6.78	21 700	7.29	26 130	7.74	
MTZ065		45	3 050	2.83	4 600	3.52	6 450	4.15	8 650	4.70	11 250	5.21	14 300	5.67	17 860	6.10	21 960	6.51	26 670	6.90	
MTZ072		45	3 820	3.87	5 540	4.45	7 580	5.07	9 980	5.70	12 780	6.35	16 040	7.01	19 780	7.65	24 070	8.28	28 950	8.89	
MTZ073		45	3 670	3.44	5 360	4.16	7 400	4.83	9 860	5.45	12 780	6.01	16 240	6.53	20 280	7.00	24 960	7.41	30 340	7.77	
MTZ080		45	4 470	4.39	6 410	5.09	8 700	5.83	11 370	6.60	14 470	7.38	18 060	8.16	22 180	8.93	26 870	9.67	32 180	10.38	
MTZ081		45	4 580	4.02	6 450	4.91	8 690	5.72	11 370	6.47	14 550	7.16	18 290	7.80	22 660	8.40	27 710	8.96	33 510	9.51	
MTZ100		45	4 390	4.61	6 700	5.63	9 450	6.54	12 720	7.35	16 570	8.06	21 100	8.69	26 370	9.23	32 450	9.70	39 420	10.10	
MTZ125		45	6 760	6.37	9 580	7.47	12 910	8.52	16 850	9.52	21 470	10.45	26 880	11.30	33 150	12.06	40 380	12.72	48 650	13.28	
MTZ144		45	8 360	7.40	11 580	8.66	15 410	9.83	19 960	10.91	25 320	11.95	31 610	12.94	38 930	13.92	47 390	14.90	57 080	15.91	
MTZ160	</td																				

## Reciprocating compressors – Commercial

Model		4	5	6	7	Swept volume cm <sup>3</sup> /rev	Displacement m <sup>3</sup> /h at 2900 rpm	Cylinder number	Oil charge dm <sup>3</sup>	Net weight kg
		460/3/60 400/3/50	230/1/50	230/3/50	575/3/60 500/3/50					
Low back pressure Applications	<b>NTZ048</b>	120F0001	120F0087			48	8.4	1	0.95	21
	<b>NTZ068</b>	120F0002	120F0088			68	11.8	1	0.95	23
	<b>NTZ096</b>	120F0003				96	16.7	2	1.8	35
	<b>NTZ108</b>	120F0004				108	18.7	2	1.8	35
	<b>NTZ136</b>	120F0005				136	23.6	2	1.8	35
	<b>NTZ215</b>	120F0006				215	37.5	4	3.9	62
	<b>NTZ271</b>	120F0007				271	47.3	4	3.9	64
	<b>NTZ430</b>	120F0024				2 x 215	2 x 37.5	2 x 4	2 x 3.9	138
	<b>NTZ542</b>	120F0025				2 x 271	2 x 47.3	2 x 4	2 x 2.9	142
Medium - High back pressure Applications	<b>MT018</b>	MT18-4VI	MT18-5VI			30	5.3	1	0.95	21
	<b>MT022</b>	MT22-4VI	MT22-5VI	MT22-6VI		38	6.6	1	0.95	21
	<b>MT028</b>	MT28-4VI	MT28-5VI	MT28-6VI		48	8.4	1	0.95	23
	<b>MT032</b>	MT32-4VI	MT32-5VI	MT32-6VI		54	9.4	1	0.95	24
	<b>MT036</b>	MT36-4VI	MT36-5VI	MT36-6VI		60	10.5	1	0.95	25
	<b>MT040</b>	MT40-4VI		MT40-6VI		68	11.8	1	0.95	26
	<b>MT044</b>	MT44-4VI		MT44-6VI	MT44-7VI	76	13.3	2	1.8	35
	<b>MT050</b>	MT50-4VI	MT50-5VI	MT50-6VI	MT50-7VI	86	14.9	2	1.8	35
	<b>MT056</b>	MT56-4VI		MT56-6VI	MT56-7VI	96	16.7	2	1.8	37
	<b>MT064</b>	MT64-4VI		MT64-6VI		108	18.7	2	1.8	37
	<b>MT072</b>	MT72-4VI		MT72-6VI		121	21.0	2	1.8	40
	<b>MT080</b>	MT80-4VI		MT80-6VI		136	23.6	2	1.8	40
	<b>MT100</b>	MT100-4VI		MT100-6VI	MT100-7VI	171	29.8	4	3.9	60
	<b>MT125</b>	MT125-4VI		MT125-6VI	MT125-7VI	215	37.5	4	3.9	64
	<b>MT144</b>	MT144-4VI		MT144-6VI	MT144-7VI	242	42.1	4	3.9	67
	<b>MT160</b>	MT160-4VI		MT160-6VI	MT160-7VI	272	47.3	4	3.9	69
	<b>MTM200</b>	MTM200T4SA		MTM200T6SA		2 x 171	2 x 29.8	2 x 4	2 x 3.9	134
	<b>MTM250</b>	MTM250T4SA		MTM250T6SA		2 x 215	2 x 37.5	2 x 4	2 x 3.9	142
	<b>MTM288</b>	MTM288T4SA		MTM288T6SA		2 x 242	2 x 42.1	2 x 4	2 x 3.9	148
	<b>MTM320</b>	MTM320T4SA		MTM320T6SA		2 x 272	2 x 47.3	2 x 4	2 x 3.9	152
	<b>MTZ018</b>	MTZ18-4VI	MTZ18-5VI	MTZ18-6VI		30	5.3	1	0.95	21
	<b>MTZ022</b>	MTZ22-4VI	MTZ22-5VI	MTZ22-6VI		38	6.6	1	0.95	21
	<b>MTZ028</b>	MTZ28-4VI	MTZ28-5VI	MTZ28-6VI		48	8.4	1	0.95	23
	<b>MTZ032</b>	MTZ32-4VI	MTZ32-5VI	MTZ32-6VI	MTZ32-7VI	54	9.4	1	0.95	24
	<b>MTZ036</b>	MTZ36-4VI	MTZ36-5VI	MTZ36-6VI	MTZ36-7VI	60	10.5	1	0.95	25
	<b>MTZ040</b>	MTZ40-4VI		MTZ40-6VI		68	11.8	1	0.95	26
	<b>MTZ044</b>	MTZ44-4VI		MTZ44-6VI	MTZ44-7VI	76	13.3	2	1.8	35
	<b>MTZ050</b>	MTZ50-4VI	MTZ50-5VI	MTZ50-6VI	MTZ50-7VI	86	14.9	2	1.8	35
	<b>MTZ056</b>	MTZ56-4VI		MTZ56-6VI	MTZ56-7VI	96	16.7	2	1.8	37
	<b>MTZ064</b>	MTZ64-4VI		MTZ64-6VI		108	18.7	2	1.8	37
	<b>MTZ072</b>	MTZ72-4VI		MTZ72-6VI		121	21.0	2	1.8	40
	<b>MTZ080</b>	MTZ80-4VI		MTZ80-6VI		136	23.6	2	1.8	40
	<b>MTZ100</b>	MTZ100-4VI		MTZ100-6VI	MTZ100-7VI	171	29.8	4	3.9	60
	<b>MTZ125</b>	MTZ125-4VI		MTZ125-6VI	MTZ125-7VI	215	37.5	4	3.9	64
	<b>MTZ144</b>	MTZ144-4VI		MTZ144-6VI	MTZ144-7VI	242	42.1	4	3.9	67
	<b>MTZ160</b>	MTZ160-4VI		MTZ160-6VI	MTZ160-7VI	272	47.3	4	3.9	69
	<b>MTZ200</b>	MTZ200T4SA		MTZ200T6SA		2 x 171	2 x 29.8	2 x 4	2 x 3.9	134
	<b>MTZ250</b>	MTZ250T4SA		MTZ250T6SA		2 x 215	2 x 37.5	2 x 4	2 x 3.9	142
	<b>MTZ288</b>	MTZ288T4SA		MTZ288T6SA		2 x 242	2 x 42.1	2 x 4	2 x 3.9	148
	<b>MTZ320</b>	MTZ320T4SA		MTZ320T6SA		2 x 272	2 x 47.3	2 x 4	2 x 3.9	152


## Dimensions

**MT / MTZ / NTZ  
1 cylinder**




D : 224 mm  
H : 333/358 mm  
H1 : 263 mm  
H2 : 68 mm

**MT / MTZ / NTZ  
2 cylinders**

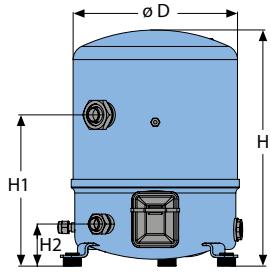


D : 288 mm  
H : 413 mm  
H1 : 265 mm  
H2 : 74 mm

**MT / MTZ / NTZ  
4 cylinders**

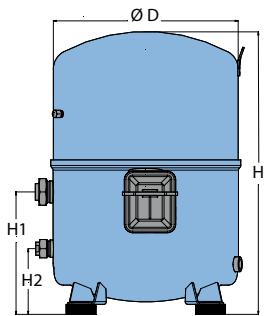

D : 352 mm  
H : 519 / 540 mm  
H1 : 233 mm  
H2 : 125 mm


**MT / MTZ / NTZ Tandem  
2 x 4 cylinders**

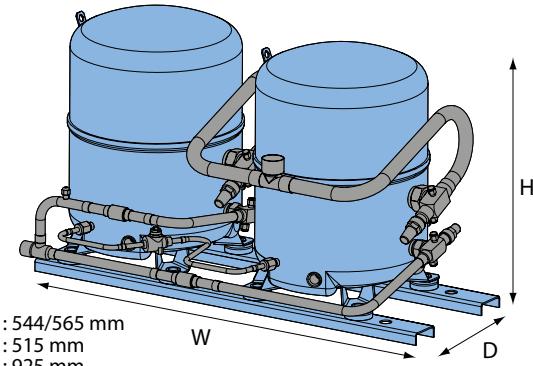

H : 544/565 mm  
D : 515 mm  
W : 925 mm

# Scroll compressors – H series

## Dimensions

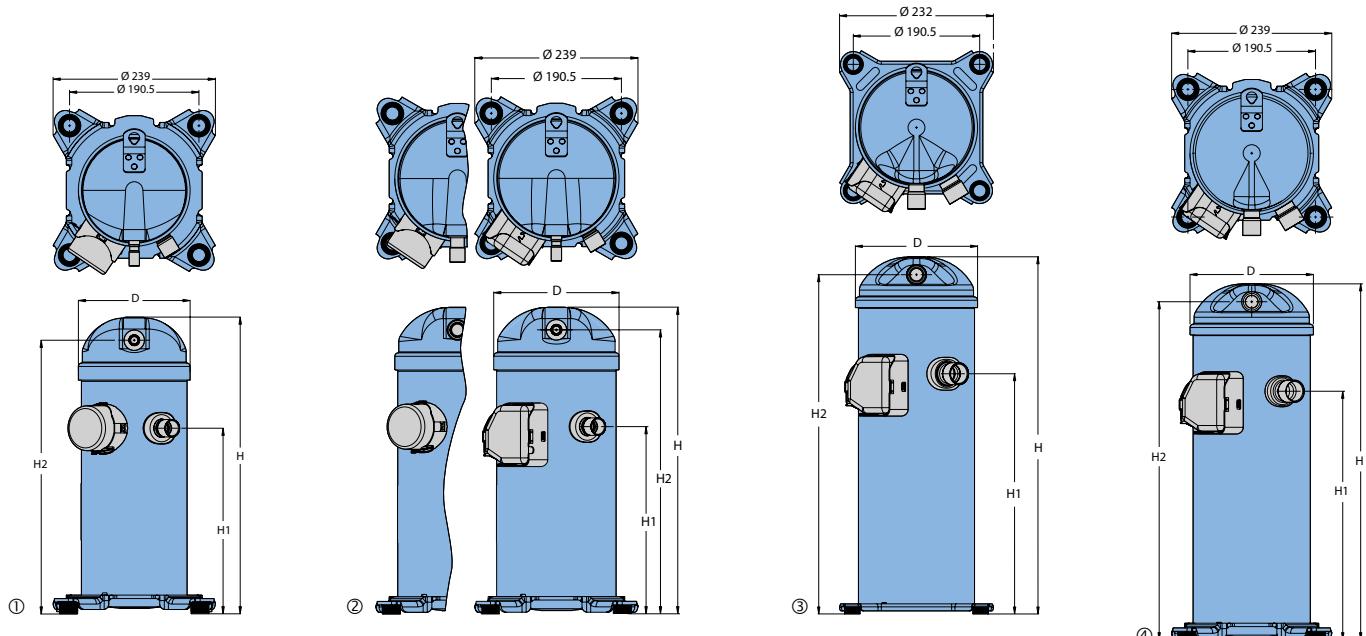

Outline	R22	R407C	R410A	D	H	H1	H2
①	HRM032-034-038-040-042	HRP034-038-040-042	HRH029-031-032-034-036-038	165	413	250	379
①	HRM045-047	HRP045-047	HRH040	165	439	275	405
②	HRM048-051-054-058-060-HLM068-072-075-078-081	HRP048-051-054-058-060-HLP068-072-075-081	HRH041-044-049-051-054-056-HLH061-068-072-083	184	455	280	422
③	HCM094	HCP094		184	536	369	509
③	HCM109-120	HCP109-120		184	545	369	519
④			HCJ090-105-120	184	537	377	510

All dimensions in mm

## Nomenclature

Type	Size	Motor	Features																				
<b>HRH</b>	<b>036</b>	<b>U1L</b>	<b>P6</b>																				
<b>Application:</b> _____			<b>Other features</b>																				
H: high temperature / air conditioning			<table border="1"> <tr> <td>Oil sight glass</td> <td>Oil equalisation</td> <td>Oil drain</td> <td>LP gauge port</td> <td>Gas equalisation port</td> </tr> <tr> <td>6</td> <td>None</td> <td>None</td> <td>None</td> <td>None</td> </tr> <tr> <td>7</td> <td>Threaded</td> <td>None</td> <td>None</td> <td>None</td> </tr> <tr> <td>8</td> <td>None</td> <td>Brazed</td> <td>None</td> <td>None</td> </tr> </table>	Oil sight glass	Oil equalisation	Oil drain	LP gauge port	Gas equalisation port	6	None	None	None	None	7	Threaded	None	None	None	8	None	Brazed	None	None
Oil sight glass	Oil equalisation	Oil drain	LP gauge port	Gas equalisation port																			
6	None	None	None	None																			
7	Threaded	None	None	None																			
8	None	Brazed	None	None																			
<b>Family:</b> _____																							
C: light commercial scroll																							
R: residential scroll (new platform)																							
L: light commercial scroll (new platform)																							
<b>Refrigerant &amp; lubricant:</b> _____			<b>Tubing and electrical connections</b>																				
M: R22/R417A, alkylbenzene lubricant*			P: brazed connections, spade terminals																				
P: R407C, PVE lubricant			C: brazed connections, screw terminals																				
H: R410A, PVE lubricant																							
J: R410A, PVE lubricant																							
<b>Nominal capacity:</b> _____			<b>Motor protection</b>																				
In thousand Btu/h at 60 Hz, ARI conditions			L: internal motor protection																				
<b>Model variation:</b> _____																							
T: design optimized for 7.2/54.4°C			<b>Motor voltage code</b>																				
U: design optimized for 7.2/37.8°C			1: 208-230 V/1~/60 Hz 2: 200-220 V/3~/50Hz & 208-230 V/3~/60 Hz 4: 380-400 V/3~/50 Hz & 460 V/3~/60 Hz 5: 220-240 V/1~/50 Hz 7: 500 V/3~/50 Hz & 575 V/3~/60 Hz 9: 380 V/3~/60 Hz																				

\* When H\*M compressors are used with R417A, the factory charged oil must be replaced by PVE oil 320HV (120Z5034)

## Scroll compressors R407C · HRP/HLP/HCP

	Te	-25	-25	-20	-20	-15	-15	-10	-10	-5	-5	0	0	5	5	10	10
	Tc	Cooling (W)	Pe (kW)														
HRP025T4	35	1900	1.11	2400	1.15	3000	1.18	3700	1.21	4600	1.24	5500	1.26	6500	1.29	7600	1.32
	45	-	-	2100	1.38	2700	1.43	3400	1.47	4100	1.51	4900	1.53	5900	1.55	6900	1.57
	55	-	-	-	-	-	-	3000	1.76	3700	1.81	4400	1.85	5300	1.88	6200	1.89
HRP034T4	35	2500	1.73	3200	1.71	4100	1.70	5100	1.69	6300	1.68	7700	1.67	9300	1.64	11200	1.59
	45	-	-	2800	2.19	3500	2.18	4500	2.16	5600	2.15	6800	2.14	8300	2.12	10000	2.08
	55	-	-	-	-	-	-	3800	2.77	4800	2.76	5900	2.75	7200	2.73	8700	2.71
HRP038T4	35	2700	1.85	3500	1.83	4400	1.82	5500	1.82	6900	1.80	8400	1.79	10200	1.76	12200	1.71
	45	-	-	3100	2.32	3900	2.31	4900	2.30	6100	2.29	7500	2.27	9100	2.25	11000	2.21
	55	-	-	-	-	-	-	4200	2.91	5300	2.90	6600	2.89	8000	2.87	9700	2.84
HRP040T4	35	2900	2.03	3700	2.01	4700	2.00	5800	1.99	7200	1.97	8900	1.95	10700	1.92	12900	1.87
	45	-	-	3200	2.57	4100	2.55	5100	2.54	6400	2.52	7800	2.51	9500	2.48	11500	2.44
	55	-	-	-	-	-	-	4300	3.24	5500	3.23	6800	3.22	8300	3.20	10000	3.17
HRP042T4	35	3000	2.13	3900	2.11	4900	2.10	6100	2.09	7600	2.08	9300	2.06	11300	2.02	13600	1.97
	45	-	-	3300	2.70	4300	2.68	5400	2.67	6700	2.65	8300	2.64	10000	2.61	12100	2.56
	55	-	-	-	-	-	-	4600	3.41	5700	3.40	7100	3.38	8700	3.36	10500	3.33
HRP045T4	35	3300	2.19	4200	2.16	5300	2.15	6700	2.14	8300	2.13	10100	2.11	12300	2.07	14700	2.01
	45	-	-	3700	2.86	4700	2.83	6000	2.81	7400	2.80	9100	2.78	11100	2.75	13400	2.70
	55	-	-	-	-	-	-	5200	3.70	6500	3.69	8000	3.68	9800	3.66	11900	3.62
HRP047T4	35	3400	2.30	4400	2.28	5600	2.26	7000	2.25	8700	2.24	10600	2.22	12900	2.18	15500	2.12
	45	-	-	3900	2.97	4900	2.94	6200	2.93	7700	2.91	9500	2.89	11600	2.86	13900	2.81
	55	-	-	-	-	-	-	5300	3.81	6700	3.80	8300	3.78	10100	3.76	12300	3.73
HRP048T4	35	3500	2.39	4400	2.38	5600	2.37	7100	2.36	8800	2.35	10700	2.32	13000	2.28	15600	2.23
	45	-	-	3900	2.88	4900	2.87	6200	2.86	7800	2.85	9500	2.83	11600	2.80	14000	2.75
	55	-	-	-	-	-	-	5300	3.44	6700	3.44	8200	3.42	10100	3.40	12200	3.37
HRP051T4	35	3700	2.33	4800	2.36	6100	2.39	7600	2.42	9400	2.46	11500	2.50	14000	2.54	16800	2.60
	45	-	-	4200	3.18	5400	3.15	6800	3.13	8400	3.12	10300	3.11	12600	3.11	15100	3.12
	55	-	-	-	-	-	-	5800	4.00	7300	3.95	9000	3.91	11000	3.89	13400	3.87
HRP054T4	35	3900	2.44	5000	2.46	6400	2.50	8000	2.53	9800	2.57	12100	2.61	14600	2.66	17600	2.72
	45	-	-	4400	3.32	5600	3.29	7000	3.26	8700	3.25	10800	3.24	13100	3.24	15800	3.25
	55	-	-	-	-	-	-	6100	4.15	7600	4.10	9400	4.06	11400	4.03	13800	4.01
HRP058T4	35	4200	2.61	5400	2.64	6800	2.68	8500	2.71	10600	2.75	12900	2.80	15700	2.85	18800	2.91
	45	-	-	4700	3.56	6000	3.52	7500	3.50	9400	3.48	11500	3.47	14000	3.48	16900	3.49
	55	-	-	-	-	-	-	6500	4.45	8100	4.39	10000	4.35	12300	4.32	14800	4.30
HRP060T4	35	4300	2.71	5600	2.74	7000	2.78	8800	2.81	10900	2.85	13400	2.90	16200	2.95	19500	3.02
	45	-	-	4800	3.65	6200	3.61	7800	3.58	9700	3.55	11900	3.54	14500	3.54	17400	3.56
	55	-	-	-	-	-	-	6700	4.50	8400	4.42	10300	4.36	12600	4.32	15300	4.31
HLP068T4	35	5300	3.37	6800	3.42	8600	3.46	10800	3.50	13300	3.55	16300	3.60	19800	3.67	23900	3.77
	45	-	-	5800	4.50	7400	4.44	9200	4.38	11400	4.34	14000	4.32	17100	4.33	20600	4.36
	55	-	-	-	-	-	-	7800	5.43	9500	5.31	11700	5.22	14200	5.16	17300	5.15
HLP072T4	35	5600	3.57	7200	3.66	9100	3.71	11300	3.75	14000	3.78	17200	3.83	20800	3.89	25000	4.00
	45	-	-	6100	4.83	7800	4.73	9700	4.64	12000	4.58	14800	4.55	18000	4.57	21700	4.65
	55	-	-	-	-	-	-	8200	5.76	10100	5.56	12400	5.42	15100	5.35	18300	5.37
HLP075T4	35	5500	3.84	7100	3.81	9000	3.80	11300	3.78	14000	3.76	17200	3.72	20800	3.65	25000	3.56
	45	-	-	6300	4.69	8000	4.67	10100	4.65	12500	4.63	15400	4.60	18700	4.55	22500	4.47
	55	-	-	-	-	-	-	8600	5.70	10800	5.69	13400	5.67	16400	5.64	19900	5.58
HLP081T4	35	5700	4.16	7300	4.15	9300	4.13	11600	4.11	14400	4.07	17700	4.02	21400	3.95	25700	3.85
	45	-	-	6600	5.13	8400	5.10	10600	5.07	13200	5.03	16200	4.99	19700	4.92	23700	4.84
	55	-	-	-	-	-	-	9300	6.26	11700	6.21	14500	6.16	17800	6.10	21500	6.02
HCP094T4	35	6600	4.61	8500	4.59	10800	4.57	13500	4.55	16700	4.52	20400	4.47	24800	4.40	29800	4.29
	45	-	-	7500	5.63	9500	5.61	12000	5.58	14900	5.56	18300	5.52	22300	5.46	26900	5.37
	55	-	-	-	-	-	-	10300	6.83	13000	6.81	16000	6.78	19600	6.74	23800	6.68
HCP109T4	35	8100	4.80	10200	4.93	13000	5.02	16400	5.09	20300	5.15	24700	5.21	29500	5.26	34800	5.32
	45	-	-	9300	6.01	11500	6.19	14400	6.31	18000	6.39	22200	6.42	26900	6.43	32100	6.41
	55	-	-	-	-	-	-	12600	7.84	15600	7.98	19300	8.05	23700	8.06	28700	8.01
HCP120T4	35	9000	5.49	11300	5.64	14400	5.75	18100	5.81	22300	5.86	27200	5.91	32500	5.98	38400	6.07
	45	-	-	10300	6.85	12600	7.03	15800	7.14	19600	7.21	24200	7.24	29400	7.26	35200	7.28
	55	-	-	-	-	-	-	13700	8.82	16800	8.94	20800	8.99	25600	9.01	31000	8.99

To: Evaporating temperature in °C

Tc: Condensing temperature in °C

Qo: Cooling capacity in W

Pe: Power input in kW


Superheat = 11.1 K

Subcooling = 8.3 K


Voltage: 400 V / 3 / 50 Hz

\*: Voltage: 220-240 V / 1 / 50 Hz


## Product range single compressors – Air Conditioning Performer® scroll compressors S series




	D	H	H1	H2
S084-090-100	254	508	142	465
S110-120	254	558	178	515




	D	H	H1	H2
S148-161	266	591	180	556



	D	H	H1	H2
S112	243	535	278	504
S124-147	243	540	278	509



	D	H	H1	H2
S115-125	254	581	180	537
S160	266	631	180	596
S175-185	316	678	180	641

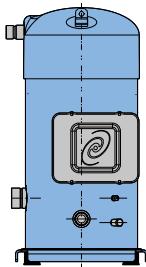

	D	H	H1	H2
S240	344	727	196	654
S300	344	738	196	665
S380	344	762	196	689

All dimensions in mm

Model	Motor voltage code		
	400 V/3~50Hz - 460V/3~60Hz	230/3/50	500/3~50 - 575/3~60
SM/SZ084-090-100-110-120	●	●	●
SM/SZ148-161	●	●	●
SM112-124-147	●		
SM/SZ115-125-160-175-185	○ ●	○ ●	○ ●
SY185	○ ●		
SY/SZ240-300	○ ●	○ ●	○ ●
SY/SZ380 *	●		

○ Rotolock version

● Brazed version

\* SY380 only available for 400/3~50Hz

Family, lubricant & refrigerant  
**SZ**  
**SY**

Nominal capacity  
**185**  
**300**

Voltage  
-  
**A**  
**7**  
**R**  
**CA**

Version  
**C**  
**A**

Single compressors  
Single compressors

Family, lubricant & refrigerant  
SM: Scroll, Mineral oil, R22/R417A\*\*  
SY: Scroll, POE lubricant, R22/R417A (and R407C for SY185-240-300)  
SZ: Scroll, POE lubricant, R407C - R134a (and R404A, R507A for SZ084 to SZ185)

Nominal capacity  
in thousand Btu/h at 60 Hz, R22, ARI conditions

Motor voltage code  
3: 200-230V/3~/60 Hz  
4: 380-400V/3~/50 - 460V/3~/60 Hz  
6: 230V/3~/50 Hz  
7: 500V/3~/50 Hz - 575V/3~/60 Hz  
9: 380V/3~/60 Hz

Motor protection type		Connection	Module voltage	Applies to
Internal overload protector	<b>V</b>	: brazed		S 084-090-100-110-120-148-161
	<b>A</b>	: brazed		S 112-124-147
Internal thermostat	<b>C</b>	: brazed		S 115-125-160-175-185
	<b>R</b>	: rotolock		
Electronic protection module	<b>P</b>	: brazed 24 V AC		S 240 - 300
	<b>X</b>	: brazed 230 V		
<b>S</b>	<b>Y</b>	: rotolock 24 V AC		S 380 *
		: rotolock 230 V		
<b>CA</b>	<b>C</b> : brazed	<b>A</b> : 24V AC		
<b>CB</b>	<b>A</b> : 115/230V			
<b>PA</b>	<b>P</b> : rotolock	<b>A</b> : 24V AC		
<b>PB</b>		<b>B</b> : 115/230V		
<b>CA</b>	<b>C</b> : brazed	<b>A</b> : 24V AC		
<b>CB</b>		<b>B</b> : 115/230V		

\* SY380 only available for 400V/3~/50 Hz, SZ380 available for both 400V/3~/50 Hz and 460V/3~/60 Hz

\*\* When SM compressors are used with R417A, the factory charged mineral oil 160P must be replaced by polyolester oil 160SZ

## Scroll compressors SM / SY R22

Model	To	-20		-15		-10		-5		0		5		10		15	
	Tc	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe								
<b>SM084</b>	35	9 600	4.8	12 200	4.8	15 200	4.8	18 700	4.9	22 600	4.9	27 100	4.9	32 100	4.9	37 800	4.9
	55	-	-	-	-	-	-	15 000	7.5	18 500	7.5	22 500	7.5	22 700	7.4	32 100	7.4
<b>SM090</b>	35	10 600	5.2	13 300	5.2	16 500	5.3	20 200	5.3	24 500	5.4	29 400	5.4	34 900	5.4	41 100	5.4
	55	-	-	-	-	-	-	16 400	7.9	20 000	7.9	24 200	7.9	28 900	7.9	34 300	7.9
<b>SM100</b>	35	11 200	5.4	14 100	5.5	17 400	5.5	21 300	5.5	25 700	5.6	30 700	5.6	36 400	5.6	42 700	5.6
	55	-	-	-	-	-	-	17 200	8.3	21 000	8.3	25 300	8.3	30 100	8.2	35 600	8.2
<b>SM110</b>	35	12 800	6.2	16 100	6.2	20 000	6.3	24 400	6.3	29 500	6.3	35 200	6.4	41 600	6.4	48 800	6.4
	55	-	-	-	-	-	-	19 800	9.5	24 100	9.5	29 000	9.5	34 500	9.5	40 700	9.4
<b>SM112</b>	35	14 100	6.1	17 600	6.2	21 600	6.3	26 200	6.5	31 500	6.6	37 600	6.8	44 400	7.0	52 200	7.2
	55	-	-	-	-	-	-	21 700	9.4	26 200	9.5	31 300	9.7	37 100	9.8	43 700	10.0
<b>SM115</b>	35	14 200	6.5	17 900	6.5	22 000	6.6	26 500	6.6	31 500	6.7	37 000	6.7	43 000	6.8	49 400	6.8
	55	-	-	-	-	-	-	21 600	10.2	26 200	10.2	31 200	10.2	36 600	10.2	42 500	10.2
<b>SM120</b>	35	15 000	7.1	18 800	7.1	23 300	7.2	28 400	7.2	34 200	7.2	40 800	7.3	48 300	7.3	56 600	7.4
	55	-	-	-	-	-	-	23 000	10.9	28 000	10.9	33 700	10.9	40 100	10.9	47 300	10.9
<b>SM124</b>	35	16 000	6.5	19 800	6.6	24 300	6.8	29 500	7.0	35 400	7.3	42 200	7.6	49 900	8.0	58 600	8.4
	55	-	-	-	-	-	-	24 100	10.2	29 100	10.4	34 700	10.6	41 200	10.9	48 600	11.2
<b>SM125</b>	35	15 500	7.0	19 600	7.1	24 100	7.2	29 100	7.2	34 600	7.3	40 600	7.3	47 100	7.4	54 200	7.4
	55	-	-	-	-	-	-	23 700	11.1	28 700	11.1	34 200	11.1	40 200	11.1	46 600	11.1
<b>SM147</b>	35	18 600	7.6	22 800	7.7	27 800	7.9	33 500	8.1	40 000	8.3	47 500	8.5	55 900	8.7	65 500	8.8
	55	-	-	-	-	-	-	28 000	11.8	33 600	12.0	40 100	12.2	47 600	12.5	56 000	12.7
<b>SM148</b>	35	18 100	8.3	22 600	8.4	27 800	8.5	33 800	8.6	40 600	8.7	48 500	8.8	57 400	8.9	67 500	9.0
	55	-	-	-	-	-	-	27 600	12.9	33 500	13.0	40 300	13.1	48 000	13.2	56 700	13.3
<b>SM160</b>	35	19 200	9.2	24 200	9.4	29 900	9.5	36 500	9.7	43 900	9.8	52 400	10.0	61 900	10.1	72 500	10.2
	55	-	-	-	-	24 100	13.9	29 900	14.0	36 400	14.2	43 800	14.3	52 200	14.4	61 600	14.5
<b>SM161</b>	35	19 700	9.0	24 600	9.1	30 200	9.2	36 700	9.3	44 200	9.4	52 700	9.5	62 400	9.6	73 300	9.7
	55	-	-	-	-	-	-	30 000	14.0	36 400	14.1	43 800	14.2	52 100	14.3	61 600	14.4
<b>SM175</b>	35	21 100	9.8	26 400	10.0	32 500	10.1	39 500	10.3	47 500	10.5	56 500	10.6	66 600	10.7	77 800	10.8
	55	-	-	-	-	-	-	32 200	15.1	39 200	15.2	47 000	15.4	55 800	15.5	65 600	15.7
<b>SM185</b>	35	22 500	10.4	28 100	10.6	34 600	10.8	42 000	10.9	50 500	11.1	60 100	11.2	70 800	11.4	82 800	11.5
	55	-	-	-	-	27 800	15.8	34 300	16.0	41 700	16.2	50 000	16.3	59 300	16.5	69 800	16.6
<b>SY185</b>	35	22 500	10.4	28 000	10.5	34 500	10.6	42 000	10.7	50 800	10.8	60 800	10.9	72 200	11.0	85 100	11.2
	55	-	-	-	-	28 200	15.5	34 600	15.8	42 100	16.1	50 800	16.4	60 700	16.6	71 900	16.9
<b>SY240</b>	35	30 600	14.0	38 200	14.2	47 100	14.4	57 300	14.8	69 100	15.1	82 500	15.6	97 600	16.2	114 800	16.8
	55	-	-	-	-	-	-	46 700	21.4	56 700	21.7	68 100	22.2	81 000	22.6	95 700	23.2
<b>SY300</b>	35	39 800	16.4	49 400	16.9	60 600	17.4	73 600	18.0	88 500	18.6	105 600	19.2	125 000	19.9	146 900	20.6
	55	-	-	-	-	-	-	59 600	26.0	72 300	26.6	86 800	27.4	103 400	28.3	122 300	29.2
<b>SM170</b>	35	18 900	9.5	24 000	9.6	29 900	9.7	36 800	9.7	44 500	9.8	53 300	9.8	63 300	9.8	74 400	9.9
	55	-	-	-	-	-	-	29 500	15.0	36 400	15.0	44 300	15.0	53 300	14.9	63 300	14.8
<b>SM180</b>	35	20 900	10.4	26 200	10.5	32 600	10.6	39 900	10.6	48 300	10.7	57 900	10.8	68 700	10.8	80 900	10.8
	55	-	-	-	-	-	-	32 300	15.8	39 400	15.9	47 600	15.8	57 000	15.8	67 500	15.7
<b>SM200</b>	35	22 000	10.8	27 700	10.9	34 300	11.0	41 900	11.1	50 600	11.2	60 500	11.2	71 700	11.2	84 200	11.3
	55	-	-	-	-	-	-	34 000	16.5	41 400	16.5	49 800	16.5	59 400	16.4	70 100	16.4
<b>SM220</b>	35	25 300	12.3	31 800	12.4	39 400	12.5	48 100	12.6	58 000	12.7	69 300	12.7	82 000	12.8	96 200	12.8
	55	-	-	-	-	-	-	39 000	18.9	47 500	18.9	57 100	18.9	68 000	18.9	80 300	18.9
<b>SM230</b>	35	27 900	12.9	35 200	13.0	43 300	13.1	52 300	13.2	62 100	13.3	72 900	13.4	84 600	13.5	97 300	13.6
	55	-	-	-	-	-	-	42 600	20.4	51 600	20.4	61 500	20.4	72 100	20.4	83 700	20.3
<b>SM242</b>	35	29 500	14.2	37 100	14.2	45 800	14.3	55 900	14.4	67 400	14.5	80 400	14.6	95 100	14.7	111 400	14.8
	55	-	-	-	-	-	-	45 300	21.8	55 200	21.8	66 400	21.9	79 100	21.9	93 200	21.9
<b>SM248</b>	35	32 000	13.0	39 700	13.3	48 600	13.6	58 900	14.1	70 800	14.6	84 400	15.3	99 800	15.9	117 300	16.7
	55	-	-	-	-	-	-	48 200	20.4	58 100	20.7	69 500	21.2	82 500	21.7	97 200	22.4
<b>SM250</b>	35	30 600	14.1	38 600	14.2	47 500	14.3	57 400	14.4	68 200	14.5	80 000	14.6	92 800	14.7	106 700	14.8
	55	-	-	-	-	-	-	46 700	22.3	56 600	22.3	67 400	22.3	79 200	22.2	91 800	22.2
<b>SM268</b>	35	32 600	15.4	40 800	15.6	50 300	15.7	61 200	15.8	73 700	16.0	88 000	16.1	104 100	16.2	122 200	16.4
	55	-	-	-	-	-	-	49 900	23.8	60 600	24.0	72 900	24.1	86 800	24.2	102 500	24.3
<b>SM271</b>	35	32 100	15.2	40 100	15.3	49 400	15.5	60 200	15.6	72 500	15.7	86 600	15.9	102 500	16.0	120 300	16.1
	55	-	-	-	-	-	-	49 100	23.4	59 600	23.5	71 700	23.7	85 400	23.7	100 800	23.8
<b>SM272</b>	35	34 600	14.1	42 700	14.4	52 100	14.7	62 900	15.1	75 400	15.6	89 700	16.1	105 800	16.6	124 100	17.2
	55	-	-	-	-	-	-	52 000	22.0	62 700	22.3	74 900	22.8	88 800	23.3	104 600	23.9
<b>SM281</b>	35	34 200	16.1	42 700	16.2	52 700	16.4	64 100	16.5	77 200	16.7	92 100	16.8	109 000	16.9	128 000	17.1
	55	-	-	-	-	-	-	52 200	24.9	63 500	25.0	76 300	25.1	90 900	25.2	107 300	25.3
<b>SM285</b>	35	34 300	16.2	43 100	16.5	53 200	16.7	64 600	16.9	77 400	17.1	91 600</					


## Scroll compressors SZ R134a

Model	To	-15		-10		-5		0		5		10		15	
	Tc	Qo	Pe	Qo	Pe	Qo	Pe								
<b>SZ084</b>	35	7 800	3.3	9 800	3.3	12 300	3.3	15 300	3.3	18 700	3.3	22 700	3.3	27 200	3.2
	55	-	-	7 800	5.0	9 900	5.1	12 300	5.1	15 200	5.1	18 500	5.1	22 400	5.1
<b>SZ090</b>	35	8 200	3.5	10 400	3.5	13 100	3.5	16 100	3.5	19 700	3.5	23 900	3.5	28 600	3.4
	55	-	-	8 300	5.3	10 500	5.3	13 000	5.4	16 000	5.4	19 500	5.4	23 600	5.4
<b>SZ100</b>	35	8 800	3.6	11 100	3.7	13 900	3.7	17 100	3.7	20 900	3.7	25 300	3.7	30 200	3.7
	55	-	-	8 800	5.6	11 100	5.6	13 800	5.7	17 000	5.7	20 700	5.7	24 900	5.7
<b>SZ110</b>	35	10 100	4.1	12 800	4.2	15 900	4.2	19 600	4.3	23 800	4.3	28 700	4.3	34 300	4.3
	55	-	-	10 000	6.3	12 700	6.4	15 800	6.4	19 400	6.5	23 600	6.5	28 300	6.5
<b>SZ115</b>	35	11 100	4.6	14 000	4.7	17 500	4.7	21 600	4.8	26 300	4.8	31 800	4.8	38 000	4.7
	55	-	-	10 900	7.0	13 900	7.1	17 400	7.1	21 400	7.1	26 100	7.1	31 500	7.1
<b>SZ120</b>	35	11 900	4.8	15 000	4.9	18 600	4.9	22 800	5.0	27 700	5.0	33 300	5.0	39 600	5.0
	55	-	-	11 700	7.3	14 800	7.4	18 400	7.5	22 600	7.5	27 400	7.5	32 800	7.5
<b>SZ125</b>	35	11 500	4.8	14 600	4.9	18 300	4.9	22 600	5.0	27 500	5.0	33 200	5.0	39 700	4.9
	55	-	-	11 400	7.3	14 500	7.3	18 100	7.4	22 400	7.4	27 300	7.4	32 900	7.4
<b>SZ148</b>	35	13 400	6.0	17 100	6.1	21 400	6.2	26 500	6.3	32 500	6.3	39 500	6.2	47 500	6.0
	55	-	-	13 400	9.2	17 000	9.4	21 300	9.5	26 300	9.5	32 200	9.4	39 000	9.3
<b>SZ160</b>	35	15 300	6.2	19 300	6.3	24 100	6.4	29 600	6.5	36 100	6.5	43 600	6.6	52 000	6.6
	55	-	-	15 100	9.3	19 100	9.5	23 900	9.6	29 400	9.7	35 800	9.7	43 100	9.8
<b>SZ161</b>	35	14 600	6.2	18 600	6.3	23 300	6.4	28 800	6.5	35 300	6.5	42 800	6.5	51 400	6.5
	55	-	-	14 700	9.4	18 700	9.6	23 300	9.7	28 600	9.8	34 900	9.8	42 000	9.8
<b>SZ175</b>	35	16 300	6.8	20 500	6.9	25 600	6.9	31 500	7.0	38 400	7.1	46 300	7.1	55 300	7.1
	55	-	-	16 100	10.1	20 300	10.3	25 400	10.4	31 200	10.5	38 000	10.6	45 800	10.6
<b>SZ185</b>	35	17 300	7.2	21 900	7.3	27 200	7.4	33 500	7.5	40 900	7.6	49 300	7.6	58 900	7.6
	55	-	-	17 100	10.8	21 700	11.0	27 000	11.1	33 300	11.2	40 500	11.3	48 800	11.4
<b>SZ240</b>	35	23 200	10.1	29 400	10.2	36 700	10.4	45 400	10.5	55 500	10.7	67 300	10.9	80 800	11.1
	55	-	-	23 000	14.9	29 100	15.0	36 400	15.2	44 900	15.4	54 800	15.7	66 200	15.9
<b>SZ300</b>	35	29 100	12.3	36 500	12.7	45 400	13.0	55 900	13.2	68 300	13.4	82 700	13.6	99 500	13.8
	55	-	-	28 800	18.4	36 100	18.9	44 700	19.3	55 100	19.7	67 200	20.0	81 400	20.3
<b>SZ380</b>	35	36 200	15.2	45 500	15.6	56 500	16.0	69 500	16.3	84 800	16.5	102 600	16.8	123 200	17.1
	55	-	-	36 000	22.2	45 200	22.7	56 100	23.1	68 900	23.4	84 000	23.6	101 500	23.7
<b>SZ170</b>	35	15 300	6.6	19 400	6.6	24 300	6.6	30 100	6.6	36 800	6.6	44 700	6.6	53 600	6.5
	55	-	-	15 400	10.0	19 500	10.1	24 300	10.2	29 900	10.2	36 500	10.3	44 100	10.3
<b>SZ180</b>	35	16 200	6.9	20 500	7.0	25 700	7.0	31 800	7.0	38 900	7.0	47 100	7.0	56 400	6.9
	55	-	-	16 300	10.6	20 600	10.6	25 700	10.7	31 600	10.8	38 500	10.8	46 500	10.8
<b>SZ200</b>	35	17 200	7.3	21 800	7.4	27 300	7.4	33 700	7.4	41 200	7.4	49 800	7.4	59 600	7.4
	55	-	-	17 300	11.2	21 800	11.3	27 200	11.3	33 500	11.4	40 800	11.4	49 100	11.4
<b>SZ220</b>	35	19 900	8.3	25 100	8.4	31 300	8.4	38 600	8.5	47 000	8.5	56 600	8.5	67 500	8.5
	55	-	-	19 800	12.7	25 000	12.8	31 200	12.9	38 300	13.0	46 400	13.0	55 800	13.0
<b>SZ230</b>	35	21 800	9.2	27 600	9.4	34 500	9.5	42 600	9.5	51 900	9.6	62 700	9.6	74 900	9.5
	55	-	-	21 500	14.0	27 400	14.1	34 200	14.2	42 200	14.3	51 400	14.3	62 000	14.3
<b>SZ242</b>	35	23 300	9.6	29 500	9.7	36 700	9.8	45 000	9.9	54 600	10.0	65 500	10.0	77 900	10.0
	55	-	-	23 100	14.7	29 200	14.8	36 300	14.9	44 500	15.0	53 900	15.1	64 600	15.1
<b>SZ250</b>	35	22 700	9.6	28 800	9.7	36 000	9.9	44 400	9.9	54 200	10.0	65 400	10.0	78 300	9.9
	55	-	-	22 500	14.5	28 600	14.7	35 700	14.8	44 100	14.9	53 700	14.9	64 700	14.8
<b>SZ268</b>	35	24 900	10.8	31 600	11.0	39 400	11.1	48 600	11.2	59 300	11.3	71 600	11.2	85 700	11.0
	55	-	-	24 700	16.6	31 400	16.8	39 200	17.0	48 200	17.0	58 700	17.0	70 700	16.8
<b>SZ271</b>	35	24 300	10.4	30 900	10.5	38 600	10.6	47 700	10.7	58 200	10.8	70 400	10.8	84 400	10.8
	55	-	-	24 400	15.8	30 900	16.0	38 500	16.1	47 300	16.3	57 600	16.3	69 300	16.3
<b>SZ281</b>	35	26 100	11.0	33 000	11.2	41 300	11.3	50 900	11.4	62 100	11.5	74 900	11.6	89 600	11.5
	55	-	-	26 000	16.8	33 000	17.0	41 100	17.2	50 500	17.3	61 300	17.4	73 700	17.4
<b>SZ285</b>	35	26 500	11.0	33 500	11.2	41 700	11.3	51 400	11.4	62 700	11.5	75 600	11.5	90 400	11.5
	55	-	-	26 100	16.6	33 100	16.8	41 400	17.0	51 000	17.1	62 100	17.2	74 800	17.2
<b>SZ290</b>	35	26 900	11.4	34 000	11.5	42 500	11.7	52 300	11.8	63 800	11.9	76 900	11.9	92 000	11.9
	55	-	-	26 600	17.1	33 700	17.3	42 100	17.5	51 900	17.6	63 200	17.7	76 100	17.8
<b>SZ296</b>	35	26 500	12.2	33 700	12.3	42 200	12.5	52 300	12.5	64 000	12.5	77 700	12.3	93 500	12.0
	55	-	-	26 400	18.5	33 500	18.8	42 000	19.0	51 900	19.0	63 500	18.9	76 900	18.6
<b>SZ310</b>	35	28 400	12.0	36 000	12.2	44 800	12.3	55 300	12.5	67 300	12.5	81 300	12.6	97 100	12.6
	55	-	-	28 100	18.1	35 600	18.3	44 500	18.5	54 800	18.6	66 700	18.7	80 400	18.8
<b>SZ320</b>	35	30 200	12.4	38 100	12.6	47 400	12.8	58 400	12.9	71 100	13.0	85 800	13.1	102 500	13.1
	55	-	-	29 800	18.7	37 700	18.9	47 000	19.1	57 900	19.3	70 500	19.5	84 900	19.6
<b>SZ322</b>	35	28 800	12.4	36 600	12.7	45 900	12.8	56 800	13.0	69 500	13.0	84 300	13.1	101 300	13.0
	55	-	-	29 000	18.9	36 700	19.2	45 800	19.4	56 400	19.5	68 700	19.6	82 800	19.7
<b>SZ350</b>	35	32 100	13.5	40 500	13.7	50 400	13.9	62 100	14.0	75 600	14.1	91 200	14.2	109 000	14.2
	55	-	-	31 600	20.2	40 100	20.5	50 000	20.7	61 500	20.9	74 900	21.1	90 200	21.3
<b>SZ370</b>	35	34 100	14.4	43 100	14.6	53 700	14.8	66 100	15.0	80 500	15.1	97 100	15.2	116 000	15.2
	55	-	-	33 700	21.6	42 700	21.9	53 200	22.1	6					

## Scroll compressors SZ R407C

Model	To	-20		-15		-10		-5		0		5		10		15	
	Tc	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe	Qo	Pe
<b>SZ084</b>	35	8 400	4.5	11 100	4.5	14 300	4.5	17 900	4.5	22 000	4.5	26 700	4.5	32 000	4.4	37 900	4.3
	55	-	-	-	-	-	-	12 600	7.2	16 200	7.2	20 300	7.2	25 000	7.1	30 100	7.1
<b>SZ090</b>	35	9 200	4.8	12 000	4.9	15 300	4.9	19 100	4.9	23 500	5.0	28 500	4.9	34 200	4.9	40 700	4.8
	55	-	-	-	-	-	-	14 100	7.7	17 800	7.7	22 100	7.7	27 000	7.7	32 500	7.7
<b>SZ100</b>	35	10 000	5.2	12 900	5.2	16 400	5.3	20 400	5.4	25 100	5.4	30 600	5.4	36 800	5.4	43 800	5.4
	55	-	-	-	-	-	-	15 800	8.2	19 700	8.2	24 100	8.3	29 200	8.3	35 000	8.3
<b>SZ110</b>	35	11 500	5.8	14 800	5.9	18 700	6.0	23 300	6.1	28 600	6.1	34 700	6.1	41 700	6.1	49 600	6.0
	55	-	-	-	-	-	-	18 000	9.4	22 400	9.4	27 400	9.4	33 200	9.4	39 700	9.3
<b>SZ115</b>	35	12 700	6.5	16 200	6.6	20 500	6.6	25 500	6.7	31 300	6.7	38 000	6.7	45 700	6.6	54 400	6.5
	55	-	-	-	-	-	-	19 600	10.3	24 300	10.4	29 800	10.4	36 200	10.3	43 400	10.3
<b>SZ120</b>	35	13 500	6.8	17 300	6.9	21 800	6.9	27 000	7.0	33 100	7.0	40 100	7.0	48 100	7.0	57 100	6.9
	55	-	-	-	-	-	-	20 900	10.9	25 900	10.9	31 700	10.9	38 300	10.9	45 900	10.8
<b>SZ125</b>	35	13 500	6.9	17 300	7.0	21 800	7.1	27 100	7.1	33 300	7.1	40 400	7.1	48 600	7.0	57 900	6.9
	55	-	-	-	-	-	-	20 900	11.0	25 900	11.1	31 700	11.1	38 500	11.0	46 100	10.9
<b>SZ148</b>	35	16 500	8.3	21 100	8.4	26 400	8.5	32 700	8.7	40 000	8.8	48 500	8.9	58 300	8.9	69 500	8.9
	55	-	-	-	-	-	-	25 800	13.3	31 800	13.4	38 800	13.5	46 900	13.6	56 200	13.7
<b>SZ160</b>	35	17 600	8.9	22 500	9.1	28 200	9.2	35 000	9.4	42 900	9.4	52 000	9.5	62 400	9.4	74 200	9.3
	55	-	-	-	-	-	-	27 400	14.0	33 900	14.2	41 500	14.2	50 100	14.3	60 000	14.2
<b>SZ161</b>	35	17 800	8.9	22 700	9.0	28 500	9.1	35 300	9.2	43 200	9.3	52 300	9.4	62 900	9.6	75 000	9.7
	55	-	-	-	-	-	-	27 900	14.3	34 400	14.4	41 900	14.5	50 600	14.6	60 700	14.6
<b>SZ175</b>	35	19 300	9.5	24 600	9.6	30 800	9.8	38 000	9.9	46 500	10.0	56 300	10.1	67 500	10.1	80 200	10.1
	55	-	-	-	-	-	-	29 400	15.1	36 300	15.3	44 300	15.4	53 600	15.5	64 100	15.6
<b>SZ185</b>	35	20 600	10.2	26 100	10.4	32 700	10.5	40 500	10.6	49 500	10.7	59 900	10.8	71 800	10.9	85 400	10.9
	55	-	-	-	-	-	-	31 300	16.3	38 600	16.4	47 200	16.6	57 000	16.7	68 200	16.8
<b>SZ240</b>	35	26 900	14.0	34 700	14.3	43 900	14.7	54 700	15.0	67 300	15.3	81 900	15.6	98 700	15.9	117 900	16.2
	55	-	-	26 600	21.2	34 200	21.6	42 900	22.1	53 100	22.4	64 800	22.8	78 400	23.1	94 000	23.4
<b>SZ300</b>	35	35 800	16.7	44 900	17.1	55 700	17.4	68 400	17.8	83 500	18.1	101 300	18.4	122 000	18.7	146 100	19.1
	55	-	-	34 300	25.6	43 000	26.1	53 300	26.6	65 500	27.1	80 000	27.6	97 100	28.1	117 100	28.6
<b>SZ380</b>	35	42 900	20.3	54 100	20.7	67 300	21.2	82 900	21.7	101 000	22.2	122 100	22.8	146 400	23.3	174 100	23.8
	55	-	-	41 900	31.4	52 800	31.9	65 500	32.4	80 500	33.0	97 900	33.6	118 100	34.3	141 300	34.9
<b>SZ170</b>	35	16 600	8.9	21 900	9.0	28 100	9.0	35 300	9.1	43 400	9.0	52 600	9.0	63 000	8.8	74 600	8.6
	55	-	-	-	-	-	-	24 800	14.3	31 900	14.3	40 000	14.3	49 200	14.3	59 400	14.1
<b>SZ180</b>	35	18 100	9.6	23 600	9.7	30 100	9.8	37 600	9.9	46 300	9.9	56 200	9.9	67 500	9.8	80 100	9.7
	55	-	-	-	-	-	-	27 800	15.4	35 100	15.4	43 600	15.5	53 100	15.4	63 900	15.4
<b>SZ200</b>	35	19 800	10.3	25 500	10.5	32 300	10.6	40 200	10.7	49 500	10.8	60 200	10.8	72 400	10.8	86 300	10.7
	55	-	-	-	-	-	-	31 200	16.4	38 700	16.5	47 500	16.5	57 600	16.6	69 000	16.5
<b>SZ220</b>	35	22 700	11.7	29 200	11.9	36 800	12.0	45 800	12.1	56 300	12.2	68 300	12.2	82 100	12.1	97 600	12.0
	55	-	-	-	-	-	-	35 500	18.7	44 100	18.8	54 000	18.8	65 300	18.8	78 200	18.7
<b>SZ230</b>	35	24 900	12.9	32 000	13.1	40 300	13.2	50 200	13.3	61 700	13.3	74 900	13.3	90 000	13.2	107 200	13.0
	55	-	-	-	-	-	-	38 600	20.7	48 000	20.7	58 800	20.7	71 200	20.7	85 400	20.5
<b>SZ242</b>	35	26 600	13.5	34 000	13.7	42 900	13.9	53 200	14.0	65 200	14.0	79 000	14.0	94 800	13.9	112 600	13.8
	55	-	-	-	-	-	-	41 200	21.8	51 100	21.8	62 500	21.8	75 500	21.7	90 400	21.5
<b>SZ250</b>	35	26 500	13.8	34 000	13.9	42 900	14.1	53 400	14.2	65 600	14.2	79 600	14.2	95 700	14.0	114 000	13.8
	55	-	-	-	-	-	-	41 100	22.0	51 000	22.1	62 500	22.1	75 800	22.0	90 900	21.8
<b>SZ268</b>	35	29 600	15.1	37 800	15.3	47 400	15.5	58 800	15.7	72 000	15.8	87 300	15.9	104 800	15.9	124 700	15.8
	55	-	-	-	-	-	-	46 100	24.2	56 900	24.3	69 500	24.4	84 000	24.4	100 600	24.5
<b>SZ271</b>	35	28 900	14.7	37 000	15.0	46 500	15.1	57 700	15.3	70 700	15.4	85 700	15.5	103 000	15.6	122 700	15.7
	55	-	-	-	-	-	-	45 200	23.6	55 900	23.8	68 300	23.9	82 500	24.0	98 900	24.0
<b>SZ281</b>	35	30 900	15.7	39 400	15.9	49 500	16.1	61 300	16.2	75 100	16.4	91 100	16.5	109 300	16.5	130 100	16.6
	55	-	-	-	-	-	-	48 100	25.2	59 400	25.3	72 500	25.4	87 600	25.4	105 000	25.4
<b>SZ285</b>	35	30 600	15.8	39 100	16.1	49 300	16.3	61 200	16.5	75 000	16.6	91 000	16.5	109 300	16.4	130 100	16.2
	55	-	-	-	-	-	-	47 600	25.0	58 900	25.2	72 100	25.3	87 300	25.3	104 600	25.1
<b>SZ290</b>	35	31 500	15.9	40 200	16.2	50 500	16.4	62 600	16.6	76 700	16.7	92 900	16.7	111 500	16.7	132 600	16.6
	55	-	-	-	-	-	-	48 300	25.5	59 800	25.7	73 100	25.8	88 400	25.9	105 800	25.9
<b>SZ296</b>	35	32 600	16.6	41 500	16.8	52 000	17.0	64 400	17.3	78 800	17.6	95 500	17.7	114 800	17.8	136 900	17.8
	55	-	-	-	-	-	-	50 900	26.5	62 700	26.7	76 500	26.9	92 500	27.2	110 800	27.4
<b>SZ310</b>	35	33 500	17.1	42 700	17.3	53 700	17.6	66 600	17.7	81 500	17.9	98 800	17.9	118 600	17.9	141 100	17.8
	55	-	-	-	-	-	-	51 300	27.3	63 600	27.5	77 700	27.6	94 000	27.7	112 600	27.7
<b>SZ320</b>	35	34 800	17.8	44 300	18.2	55 600	18.5	68 900	18.7	84 500	18.9	102 400	18.9	122 800	18.8	146 100	18.5
	55	-	-	-	-	-	-	54 100	28.0	66 900	28.3	81 700	28.5	98 800	28.5	118 200	28.4
<b>SZ322</b>	35	35 100	17.8	44 800	18.0	56 100</											

## Scroll compressors – tandem




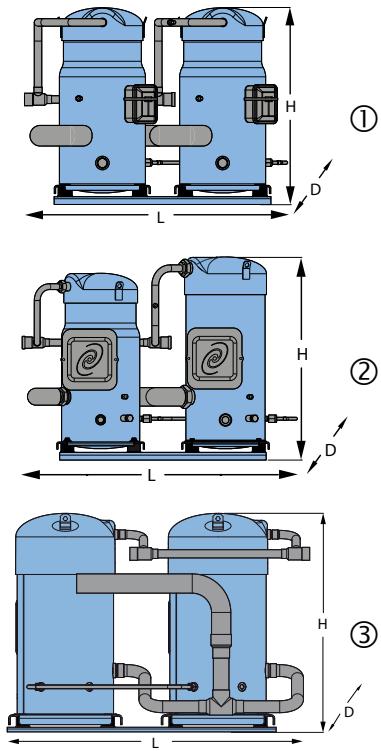


Outline n°	Model	Composition	Voltage code			Dimensions (mm)		
			4	6	7	L	D	H
			400/3/50 460/3/60	230/3/50	500/3/50 575/3/60			
①	SM/SZ170	S084 + S084	●	●	●	757	432	532
	SM/SZ180	S090 + S090	●	●	●	757	432	532
	SM/SZ200	S100 + S100	●	●	●	757	432	532
	SM/SZ220	S110 + S110	●	●	●	777	443	582
	SM/SZ230	S115 + S115	●	●	●	836	480	603
	SM/SZ242	S120 + S120	●	●	●	777	443	582
	SM248	S124 + S124	○			844	445	564
	SM/SZ250	S125 + S125	●	●	●	836	480	603
	SM272	S124 + S147	○			844	445	564
	SM294	S147 + S147	○			844	445	564
	SM/SZ296	S148 + S148	●	●	●	924	438	614
	SM/SZ320	S160 + S160	●	●	●	911	480	657
	SM/SZ322	S161 + S161	●	●	●	924	438	614
	SM/SZ350	S175 + S175	●	●	●	1004	495	717
②	SM/SZ370	S185 + S185	●	●	●	1004	495	717
	SM/SZ268	S148 + S120	●	●	●	930	441	614
	SM/SZ271	S161 + S110	●	●	●	930	441	614
	SM/SZ281	S161 + S120	●	●	●	930	441	614
	SM/SZ285	S160 + S125	●	●	●	884	480	657
	SM/SZ290	S175 + S115	●	●	●	924	496	705
	SM/SZ310	S185 + S125	●	●	●	924	496	705
	SY/SZ425	S240 + S185	○	○	○	1029	552	729
	SY/SZ485	S300 + S185	○	○	○	1029	552	740
	SY/SZ482	S240 + S240	○	○	○	984	510	730
③	SY/SZ540	S300 + S240	○	○	○	984	510	740
	SY/SZ600	S300 + S300	○	○	○	984	510	740
	SY/SZ620	S240 + S380	○			1058	595	770
	SY/SZ680	S300 + S380	○			1058	595	770
	SY/SZ760	S380 + S380	○			1063	595	770

● Factory built tandems

○ Tandems to be achieved by assembly of individual compressors. Specific outline drawings of tandems, trio and quadro units are available, refer to FRCC.PC.005.

## Scroll compressors – SH

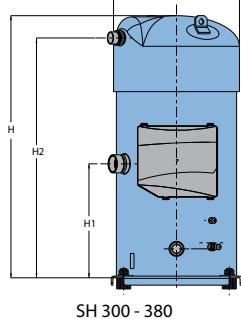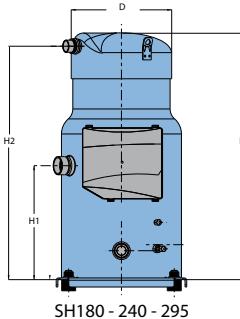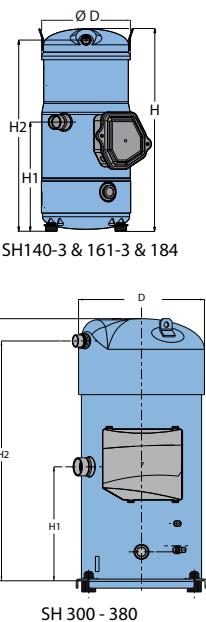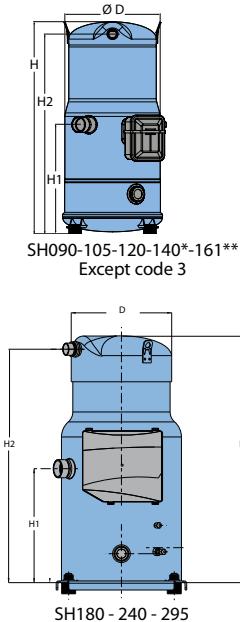

Model	D	H	H1	H2
SH090	243	482	235	451
SH105	243	540	278	509
SH120	243	540	278	509
SH140	243	540	278	509
SH161	243	540	278	509
SH184	243	555	300	525
SH180	318	682	331	647
SH240	318	682	331	647
SH295	318	682	331	647
SH300	333	723	331	664
SH380	333	755	331	696

All dimensions in mm

Motor voltage code	Code 4	Code 6	Code 7
Nominal voltage	380-400 V - 3 ph	230 V - 3 ph	500V - 3 ph
Voltage range	340-440 V	207-253 V	450 - 550 V

## Nameplate reference

Family, lubricant & refrigerant	Nominal capacity	Approvals	Voltage	Version	Evolution index
<b>SH</b>	<b>300</b>	<b>B</b>	<b>4</b>	<b>AB</b>	<b>A</b>
<b>Family, lubricant &amp; refrigerant</b>					<b>Evolution index</b> A~Z
<b>SH:</b> Scroll, POE lubricant, for R410A					
<b>Nominal capacity</b> in thousand Btu/h at 60 Hz, R410A, ARI conditions					<b>Motor protection</b>
<b>UL index</b>					L: Internal overload protector A: Electronic, 24V AC B: Electronic, SH180: 230V SH240-300-380: 115/230V C: Customized electrical box
<b>Motor voltage code</b>					<b>Suction and discharge connections</b> A: Brazed connections
3: 200-230V/3~/60 Hz					
4: 380-400V/3~/50 Hz - 460V/3~/60 Hz					
6: 230V/3~/50 Hz					
7: 500V/3~/50 Hz - 575V/3~/60 Hz					
9: 380V/3~/60 Hz					

# Scroll compressors – SH series

## Scroll compressors R410A · SH · 50 Hz

	Te	-20	-20	-15	-15	-10	-10	-5	-5	0	0	5	5	10	10	15	15
	Tc	Cooling (W)	Pe (kW)														
SH090-4	35	9600	4.97	12100	4.86	14900	4.78	18200	4.71	22000	4.66	26300	4.64	31300	4.64	36900	4.68
	45	8500	5.60	10500	6.08	13100	5.99	16100	5.91	19600	5.85	23500	5.82	28000	5.81	33200	5.83
	55	-	-	-	-	11300	7.09	13900	7.44	17000	7.38	20500	7.35	24500	7.33	29200	7.35
SH105-4	35	11800	5.93	14700	5.83	18000	5.74	21900	5.67	26300	5.62	31400	5.59	37100	5.58	43700	5.58
	45	10200	6.66	12900	7.24	15900	7.15	19400	7.08	23400	7.02	28100	6.99	33400	6.97	39400	6.97
	55	-	-	-	-	13900	8.35	16800	8.82	20400	8.77	24600	8.73	29400	8.72	34800	8.73
SH120-4	35	13400	6.56	16700	6.48	20500	6.38	24900	6.28	30000	6.20	35800	6.17	42400	6.21	49900	6.32
	45	11400	7.35	14600	8.05	18100	8.00	22100	7.92	26700	7.84	32000	7.77	38000	7.75	44900	7.78
	55	-	-	-	-	15200	9.34	19100	9.82	23200	9.79	27900	9.74	33300	9.71	39500	9.70
SH140-4	35	15500	7.38	19200	7.30	23400	7.20	28400	7.11	34000	7.06	40500	7.04	47800	7.09	56100	7.22
	45	13700	8.53	16900	9.12	20800	9.04	25200	8.93	30400	8.83	36200	8.73	42900	8.68	50500	8.67
	55	-	-	-	-	18000	10.75	21700	11.20	26200	11.08	31400	10.95	37400	10.83	44200	10.72
SH161-4	35	17600	7.78	21700	7.77	26500	7.79	32100	7.83	38500	7.88	45800	7.92	54100	7.93	63600	7.91
	45	15100	9.80	19100	9.72	23500	9.72	28600	9.75	34400	9.79	41000	9.83	48700	9.87	57300	9.88
	55	-	-	-	-	19900	12.37	24600	12.16	29700	12.17	35700	12.20	42500	12.23	50300	12.25
SH180-4	35	19200	9.09	24000	9.12	29600	9.14	36000	9.16	43500	9.19	52100	9.23	61800	9.30	72700	9.38
	45	16600	11.26	21000	11.30	26200	11.33	32100	11.34	39000	11.34	46800	11.34	55700	11.35	65800	11.37
	55	-	-	-	-	22300	14.12	27600	14.12	33700	14.10	40700	14.07	48700	14.03	57800	13.99
SH184-4	35	19800	9.25	24500	9.16	29900	9.09	36200	9.04	43400	9.04	51700	9.08	61200	9.20	71900	9.39
	45	17800	10.65	21600	11.43	26500	11.34	32200	11.25	38700	11.20	46300	11.18	54800	11.21	64600	11.31
	55	-	-	-	-	23400	13.36	27800	13.98	33600	13.89	40200	13.82	47900	13.78	56600	13.80
SH240-4	35	26700	11.95	33200	12.02	40700	12.06	49200	12.11	59000	12.17	70200	12.27	82800	12.43	97100	12.65
	45	23300	14.80	29300	14.90	36100	14.97	43900	15.02	52800	15.06	63000	15.12	74500	15.21	87400	15.34
	55	-	-	-	-	30900	18.57	37800	18.64	45800	18.69	54800	18.72	65100	18.77	76800	18.85
SH295-4	35	33300	14.42	40900	14.61	49800	14.77	60200	14.95	72100	15.19	85700	15.53	101200	16.03	118600	16.72
	45	29400	17.53	36300	17.83	44400	18.05	53800	18.23	64600	18.41	76900	18.64	91000	18.96	107000	19.42
	55	-	-	-	-	38500	22.00	46700	22.27	56200	22.48	67200	22.68	79800	22.91	94100	23.22
SH300-4	35	34000	14.96	42000	15.13	51300	15.30	62100	15.49	74400	15.70	88500	15.96	104600	16.27	122700	16.66
	45	29800	18.35	37100	18.51	45500	18.67	55200	18.84	66500	19.03	79300	19.26	93900	19.55	110500	19.91
	55	-	-	-	-	39000	22.98	47600	23.13	57500	23.30	68900	23.50	82000	23.75	96900	24.07
SH380-4	35	40400	18.41	50000	18.58	61100	18.70	74000	18.83	88900	18.99	105900	19.24	125300	19.61	147200	20.15
	45	35500	22.35	44200	22.65	54300	22.85	66000	22.99	79600	23.12	95100	23.26	112900	23.48	133000	23.80
	55	-	-	-	-	46600	27.95	57000	28.19	69000	28.35	82900	28.47	98900	28.61	117100	28.79

To: Evaporating temperature in °C  
Tc: Condensing temperature in °C

Qo: Cooling capacity in W  
Pe: Power input in kW

Superheat = 11.1 K  
Subcooling = 8.3 K

Voltage: 400 V / 3 / 50 Hz

## Further reference

Compressor model	Connections	Mounting feet	Motor protection	Code no. for Industrial pack		Code no. for Single pack			
				Nbr	4 460/3/60 380-400/3/50	4 460/3/60 380-400/3/50	6 230/3/50	7 575/3/60 500/3/50	
SH090	Brazed	Flexible	Internal	8	120H0004	120H0003	120H0005	120H0007	
SH105	Brazed	Flexible	Internal	8	120H0212	120H0211	120H0213	120H0215	
SH120	Brazed	Flexible	Internal	8	120H0014	120H0013	120H0015	120H0017	
SH140	Brazed	Flexible	Internal	8	120H0202	120H0201	120H0203	120H0205	
SH161	Brazed	Flexible	Internal	8	120H0024	120H0023	120H0025	120H0027	
SH184	Brazed	Flexible	Internal		120H0362	120H0361	120H0363	120H0365	
SH180 ①	Brazed	rigid	Module 24V AC *	6	120H0268	120H0267	-	120H0269	
	Brazed	rigid	Module 230 V *	6	120H0276	120H0457	-	120H0459	
SH240 ①	Brazed	rigid	Module 24V AC *	6	120H0292	120H0291	-	120H0293	
	Brazed	rigid	Module 115-230 V *	6	120H0300	120H0465	-	120H0467	
SH245 ①	Brazed	rigid	Module 24V AC *	6	120H0292	120H0291	-	120H0293	
	Brazed	rigid	Module 115-230 V *	6	120H0300	120H0465	-	120H0467	
SH300 ①	Brazed	rigid	Module 24V AC *	4	120H0238	120H0237	-	120H0241	
	Brazed	rigid	Module 115-230 V *	4	120H0240	120H0473	-	120H0475	
SH380 ①	Brazed	rigid	Module 24V AC *		120H0254	120H0253	-	120H0257	
	Brazed	rigid	Module 115-230 V *	4	120H0256	120H0481	-	120H0483	

① models with rigid mounting feet are for parallel mounting only. For single mounting use flexible grommet kit ref 8156138

\* Electronic motor protection, module located in terminal box

## Scroll compressors - R404A

Model	To	-25		-20		-15		-10		-5		0		5		10		
	Tc	Qo	Pe															
50Hz	MLZ015T4	30	2 300	1.2	2 900	1.2	3 500	1.2	4 300	1.2	5 200	1.2	6 200	1.2	7 400	1.1	8 700	1.1
	MLZ015T4	40	1 900	1.6	2 400	1.6	3 000	1.6	3 700	1.5	4 400	1.5	5 300	1.5	6 300	1.5	7 400	1.5
	MLZ019T4	50	-	-	1 800	2.1	2 400	2.0	2 900	2.0	3 600	1.9	4 300	1.9	5 100	1.9	6 000	1.9
	MLZ019T4	30	3 000	1.5	3 800	1.5	4 600	1.5	5 600	1.5	6 700	1.5	8 000	1.5	9 500	1.5	11 200	1.6
	MLZ021T4	40	2 600	1.9	3 300	1.9	4 000	1.9	4 800	1.9	5 800	1.9	6 900	1.9	8 200	1.9	9 700	1.9
	MLZ021T4	50	-	-	2 700	2.4	3 300	2.4	4 000	2.4	4 800	2.4	5 800	2.4	6 800	2.4	8 100	2.3
	MLZ026T4	30	3 200	1.6	4 000	1.6	4 900	1.6	5 900	1.6	7 100	1.6	8 500	1.6	10 000	1.7	11 800	1.7
	MLZ026T4	40	2 800	2.0	3 500	2.0	4 300	2.0	5 100	2.0	6 200	2.0	7 300	2.0	8 700	2.0	10 300	2.0
	MLZ026T4	50	-	-	2 900	2.5	3 500	2.5	4 300	2.6	5 100	2.5	6 100	2.5	7 300	2.5	8 600	2.4
	MLZ030T4	30	4 100	2.0	5 000	2.0	6 100	2.0	7 400	2.0	8 900	2.0	10 600	2.0	12 500	2.0	14 700	2.0
60Hz	MLZ030T4	40	3 500	2.5	4 300	2.5	5 300	2.5	6 400	2.5	7 700	2.5	9 200	2.5	10 900	2.5	12 800	2.5
	MLZ030T4	50	-	-	3 600	3.2	4 400	3.2	5 300	3.2	6 400	3.2	7 700	3.1	9 100	3.1	10 700	3.2
	MLZ038T4	30	4 900	2.3	6 000	2.4	7 300	2.4	8 900	2.4	10 700	2.4	12 700	2.4	15 100	2.4	17 700	2.3
	MLZ038T4	40	4 200	2.9	5 200	3.0	6 400	3.0	7 700	3.0	9 300	3.0	11 100	3.0	13 100	3.0	15 400	2.9
	MLZ042T4	50	-	-	4 300	3.7	5 300	3.7	6 400	3.7	7 700	3.7	9 200	3.7	11 000	3.7	12 900	3.7
	MLZ042T4	30	5 800	2.8	7 200	2.8	8 800	2.8	10 600	2.9	12 800	2.9	15 200	2.9	18 000	2.8	21 200	2.7
	MLZ042T4	40	5 000	3.6	6 200	3.5	7 600	3.5	9 200	3.6	11 100	3.6	13 200	3.6	15 600	3.6	18 400	3.5
	MLZ042T4	50	-	-	5 100	4.5	6 300	4.4	7 700	4.4	9 200	4.4	11 000	4.5	13 100	4.4	15 400	4.4
	MLZ045T4	30	6 300	3.2	7 900	3.3	9 800	3.4	12 000	3.5	14 500	3.6	17 500	3.6	20 900	3.6	24 800	3.5
	MLZ045T4	40	5 500	4.1	6 900	4.1	8 500	4.2	10 400	4.2	12 500	4.3	15 100	4.3	18 000	4.3	21 500	4.3
60Hz	MLZ045T4	50	-	-	5 800	5.3	7 100	5.3	8 600	5.3	10 400	5.3	12 600	5.3	15 100	5.3	18 100	5.3
	MLZ048T4	30	7 000	3.4	8 600	3.4	10 600	3.4	12 800	3.5	15 400	3.5	18 300	3.5	21 600	3.4	25 300	3.2
	MLZ048T4	40	6 100	4.3	7 500	4.3	9 100	4.3	11 100	4.3	13 300	4.3	15 900	4.3	18 800	4.3	22 000	4.2
	MLZ048T4	50	-	-	6 200	5.5	7 600	5.4	9 200	5.4	11 100	5.4	13 200	5.4	15 700	5.4	18 500	5.3
	MLZ048T4	30	7 600	3.7	9 400	3.7	11 500	3.7	13 900	3.7	16 700	3.7	19 900	3.7	23 600	3.7	27 900	3.6
	MLZ048T4	40	6 600	4.6	8 200	4.6	10 000	4.6	12 100	4.6	14 500	4.6	17 300	4.6	20 500	4.6	24 200	4.6
	MLZ048T4	50	-	-	6 800	5.8	8 300	5.8	10 100	5.8	12 100	5.8	14 400	5.8	17 100	5.8	20 300	5.7
	MLZ058T4	30	9 300	4.3	11 300	4.4	13 800	4.5	16 900	4.5	20 400	4.5	24 400	4.6	28 900	4.6	33 700	4.7
	MLZ058T4	40	7 600	5.5	9 300	5.6	11 600	5.6	14 300	5.6	17 400	5.5	20 900	5.6	24 800	5.6	29 000	5.8
	MLZ058T4	50	-	-	7 100	7.2	9 000	7.1	11 300	7.0	14 000	6.9	17 000	6.9	20 300	6.9	23 900	7.1
60Hz	MLZ066T4	30	10 400	4.9	12 900	5.0	15 700	5.0	19 000	5.1	22 800	5.2	27 200	5.3	32 300	5.5	38 000	5.8
	MLZ066T4	40	9 000	6.1	11 200	6.1	13 600	6.2	16 500	6.2	19 800	6.3	23 600	6.4	27 900	6.5	32 800	6.7
	MLZ066T4	50	-	-	9 200	7.7	11 400	7.7	13 800	7.7	16 600	7.7	19 700	7.8	23 300	7.8	27 400	7.9
	MLZ076T4	30	12 200	5.7	15 200	5.7	18 500	5.7	22 400	5.8	26 800	5.9	31 900	6.1	37 800	6.2	44 600	6.3
	MLZ076T4	40	10 600	7.0	13 100	7.0	15 900	7.1	19 100	7.1	22 900	7.2	27 200	7.3	32 300	7.4	38 200	7.5
	MLZ076T4	50	-	-	11 000	8.7	13 000	8.7	15 400	8.8	18 300	8.9	21 800	8.9	25 900	9.0	30 800	9.0
	MLZ015T4	30	2 800	1.5	3 500	1.5	4 300	1.5	5 200	1.5	6 200	1.5	7 500	1.4	8 900	1.4	10 500	1.4
	MLZ015T4	40	2 300	1.9	2 900	1.9	3 600	1.9	4 500	1.9	5 400	1.9	6 400	1.8	7 600	1.8	9 000	1.8
	MLZ019T4	50	-	-	2 300	2.3	3 000	2.3	3 700	2.4	4 400	2.3	5 300	2.3	6 300	2.3	7 500	2.3
	MLZ019T4	30	3 800	1.8	4 600	1.8	5 700	1.8	6 800	1.8	8 200	1.8	9 700	1.8	11 500	1.9	13 500	1.9
60Hz	MLZ021T4	30	3 200	2.2	4 000	2.3	4 900	2.3	5 900	2.3	7 100	2.3	8 400	2.3	10 000	2.3	11 700	2.3
	MLZ021T4	40	3 400	1.8	4 900	1.9	6 000	2.0	7 300	2.0	8 700	2.0	10 400	2.0	12 200	2.0	14 200	2.1
	MLZ021T4	50	-	-	3 600	3.0	4 400	3.1	5 300	3.1	6 400	3.0	7 600	3.0	9 000	3.0	10 500	3.0
	MLZ026T4	30	5 000	2.3	6 100	2.4	7 500	2.5	9 100	2.5	10 900	2.5	12 900	2.5	15 200	2.5	17 800	2.5
	MLZ026T4	40	4 300	2.9	5 300	3.0	6 500	3.1	7 900	3.1	9 400	3.1	11 200	3.1	13 200	3.1	15 400	3.1
	MLZ026T4	50	-	-	4 400	3.7	5 400	3.8	6 600	3.8	7 900	3.8	9 400	3.8	11 100	3.8	13 000	3.8
	MLZ030T4	30	5 800	2.7	7 200	2.8	8 800	2.8	10 700	2.8	12 800	2.9	15 200	2.9	17 800	2.8	20 800	2.8
	MLZ030T4	40	5 100	3.5	6 300	3.5	7 600	3.5	9 300	3.5	11 100	3.5	13 200	3.5	15 500	3.5	18 200	3.5
	MLZ030T4	50	-	-	5 200	4.3	6 400	4.3	7 700	4.3	9 300	4.4	11 100	4.4	13 100	4.4	15 400	4.4
	MLZ038T4	30	7 000	3.4	8 600	3.3	10 500	3.4	12 700	3.4	15 300	3.4	18 100	3.4	21 400	3.4	25 100	3.3
60Hz	MLZ042T4	40	6 000	4.2	7 500	4.2	9 200	4.2	11 100	4.2	13 300	4.2	15 800	4.3	18 600	4.2	21 800	4.2
	MLZ042T4	50	-	-	6 200	5.2	7 700	5.2	9 300	5.2	11 200	5.3	13 300	5.3	15 600	5.3	18 300	5.2
	MLZ045T4	30	8 100	3.9	10 100	4.0	12 300	4.1	14 800	4.1	17 700	4.0	21 100	4.0	24 800	4.0	29 100	4.1
	MLZ045T4	40	7 000	5.0	8 700	5.1	10 700	5.1	12 900	5.1	15 400	5.1	18 300	5.1	21 600	5.0	25 300	5.1
	MLZ045T4	50	-	-	7 200	6.4	8 900	6.4	10 800	6.4	12 900	6.4	15 400	6.3	18 200	6.3	21 400	6.3
	MLZ048T4	30	8 500	4.0	10 500	4.0	12 800	4.0	15 500	4.1	18 600	4.1	22 100	4.1	26 000	4.1	30 400	4.1
	MLZ048T4	40	7 400	4.9	9 100	5.0	11 100	5.0	13 500	5.0	16 100	5.0	19 100	5.0	22 600	5.1	26 400	5.1
	MLZ048T4	50	-	-	7 600	6.3	9 300	6.3	11 300	6.3	13 500	6.3	16 100	6.3	19 000	6.3	22 300	6.3
	MLZ048T4	30	9 300	4.3	11 400													

## Scroll compressors - R134a

Model		To	-10		-5		0		5		10		15	
		Tc	Qo	Pe										
50Hz	MLZ015T4	30	2 400	0.7	3 000	0.7	3 700	0.8	4 500	0.8	5 400	0.8	-	-
		40	-	-	2 700	0.9	3 300	0.9	4 100	0.9	4 900	0.9	5 900	1.0
		50	-	-	2 400	1.1	3 000	1.1	3 600	1.2	4 400	1.2	5 200	1.2
	MLZ019T4	30	3 100	0.9	3 800	1.0	4 700	1.0	5 800	1.0	7 000	1.0	-	-
		40	-	-	3 500	1.2	4 300	1.2	5 200	1.2	6 300	1.2	7 600	1.2
		50	-	-	3 100	1.4	3 800	1.5	4 700	1.5	5 600	1.5	6 700	1.5
	MLZ021T4	30	3 300	1.0	4 100	1.0	5 000	1.0	6 100	1.0	7 400	1.0	-	-
		40	-	-	3 700	1.2	4 600	1.2	5 600	1.2	6 700	1.3	8 000	1.3
		50	-	-	3 300	1.5	4 000	1.5	4 900	1.5	6 000	1.5	7 200	1.6
	MLZ026T4	30	4 100	1.2	5 100	1.2	6 200	1.2	7 600	1.2	9 100	1.3	-	-
		40	-	-	4 600	1.5	5 600	1.5	6 900	1.5	8 300	1.5	9 900	1.6
		50	-	-	4 100	1.8	5 000	1.8	6 100	1.9	7 400	1.9	8 900	1.9
	MLZ030T4	30	4 900	1.4	6 100	1.4	7 500	1.4	9 100	1.5	11 000	1.5	-	-
		40	-	-	5 500	1.8	6 800	1.8	8 300	1.8	10 000	1.8	12 000	1.8
		50	-	-	4 900	2.2	6 000	2.2	7 400	2.2	8 900	2.2	10 700	2.3
	MLZ038T4	30	5 800	1.7	7 200	1.7	8 800	1.8	10 700	1.8	12 900	1.8	-	-
		40	-	-	6 500	2.2	8 000	2.2	9 700	2.2	11 700	2.2	14 000	2.2
		50	-	-	5 700	2.6	7 100	2.7	8 700	2.7	10 500	2.7	12 500	2.7
	MLZ042T5	30	6 600	2.1	8 200	2.2	10 100	2.2	12 100	2.3	14 400	2.4	-	-
		40	-	-	7 500	2.6	9 200	2.6	11 100	2.7	13 200	2.7	15 700	2.8
		50	-	-	6 500	3.1	8 100	3.1	9 900	3.2	11 800	3.2	14 100	3.2
	MLZ045T4	30	7 100	2.0	8 900	2.0	11 000	2.0	13 300	2.0	16 000	2.0	-	-
		40	-	-	8 000	2.5	9 900	2.5	12 100	2.5	14 600	2.5	17 400	2.6
		50	-	-	7 100	3.0	8 800	3.1	10 800	3.1	13 000	3.1	15 600	3.2
	MLZ048T4	30	7 600	2.1	9 500	2.1	11 600	2.2	14 100	2.2	16 900	2.2	-	-
		40	-	-	8 500	2.7	10 500	2.7	12 800	2.7	15 400	2.7	18 300	2.7
		50	-	-	7 500	3.3	9 300	3.3	11 400	3.4	13 800	3.4	16 400	3.4
	MLZ058T4	30	9 100	2.6	11 300	2.7	13 800	2.8	16 600	2.8	20 000	2.9	-	-
		40	-	-	10 100	3.3	12 400	3.4	15 100	3.4	18 100	3.4	21 500	3.4
		50	-	-	9 000	4.1	11 100	4.1	13 400	4.2	16 100	4.2	19 200	4.1
	MLZ066T4	30	10 500	3.0	13 100	3.1	16 000	3.1	19 300	3.2	23 200	3.2	-	-
		40	-	-	11 800	3.8	14 500	3.8	17 500	3.9	21 100	3.9	25 000	3.9
		50	-	-	10 400	4.6	12 800	4.7	15 600	4.7	18 800	4.8	22 300	4.7
	MLZ076T4	30	11 800	3.4	14 600	3.5	17 900	3.6	21 600	3.7	25 800	3.7	-	-
		40	-	-	13 100	4.3	16 100	4.4	19 600	4.4	23 500	4.4	28 000	4.4
		50	-	-	11 600	5.3	14 300	5.4	17 400	5.4	21 000	5.4	25 000	5.3
60Hz	MLZ015T4	30	3 000	0.9	3 700	0.9	4 600	0.9	5 500	0.9	6 600	1.0	-	-
		40	-	-	3 400	1.1	4 200	1.1	5 100	1.1	6 100	1.2	7 200	1.2
		50	-	-	3 000	1.3	3 700	1.4	4 600	1.4	5 500	1.4	6 500	1.4
	MLZ019T4	30	3 800	1.2	4 800	1.2	5 900	1.2	7 100	1.2	8 500	1.3	-	-
		40	-	-	4 300	1.4	5 400	1.5	6 500	1.5	7 800	1.5	9 300	1.5
		50	-	-	3 900	1.7	4 800	1.8	5 900	1.8	7 100	1.8	8 400	1.8
	MLZ021T4	30	4 100	1.2	5 100	1.2	6 200	1.2	7 600	1.2	9 100	1.3	-	-
		40	-	-	4 600	1.5	5 700	1.5	6 900	1.5	8 300	1.5	9 900	1.6
		50	-	-	4 100	1.8	5 100	1.8	6 200	1.9	7 500	1.9	8 900	1.9
	MLZ026T4	30	5 000	1.4	6 300	1.5	7 700	1.5	9 300	1.5	11 200	1.6	-	-
		40	-	-	5 700	1.8	7 000	1.8	8 600	1.9	10 300	1.9	12 200	1.9
		50	-	-	5 100	2.2	6 300	2.2	7 700	2.3	9 300	2.3	11 000	2.3
	MLZ030T4	30	6 000	1.8	7 500	1.8	9 300	1.8	11 300	1.8	13 500	1.9	-	-
		40	-	-	6 800	2.2	8 500	2.2	10 300	2.2	12 400	2.3	14 700	2.3
		50	-	-	6 100	2.6	7 600	2.7	9 300	2.7	11 200	2.8	13 300	2.8
	MLZ038T4	30	7 100	2.1	8 800	2.1	10 900	2.2	13 200	2.2	15 900	2.3	-	-
		40	-	-	8 000	2.6	9 900	2.6	12 100	2.7	14 600	2.7	17 300	2.8
		50	-	-	7 200	3.1	8 900	3.2	10 900	3.2	13 200	3.3	15 700	3.3
	MLZ042T1	30	8 000	2.6	9 900	2.6	12 100	2.7	14 600	2.8	17 300	2.8	-	-
		40	-	-	9 000	3.1	11 000	3.2	13 400	3.2	16 000	3.3	19 000	3.4
		50	-	-	7 900	3.7	9 800	3.8	11 900	3.8	14 400	3.9	17 200	4.0
	MLZ045T4	30	8 800	2.4	11 000	2.5	13 500	2.5	16 300	2.6	19 500	2.6	-	-
		40	-	-	9 900	3.0	12 200	3.1	14 800	3.1	17 800	3.2	21 100	3.3
		50	-	-	8 600	3.7	10 700	3.8	13 100	3.8	15 800	3.9	18 900	3.9
	MLZ048T4	30	9 300	2.6	11 600	2.7	14 200	2.7	17 200	2.8	20 600	2.9	-	-
		40	-	-	10 400	3.3	12 900	3.3	15 600	3.4	18 800	3.4	22 200	3.5
		50	-	-	9 200	4.0	11 300	4.1	13 900	4.1	16 700	4.2	19 900	4.2
	MLZ058T4	30	11 100	3.1	13 700	3.2	16 800	3.3	20 200	3.5	24 000	3.6	-	-
		40	-	-	12 400	4.0	15 200	4.1	18 300	4.2	21 900	4.2	25 900	4.3
		50	-	-	11 000	4.8	13 500	5.0	16 300	5.1	19 600	5.1	23 300	5.1
	MLZ066T4	30	12 700	3.6	15 700	3.7	19 200	3.8	23 200	4.0	27 600	4.1	-	-
		40	-	-	14 200	4.5	17 400	4.7	21 100	4.8	25 200	4.9	29 800	4.9
		50	-	-	12 600	5.5	15 500	5.7	18 800	5.8	22 500	5.9	26 700	5.9
	MLZ076T4	30	14 300	4.1	17 600	4.2	21 500	4.4	26 000	4.5	31 000	4.7	-	-
		40	-	-	16 000	5.2	19 600	5.3	23 600	5.5	28 300	5.6	33 400	5.6
		50	-	-	14 200	6.4	17 400	6.5	21 100	6.6	25 300	6.7	29 800	6.7

**Legend:** To: Evaporating temperature in °C

Qo: Cooling capacity in W

RGT = 20°C

Tc: Condensing temperature in °C

Pe: Power input in kW


Subcooling = 0 K

Capacity data at other conditions are available in the datasheets at: [www.danfoss.com/odsg](http://www.danfoss.com/odsg)


## Scroll compressors • MLZ

Model	Dimensions (mm)			
	D	H	H1	H2
MLZ 015	165	412	250	379
MLZ 019	165	412	250	379
MLZ 021	165	412	250	379
MLZ 026	165	412	250	379
MLZ 030	184	455	280	422
MLZ 038	184	455	280	422
MLZ 045	184	455	280	422
MLZ 048	184	455	280	422
MLZ 058	185	536	369	509
MLZ 066	185	545	369	518
MLZ 076	185	545	369	518


MLZ 015 - 019 - 021 - 026

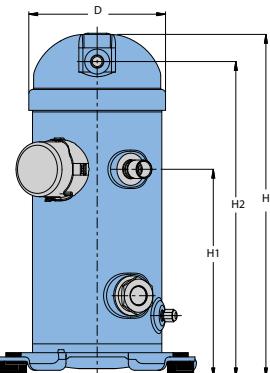


MLZ 030 - 038 - 045 - 048

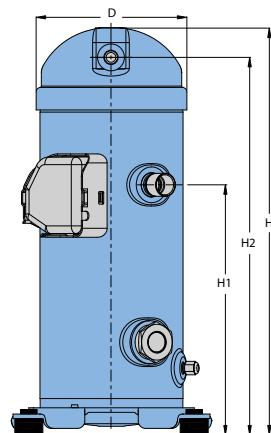

MLZ 058 - 066 - 076

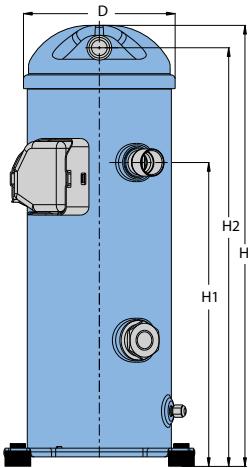


Common footprint • MLZ 015 - 076



### Nomenclature


Type	Size	Motor	Features										
M LZ	021	T 4 L	P 9										
Application			Other features										
M: medium temperature refrigeration			<table border="1"> <tr> <td>Oil sight glass</td> <td>Oil equalisation</td> <td>Oil drain</td> <td>LP gauge port</td> <td>Gas equalisation port</td> </tr> <tr> <td>9 Threaded</td> <td>None</td> <td>Schrader</td> <td>None</td> <td>None</td> </tr> </table>	Oil sight glass	Oil equalisation	Oil drain	LP gauge port	Gas equalisation port	9 Threaded	None	Schrader	None	None
Oil sight glass	Oil equalisation	Oil drain	LP gauge port	Gas equalisation port									
9 Threaded	None	Schrader	None	None									
Family, Refrigerant & lubricant			Tubing and electrical connections										
LZ: R404A - R507 - R134a - R22, PVE lubricant			P: brazed connections, spade terminals C: brazed connections, screw terminals										
Nominal capacity			Motor protection										
In thousand Btu/h at 60 Hz, ARI, MBP conditions			L: internal motor protection										
Model variation			Motor voltage code										
T: design optimised for refrigeration			1: 208-230V/1~/60 Hz 2: 200-220V/3~/50 Hz & 208-230V/3~/60 Hz 4: 380-400V/3~/50 Hz & 460V/3~/60 Hz 5: 220-240V/1~/50 Hz 7: 500V/3~/50 Hz & 575V/3~/60 Hz 9: 380V/3~/60 Hz										

## Reciprocating compressors – Variable speed

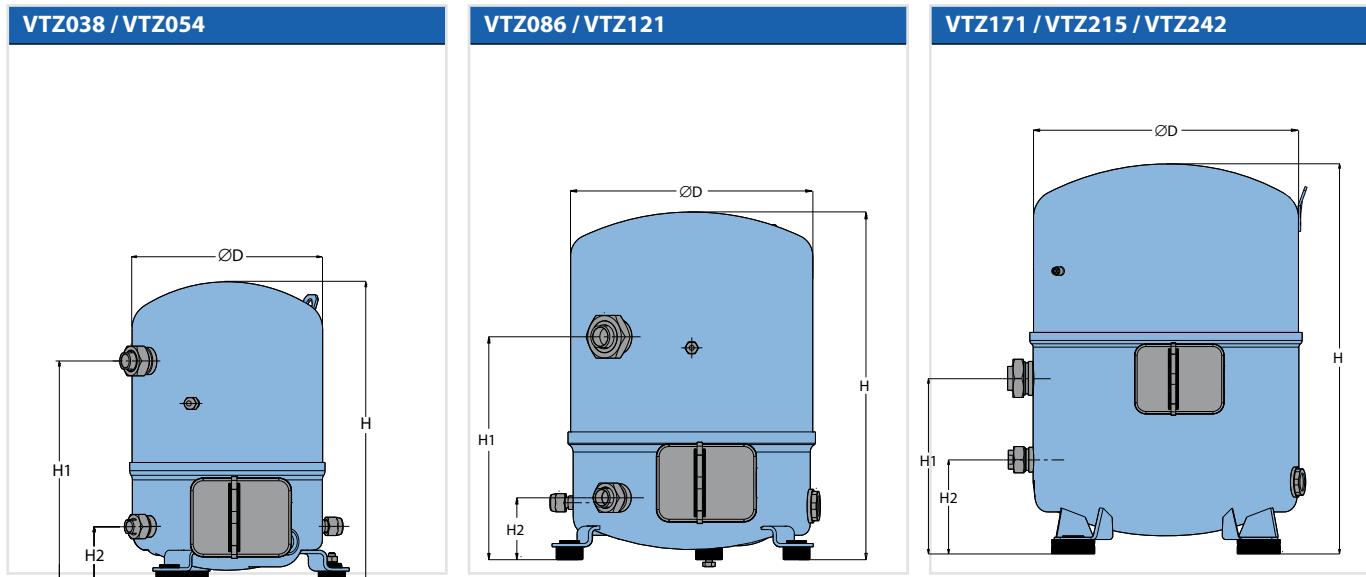


Type	Cylinders	Dimensions (mm)				
		D	H	H1	H2	
VTZ038 / VTZ054	1	224	356	263	68	
VTZ086 / VTZ121	2	288	413	265	74	
VTZ171 / VTZ215 / VTZ242	4	352	518	233	125	

### Compressor nomenclature

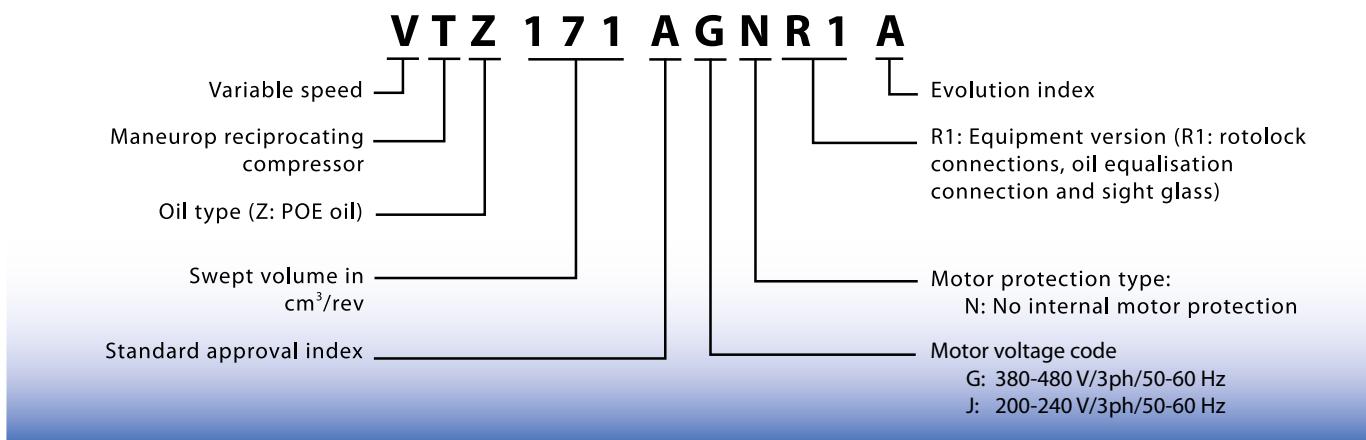

### Frequency converter nomenclature

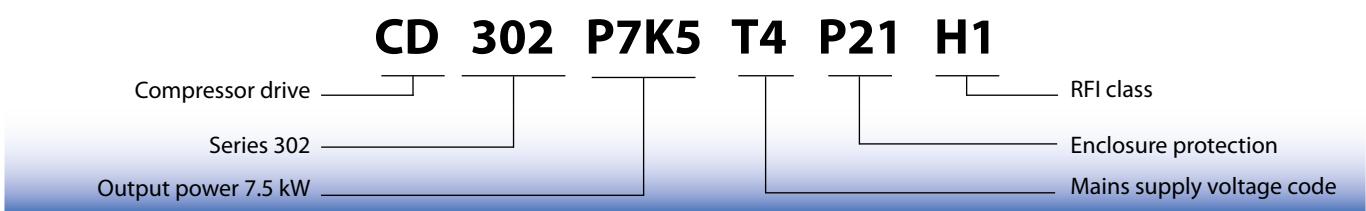

Drive supply voltage	Drive power (kW)	Compressor voltage code	Compressor model	IP20			IP21			IP55		
				Drive enclosure	Overall dimension (hxwxd) mm	Weight (kg)	Drive enclosure	Overall dimension (hxwxd) mm	Weight (kg)	Drive enclosure	Overall dimension (hxwxd) mm	Weight (kg)
T4 : 380-480/3/50-60	4	G	VTZ038	A2	268×90×205	4.9	-	-	-	A5	420×242×200	13.5
	5.5		VTZ054	A3	268×130×205	6.6	-	-	-	A5	420×242×200	13.5
	7.5		VTZ086	A3	268×130×205	6.6	-	-	-	A5	420×242×200	13.5
	11		VTZ121	B3	399×165×248	12	B1	494×242×260	23	B1	480×242×260	23
	15		VTZ171	B3	399×165×248	12	B1	494×242×260	23	B1	480×242×260	23
	18.5		VTZ215	B4	518×231×242	23	B2	664×242×260	27	B2	650×242×260	27
	22		VTZ242	-	-	-	B2	664×242×260	27	B2	650×242×260	27


#### Code numbers for ordering single pack compressors and frequency converters

Compressor		Frequency converter				
Model	Code No.	Model & power	IP class	RFI class*	LCP**	Code No.
VTZ038-G	120B0001	CD302	IP20	H1	yes	131B3543
		4.0 kW	IP55	H1	yes	131B3547
VTZ054-G	120B0002	CD302	IP20	H1	yes	131B3552
		5.5 kW	IP55	H1	yes	131B3556
VTZ086-G	120B0003	CD302	IP20	H1	yes	131B3560
		7.5 kW	IP55	H1	yes	131B3564
VTZ121-G	120B0004	CD302	IP21	H1	yes	131B3568
		11.0 kW	IP55	H1	yes	131B3572
VTZ171-G	120B0005	CD302	IP21	H1	yes	131B3576
		15.0 kW	IP55	H1	yes	131B3580
VTZ215-G	120B0006	CD302	IP21	H1	yes	131B3584
		18.5 kW	IP55	H1	yes	131B3588
VTZ242-G	120B0007	CD302	IP21	H1	yes	131B3592
		22.0 kW	IP55	H1	yes	131B3596

Listed code numbers are for compressors with voltage code G and frequency converters with supply voltage code T4 (380-400 V/3ph/50-60Hz). VTZ038 to VTZ121 are available with voltage code J (200-240V/3ph/50-60Hz) on request.

\* RFI class H2 available on request

\*\* Models without LCP available on request

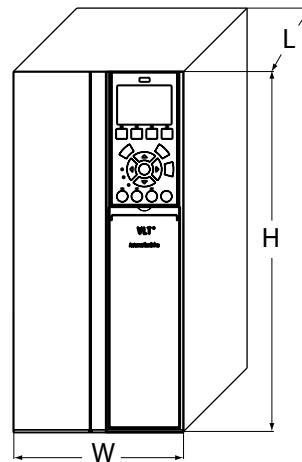

# Danfoss CO<sub>2</sub> product range

Product Grouping	Product	Product Description
Transcritical Expansion Valves	CCMT	Electrically operated high pressure expansion valve
	ICMTS	Motorized transcritical control valves
Pressure Regulating & Gas-Bypass Valves	ICS with CVP-HP/XP	Mechanical backpressure regulators
	CCM	Standstill capable electronic backpressure regulators
Electronic Expansion Valves	AKVH	Standstill capable pulse width modulating expansion valves
	AKV	Pulse width modulating expansion valves
	AKVA	Industrial pulse width modulating expansion valves
	ICM	Industrial motorized expansion valves
	CCM	Standstill capable motorized expansion valves
Valve Stations	ICF	Industrial valve stations
Solenoid Valves	EVR 2-8	Small solenoids
	EVRH 10-40	Large solenoids
	EVRS	Industrial solenoids
	EVRST	Industrial solenoids capable of opening at 0 differential
	ICS + EVM	Industrial solenoid valves for large capacities
Line Components	SVA-S and SVA-L	Industrial stop valves
	SCA-X and CHV-X	Industrial stop/check and check valves
	SNV-ST and SVA-SS	Industrial stop needle valves
	GBC for CO <sub>2</sub>	Ball valves
	NRV	Check valves
	SG	Sight glasses - inline and socket versions
	DCRH	Exchangeable core filter driers
	DML	Filter driers
	DMT	Transcritical oil and refrigerant driers
	FIA	Filters
Regulating Valves	REG-SA and REG-SB	Regulating valves for pump recirculated systems
Liquid Level Controls	AKS 4100	Liquid Level Sensors
	EKC 347	PI controllers
Safety valves	SFA 15	Safety relief valves
	DSV	Industrial double safety relief valve manifolds
Pressure Switches	RT	Differential pressure switches
	MBS 5000	Transcritical pressure switches
	KP 6	Pressure switches
Pressure Sensors	AKS 2050	Radiometric transcritical pressure transmitters
	AKS 32	Pressure transmitters (0-5V signal)
	AKS 32R	Radiometric pressure transmitters
	AKS 33	Pressure transmitters (4-20mA signal)
Temperature Sensors	AKS 11	Suction side sensor
	AKS 21A	Discharge side sensor
Gas Detection	GD	Gas detectors
Electronic HP Controls	EKC326A	Controllers for transcritical operation and gas bypass
Electronic Evaporator Controllers	AK CC 450	CO <sub>2</sub> "brine" case controllers
	AK CC 550	Single case controllers
	AK CC 750	Multi-case controllers
Cascade HX controller	EKC 313	CO <sub>2</sub> /CO <sub>2</sub> cascade heat exchanger controllers
	EKC 316A	X-refrigerant/CO <sub>2</sub> expansion valve controllers
Pack Controllers	AK PC 740	Pack controllers (up to 4 compressors)
	AK PC 780	Pack controllers (up to 8 compressors)
	XM 205A	8 analog input/ 8 output relay extension module
System Manager	AK SC 255	CO <sub>2</sub> supermarket system manager
Service Tool	MIMIC	Graphical system monitoring software
	AKM	Service technician software

For more information on Danfoss CO<sub>2</sub> products visit [www.danfoss.com/co2](http://www.danfoss.com/co2)

\*A special high pressure version is available

#### Danfoss CO<sub>2</sub> product range

# Use of flammable refrigerants such as hydrocarbons

The use of low GWP flammable refrigerants is increasing so flammable refrigerants, whether natural or chemical substances, are now used at an increasing rate in general refrigeration applications globally.

The increasing use of hydrocarbons means that refrigeration contractors and service technicians without prior experience of flammable refrigerants are now starting to work with these substances. There is therefore an increased risk of hazardous situations and to limit the risks for customers and end-users, Danfoss requires a formal agreement to be signed when our customers buy products applicable for flammable refrigerants in non-industrial refrigeration applications.

The agreement works as a guide. It builds on the most important international standards to improve safety.

The main points include:

- Follow the relevant norms and legislation.
- Ensure that only competent people are working with flammable refrigerants, including technicians servicing the refrigeration system.
- Have business liability insurance.
- Where Danfoss products are used, only components and spare parts approved for flammable refrigerants shall be used.

## Refrigeration Controls

### Thermostatic expansion valves

#### type TUBE and TUCE

- Bi-flow function.
- Capacities up to 20 kW.
- Max. working pressure 34 bar.
- Stainless steel, hermetically tight solder version.
- Bimetal connections for fast and safe soldering.
- Connections 1/4" and 3/8" inlet, 1/2" outlet.
- External pressure pressure equalization
- Adjustable superheat type (TUBE) available for laboratory use.

### Expansion valves type TGE

- Bi-flow with expansion in both directions.
- Capacities up to 130 kW
- Head pressure independent.
- Balance port (BP).
- Max. working pressure 46 bar.
- Cylindrical bulb design, with new bulb strap.
- Inlet in 5/8" or 7/8", outlet 7/8".
- External pressure equalization.
- Adjustable superheat setting.

### Solenoid valve type EVR

- Direct or servo operated solenoid valve especially designed for liquid, suction, and hot gas lines.
- Media temperatures up to 105 °C.
- Solder connections up to 7/8 in.
- Extended ends for soldering make installation easy. It is not necessary to dismantle the valve when soldering.
- Wide choice of coils for a.c. and d.c.
- Fast and safe mounting of "Clip-on"-coil.
- MOPD up to 25 bar with 14 W coil.

### Shut-off valve type BML

- Manual shut-off valve for installation in liquid, suction and hot gas lines.
- Connections size up to 22mm (7/8") ODF.
- Capacities (K<sub>v</sub>) 0.3 -2.9 m<sup>3</sup>/h.

### Check valves type NRV and NRVH

- Non-return valves for liquid, hot-gas and suction lines.
- NRVH with stronger spring to avoid resonance problems with compressors connected in parallel.
- Connections size up to 22 mm (7/8") ODF.
- Capacities (K<sub>v</sub>) 0.56 -5.5 m<sup>3</sup>/h.

### Filter driers type DCL and DML

- Protects refrigeration and air-conditioning systems from moisture, acids and solid particles.
- Connections size up to 22 mm (7/8") ODF.
- Capacities up to 100 kW.

### Sight glasses type SGI and SGN

- Sight glasses for monitoring condition and moisture content of refrigerant and the flow in oil return lines.
- SGI for R290, R600 and R600a, and SGN for R1270.
- Connections size up to 22mm (7/8") ODF.

### Thermostat type RT

- 2 m capillary tubes.
- Range -5°C to 30°C.
- High temperature versions available up to 250°C.

### Pressure control type RT

- Connection G 3/8A + welded nipple Ø6.5/10 mm.
- Range RT 5E: 4 to 17 bar.
- Regulating ranges available from -0.8 bar as minimum up to 30 bar as maximum.

### Electronic Refrigeration Controller

#### type ERC

- Manages all energy consuming parts in the refrigeration appliance
- Designed to cut energy consumption
- IP rated body for high moisture resistance
- Internationally approved hardware (CE, UL, GOST, and many more)
- For use in all climates, indoors as well as outdoors.
- IECEx approved for use with hydrocarbon refrigerants
- Can be used on all light commercial applications.

### Pressure controls type KP

- Protects against excessively low suction or high discharge pressure.
- The high pressure controls are equipped with failsafe double bellows, and low pressure controls with reduced bellow travel to enhance life time
- Manual and automatic reset available
- Regulating ranges -0.2 to 7.5 bar and 8 to 32 bar.
- Connection 1/4" ODF.

### Differential pressure control

#### type RT 260 AE and RT 262 AE

- Connection G 3/8A + welded nipple Ø6.5/10 mm.
- Regulating range 0.1 to 4 bar.

### Differential pressure controls

#### type MP 55E

- Protects refrigeration compressors against low lubricating oil pressure.
- Wide regulating range ( $\Delta P$  0.3 to 4.5 bar).
- Connections 1/4" ODF.

# Compressors and Condensing Units for R290

## Running with R290 for light commercial refrigeration in LMBP applications

- Such as bottle coolers and vending machines, water and beer coolers, display freezers, food and delicatessen
- Small dimensions make compact cabinets
- Low sound emission
- Reduced installation and running costs

## Fix speed Compressors and Condensing Units range

- Available in T, N, SC platforms (3-21 cm<sup>3</sup>)
- Application at high ambient temperature possible
- High appliance and system robustness at rough operating conditions
- Insensitive towards unstable electric power supply
- Prewired and ready to braze Condensing Units

## Variable Speed SLV15CNK.2

### Compressor and Controller

- Variable speed 2000 – 4000 rpm, with permanent magnet motor
- Intelligent controller for whole appliance will save up to 40% energy
- Monitor system performance, intelligent controller for ultimate control and alarm management, HACCP compliance easy
- Built-in data logging function allows food quality and safety
- Protection: current, speed, temperature; electronic thermostat

## Direct Current Compressors for R290 and R600a

## BD running with R290 or R600a for stationary LMBP applications, freezers and solar powered systems

- Such as ice cream freezers and boxes, pharmaceutical applications up to 200 litres
- 10-45 V and 12-24 V DC

- Electronic control unit with built-in speed control, thermostats signal, thermal protection, safety against destructive battery discharge, electronic thermostat and fan speed control on selected models

## The Danfoss product range for the refrigeration and air conditioning industry

Danfoss Refrigeration & Air Conditioning is a worldwide manufacturer with a leading position in industrial, commercial and supermarket refrigeration as well as air conditioning and climate solutions.

We focus on our core business of making quality products, components and systems that enhance performance and reduce total life cycle costs – the key to major savings.



We offer a single source for one of the widest ranges of innovative refrigeration and air conditioning components and systems in the world. And, we back technical solutions with business solutions to help your company reduce costs, streamline processes and achieve your business goals.

Danfoss A/S · [www.danfoss.com](http://www.danfoss.com)