



Rivet Nut Catalogue

S&G Paneltech & Fastening Systems is a trusted manufacturer & distributor specializing in high-quality electrical panel cabinets, panel accessories, and fastening solutions.




Engineered Fastening & Panel Solutions from Source to Manufacturing Excellence

About Us

- ✓ Established manufacturer, importer and distributor of electrical panel cabinets, panel accessories, and advanced fastening solutions
- ✓ Driven by precision engineering, innovation, and uncompromising quality
- ✓ Expertise in delivering both standard and custom-engineered fasteners tailored for demanding industrial applications
- ✓ Backed by a highly skilled technical team ensuring consistent performance and reliability
- ✓ Products developed in compliance with stringent quality and industry standards
- ✓ Integrated approach combining technical excellence with customer-focused service
- ✓ Trusted partner for electrical and mechanical assembly solutions across diverse industries
- ✓ Commitment to delivering durable, efficient, and value-driven products that reinforce long-term partnerships

Our Global Sourcing & International Sales

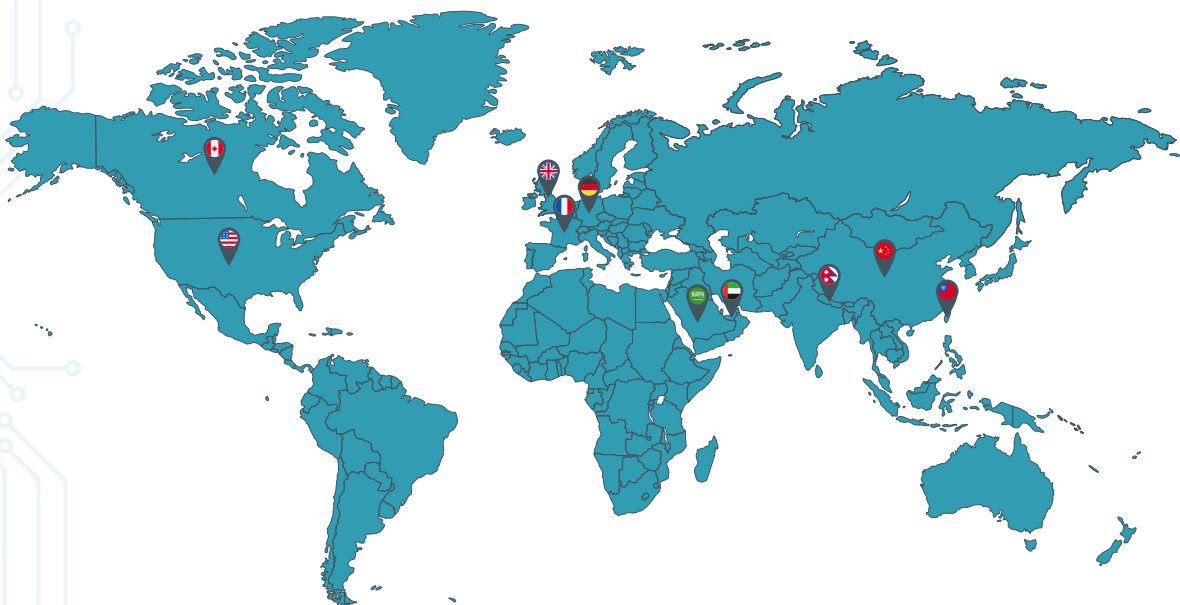

Contents

Technical Data Sheet 01

Flat Hd Round Body Plain 02
Flat Hd Round Body Plain Closed End

Red . Hd Round Body Plain 03
Red. Hd Round Body Plain Closed End

Flat Hd Knurled Round Body 04
Flat Hd Knurled Body Closed End

Reduced Hd Knurled Body 05
Reduced Hd Knurled Body Closed End

CSK Hd Round Body Plain 06
CSK Hd Round Body Plain Closed End

CSK Hd Round Body Knurled 07
CSK Hd Round Body Knurled Closed End

Flat Head Semi Hex Body 08
Flat Head Semi Hex Closed End

Flat Head Full Hex Body 09
Flat Head Full Hex Closed End

Red. Hex Head Full Hex Body 10
Red. Hex Head Full Hex Closed End

Red. Hex Head Inner (Half) Hex Body 11
Red. Hex Head Inner (Half) Hex Cl. End

Flat Head Inner (Half) Hex Body 12
Flat Head Inner (Half) Hex Closed End

Red . Hd Round Body Plain - UK 13
Red. Hd Knurled Body - UK

Red. Hex Hd. Inner (Half) Hex Body - UK 14
Flat Head Inner (Half) Hex Body - UK

Flat Head Knurled Body - AVK 15

Small Flat Head Knurled Body - AVK 16

SS Flat Hd Round Body Plain 17
SS Flat Hd Round Body Plain Closed End

SS Flat Hd Knurled Round Body 18
SS Flat Hd Knurled Body Closed End

SS Red. Hd Round Body Plain 19
SS Red.Hd Round Body Plain Closed End

SS Reduced Hd Knurled Body 20
SS Reduced Hd Knurled Body Closed End

SS CSK Hd Round Body Plain 21
SS CSK Hd Round Body Plain Closed End

SS CSK Hd Round Body Knurled 22
SS CSK Hd Round Body Knurled CL.End

SS Red. Hex Hd Inner (Half) Hex Body 23
SS Red. Hex Hd Inner (Half) Hex CL. End

SS Flat Hd Inner (Half) Hex Body 24
SS Flat Hd Inner (Half) Hex Closed End


Flat Hd Round Body Plain (AL) 25
Red. Hd Round Body Plain (AL)

Flat Hd Knurled Body (AL) 26
Reduced Hd Knurled Body (AL)


Flat Hd. Square Body 27
Flat Hd Slotted Body

Standard By : GB/T17880.6-1999


Technical Datasheet




Axial proof load



Broken torque



Torque to turn



Shearing strength

TABLE 1 : AXIAL PROOF LOAD FOR THREAD

Unit : N

Rivet nut			Mechanical char			Thread Size			
			M3	M4	M5	M6	M8	M10	M12
Round and Hex, Flat and (Reduced) countersunk head	Proof load	steel/stainless steel	3900	6800	11500	16500	25000	32000	34000
		Aluminum	1900	4000	6500	7800	12300	17500	---

TABLE 2 : BROKEN TORQUE

Unit : N.m

螺纹规格 Thread Size	M3	M4	M5	M6	M8	M10	M12
Steel/Inox Flat head, round and hex	2	5	8.5	15	26	50	80
Steel/Inox Countersunk head, round and hex	1	4	8	15	26	45	70
Steel/Inox Reduced head, round and hex	1	3	6	11	20	32	50
Alu Flat and reduced (counter)head round body	0.7	2.5	5	8	20	25	---

TABLE 3 : TURNING TORQUE FOR CLAMPING FORCE

Unit : N.m

螺纹规格 Thread Size	M3	M4	M5	M6	M8	M10	M12
Steel/Inox Flat head, round body	0.5	1	2	4.5	5.5	11	30
Steel/Inox (Reduced) counter head round	0.4	0.8	1.5	3.5	4.5	8.5	24
Aluminum Flat head, round body	0.25	0.9	1.5	3.5	5	6.5	21
Aluminum (Reduced) counter, round body	0.2	0.7	1.2	2.5	4	5	16

TABLE 4 : SHEARING STRENGTH

Unit : N




Rivet nut			Mechanical char			Thread Size			
			M3	M4	M5	M6	M8	M10	M12
Round and Hex,Flat and (Reduced) countersunk head	Shearing	steel/stainless steel	900	1500	2000	3000	4400	5000	6500
		Aluminum	600	1000	1200	2000	2400	3800	---

1 Steel for C1008 2. Stainless steel for ANSI304 3. Aluminum for Almg2.5

ALL THESE DATA ARE JUST FOR YOUR REFERENCE. THE EXACT DATA PLEASE FOLLOW OUR PHYSICAL TESTS.

FH- RB

Flat Head Round Body Plain






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	FH-RB-0315	0.5-1.5	4.7	5.0	4.9	7.2	0.8	8.5
	FH-RB-0325	1.5-2.5						9.5
M4	FH-RB-0420	0.5-2.0	6.0	6.0	5.9	8.5	0.8	10.5
	FH-RB-0435	2.0-3.5						12.0
M5	FH-RB-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	13.0
	FH-RB-0550	2.5-5.0	8.5					17.0
M6	FH-RB-0630	0.5-3.0	9.2	9.0	8.9	12.3	1.3	15.5
	FH-RB-0655	3.0-5.5						18.0
M8	FH-RB-0835	0.5-3.5	11.5	11.0	10.9	15.0	1.5	18.5
	FH-RB-0860	3.5-6.0						21.0
M10	FH-RB-1025	0.5-2.5	11.5	13.0	12.9	16.3	1.5	17.0
	FH-RB-1040	2.5-4.0						21.0
M10	FH-RB-1060	4.0-6.0	12.5	13.0	12.9	17.0	1.6	24.0
	FH-RB-1035(12H)	1.0-3.5						19.0
M12	FH-RB-1240	1.0-4.0	13.5	15.0	14.9	18.0	1.7	22.0
	FH-RB-1265	4.0-6.5						25.0
M12	FH-RB-1240(16H)	1.0-4.0	16.0	16.0	15.9	22.0	2.0	25.0
M16	FH-RB16	2.5-5.0	20.0	21.0	20.9	26.0	2.5	33.0

FH-RBC

Flat Head Round Body Plain Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size +0.1 0	D +0.07 -0.1	B	K	L
M3	FH-RBC-0315	0.5-1.5	10.0	5.0	4.9	7.2	0.8	13.3
M4	FH-RBC-0420	0.5-2.0	11.3	6.0	5.9	9.0	0.8	16.0
	FH-RBC-0440	2.0-4.0						18.0
M5	FH-RBC-0525	0.5-2.5	11.5	7.0	6.9	10.0	1.0	17.0
	FH-RBC-0550	2.5-5.0						19.0
M6	FH-RBC-0630	0.5-3.0	12.7	9.0	8.9	12.3	1.3	19.2
	FH-RBC-0650	3.0-5.5						21.0
M8	FH-RBC-0830	0.5-3.0	14.8	11.0	10.9	15.0	1.5	21.5
	FH-RBC-0855	3.0-5.5						24.0
M10	FH-RBC-1040	1.0-4.0	19.2	13.0	12.9	17.0	1.6	27.0

RH-RB

Reduce Head Round Body Plain






UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	RH-RB-0315	0.5-1.5	6.2	5.0	4.9	6.0	0.5	9.0
M4	RH-RB-0420	0.5-2.0	6.5	6.0	5.9	7.0	0.5	10.5
	RH-RB-0440	2.0-4.0						13.0
M5	RH-RB-0520	0.5-2.0	7.0	7.0	6.9	8.0	0.5	11.5
	RH-RB-0540	2.0-4.0						13.0
M6	RH-RB-0625	0.5-2.5	8.5	9.0	8.9	10.5	0.6	14.0
	RH-RB-0650	2.5-5.0				10.0	0.6	17.0
M8	RH-RB-0830	0.5-3.0	10.0	11.0	10.9	12.0	0.65	16.5
	RH-RB-0850	3.0-5.0						18.5
M10	RH-RB-1030	0.5-3.0	13.0	13.0	12.9	14.1	0.7	17.7
	RH-RB-1055	3.0-5.5						21.0
M10	RH-RB-1030(12H)	0.5-3.0	12.5	12.0	11.9	13.0	0.7	18.0

RH-RBC

Reduce Head Round Body Plain Close End






UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	RH-RBC-0420	0.5-2.0	11.0	6.0	5.9	7.0	0.5	15.0
	RH-RBC-0435	2.0-3.5						16.0
M5	RH-RBC-0520	0.5-2.0	12.5	7.0	6.9	8.0	0.5	16.5
	RH-RBC-0535	2.0-3.5						17.5
M6	RH-RBC-0625	0.5-2.5	15.5	9.0	8.9	10.0	0.6	20.5
	RH-RBC-0640	2.5-4.0						22.0
M8	RH-RBC-0830	0.5-3.0	17.0	11.0	10.9	12.0	0.65	23.0
	RH-RBC-0845	2.5-4.5						24.5
M10	RH-RBC-1030	1.0-3.0	18.2	13.0	12.9	14.1	0.7	24.5
	RH-RBC-1050	3.0-5.0						26.0

FH-KB

Flat Head Knurled Body



UNIT: mm




Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	FH-KB-0315	0.5-1.5	6.0	5.0	4.9	8.0	0.8	10.0
M4	FH-KB-0420	0.5-2.0	6.0	6.0	5.9	9.0	0.8	10.5
	FH-KB-0435	2.0-3.5						12.0
M5	FH-KB-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	13.0
	FH-KB-0550	2.5-5.0	8.5					16.5
M6	FH-KB-0630	0.5-3.0	9.2	9.0	8.9	12.30 (*13.0)	1.3	15.5
	FH-KB-0655	3.0-5.5	10.5					19.5
M8	FH-KB-0835	1.0-3.5	11.5	11.0	10.9	14.5(*16.0)	1.5	18.5
	FH-KB-0860	3.5-6.0						21.0
M10	FH-KB-1040	1.0-4.0	13.5	13.0	12.9	17.0(*19.0)	1.7	21.5
	FH-KB-1065	4.0-6.5						24.0
M12	FH-KB-1240	1.0-4.0	13.5	15.0	14.9	18.0	1.7	22.0
	FH-KB-1265	4.0-6.5	14.0					25.0
M10	FH-KB-1035(12H)	1.0-3.5	11.0	12.0	11.9	16.0	1.6	19.0
M12	FH-KB-1240(16H)	1.0-4.0	15.0	16.0	15.9	22.0	2.0	25.0
	FH-KB-1260(16H)	3.5-6.0	16.0					28.0

※ Part are different series, if customer need this size, please mark.

※ All this part included serration or without serration under the flange.

FH-KBC

Flat Head Knurled Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-KBC-0420	0.5-2.0	11.3	6.0	5.9	9.0	0.8	16.0
	FH-KBC-0440	2.0-4.0						18.0
M5	FH-KBC-0530	0.5-3.0	11.5	7.0	6.9	10.0	1.0	17.0
	FH-KBC-0550	2.5-5.0						19.0
M6	FH-KBC-0630	0.5-3.0	12.7	9.0	8.9	12.3	1.3	19.2
	FH-KBC-0650	3.0-5.0						21.0
M8	FH-KBC-0830	0.5-3.0	14.8	11.0	10.9	15.0	1.5	21.5
	FH-KBC-0855	3.0-5.5						24.0
M10	FH-KBC-1040	1.0-4.0	19.2	13.0	12.9	17.0	1.6	27.0

RH-KB

Reduce Head Knurled Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	RH-KB-0320	0.5-2.0	6.2	5.0	4.9	6.0	0.5	9.0
M4	RH-KB-0420 RH-KB-0440	0.5-2.0 2.0-4.0	7.0	6.0	5.9	7.0	0.5	11.2 13.0
M5	RH-KB-0520 RH-KB-0540	0.5-2.0 2.0-4.0	7.0	7.0	6.9	8.0	0.5	11.5 13.0
M6	RH-KB-0625 RH-KB-0650	0.5-2.5 2.5-5.0	8.5	9.0	8.9	10.0	0.6	14.0 16.0
M8	RH-KB-0830 RH-KB-0850	0.5-3.0 3.0-5.0	10.0	11.0	10.9	12.0	0.65	16.5 18.5
M10	RH-KB-1035 RH-KB-1060	1.0-3.5 3.5-6.0	12.5	13.0	12.9	14.0	0.7	19.5 22.0
M10	RH-KB-1035(12H)	1.0-3.5	12.5	12.0	11.9	13.0	0.7	19.5
M12	RH-KB-1240	1.0-4.0	16.2	16.0	15.9	17.6	0.75	24.2

RH-KBC

Reduce Head Knurled Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	RH-KBC-0420 RH-KBC-0435	0.5-2.0 2.0-3.5	11.0	6.0	5.9	7.0	0.5	15.0 16.5
M5	RH-KBC-0520 RH-KBC-0535	0.5-2.0 2.0-3.5	12.5	7.0	6.9	8.0	0.5	16.5 18.0
M6	RH-KBC-0630 RH-KBC-0645	0.5-3.0 3.0-4.5	15.5	9.0	8.9	10.0	0.6	20.5 22.0
M8	RH-KBC-0830 RH-KBC-0845	0.5-3.0 3.0-4.5	17.0	11.0	10.9	12.0	0.65	23.0 24.5
M10	RH-KBC-1030 RH-KBC-1050	1.0-3.0 3.0-5.0	18.2	13.0	12.9	14.0	0.7	24.5 26.0

CH-RB

Countersunk Head Round Body Plain






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-RB-0430	1.5-3.0	6.5	6.0	5.9	9.0	1.5	12.0
M5	CH-RB-0535	1.5-3.5	7.5	7.0	6.9	10.0	1.5	13.0
M6	CH-RB-0640	1.5-4.0	9.0	9.0	8.9	12.0	1.5	15.5
M8	CH-RB-0845	2.0-4.5	11.0	11.0	10.9	14.0	1.5	18.5
M10	CH-RB-1050	2.0-5.0	13.0	13.0	12.9	16.0	1.5	21.0

CH-RBC

Countersunk Head Round Body Plain Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-RBC-0430	1.5-3.0	10.5	6.0	5.9	8.5	1.5	17.5
M5	CH-RBC-0535	1.5-3.5	11.5	7.0	6.9	9.5	1.5	20.0
M6	CH-RBC-0640	1.5-4.0	12.7	9.0	8.9	11.5	1.5	23.0
M8	CH-RBC-0840	1.5-4.0	14.0	11.0	10.9	13.5	1.5	27.0
M10	CH-RBC-1045	2.0-4.5	19.0	13.0	11.9	14.5	1.7	30.0

CH-KB

Countersunk Head Knurled Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-KB-0430	1.5-3.0	6.5	6.0	5.9	9.0	1.5	12.0
M5	CH-KB-0535	1.5-3.5	7.5	7.0	6.9	10.0	1.5	13.0
M6	CH-KB-0640	1.5-4.0	9.0	9.0	8.9	12.0	1.5	15.5
M8	CH-KB-0845	2.0-4.5	11.0	11.0	10.9	14.0	1.5	18.5
M10	CH-KB-1050	2.0-5.0	13.0	13.0	12.9	16.0	1.5	21.0
M12	CH-KB-1250(16H)	2.0-5.0	16.5	16.0	15.9	19.0	1.5	24.0

CH-KBC

Countersunk Head Knurled Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-KBC-0430	1.5-3.0	10.5	6.0	5.9	8.5	1.5	17.5
M5	CH-KBC-0535	1.5-3.5	11.5	7.0	6.9	9.5	1.5	20.0
M6	CH-KBC-0640	1.5-4.0	12.7	9.0	8.9	11.5	1.5	23.0
M8	CH-KBC-0840	1.5-4.0	14.0	11.0	10.9	13.5	1.5	27.0
M10	CH-KBC-1045	2.0-4.5	19.0	13.0	11.9	14.5	1.7	30.0

FH-SHB

Flat Head Semi-Hex Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-SHB-0420	0.5-2.0	6.5	6.0	5.9	9.0	0.8	11.0
M5	FH-SHB-0525	0.5-2.5	8.0	7.0	6.9	10.0	1.0	13.0
M6	FH-SHB-0630	0.5-3.0	8.5	9.0	8.9	12.7	1.35	15.0
M8	FH-SHB-0835	1.0-3.5	10.5	11.0	10.9	16.0	1.5	18.0
M10	FH-SHB-1035	1.0-3.5	12.5	13.0	12.9	18.0	1.7	21.0
M12	FH-SHB-1240	1.0-4.0	14.0	15.0	14.9	20.0	1.7	23.0
M10	FH-SHB-1035(12H)	1.0-3.5	11.0	12.0	11.9	17.0	1.6	19.0
M12	FH-SHB-1250(16H)	2.0-5.0	16.5	16.0	15.9	23.0	2.2	27.5

FH-SHBC

Flat Head Semi-Hex Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-SHBC-0420	0.5-2.0	11.0	6.0	5.9	9.0	0.8	15.0
M5	FH-SHBC-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	18.0
M6	FH-SHBC-0630	0.5-3.0	17.0	9.0	8.9	12.7	1.3	23.0
M8	FH-SHBC-0835	1.0-3.5	19.0	11.0	10.9	16.0	1.5	26.0
M10	FH-SHBC-1040	1.0-4.0	25.0	13.0	12.9	19.0	1.7	33.0

FH-FHB

Flat Head Full Hex Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	FH-FHB-0420	0.5-2.0	6.5	6.0	5.9	9.0	0.8	11.0
M5	FH-FHB-0525	0.5-2.5	8.0	7.0	6.9	10.0	1.0	14.0
M6	FH-FHB-0630	0.5-3.0	8.5	9.0	8.9	12.7(*13.0)	1.35	15.0(*16.0)
M8	FH-FHB-0835	1.0-3.5	10.5	11.0	10.9	16.0	1.5	18.0
M10	FH-FHB-1035	1.0-3.5	12.5	13.0	12.9	18.0(*19.0)	1.7	21.0(*23.0)
M12	FH-FHB-1240	1.0-4.0	14.0	15.0	14.9	20.0	1.7	23.0
M10	FH-FHB-1035(12H)	1.0-3.5	13.5	12.0	11.9	18.0	1.7	21.0
M12	FH-FHB-1250(16H)	2.0-5.0	16.5	16.0	15.9	23.0	2.0	27.0

※Part are different series, if customer need this size, please mark.

FH-FHBC

Flat Head Full Hex Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	FH-FHBC-0420	0.5-2.0	11.0	6.0	5.9	9.0	1.0	15.0
M5	FH-FHBC-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	18.0
M6	FH-FHBC-0630	0.5-3.0	17.0	9.0	8.9	12.7	1.5	23.0
M8	FH-FHBC-0835	1.0-3.5	19.0	11.0	10.9	16.0	1.5	26.0
M10	FH-FHBC-1040	1.0-4.0	25.0	13.0	12.9	19.0	2.0	33.0

RHH-FHB

Reduce Hex Head Full-Hex Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	RHH-FHB-0425	0.5-2.5	6.7	6.0	5.9	7.0	0.5	11.0
	RHH-FHB-0450	2.5-5.0						13.5
M5	RHH-FHB-0530	0.5-3.0	9.0	7.0	6.9	8.0	0.5	14.5
	RHH-FHB-0550	3.0-5.0						16.0
M6	RHH-FHB-0635	1.0-3.5	10.0	9.0	8.9	10.0	0.6	16.0
	RHH-FHB-0660	3.5-6.0						18.0
M8	RHH-FHB-0840	1.0-4.0	11.5	11.0	10.9	12.0	0.65	18.0
	RHH-FHB-0860	4.0-6.0						20.0
M10	RHH-FHB-1035	1.0-3.5	12.5	13.0	12.9	14.5	0.75	19.0
	RHH-FHB-1060	3.5-6.0						23.5
M12	RHH-FHB-1240	1.0-4.0	15.5	16.0	15.9	17.5	1.0	25.0

RHH-FHBC

Reduce Hex Head Full-Hex Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	RHH-FHBC-0425	0.5-2.5	12.3	6.0	5.9	7.0	0.5	16.0
M5	RHH-FHBC-0530	0.5-3.0	15.2	7.0	6.9	8.0	0.5	20.0
M6	RHH-FHBC-0635	0.5-3.5	14.5	9.0	8.9	10.0	0.6	20.5
M8	RHH-FHBC-0840	1.0-4.0	17.0	11.0	10.9	12.0	0.65	23.0
M10	RHH-FHBC-1045	1.0-4.5	20.0	13.0	12.9	14.5	0.75	28.5

RHH-IHB

Reduce Hex Head Inner-Hex Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	HB	K	L
M4	RHH-IHB-0420	0.5-2.0	8.3	6.0	5.9	7.0	0.5	12.0
M5	RHH-IHB-0525	0.5-2.5	8.7	7.0	6.9	8.0	0.5	13.0
M6	RHH-IHB-0635	1.0-3.5	10.5	9.0	8.9	10.0	0.6	16.0
M8	RHH-IHB-0835	1.0-3.5	11.3	11.0	10.9	12.0	0.65	17.5
M10	RHH-IHB-1040	1.0-4.0	12.8	13.0	12.9	14.5	0.75	21.0
M12	RHH-IHB-1240	1.0-4.0	14.8	16.0	15.9	17.5	1.0	24.0

RHH-IHBC

Reduce Hex Head Inner-Hex Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	HB	K	L
M4	RHH-IHBC-0420	0.5-2.0	11.5	6.0	5.9	7.0	0.5	15.5
M5	RHH-IHBC-0525	0.5-2.5	13.5	7.0	6.9	8.0	0.5	18.0
M6	RHH-IHBC-0635	0.5-3.5	15.8	9.0	8.9	10.0	0.6	21.5
M8	RHH-IHBC-0835	1.0-3.5	18.2	11.0	10.9	12.0	0.65	24.0
M10	RHH-IHBC-1040	1.0-4.0	23.2	13.0	12.9	14.5	0.75	30.5

FH-IHB

Flat Head Inner-Hex Body






UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-IHB-0420	0.5-2.0	7.0	6.0	5.9	9.0	0.8	11.0
M5	FH-IHB-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	12.0
M6	FH-IHB-0630	0.5-3.0	9.2	9.0	8.9	12.7	1.3	15.5
M8	FH-IHB-0835	1.0-3.5	11.2	11.0	10.9	16.0	1.5	18.0
M10	FH-IHB-1035	1.0-3.5	12.8	13.0	12.9	18.0	1.7	21.0

※Part are different series, if customer need this size, please mark.

FH-IHBC

Flat Head Inner-Hex Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-IHBC-0420	0.5-2.0	11.5	6.0	5.9	9.0	1.0	16.0
M5	FH-IHBC-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	18.5
M6	FH-IHBC-0635	0.5-3.0	17.0	9.0	8.9	12.7	1.5	23.0
M8	FH-IHBC-0835	1.0-3.5	18.2	11.0	10.9	16.0	1.5	25.0
M10	FH-IHBC-1040	1.0-4.0	25.0	13.0	12.9	19.0	1.7	33.0

RH-RB-UK

Reduce Head Round Body Plain-UK






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $\pm 0.05(+0.07 -0.1)$	B	K	L
M3	RH-RB-UK-0315	0.5-1.5	5.5	4.8	4.65	5.4	0.4	9.0
M4	RH-RB-UK-0420	0.5-2.0	6.5	6.4	6.25	7.0	0.5	10.5
M5	RH-RB-UK-0525	0.5-2.5	7.5	7.2	7.05	7.8	0.5	12.0
M6	RH-RB-UK-0630	1.0-3.0	9.2	9.6	9.45	10.3	0.6	15.0
M8	RH-RB-UK-0835	1.0-3.5	10.5	10.6	10.45	11.3	0.6	16.0
M10	RH-RB-UK-1040	1.0-4.0	12.8	12.8	12.65*	13.8	0.65	20.0

RH-KB-UK

Reduce Head Knurled Body-UK






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $\pm 0.05(+0.07 -0.1)$	B	K	L
M3	RH-KB-UK-0315	0.5-1.5	5.5	4.8	4.65	5.4	0.4	9.0
M4	RH-KB-UK-0420	0.5-2.0	6.5	6.5	6.35	7.0	0.5	10.5
M5	RH-KB-UK-0525	0.5-2.5	7.5	7.25	7.15	7.85	0.5	12.0
M6	RH-KB-UK-0630	1.0-3.0	9.2	9.6	9.45	10.3	0.6	15.0
M8	RH-KB-UK-0835	1.0-3.5	10.5	10.6	10.45	11.3	0.6	16.0
M10	RH-KB-UK-1040	1.0-4.0	12.8	12.8	12.65*	13.8	0.65	20.0

RHH-IHB-UK

Reduce Hex Head Inner Hex Body-UK






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D ± 0.05 (± 0.08)	B	K	L
M4	RHH-IHB-UK-0420	0.5-2.0	6.5	6.4	6.25	7.25	0.5	10.5
M5	RHH-IHB-UK-0525	0.5-2.5	7.5	7.2	7.05	8.1	0.5	12.0*
M6	RHH-IHB-UK-0630	1.0-3.0	9.2	9.6	9.45	10.5*	0.6*	15.0*
M8	RHH-IHB-UK-0835	1.0-3.5	10.5	10.6	10.45	11.5*	0.65*	16.5*

FH-IFB-UK

Flat Head Inner-Hex Body-UK




UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D ± 0.05 (± 0.08)	B	K	L
M4	FH-IHB-UK-0420	0.5-2.0	6.5	6.4	6.25	9.5	0.6	10.5
M5	FH-IHB-UK-0525	0.5-2.5	7.5	7.2	7.05	10.0	0.8	12.0
M6	FH-IHB-UK-0630	1.0-3.0	9.2	9.6	9.4*	12.95*	1.0*	15.5*
M8	FH-IHB-UK-0835	1.0-3.5	10.5	10.6	10.45*	16.5*	1.15*	18.5*

FH-KB-US

AVK

Flat Head Knurled Body-AVK

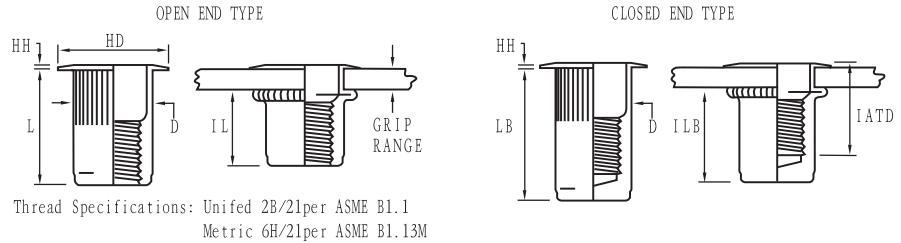

UNIT: INCH

Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size +0.006 -0.000	HD ±0.010 ±0.205*	HH ±0.003	L ±0.015	D MAX.	IL MAX.	LB ±0.015	ILB MAX.	IATD* MAX.
6-32 UNC	632	.020-.080	80	17/64(.2656)	.390	.030	.420	.265	.305	.740	.640	.610
6-32UNC	632	.080-.130	130	17/64(.2656)	.390	.030	.470	.265	.305	.740	.580	.670
8-32UNC	832	.020-.080	80	17/64(.2656)	.390	.030	.420	.265	.305	.740	.640	.610
8-32UNC	832	.080-.130	130	17/64(.2656)	.390	.030	.470	.265	.305	.740	.580	.670
10-24UNC	1024	.020-.130	130	19/64(.2969)	.415	.030	.475	.296	.315	.990	.845	.730
10-24UNC	1024	.130-.225	225	19/64(.2969)	.415	.030	.585	.296	.315	.990	.735	.840
10-32 UNF	1032	.020-.130	130	19/64(.2969)	.415	.030	.475	.296	.315	.990	.845	.730
10-32 UNF	1032	.130-.225	225	19/64(.2969)	.415	.030	.585	.296	.315	.990	.735	.840
1/4-20 UNC	420	.027-.165	165	25/64(.3906)	.500	.030	.580	.390	.380	1.190	1.005	.895
1/4-20 UNC	420	.165-.260	260	25/64(.3906)	.500	.030	.680	.390	.380	1.190	.905	1.035
5/16-18 UNC	518	.027-.150	150	17/32(.5312)	.685*	.035	.690	.530	.470	1.390	1.175	.995
5/16-18 UNC	518	.150-.312	312	17/32(.5312)	.685*	.035	.805	.530	.425	1.390	1.025	1.120
3/8-16 UNC	616	.027-.150	150	17/32(.5312)	.685*	.035	.690	.530	.470	1.390	1.175	.995
3/8-16 UNC	616	.150-.312	312	17/32(.5312)	.685*	.035	.805	.530	.425	1.390	1.025	1.120
1/2-13 UNC	813	.063-.200	200	11/16(.6875)	.865*	.047	1.150	.685	.850	2.365	2.070	1.505
1/2-13 UNC	813	.200-.350	350	11/16(.6875)	.865*	.047	1.300	.685	.850	2.365	1.920	1.505
1/2-13 UNC	813	.365-.500	500	11/16(.6875)	.865*	.047	1.450	.685	.860	2.365	1.770	1.505

* Stainless steel dimension same as steel dimension

UNIT : mm


Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size +0.15 -0.000	HD ±0.25 ±0.64*	HH ±0.008	L ±0.38	D MAX.	IL MAX.	LB ±0.38	ILB MAX.	IATD* MAX.
M4x0,7 ISO	470	0,50-2,00	2.0	6,75	9,91	0,76	10,67	6,73	7,75	18,80	16,26	15,49
M4x0,7 ISO	470	2,00-3,30	3.3	6,75	9,91	0,76	11,94	6,73	7,75	18,80	14,73	17,02
M5x0,8 ISO	580	0,50-3,30	3.3	7,60	10,54	0,76	12,07	7,52	8,00	25,15	21,46	18,54
M5x0,8 ISO	580	3,30-5,70	5.7	7,60	10,54	0,76	14,86	7,52	8,00	25,15	18,67	21,34
M6x1,0 ISO	610	0,70-4,20	4.2	10,00	12,70	0,76	14,73	9,91	9,65	30,23	25,53	22,73
M6x1,0 ISO	610	4,20-6,60	6.6	10,00	12,70	0,76	17,27	9,91	9,65	30,23	22,99	26,29
M8x1,25 ISO	8125	0,70-3,80	3.8	13,50	17,40*	0,89	17,53	13,46	11,94	35,31	29,85	25,27
M8x1,25 ISO	8125	3,80-7,90	7.9	13,50	17,40*	0,89	20,45	13,46	10,80	35,31	26,04	28,45
M10x1,5 ISO	1015	0,70-3,80	3.8	13,50	17,40*	0,89	17,53	13,46	11,94	35,31	29,85	25,27
M10x1,5 ISO	1015	3,80-7,90	7.9	13,50	17,40*	0,89	20,45	13,46	10,80	35,31	26,04	28,45
M12x1,75 ISO	12175	1,60-5,10	5.1	17,45	21,97*	1,19	29,21	17,4	21,59	60,07	52,58	38,23
M12x1,75 ISO	12175	5,10-8,90	8.9	17,45	21,97*	1,19	33,02	17,4	21,59	60,07	48,77	38,23
M12x1,75 ISO	12175	8,90-12,7	12.7	17,45	21,97*	1,19	36,83	17,4	21,84	60,07	44,96	38,23

* Stainless steel dimension same as steel dimension

SFH-KB-US

AVK

Small Flat Head Knurled Body-AVK

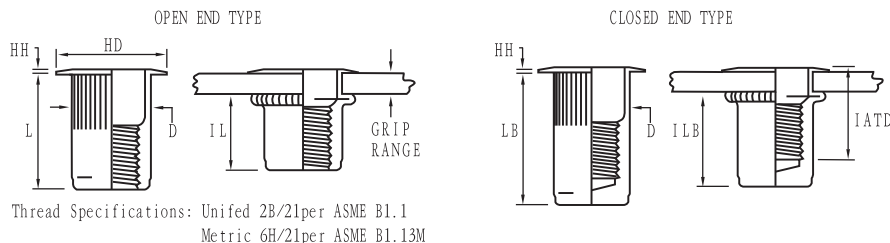

UNIT: INCH

Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size $+0.006$ -0.000	HD ± 0.010	HH ± 0.002	L ± 0.015	D MAX.	IL MAX.	LB ± 0.015	ILB MAX.	IATD* MAX.
6-32 UNC	632	.020-.080	80	17/64(.2656)	.310	.019	.420	.265	.305	.740	.640	.610
6-32 UNC	632	.080-.130	130	17/64(.2656)	.310	.019	.470	.265	.305	.740	.580	.670
8-32 UNC	832	.020-.080	80	17/64(.2656)	.310	.019	.420	.265	.305	.740	.640	.610
8-32 UNC	832	.080-.130	130	17/64(.2656)	.310	.019	.470	.265	.305	.740	.580	.670
10-24 UNC	1024	.020-.130	130	19/64(.2969)	.340	.019	.475	.296	.315	.990	.845	.730
10-24 UNC	1024	.130-.225	225	19/64(.2969)	.340	.019	.585	.296	.315	.990	.735	.840
10-32 UNF	1032	.020-.130	130	19/64(.2969)	.340	.019	.475	.296	.315	.990	.845	.730
10-32 UNF	1032	.130-.225	225	19/64(.2969)	.340	.019	.585	.296	.315	.990	.735	.840
1/4-20 UNC	420	.027-.165	165	25/64(.3906)	.455	.022	.580	.390	.380	1.190	1.005	.895
1/4-20 UNC	420	.165-.260	260	25/64(.3906)	.455	.022	.680	.390	.380	1.190	.905	1.035
5/16-18 UNC	518	.027-.150	150	17/32(.5312)	.595	.022	.690	.530	.470	1.390	1.175	.995
5/16-18 UNC	518	.150-.312	312	17/32(.5312)	.595	.022	.805	.530	.425	1.390	1.025	1.120
3/8-16 UNC	616	.027-.150	150	17/32(.5312)	.595	.022	.690	.530	.470	1.390	1.175	.995
3/8-16 UNC	616	.150-.312	312	17/32(.5312)	.595	.022	.805	.530	.425	1.390	1.025	1.120

※ Stainless steel dimension same as steel dimension




UNIT: mm

Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size $+0.15$ -0.00	HD ± 0.25	HH ± 0.05	L ± 0.38	D MAX	IL MAX	LB ± 0.38	ILB MAX	IATD* MAX
M4x0,7 ISO	470	0,50-2,00	2.0	6,75	7,87	0,48	10,67	6,73	7,75	18,80	16,26	15,49
M4x0,7 ISO	470	2,00-3,30	3.3	6,75	7,87	0,48	11,94	6,73	7,75	18,80	14,73	17,02
M5x0,8 ISO	580	0,50-3,30	3.3	7,60	8,64	0,48	12,07	7,52	8,00	25,15	21,46	18,54
M5x0,8 ISO	580	3,30-5,70	5.7	7,60	8,64	0,48	14,86	7,52	8,00	25,15	18,67	21,34
M6x1,0 ISO	610	0,70-4,20	4.2	10,00	11,56	0,55	14,73	9,91	9,65	30,23	25,53	22,73
M6x1,0 ISO	610	4,20-6,60	6.6	10,00	11,56	0,55	17,27	9,91	9,65	30,23	22,99	26,29
M8x1,25 ISO	8125	0,70-3,80	3.8	13,50	15,11	0,55	17,53	13,46	11,94	35,31	29,85	25,27
M8x1,25 ISO	8125	3,80-7,90	7.9	13,50	15,11	0,55	20,45	13,46	10,80	35,31	26,04	28,45
M10x1,5 ISO	1015	0,70-3,80	3.8	13,50	15,11	0,55	17,53	13,46	11,94	35,31	29,85	25,27
M10x1,5 ISO	1015	3,80-7,90	7.9	13,50	15,11	0,55	20,45	13,46	10,80	35,31	26,04	28,45

※ Stainless steel dimension same as steel dimension

FH-RB/SS

A2 Flat Head Round Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	FH-RB/SS-0320	0.5-2.0	4.5	5.0	4.9	7.0	0.8	8.8
M3	FH-RB/SS-0330	2.0-3.0	6.2	5.0	4.9	7.0	0.8	10.5
M4	FH-RB/SS-0420	0.5-2.0	6.0	6.0	5.9	9.0	0.8	10.8
M4	FH-RB/SS-0440	2.0-4.0	8.0	6.0	5.9	9.0	0.8	13.0
M5	FH-RB/SS-0525	0.5-2.5	7.0	7.0	6.9	10.0	1.0	13.0
M5	FH-RB/SS-0545	2.5-4.5	9.5	7.0	6.9	10.0	1.0	15.5
M6	FH-RB/SS-0630	0.5-3.0	8.5	9.0	8.9	13.0	1.5	15.0
M6	FH-RB/SS-0650	3.0-5.0	11.0	9.0	8.9	13.0	1.5	17.5
M8	FH-RB/SS-0835	0.5-3.5	11.0	11.0	10.9	15.0	1.5	18.0
M8	FH-RB/SS-0860	3.5-6.0	14.0	11.0	10.9	15.0	1.5	21.0
M10	FH-RB/SS-1035	1.0-3.5	12.0	13.0	12.9	17.0	1.8	20.3
M10	FH-RB/SS-1055	3.5-5.5	15.7	13.0	12.9	17.0	1.8	24.0
M12(16H)	FH-RB/SS-1235	1.0-3.5	16.0	16.0	15.9	19.0	1.8	22.0
M12(16H)	FH-RB/SS-1255	3.5-5.5	18.0	16.0	15.9	19.0	1.8	24.3
M12	FH-RB/SS-1235(16H)	1.0-3.5	16.0	15.0	14.9	19.0	1.8	22.0
M12	FH-RB/SS-1255(16H)	3.5-5.5	18.0	15.0	14.9	19.0	1.8	24.3

FH-RBC/SS

A2 Flat Head Round Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-RBC/SS-0420	0.5-2.0	12.0	6.0	5.9	9.0	0.8	16.5
M4	FH-RBC/SS-0425	1.0-2.5	12.8	6.0	5.9	9.0	0.8	17.3
M5	FH-RBC/SS-0525	0.5-2.5	13.0	7.0	6.9	10.0	1.0	18.0
M5	FH-RBC/SS-0540	2.5-4.0	14.5	7.0	6.9	10.0	1.0	19.5
M6	FH-RBC/SS-0630	0.5-3.0	17.0	9.0	8.9	13.0	1.5	20.5
M6	FH-RBC/SS-0655	3.0-5.5	20.0	9.0	8.9	13.0	1.5	23.5
M8	FH-RBC/SS-0835	0.5-3.5	21.5	11.0	10.9	15.0	1.5	25.5
M8	FH-RBC/SS-0860	3.5-6.0	24.0	11.0	10.9	15.0	1.5	28.0
M10	FH-RBC/SS-1035	0.5-3.5	26.0	13.0	12.9	17.0	1.8	29.0
M10	FH-RBC/SS-1060	3.5-6.0	31.3	13.0	12.9	17.0	1.8	34.3
M12	FH-RBC/SS-1230	0.5-3.0	29.5	16.0	15.9	23.0	2.0	39.0

FH-KB/SS

A2 Flat Head Knurled Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	FH-KB/SS-0320	0.5-2.0	4.5	5.0	4.9	7.0	0.8	8.8
M3	FH-KB/SS-0330	2.0-3.0	6.2	5.0	4.9	7.0	0.8	10.5
M4	FH-KB/SS-0420	0.5-2.0	6.0	6.0	5.9	9.0	0.8	10.8
M4	FH-KB/SS-0440	2.0-4.0	8.0	6.0	5.9	9.0	0.8	13.0
M5	FH-KB/SS-0525	0.5-2.5	7.0	7.0	6.9	10.0	1.0	13.0
M5	FH-KB/SS-0545	2.5-4.5	9.5	7.0	6.9	10.0	1.0	15.5
M6	FH-KB/SS-0630	0.5-3.0	8.5	9.0	8.9	13.0	1.5	15.0
M6	FH-KB/SS-0650	3.0-5.0	11.0	9.0	8.9	13.0	1.5	17.5
M8	FH-KB/SS-0835	0.5-3.5	11.0	11.0	10.9	15.0	1.5	18.0
M8	FH-KB/SS-0860	3.5-6.0	14.0	11.0	10.9	15.0	1.5	21.0
M10	FH-KB/SS-1035	1.0-3.5	12.0	13.0	12.9	17.0	1.8	20.3
M10	FH-KB/SS-1055	3.5-5.5	15.7	13.0	12.9	17.0	1.8	24.0
M12(16H)	FH-KB/SS-1235	1.0-3.5	16.0	16.0	15.9	19.0	1.8	22.0
M12(16H)	FH-KB/SS-1255	3.5-5.5	18.0	16.0	15.9	19.0	1.8	24.3
M12	FH-KB/SS-1235(15H)	1.0-3.5	16.0	15.0	14.9	19.0	1.8	22.0
M12	FH-KB/SS-1255(15H)	3.5-5.5	18.0	15.0	14.9	19.0	1.8	24.3

FH-KBC/SS

A2 Flat Head Knurled Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-KBC/SS-0420	0.5-2.0	12.0	6.0	5.9	9.0	0.8	16.5
M4	FH-KBC/SS-0425	1.0-2.5	12.8	6.0	5.9	9.0	0.8	17.3
M5	FH-KBC/SS-0525	0.5-2.5	13.0	7.0	6.9	10.0	1.0	18.0
M5	FH-KBC/SS-0540	2.5-4.0	14.5	7.0	6.9	10.0	1.0	19.5
M6	FH-KBC/SS-0630	0.5-3.0	17.0	9.0	8.9	13.0	1.5	20.5
M6	FH-KBC/SS-0655	3.0-5.5	20.0	9.0	8.9	13.0	1.5	23.5
M8	FH-KBC/SS-0835	0.5-3.5	21.5	11.0	10.9	15.0	1.5	25.5
M8	FH-KBC/SS-0860	3.5-6.0	24.0	11.0	10.9	15.0	1.5	28.0
M10	FH-KBC/SS-1035	0.5-3.5	26.0	13.0	12.9	17.0	1.8	29.0
M10	FH-KBC/SS-1060	3.5-6.0	31.3	13.0	12.9	17.0	1.8	34.3
M12	FH-KBC/SS-1230	0.5-3.0	29.5	16.0	15.9	23.0	2.0	39.0

RH-RB/SS

A2 Reduce Head Round Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	RH-RB/SS-0315	0.5-1.5	5.0	5.0	4.9	5.5	0.35	8.5
M3	RH-RB/SS-0325	1.5-2.5	6.0	5.0	4.9	5.5	0.35	9.5
M4	RH-RB/SS-0415	0.5-1.5	5.5	6.0	5.9	7.0	0.50	10.0
M4	RH-RB/SS-0425	1.5-2.5	6.5	6.0	5.9	7.0	0.50	11.0
M5	RH-RB/SS-0520	0.5-2.0	6.0	7.0	6.9	8.0	0.60	12.0
M5	RH-RB/SS-0535	2.0-3.5	7.5	7.0	6.9	8.0	0.60	13.5
M6	RH-RB/SS-0630	0.5-3.0	9.0	9.0	8.9	10.0	0.60	14.5
M6	RH-RB/SS-0645	3.0-4.5	10.5	9.0	8.9	10.0	0.60	16.0
M8	RH-RB/SS-0835	0.5-3.5	10.0	11.0	10.9	12.3	0.60	16.5
M8	RH-RB/SS-0850	3.5-5.0	11.5	11.0	10.9	12.3	0.60	18.0
M10	RH-RB/SS-1035	0.5-3.5	12.0	13.0	12.9	14.5	0.85	19.0
M12	RH-RB/SS-1235	0.5-3.5	14.5	15.0	14.9	16.5	0.85	22.5

RH-RBC/SS

A2 Reduce Head Round Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	RH-RBC/SS-0420	0.5-2.0	12.5	6.0	5.9	7.0	0.50	16.5
M5	RH-RBC/SS-0525	0.5-2.5	13.5	7.0	6.9	8.0	0.60	18.5
M6	RH-RBC/SS-0630	0.5-3.0	17.0	9.0	8.9	10.0	0.60	23.0
M8	RH-RBC/SS-0835	0.5-3.5	19.5	11.0	10.9	12.3	0.60	26.5
M10	RH-RBC/SS-1035	0.5-3.5	25.5	13.0	12.9	14.5	0.85	33.0
M12	RH-RBC/SS-1240	2.0-4.0	20.0	15.0	14.9	16.5	0.85	28.0

RH-KB/SS

A2 Reduce Head Knurled Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	RH-KB/SS-0315	0.5-1.5	5.0	5.0	4.9	5.5	0.35	8.5
M3	RH-KB/SS-0325	1.5-2.5	6.0	5.0	4.9	5.5	0.35	9.5
M4	RH-KB/SS-0415	0.5-1.5	5.5	6.0	5.9	7.0	0.50	10.0
M4	RH-KB/SS-0425	1.5-2.5	6.5	6.0	5.9	7.0	0.50	11.0
M5	RH-KB/SS-0520	0.5-2.0	6.0	7.0	6.9	8.0	0.60	12.0
M5	RH-KB/SS-0535	2.0-3.5	7.5	7.0	6.9	8.0	0.60	13.5
M6	RH-KB/SS-0630	0.5-3.0	9.0	9.0	8.9	10.0	0.60	14.5
M6	RH-KB/SS-0645	3.0-4.5	10.5	9.0	8.9	10.0	0.60	16.0
M8	RH-KB/SS-0835	0.5-3.5	10.0	11.0	10.9	12.3	0.60	16.5
M8	RH-KB/SS-0850	3.5-5.0	11.5	11.0	10.9	12.3	0.60	18.0
M10	RH-KB/SS-1035	0.5-3.5	12.0	13.0	12.9	14.5	0.85	19.0
M12	RH-KB/SS-1235	0.5-3.5	14.5	15.0	14.9	16.5	0.85	22.5

RH-KBC/SS

A2 Reduce Head Knurled Body Close End






UNIT: mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	RH-KBC/SS-0420	0.5-2.0	12.5	6.0	5.9	7.0	0.50	16.5
M5	RH-KBC/SS-0525	0.5-2.5	13.5	7.0	6.9	8.0	0.60	18.5
M6	RH-KBC/SS-0630	0.5-3.0	17.0	9.0	8.9	10.0	0.60	23.0
M8	RH-KBC/SS-0835	0.5-3.5	19.5	11.0	10.9	12.3	0.60	26.5
M10	RH-KBC/SS-1035	0.5-3.5	25.5	13.0	12.9	14.5	0.85	33.0
M12	RH-KBC/SS-1240	2.0-4.0	20.0	15.0	14.9	16.5	0.85	28.0

CH-RB/SS

A2 Countersunk Head Round Body Plain






UNIT: mm

Thread	P/N	T (GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	CH-RB/SS-0330	1.6-3.0	5.0	5.0	4.9	7.8	1.5	9.5
M3	CH-RB/SS-0340	3.0-4.0	6.0	5.0	4.9	7.8	1.5	10.5
M4	CH-RB/SS-0435	1.6-3.5	6.0	6.0	5.9	9.0	1.5	11.0
M4	CH-RB/SS-0450	3.5-5.0	8.0	6.0	5.9	9.0	1.5	13.0
M5	CH-RB/SS-0535	1.6-3.5	8.0	7.0	6.9	10.0	1.5	14.0
M5	CH-RB/SS-0550	3.5-5.0	9.0	7.0	6.9	10.0	1.5	15.0
M6	CH-RB/SS-0640	1.6-4.0	9.0	9.0	8.9	12.0	1.5	15.0
M6	CH-RB/SS-0660	4.0-6.0	11.0	9.0	8.9	12.0	1.5	17.0
M8	CH-RB/SS-0845	1.6-4.5	10.0	11.0	10.9	14.0	1.5	16.5
M8	CH-RB/SS-0860	4.5-6.0	12.5	11.0	10.9	14.0	1.5	19.0
M10	CH-RB/SS-1045	1.6-4.5	11.0	13.0	12.9	16.0	1.7	19.0
M10	CH-RB/SS-1060	4.5-6.0	12.5	13.0	12.9	16.0	1.7	20.5
M12	CH-RB/SS-1250	1.6-5.0	13.5	15.0	14.9	18.0	1.8	22.5

CH-RBC/SS

A2 Countersunk Head Round Body Plain Close End






UNIT: mm

Thread	P/N	T (GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-RBC/SS-0435	1.6-3.5	12.3	6.0	5.9	9.0	1.5	17.3
M5	CH-RBC/SS-0535	1.6-3.5	13.5	7.0	6.9	10.0	1.5	19.5
M6	CH-RBC/SS-0640	1.6-4.0	17.5	9.0	8.9	12.0	1.5	23.5
M8	CH-RBC/SS-0845	1.6-4.5	20.0	11.0	10.9	14.0	1.5	26.5
M10	CH-RBC/SS-1050	1.6-5.0	25.5	13.0	12.9	16.0	1.7	33.0
M12	CH-RBC/SS-1235	1.6-3.5	29.5	16.0	15.9	19.0	1.8	38.0

CH-KB/SS

A2 Countersunk Head Knurled Body






UNIT: mm

Thread	P/N	T (GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	CH-KB/SS-0330	1.6-3.0	5.0	5.0	4.9	7.8	1.5	9.5
M3	CH-KB/SS-0340	3.0-4.0	6.0	5.0	4.9	7.8	1.5	10.5
M4	CH-KB/SS-0435	1.6-3.5	6.0	6.0	5.9	9.0	1.5	11.0
M4	CH-KB/SS-0450	3.5-5.0	8.0	6.0	5.9	9.0	1.5	13.0
M5	CH-KB/SS-0535	1.6-3.5	8.0	7.0	6.9	10.0	1.5	14.0
M5	CH-KB/SS-0550	3.5-5.0	9.0	7.0	6.9	10.0	1.5	15.0
M6	CH-KB/SS-0640	1.6-4.0	9.0	9.0	8.9	12.0	1.5	15.0
M6	CH-KB/SS-0660	4.0-6.0	11.0	9.0	8.9	12.0	1.5	17.0
M8	CH-KB/SS-0845	1.6-4.5	10.0	11.0	10.9	14.0	1.5	16.5
M8	CH-KB/SS-0860	4.5-6.0	12.5	11.0	10.9	14.0	1.5	19.0
M10	CH-KB/SS-1045	1.6-4.5	11.0	13.0	12.9	16.0	1.7	19.0
M10	CH-KB/SS-1060	4.5-6.0	12.5	13.0	12.9	16.0	1.7	20.5
M12	CH-KB/SS-1250	1.6-5.0	13.5	15.0	14.9	18.0	1.8	22.5

CH-KBC/SS

A2 Countersunk Knurled Body Close End






UNIT: mm

Thread	P/N	T (GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-KBC/SS-0435	1.6-3.5	12.3	6.0	5.9	9.0	1.5	17.3
M5	CH-KBC/SS-0535	1.6-3.5	13.5	7.0	6.9	10.0	1.5	19.5
M6	CH-KBC/SS-0640	1.6-4.0	17.5	9.0	8.9	12.0	1.5	23.5
M8	CH-KBC/SS-0845	1.6-4.5	20.0	11.0	10.9	14.0	1.5	26.5
M10	CH-KBC/SS-1050	1.6-5.0	25.5	13.0	12.9	16.0	1.7	33.0
M12	CH-KBC/SS-1235	1.6-3.5	29.5	16.0	15.9	19.0	1.8	38.0

RHH-IHB/SS

A2 Reduce Hex Head Inner-Hex Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	HB	K	L
M3	RHH-IHB/SS-0315	0.5-1.5	5.0	5.0	4.9	6.0	0.5	8.5
M4	RHH-IHB/SS-0420	0.5-2.0	6.0	6.0	5.9	7.0	0.6	10.0
M4	RHH-IHB/SS-0435	2.0-3.5	8.0	6.0	5.9	7.0	0.6	12.0
M5	RHH-IHB/SS-0525	0.5-2.5	7.0	7.0	6.9	8.0	0.6	12.0
M5	RHH-IHB/SS-0540	2.5-4.0	9.0	7.0	6.9	8.0	0.6	14.0
M6	RHH-IHB/SS-0630	0.5-3.0	9.0	9.0	8.9	10.0	0.6	14.5
M6	RHH-IHB/SS-0650	3.0-5.0	10.5	9.0	8.9	10.0	0.6	16.0
M8	RHH-IHB/SS-0835	0.5-3.5	10.0	11.0	10.9	12.5	0.6	16.5
M8	RHH-IHB/SS-0850	3.5-5.0	11.5	11.0	10.9	12.5	0.6	18.0
M10	RHH-IHB/SS-1035	0.5-3.5	12.5	13.0	12.9	14.3	0.85	19.0
M10	RHH-IHB/SS-1050	3.5-5.0	16.3	13.0	12.9	14.3	0.85	22.8
M12	RHH-IHB/SS-1242	0.5-4.2	14.5	16.0	15.9	17.5	0.85	23.0

RHH-IHBC/SS

A2 Reduce Hex Head Inner-Hex Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	HB	K	L
M4	RHH-IHBC/SS-0420	0.5-2.0	13.0	6.0	5.9	7.0	0.5	16.5
M5	RHH-IHBC/SS-0525	0.5-2.5	14.5	7.0	6.9	8.0	0.6	18.5
M6	RHH-IHBC/SS-0630	0.5-3.0	18.0	9.0	8.9	10.0	0.6	23.0
M8	RHH-IHBC/SS-0835	0.5-3.5	20.5	11.0	10.9	12.3	0.6	26.5
M10	RHH-IHBC/SS-1035	0.5-3.5	27.0	13.0	12.9	14.5	0.85	33.0
M12	RHH-IHBC/SS-1260	2.0-6.0	32.8	16.0	15.9	20.0	0.85	37.9

FH-IHB/SS

A2 Flat Head Inner-Hex Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-IHB/SS-0425	0.5-2.5	6.0	6.0	5.9	9.0	0.8	10.8
M4	FH-IHB/SS-0435	2.5-3.5	8.2	6.0	5.9	9.0	0.8	13.0
M5	FH-IHB/SS-0525	0.5-2.5	8.0	7.0	6.9	10.0	1.0	13.0
M5	FH-IHB/SS-0535	2.5-3.5	9.5	7.0	6.9	10.0	1.0	14.5
M6	FH-IHB/SS-0635	0.5-3.5	9.0	9.0	8.9	13.0	1.5	15.8
M6	FH-IHB/SS-0650	3.5-5.0	12.2	9.0	8.9	13.0	1.5	19.0
M8	FH-IHB/SS-0835	0.5-3.5	11.0	11.0	10.9	15.0	1.5	18.0
M8	FH-IHB/SS-0850	3.5-5.0	12.0	11.0	10.9	15.0	1.5	19.0
M10	FH-IHB/SS-1035	0.5-3.5	12.5	13.0	12.9	17.0	1.8	20.3
M10	FH-IHB/SS-1050	3.5-5.0	14.2	13.0	12.9	17.0	1.8	22.0
M12	FH-IHB/SS-1250	2.0-5.0	16.5	16.0	15.9	23.0	2.2	27.5

FH-IHBC/SS

A2 Flat Head Inner-Hex Body Close End






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-IHBC/SS-0420	0.5-2.0	12.5	6.0	5.9	9.0	0.8	17.3
M5	FH-IHBC/SS-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	19.5
M6	FH-IHBC/SS-0630	0.5-3.0	17.5	9.0	8.9	13.0	1.5	24.3
M8	FH-IHBC/SS-0835	0.5-3.5	20.5	11.0	10.9	15.0	1.5	28.0
M10	FH-IHBC/SS-1035	0.5-3.5	26.5	13.0	12.9	17.0	1.8	33.0
M12	FH-IHBC/SS-1242	0.5-4.2	23.4	16.0	15.9	20.0	1.7	36.0

FH-RB/AL

Aluminium

Flat Head Round Body Plain






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size +0.1 0	D +0.07 0.1	B	K	L
M4	FH-RB/AL-0420	0.5-2.0	6.0	6.0	5.9	8.8*	0.8*	10.5*
M5	FH-RB/AL-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	13.0
M6	FH-RB/AL-0625	0.5-2.5	9.2	9.0	8.9	12.3	1.5	15.0
M8	FH-RB/AL-0830	1.0-3.0	10.2	11.0	10.9	14.3	1.5	16.5
M10	FH-RB/AL-1040	1.0-4.0	11.5	13.0	12.9	16.3	1.6	19.0

RH-RB/AL

Aluminium

Reduce Head Round Body Plain






UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size +0.1 0	D +0.07 0.1	B	K	L
M4	RH-RB/AL-0420	0.5-2.0	6.0	6.0	5.9	7.0	0.5	10.5
M5	RH-RB/AL-0520	0.5-2.0	7.5	7.0	6.9	8.0	0.5	11.5
M6	RH-RB/AL-0625	0.5-2.5	9.2	9.0	8.9	10.0	0.6*	14.0*
M8	RH-RB/AL-0825	0.5-2.5	10.2	11.0	10.9	12.0	0.65*	15.5*
M10	RH-RB/AL-1030	1.0-3.0	11.5	13.0	12.9	14.1	0.7*	17.7*

FH-KB/AL

Aluminium

Flat Head Knurled Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ 0.1	B	K	L
M4	FH-KB/AL-0420	0.5-2.0	6.0	6.0	5.9	8.8*	0.8*	10.5*
M5	FH-KB/AL-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	13.0
M6	FH-KB/AL-0625	0.5-2.5	9.2	9.0	8.9	12.3	1.5	15.0
M8	FH-KB/AL-0830	1.0-3.0	10.2	11.0	10.9	14.3	1.5	16.5
M10	FH-KB/AL-1040	1.0-4.0	11.5	13.0	12.9	16.3	1.6	19.0

RH-KB/AL

Aluminium

Reduce Head Knurled Body







UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ 0.1	B	K	L
M4	RH-KB/AL-0420	0.5-2.0	6.0	6.0	5.9	7.0	0.5	10.5
M5	RH-KB/AL-0520	0.5-2.0	7.5	7.0	6.9	8.0	0.5	11.5
M6	RH-KB/AL-0625	0.5-2.5	9.2	9.0	8.9	10.0	0.6*	14.0*
M8	RH-KB/AL-0825	0.5-2.5	10.2	11.0	10.9	12.0	0.65*	15.5*
M10	RH-KB/AL-1030	1.0-3.0	11.5	13.0	12.9	14.1	0.7*	17.7*

FH-SQB

Flat Head Square Body






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ 0.1	B	K	L
M5	FH-SQB-0515	0.5-1.5	8	7.0	6.9	10.5	0.6	11.2
	FH-SQB-0530	1.5-3.0					0.6	12.7
M6	FH-SQB-0625	0.5-2.5	8.5	9.0	8.9	14.0*	0.8*	14.3
	FH-SQB-0640	2.5-4.0	9.5				0.8*	17.2*
M8	FH-SQB-0830	1.0-3.0	11.5	11.0	10.9	17.5*	1.3*	18.6*

FH-SLB

Flat Head Slotted Body



UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ 0.1	B	K	L
M5	FH-SLB-0545	0.5-4.5	9.6	7.5	7.4	12.7	1.0	22.0
M6	FH-SLB-0670	0.5-7.0	12.5	8.8	8.7	16.0	1.5	27.0
M8	FH-SLB-0870	1.0-7.0	14.3	11.1	11.0	19.0	1.6	30.5

CONTACT US




+91 84606 16032 | +91 84878 58005




info@sgglobal.in



1st Floor,Manibhuvan,Golwadnaka,
Laheripura New Road,
Vadodara-390001



Scan Me

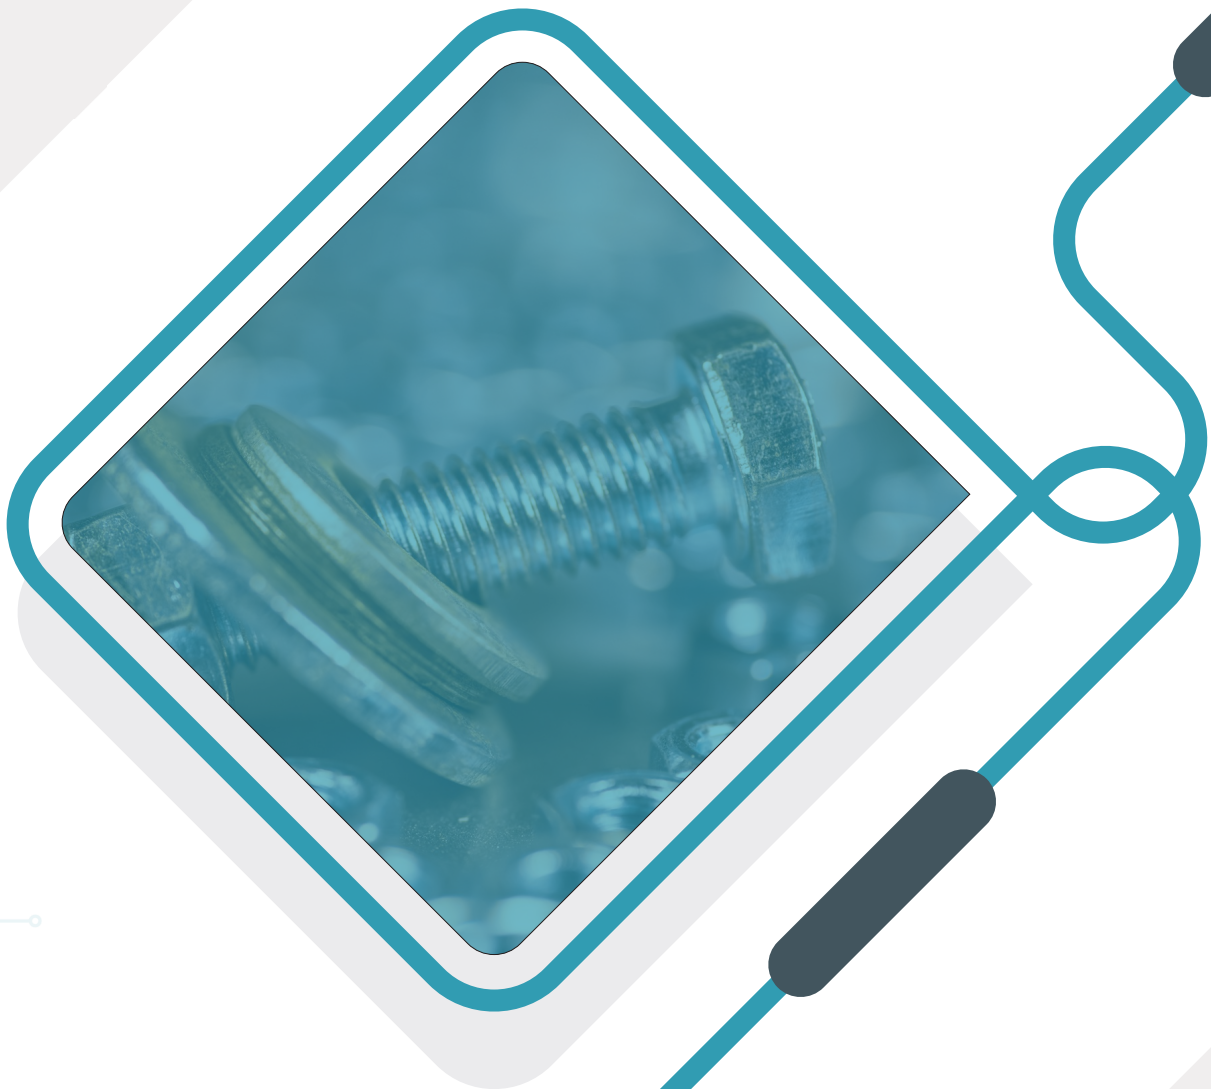

www.sgglobal.in