

# Power Tools Programme 2019

1st Edition January 2019

For professionals from professionals.



**BOSCH**

Invented for life



# Cordless Power Tools Range

**HEAVY  
DUTY**

**1 year  
warranty\***

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.



## 3.6 V Li-Ion

### IXO 3 Cordless Screwdriver (0 601 960 2L0)



Capacity	
Max. Screw Dia.	: 5 mm
Max. Torque	: 4 Nm
No-load Speed	: 0 - 180 rpm
Battery Voltage	: 3.6 V / 1.3 Ah
Charger	: AL 1115 CV
Charging Time	: about 5 hours
Weight	: 0.3 kg

### GSR 3,6 V-LI BitDrive Cordless Screwdriver (0 601 9D3 0L0)



Capacity	
Battery Voltage	: 3.6 V / 1.5 Ah
Max. Screw Dia.	: 5 mm
Max. Torque	: 4.5 Nm
No-load Speed	: 210 rpm
Charger	: Micro USB
Charging Time	: 4 hours
Weight	: 0.5 kg

## 12 V Li-Ion

### GDR 120-LI Cordless Impact Driver (0 601 9F0 0L1)



Capacity	
Battery Voltage	: 12 V / 1.5 Ah
Max. Torque Hard	: 100 Nm
No-load Speed	: 0 - 1,300 / 2,600 rpm
Impact Rate	: 2,800 - 3,200 bpm
Max Screw Dia.	: 8 mm
Bit Holder	: 1/4"
Charging Time	: 90 mins
Weight	: 1.05 kg



### GSR 12 V-EC Cordless Drill / Driver (0 601 9D4 0L2)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 25 mm
Max. Torque (hard/soft)	: 20 / 18 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Charger	: GAL 1230 CV
Charging Time	: 45 mins
Weight	: 0.9 kg

### GDR 12 V-EC Cordless Impact Driver (0 601 9E0 0L2)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Charger	: GAL 1230 CV
Charging Time	: 45 mins
Weight	: 0.95 kg

### GSR 12 V-15 FC Cordless Drill / Driver (0 601 9F6 0L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque (hard/soft)	: 30 / 15 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Chuck Capacity	: 10 mm
Charging Time	: 45 mins
Charger	: AL 1230 CV
Weight	: 0.6 kg



### GWS 12-76 V-EC (Solo)\*\* Cordless Angle Grinder (0 601 9F2 000)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
No-load Speed	: 19,500 rpm
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

### GOP 12 V-28 (Solo)\*\* Cordless Multi-Cutter (0 601 8B5 0L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Oscillation Angle on Left / Right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Weight	: 0.81 kg

### GAS 12 V-LI (Solo)\*\* Cordless Vacuum Cleaner (0 601 9E3 081)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Container Volume	: 0.35 l
Filter Surface	: 408 cm²
Max. Volume Flow Rate	: 15 l/sec
Max. Volume Pressure	: 45 mbar
Weight	: 0.9 kg



### GSA 12 V-LI (Solo)\*\* Cordless Sabre Saw (0 601 64L 9L2)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Stroke speed	: 0 - 3,000 spm
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm

### GST 12 V-LI (Solo)\*\* Cordless Jigsaw (0 601 5A1 0L1)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

### GKS 12 V-LI (Solo)\*\* Cordless Circular Saw (0 601 6A1 0L2)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg



\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply. \*\* Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

# GSR 120-LI Professional (0 601 9G8 0L0)

High-powered 2-in-1 for less

NEW!

## WHY THIS

01

### Affordability

Power and durability within reach for screwdriving and drilling

02

### High productivity

2-speed gearbox enables high productivity and excellent torque

03

### Durability

Electronic Cell Protection for longer battery life and more durability

Faster and easier bit change  
More robust securing of bits

Single sleeve chuck

Optimized for drilling and driving  
High working progress and torque

Two speed gearbox

Illuminates dark workspaces for easy working

LED light

173 mm for working in tight spaces

Compact head length

Protects cells from under-volting, excessive current draw, and deep discharge to prolong lifetime of batteries



Electronic cell protection (ECP)

Optimized for functionality giving the tool easy handling

Soft grip



## TARGET USERS

- Furniture maker
- Decorator
- Electrician
- Door / window installer
- Renovator



GSR 120-LI Professional	Unit	Specifications
Battery Voltage	V / Ah	12 / 1.5
No Load Speed	rpm	0 - 400 / 0 - 1,500
Torque (Hard / Soft)	Nm	30 / 14
Drilling in Wood / Metal	mm	20 / 10
Weight	kg	0.97

# GSB 120-LI Professional (0 601 9G8 1L0)

Highly flexible, highly economical

NEW!

## WHY THIS

01

### Affordability

Power and durability within reach for screwdriving and drilling

02

### High productivity

2-speed gearbox enables high productivity and excellent torque

03

### Durability

Electronic Cell Protection for longer battery life and more durability

Faster and easier bit change  
More robust securing of bits

Single sleeve chuck

Optimized for drilling and driving  
High working progress and torque

Two speed gearbox

Impact drilling mode for drilling in masonry

Impact mode

Illuminates dark workspaces for easy working

LED light

182 mm for working in tight spaces

Compact head length

Protects cells from under volting, excessive current draw, and deep discharge to prolong lifetime of batteries



Electronic Cell Protection (ECP)

Optimized for functionality giving the tool easy handling

Soft grip



## TARGET USERS

- Furniture maker
- Decorator
- Electrician
- Door / window installer
- Renovator



GSB 120-LI Professional	Unit	Specifications
Battery Voltage	V / Ah	12 / 1.5
No Load Speed	rpm	0 - 400 / 0 - 1,500
Torque (Hard / Soft)	Nm	30 / 14
Drilling in Wood / Metal / Masonry	mm	20 / 10 / 8
Weight	kg	1.06



# EC Brushless Motor Range

**HEAVY DUTY**

**1 year warranty**

## EC Brushless Motor Range

**Longer runtime  
Longer lifetime**



**Cordless Angle Grinder**  
GWS 12-76 V-EC (Solo)\*\*



**Cordless Drill / Screwdriver**  
GSR 12 V-EC



**Cordless Impact Driver**  
GDR 12 V-EC

**Cordless Multi-Cutter**  
GOP 12 V-28 (Solo)\*\*



**Cordless Drill / Driver**  
GSR 18 V-EC (Solo)\*\*



**Cordless Rotary Hammer**  
GBH 36 V-EC Compact



**Cordless Impact Drill**  
GSB 18 V-EC (Solo)\*\*



**Cordless Rotary Hammer**  
GBH 18 V-26 (Solo)\*\*




**Cordless Impact Wrench / Driver**  
GDV 18 V-EC



**Cordless Multi-Cutter**  
GOP 18 V-EC (Solo)\*\*

Up to **30% MORE RUNTIME**

\*Compared to Bosch power tools with DC motor of same class

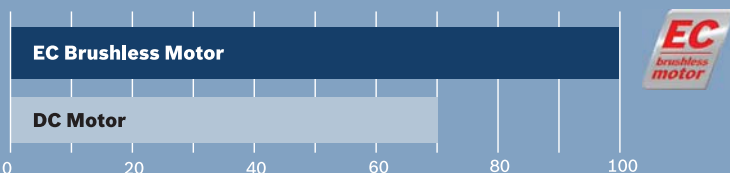

**Less maintenance effort !**

How it works



**EC Brushless Motor**  
No brush sparking due to electrical switch by electronics.



**DC Motor**  
Brush sparking at every mechanical switch operation

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply. \*\* Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.



## 18 V Li-Ion

**GSR 180-LI**  
Cordless Drill / Driver  
(0 601 9F8 1L0)

Capacity	
Battery Voltage	: 18 V / 1.5 Ah
Chuck Capacity	: 13 mm
Clutch Setting	: 20 + 1
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Torque Settings	: 20+1
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Weight	: 1.0 kg

**GSB 180-LI**  
Cordless Impact Drill  
(0 601 9F8 3L0)

Capacity	
Battery Voltage	: 18 V / 1.5 Ah
Chuck Capacity	: 13 mm
Torque (Hard / Soft)	: 54 / 21 Nm
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Impact Rate	: 0 - 27,000 min
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Masonry	: 8 mm
Charger	: AL 1814 CV

**GDX 180-LI**  
Cordless Impact Wrench / Driver  
(0 601 9G5 210)


Capacity	
Battery Voltage	: 18 V / 2.0 Ah
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,600 bpm
Max Torque	: 180 Nm
Head Length	: 170 mm
Dimensions	
Length/Height	: 171 / 234 mm
Motor	: DC
Bit Holder/Shank	: ¼" Hex; ½" Square
LED light	: Yes - above trigger

**GDS 250-LI**  
Cordless Impact Wrench  
(0 601 9G6 1L0)


Capacity	
Battery Voltage	: 18 V / 3.0 Ah
Charger	: AL 1820 CV
Max Torque	: 250 Nm
No-load Speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,300 bpm
Tool Holder	: 1/2" Square (Pin Hole + Retention Ring)
Screw Size	: M10 - M18

**GLI 180-LI (Solo)\*\***  
Cordless Worklight  
(0 601 4A1 1L0)

Capacity	
Voltage	: 18 V
Brightness in Lumen	: 300 Lm
No. of LED	: 6 Qnt
Runtime	: 300 min / Ah
Dimensions	: 116 x 78 x 163 mm
Weight	: 0.30 kg

**GBH 180-LI**  
Cordless Rotary Hammer **3 mode**  
(0 611 911 0L3)

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Impact Energy	: 1.7 J
No-load Speed	: 0 - 1,800 rpm
Impact Rate	: 0 - 4,550 bpm
Drilling Capacity Concrete	: 20 mm
Charger	: AL 1860 CV
Weight	: 2.6 kg

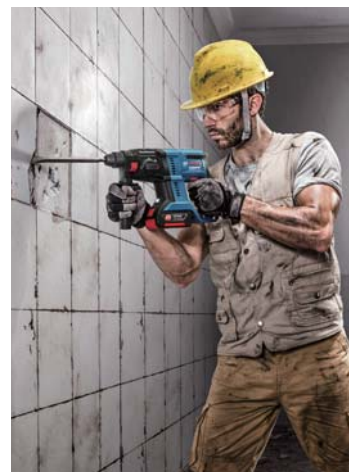**Dust Cup**  
(1 600 A00 D6H)

Capacity	
Tube Dia. (Inner / Out)	: 69 / 84
Tube Material / Thickness	: 152 / 52
Release Length / Press Length	: 2.5 mm
Weight	: 0.174 kg

**GDX 18 V-EC**  
Cordless Impact Wrench / Driver  
(0 601 9B9 1L0)

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Tool Holder	: Hex & Square
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,200 bpm
Max. Torque	: 185 Nm
Charger	: AL 1860 CV
Weight	: 1.7 kg

**GSR 18 V-EC (Solo)\*\***  
Cordless Drill / Driver  
(0 601 9E8 100)

Capacity	
Drilling Dia.: In Steel	: 13 mm
In Wood	: 38 mm
Max. torque (hard/soft)	: 50 / 31 Nm
Chuck Capacity	: 13 mm
No-load Speed	: 0-600 / 1,900 rpm
Torque Settings	: 20+1
Weight	: 1.5 kg

**GSB 18 V-EC (Solo)\*\***  
Cordless Impact Drill  
(0 601 9E9 100)

Capacity	
Drilling Dia.: In Steel	: 13 mm
In Wood	: 38 mm
In Masonry	: 13 mm
Max. torque (hard/Soft)	: 50 / 31 Nm
No-load Speed	: 0-600/1,900 rpm
Chuck Capacity	: 13 mm
Torque Settings	: 20+1
Max. Impact Rate	: 25,500 bpm
Weight	: 1.5 kg

**GDS 18 V-LI HT (Solo)\*\***  
Cordless Impact Wrench  
(0 601 9A1 3L4)

Capacity	
Torque Max.	: 650 Nm
No-load Speed	: 0 - 1,900 rpm
Impact Rate	: 0 - 2,100 bpm
Screw Diameter	: M12 - M20
Toolholder	: 1/2" External Square
Weight	: 3.0 kg

**GSA 18 V-LI (Solo)\*\***  
Cordless Sabre Saw  
(0 601 64J 0B1)

Capacity	
Stroke Length	: 28 mm
No-load Stroke Rate	
Rate	: 0 - 2,400 / 0 - 2,700 spm
Weight	: 3.4 kg

**GSA 18 V-32 (Solo)\*\***  
Cordless Sabre Saw  
(0 601 6A8 102)

Capacity	
Stroke Length	: 32 mm
No-load Stroke Rate	: 0 - 2,500 spm
Cutting Depth In Wood	: 230 mm
In Metal	: 175 mm
Weight	: 3.5 kg

**GST 18 V-LI B (Solo)\*\***  
Cordless Jigsaw  
(0 601 5A6 100)

Capacity	
No-load Stroke Rate	: 0 - 2,700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 120 mm
In Aluminium	: 20 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply. \*\* Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.



# GDS 18V-EC 300 ABR Solo Professional (0 601 9D8 281)

**HEAVY DUTY**

1 year warranty\*

**NEW!**

ABR (Auto Bolt Release), the advanced feature for bolting

## WHY THIS

- 01 **High efficiency Bosch brushless motor**  
Double lifetime and up to 30% longer runtime
- 02 **Durable gear box design**  
Doubles lifetime compared to GDS 18V-LI
- 03 **Maximum power output**  
Full power regardless of battery charge state

Provides 2x lifetime compared to GDS 18V-LI

Durable gear box

Provides 2x lifetime and up to 30% longer run time

EC brushless motor



Comfortable for long working hours

Ergonomic handle

Shuts off the tool automatically when the nut is loosen, preventing it from falling

ABR, Auto Bolt Release



100% longer battery lifetime

Batteries with coolpack



## TARGET USERS

- Scaffolders
- Factory users
- HVAC



Technical Data	GDS 18V-EC 300 ABR
Battery Capacity	18V
Max. Torque	300 Nm
No Load Speed	0 - 2400 rpm
Impact Rate	0 - 3400 bpm
Bolt Size	M10 - M18
Weight	1.85 kg

# GAS 18V-10L Professional (0 601 9C6 300)

**HEAVY DUTY**

1 year warranty\*

**NEW!**

Mobile vacuuming re-defined: now with full power

## WHY THIS

- 01 **Sustained suction power for a longer period of time**  
Thanks to its rotational airflow technology
- 02 **Easy transportation & handling**
  - Lightweight + all accessories on the tool
  - "Click and clean" interface
- 03 **Various applications**  
Designed for different kinds of dirt and non-harmful liquids

**Great performance**

Maximum airflow: 24 l/sec  
Max vacuum: 90 mbar

**Mobility**

Compact, easy to carry around  
4.6 kg

**Rotational airflow**

Sustained suction power for a longer period of time



**Strap loops**

Possibility to hang the hose

**Semi-transparent container**

Visibility of the container's fill level

**18V battery range**

4 min runtime / Ah  
Flexible power system  
Compatible with all Bosch Professional 18V batteries.

**Classification**

Dust class: L (According to EU standards)  
HEPA filter

**Versatility**

Wet and dry applications  
Main accessories at hand:  
crevice nozzle, floor nozzle,  
extension pipes  
"Click and clean" compatible

IPx4 protection

## TARGET USERS

- Craftsmen
- Renovators



GAS 18V-10 L Professional	Specifications
Battery Capacity	18V
Max. Vacuum	90 mbar
Maximum Airflow	24 l/sec
Max. Runtime with 6.0 Ah Battery	24 min
Container Volume, Gross/net	10 litre / 6 litre
Weight	4.6 kg

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply. \*\* Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

12V Cordless  
18V Cordless  
Drill, Impact Drill, Multi Cutter, Straight Grinder  
Angle Grinder  
Bench Grinder, Mixer Drill, Screwdriver, Sabre Saw  
Jigsaw, Circular Saw  
Diamond Cutter, Cut off machine  
Mitre Saw, Table Saw, Planer, Sander  
Polisher, Router  
Hot Air Gun, Blower, Vacuum  
Rotary Hammer  
Demolition Hammer



## 18 V Li-Ion

**GKS 18 V-57 (Solo)\*\*  
Cordless Circular Saw  
(0 601 6A2 2L0)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 3,400 rpm
Blade Diameter	: 165 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Capacities at 90°:	57 mm
at 45°:	42 mm
Weight	: 4.1 kg

**GKM 18 V-LI (Solo)\*\*  
Cordless Metal Circular Saw  
(0 601 6A4 001)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 4,250 rpm
Blade Diameter	: 136 mm
Saw Blade Bore Diameter	: 20 mm
Cutting Capacity	: 50 mm
Battery Voltage	: 18 V
Cutting Depth Adjustment	: Yes

**GWS 18 V-LI (Solo)\*\*  
Cordless Angle Grinder  
(0 601 93A 3L5)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 10,000 rpm
Roughing/Cutting Disc, Diameter	: 100 mm
Weight	: 2.3 kg

**GGG 18 V-LI (Solo)\*\*  
Cordless Straight Grinder  
(0 601 9B5 300)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 2 - 22,000 rpm
Toolholder	: Collet up to 8 mm Diameter
Weight	: 1.8 kg

**GAS 18 V-1 (Solo)\*\*  
Cordless Vacuum Cleaner  
(0 601 9C6 2L0)****HEAVY DUTY**

1 year warranty\*




Capacity	
Container Vol.	: 700 ml
Max. Underpressure	: 6 kPa
Max. Airflow	: 10 l/sec
Speeds	: 1 Speed
Runtime	: 7 min / Ah
Weight (w/o batt, w/o AC)	: 1.3 kg

**GBL 18 V-120 (Solo)\*\*  
Blower  
(0 601 9F5 1L0)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I: 9 min / Ah
Speed II:	5 min / Ah
Weight without Cable:	1.1 kg

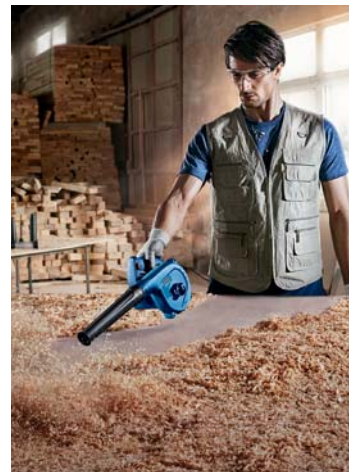**GCB 18 V-LI (Solo)\*\*  
Cordless Band Saw  
(0 601 2A0 300)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 162 m/min
Saw Blade Diameter	: 733 x 12,7 x 0,5 mm
Max. Cutting Depth	: 63,5 mm
Weight	: 3.8 kg

**GHO 18 V-LI (Solo)\*\*  
Cordless Planer  
(0 601 5A0 300)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 14,000 rpm
Cutting Depth	: 0 - 1,6 mm
Rebating Depth	: 0 - 8 mm
Planing Width, Max.	: 82 mm
Weight	: 2.6 kg

**GSS 18 V-LI (Solo)\*\*  
Cordless Orbital Sander  
(0 601 9D0 2L0)****HEAVY DUTY**

1 year warranty\*



Capacity	
No-load Speed	: 11,000 rpm
Orbital Rate	: 22,000min-1
Orbital Diameter	: 1,6 mm
Pad Size	: 113 x 101 mm
Sanding Paper Size	: 114 x 140 mm
Weight	: 1.0 kg

**GOP 18 V-28 (Solo)\*\*  
Cordless Multi-Cutter  
(0 601 8B6 002)****HEAVY DUTY**

1 year warranty\*



Capacity	
Oscillation Angle	
Left/Right	: 1,4°
No-load Speed	: 8,000 - 20,000 rpm
Grip Circumference	: 193 mm
Tool Length (without battery)	: 312 mm
Weight	: 2.0 kg

**GBH 18 V-26 (Solo)\*\*  
Cordless Rotary Hammer 3 mode  
(0 611 909 000)****HEAVY DUTY**

1 year warranty\*



Capacity	
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.6 J
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Weight	: 3.5 kg

**GDE 18 V-16  
Cordless Dust Extractor  
(1 600 A00 51M)**

Capacity	
Compatible with	: all SDS-plus GBH 18V-26 executions
Drilling Diameter	: max. 16 mm
Max. Drilling Depth:	100 mm
Weight	: 1.2 kg



\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply. \*\* Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.



# 18 V Cordless Freedom Concept

**HEAVY DUTY**

1 year warranty



## FREEDOM TO CHOOSE

Save cost and time with the Bosch Cordless System

BARE TOOLS, BATTERIES, CHARGERS AND CASES ARE SOLD SEPARATELY, GIVING YOU THE FREEDOM TO CHOOSE THE COMBINATION THAT YOU NEED



### 36 V Li-Ion

**GBH 36 V-EC Compact Cordless Rotary Hammer 2 mode** (0 611 903 RL1)



<b>Capacity</b>	
In Concrete	: 4 - 18 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 1.7 J
Rated Speed	: 0 - 1,500 rpm
Impact Rate	: 0 - 4,850 bpm
Battery Voltage	: 36 V / 2.0 Ah
Charger	: AL 3640 CV
Charging Time	: 45 mins
Weight	: 2.9 kg

**GBH 36 V-LI Plus Cordless Rotary Hammer 3 mode** (0 611 906 0L0)



<b>Capacity</b>	
In Concrete	: 8 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact energy	: 3.2 J
Impact Rate	: 0 - 4,174 bpm
Battery Voltage	: 36 V / 4.0 Ah
Charger	: AL 3680 CV
Charging Time	: 35 mins
Weight	: 4.5 kg



### 12 V Li-Ion Battery Pack

### 18 V Li-Ion Battery Pack

### ProCore 18 V

### 36 V Li-Ion Battery Pack



**GBA 12 V 2.0 Ah**  
(1 600 A00 F6X)



**GBA 12 V 4.0 Ah**  
(1 600 A00 F71)



**GBA 12 V 6.0 Ah**  
(1 600 A00 X7H)



**GBA 18 V 2.0 Ah**  
(1 600 A00 1CG)



**GBA 18 V 4.0 Ah M-C**  
(1 600 A00 163)



**GBA 18 V 6.0 Ah**  
(1 600 A00 8AE)

**NEW!**



**ProCore 18V 4.0Ah**  
(1 600 A01 6GB)



**ProCore 18V 8.0Ah**  
(1 600 A01 6GK)



**GBA 36 V 2.0 Ah**  
(1 600 A00 1ZJ)



**GBA 36 V 4.0 Ah**  
(1 600 A00 1ZN)

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply. \*\* Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

# ProCORE 18V 4.0 Ah (1 600 A016GB)

Performance of a conventional battery, significantly compacter and lighter

NEW!

## WHY THIS

01

### Best power density

Latest cell technology offering same power as a double-layer 4.0 Ah battery  
At significantly smaller size and lower weight

02

### Stay cool, live longer

135% longer lifetime compared to an ordinary battery due to improved COOLPACK 2.0 technology preventing the battery from overheating

03

### Flexible power system

100% compatible with all new and existing Bosch Professional 18V power tools and chargers



#### Most compact & lightweight

-15% in weight, -115 in volume (cm<sup>3</sup>) vs Bosch GBA 18V 4.0 Ah double-layer battery\*  
Comfort in handling with tools  
Reduce fatigue

#### High performance

As powerful (>810 W) as a standard Bosch GBA 18V 4.0 Ah double-layer battery  
Longer continuous working-time thanks to COOLPACK 2.0

#### Flexible power system

100% compatible with all Bosch professional 18V tools and chargers



#### COOLPACK 2.0: Superior heat management

Cooling element: HDPE material & TPE sheet  
No air gaps between cells and cluster housing for better heat dissipation

#### 135% longer lifetime\*\*

COOLPACK 2.0 technology prevents batteries from overheating and damages

#### SCM: Single Cell Monitoring

Maximum power at maximum safety and quality out of the cells

NEW

#### Battery status



Upgraded high resolution 5 LED indicator for battery status

# ProCORE 18V 8.0 Ah (1 600 A01 6GK)

High performance battery to get up to 1620W corded power on cordless tools

NEW!

## WHY THIS

01

### High performance

Provide up to 1620 Watt corded power\* - thanks to latest cell technology combined with Bosch's intelligent battery management

02

### Stay cool, live longer

135% longer lifetime compared to an ordinary battery due to improved COOLPACK 2.0 technology preventing the battery from overheating

03

### Flexible power system

100% compatible with all new and existing Bosch Professional 18V power tools and chargers



#### High performance

87% more power\*  
As powerful as corded tools (>1,620 W)\*\*  
Most compact (Volume [cm<sup>3</sup>]) in comparable runtime in the market  
Longer continuous working-time thanks to COOLPACK 2.0

#### COOLPACK 2.0: superior heat management

Cooling element: HDPE material & TPE sheet  
No air gaps between cells and cluster housing for better heat dissipation

#### 135% longer lifetime\*\*

COOLPACK 2.0 technology prevents batteries from overheating and damages

#### SCM: Single Cell Monitoring

Maximum power at maximum safety and quality out of the cells

NEW

#### Flexible power system

100% compatible with all Bosch professional 18V tools and chargers

#### Battery status



Upgraded high resolution 5 LED indicator for battery status



## Charger



**GAL 12V-40**  
(for 10.8V & 12V Battery)  
(1600A01B8Z)



**GAL 1860 CV**  
(for 14.4 V & 18 V Battery)  
(1 600 A00 16Y)



**GAX 18 V-30**  
(for 12 V, 14.4 V & 18 V Battery)  
(1 600 A01 1AA)

## Starter Kit

**NEW!**



**12 V 2.0 Ah (2 Batteries)**  
+ GAL 12 V-40 (1 Charger)  
(1 600 A01 B8Y)

**NEW!**



**ProCORE starter kit**  
**18V 4.0Ah (2 batteries)**  
+ GAL 1880CV (1 charger)  
(1600A016GG)



**18 V 2.0 Ah (2 Batteries)**  
+ GAL 1860 CV (1 Charger)  
(1 600 A00 1AZ)



**18 V 4.0 Ah (2 Batteries)**  
+ GAL 1860 CV (1 Charger)  
(1 600 A00 1B7)

## L-BOXX



**L-BOXX 102**  
(1 605 438 165)



**L-BOXX 136**  
(1 600 A01 2G0)



**L-BOXX 238**  
(1 600 A01 2G2)



**L-BOXX 374 (Indent)**  
(1 600 A01 2G3)

## Trolley / Roller

**L-BOXX Trolley**  
(1 600 A00 1SA)



**L-BOXX Roller**  
(1 6000 A00 1S9)



**LS-Boxx 306**  
(1 600 A00 1RU)



**i-BOXX 53**  
(1 600 A00 1RV)

























**i-BOXX Shelf 3pc**  
(1 600 A00 1SF)



**i-BOXX 53 Set 12**  
(1 600 A01 1S7)



# Charging Time For Battery Capacity (Minute)

	12 V Charger					18 V Charger					36 V Charger	
	GAL 1210 CV (1 600 A00 1HR3) 	GAL 1215 CV 	GAL 1230 CV (1 600 A00 F6S) 	GAL 12V-40 CV (1 600 A01 B8Z) 	AL 1814 CV (2 607 225 729) 	AL 1820 CV (2 607 225 425) 	GAL 1860 CV (1 600 A00 16V) 	GAL 1880 CV (1 600 A01 6GG) 	GAX 18 V-30 (1 600 A01 1AA) 	GAL 3680 CV (2 607 225 901) 		
<b>12 V</b>	 <b>1.5 Ah</b>	95	65	35	25				30			
	 <b>2.0 Ah</b> (1 600 A00 F6X)	120	80	45	30			45				
	 <b>4.0 Ah</b> (1 600 A00 F71)	240	160	85	60			85				
	 <b>6.0 Ah</b> (1 600 A00 X7H)	360	240	135	90			130				
<b>18 V</b>	 <b>1.5 Ah</b> (1 600 A00 1CC)					80			30	25		
	 <b>2.0 Ah</b> (1 600 A00 1CG)					105		15	45	30		
	 <b>4.0 Ah</b> (1 600 A00 163)					210		35	85	35		
	 <b>6.0 Ah</b> (1 600 A00 8AE)					-		50	-	55		
<b>ProCORE 18 V</b>	 <b>4.0 Ah</b> (1 600 A01 6GE)					-		50	-			
	 <b>8.0 Ah</b> (1 600 A01 6GK)					-		65	-			
<b>36 V</b>	 <b>2.0 Ah</b> (1 600 A00 1ZJ)							120		30		
	 <b>4.0 Ah</b> (1 600 A00 1ZN)									35		

\* Above data is based on approximate charging time




# Corded Power Tools Range



## Drill

### GBM 320 (0 601 1A4 5L0)



Capacity	
Power Input	: 320 W
In Steel	: 6.5 mm
In Aluminium	: 13 mm
In Wood	: 13 mm
No-load Speed	: 4,200 rpm
Weight	: 1.0 kg

### GBM 350 (0 601 1A9 5L0)




Capacity	
Power Input	: 350 W
In Steel	: 10 mm
In Wood	: 20 mm
No-load Speed	: 2,800 rpm
Weight	: 1.2 kg

### GBM 10 RE (0 601 473 5L0)

**HEAVY DUTY**

1 year warranty\*



Capacity	
Power Input	: 450 W
In Steel	: 10 mm
In Aluminium	: 10 mm
In Wood	: 25 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg



### GBM 13 RE (0 601 477 5L0)

**HEAVY DUTY**

1 year warranty\*



Capacity	
Power Input	: 600 W
In Steel	: 13 mm
In Aluminium	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.65 kg

### GBM 13 HRE "High Torque" (0 601 049 603)

**HEAVY DUTY**

1 year warranty\*



Capacity	
Power Input	: 550 W
In Steel	: 13 mm
In Aluminium	: 20 mm
In Wood	: 40 mm
No-load Speed	: 0 - 550 rpm
Torque (Approx.)	: 40 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.1 kg

### GBM 32-4 (0 601 130 203)

**HEAVY DUTY**

1 year warranty\*



Capacity	
Power Input	: 1,500 W
In Steel	: 32 mm
In Aluminium	: 50 / 70 mm
4 Speed	: 210 / 330 / 470 / 740 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.3 kg



## Impact Drill

### GSB 10 RE (0 601 228 1L6)



Capacity	
Power Input	: 500 W
In Masonry	: 10 mm
In Steel	: 8 mm
In Wood	: 20 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

### GSB 16 RE (0 601 228 1L2)

**HEAVY DUTY**

1 year warranty\*



Capacity	
Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

### GSB 20-2 RE (0 601 1A2 1L0)

**HEAVY DUTY**

1 year warranty\*



Capacity	
Power Input	: 800 W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood	: 40 mm
No-load Speed	: 0 - 1,000 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.6 kg




## Multi Cutter

### GOP 30-28 (0 601 237 0L0)

**HEAVY DUTY**

1 year warranty\*



Capacity	
Power Input	: 300W
Oscillating amplitude	: 2.8° (2 x 1.4°)
No-load Speed	: 8,000 - 20,000 opm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

## Straight Grinder

### GGG 3000 L (0 601 224 0L0)



Capacity	
Power Input	: 300 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

### GGG 5000 L (0 601 224 1L0)



Capacity	
Power Input	: 500 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 33,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg



\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.



## Straight Grinder

**GGG 28 LC / GGS 28 C**  
(0 601 221 070) / (0 601 220 070)

**HEAVY DUTY**

1 year warranty\*



1 607 014 176

**GGG 28 LC**

**GGG 28 C**

Capacity	
Power Input	: 650 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight ( GGS 28 LC )	: 1.6 kg
( GGS 28 C )	: 1.4 kg

## 4" Angle Grinder

**GWS 060**  
(0 601 375 6L0)



1 619 P07 571

Capacity	
Power Input	: 670 W
No-load Speed	: 12,000 rpm
Grinding Spindle Thread	: M10
Disc Diameter	: 100 mm
Weight	: 1.6 kg

**GWS 7-100 ET**  
(0 601 388 5L0)

**HEAVY DUTY**

1 year warranty\*



1 619 P02 870

Capacity	
Power Input	: 720 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 2,800 - 9,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg



**GWS 750-100**  
(0 601 394 0L0)

**HEAVY DUTY**

1 year warranty\*



1 619 P11 715

Capacity	
Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

**GWS 900-100**  
(0 601 396 0L0)

**HEAVY DUTY**

1 year warranty\*



1 619 P11 715

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Grinding Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

**GWS 900-100 S**  
(0 601 396 1L0)

**HEAVY DUTY**

1 year warranty\*



1 619 P11 715

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Grinding Spindle Thread	: M10
No-load Speed	: 2,800 - 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg



**GWS 9-100 P**  
(0 601 396 5L0)

**HEAVY DUTY**

1 year warranty\*



1 619 P11 715

Capacity	
Power Input	: 900 W
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg

**GWS 13-125 CI**  
(0 601 79E 002)

**HEAVY DUTY**

1 year warranty\*



1 607 000 V37

Capacity	
Power Input	: 1,300 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.3 kg

**GWS 17-125 CI**  
(0 601 79G 002)

**HEAVY DUTY**

1 year warranty\*



1607 000 V37

Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg



**GWS 18-125 L**

**HEAVY DUTY**

1 year warranty\*



1 607 000 V37

Capacity	
Power Input	: 1,800 W
No-load Speed	: 12,000 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

**GWS 17-150 CI**  
(0 601 79K 002)

**HEAVY DUTY**

1 year warranty\*



1 607 000 V37

Capacity	
Power Input	: 1,700 W
No-load Speed	: 9,300 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 150 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

**GWS 20-180**  
(0 601 849 106)

**HEAVY DUTY**

1 year warranty\*



1 607 014 171

Capacity	
Power Input	: 2,000 W
No-load Speed	: 8,500 rpm
Grinding / Cutting	
Disc Diameter	: 180 mm
Wire Cup Brush Diameter	: 100 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.2 kg



\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

12V Cordless  
18V Cordless  
Drill, Impact Drill, Multi-Cutter, Straight Grinder  
Angle Grinder  
Bench Grinder, Mixer, Drill, Screwdriver, Sabre Saw  
Circular Saw  
Diamond Cutter, Saw, Planer, Sander  
Mitre Saw, Table  
Polisher, Router  
Hot Air Gun, Blower, Vacuum  
Rotary Hammer  
Demolition Hammer

## 9" Angle Grinder

**GWS 20-230**  
(0 601 850 106)

**HEAVY DUTY** 1 year warranty\*



1 607 014 171

Capacity	
Power Input	: 2,000 W
Grinding / Cutting	
Disc Diameter	: 230 mm
Wire Cup Brush Diameter	: 100 mm
No-load Speed	: 6,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.6 kg

## Bench Grinder

**GBG 35-15**  
(0 601 27A 3L0)

**HEAVY DUTY** 1 year warranty\*



Capacity	
Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	: 10 kg

**GBG 60-20**  
(0 601 27A 4L0)

**HEAVY DUTY** 1 year warranty\*



Capacity	
Power Input	: 600 W
No-load Speed	: 3,600 rpm
Disc Diameter	: 200 mm
Weight	: 15 kg



## Stirrer / Mixer Drill

**GRW 12 E**  
(0 601 1A7 070)

**HEAVY DUTY** 1 year warranty\*



1 607 014 17A

Capacity	
Power Input	: 1,200 W
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Nominal speed	: 0 - 620 min <sup>-1</sup>
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.3 kg

## Screwdriver

**GSR 6-25 TE**  
(0 601 445 0P0)

**HEAVY DUTY** 1 year warranty\*



2 604 321 943

Capacity	
Power Input	: 701 W
Self-tapping Screws	
Diameter	: 6 mm
No-load Speed	: 0 - 2,500 rpm
Max. torque	: 20 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

**GSR 6-45 TE**  
(0 601 445 1P0)

**HEAVY DUTY** 1 year warranty\*



2 604 321 943

Capacity	
Power Input	: 701 W
Self-tapping Screws	
Diameter	: 6 mm
No-load Speed	: 0 - 4,500 rpm
Max. torque	: 12 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg



## Sabre Saw

**GSA 1100 E**  
(0 601 64C 8L0)

**HEAVY DUTY** 1 year warranty\*



2 610 956 917

Capacity	
Power Input	: 1,100 W
Cutting depth: In Wood	: 230 mm
In Metal	: 20 mm
No-load Stroke Rate	: 2,700 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.6 kg

## Jigsaw

**GST 700**  
(0 601 2A7 0L0)



Capacity	
Power Input	: 500 W
Stroke Rate	: 1,450 - 3,200 spm
Cutting Depth in Wood	: 70 mm
Stroke Length	: 20 mm
Weight	: 2.1 kg

**GST 80 PBE**  
(0 601 581 59F)

**HEAVY DUTY** 1 year warranty\*



1 607 031 228

Capacity	
Power Input	: 580 W
In Wood	: 85 mm
In Metal	: 10 mm
No-load Stroke Rate	: 500 - 3,100 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg



## Shear

**GST 25 M**  
(0 601 516 0L0)

**HEAVY DUTY** 1 year warranty\*



1 607 031 228

Capacity	
Power Input	: 670 W
In Wood	: 80 mm
In Aluminium	: 25 mm
In Steel	: 15 mm
No-load Speed	: 500 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

## Nibbler

**GSC 2.8**  
(0 601 506 142)

**HEAVY DUTY** 1 year warranty\*



1 607 031 228

Capacity	
Power Input	: 500 W
In Steel	: 2.8 mm
In Aluminium	: 3.5 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

## Nibbler

**GNA 2.0**  
(0 601 530 103)

**HEAVY DUTY** 1 year warranty\*



1 607 031 228

Capacity	
Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.0 kg



\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.



## Foam Cutter

GSG 300  
(0 601 575 103)

**HEAVY DUTY**  
1 year warranty\*



2 604 320 911

Capacity	
Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,200 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

## Circular Saw

GKS 600  
(0 601 6A9 0L0)



Capacity	
Power Input	: 1,200 W
No-load Speed	: 5,000 rpm
Blade Bore Size	: 20 mm
Diameter	: 165 mm
Cutting depth (90°/45°)	: 55 / 37 mm
Weight	: 3.6 kg

GKS 7000  
(0 601 676 0L0)



Capacity	
Power Input	: 1,100 W
Blade Diameter	: 184 mm
Cutting Depth (90°)	: 65 mm
Cutting Depth (45°)	: 47 mm
No-load Speed	: 5,200 rpm
Weight	: 3.6 kg



GKS 66 X  
(0 601 676 1L0)

**HEAVY DUTY**  
1 year warranty\*



1 619 P10 063

Capacity	
Power Input	: 1,200 W
Cutting Depth at 90°	: 66 mm
45°	: 47 mm
No-load Speed	: 4,900 rpm
Blade Diameter	: 165 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.4 kg

GKS 190  
(0 601 623 0L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 1,400 W
Blade Diameter	: 184 mm
Max. Cutting Capacities	
at 90°	: 67 mm
at 45°	: 48 mm
No-load Speed	: 5,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.1 kg

GKS 235 Turbo  
(0 601 5A2 0L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 2,050 W
Saw Blade Diameter	: 235 mm
Max. Cutting Capacities	
at 90°	: 85 mm
at 45°	: 65 mm
No-load Speed	: 0 - 5,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.6 kg

## Diamond Wheel Cutter

GDM 13-34  
(0 601 36A 2L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 1,300 W
Blade Diameter	: 110 mm
Max. Cutting Depth	: 34 mm
Base Plate	: 100 x 190 mm
No-load Speed	: 12,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

# GDC 140 Professional (0 601 3A0 0L0)

Smooth yet powerful, easy on hard surfaces too

**NEW!**

## WHY THIS

- 01 Powerful for fast cutting**  
1400W power provides fast cutting performance
- 02 Precise cutting**  
Low vibration of tool and disc for easy control
- 03 Extended durability**  
Robust motor, coupled with strong flange and sturdy bearing



## TARGET USERS

- Contractors
- Renovators
- Plumbers and Electricians



Technical Data	GDC 140 Professional
Input power	1,400 W
No Load Speed	13,200 rpm
Max. Cutting Disc Diameter	115 mm
Max. Cutting Depth	35 mm
Weight	2.9 kg

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

## Cut-off Machine

**GCO 14-24 J**  
(0 601 B37 2L0)

**HEAVY DUTY**  
1 year warranty\*



1 607 014 171

Capacity	
Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Cutting Capacity	<input type="checkbox"/> : 100 x 196 mm <input type="checkbox"/> : 119 x 119 mm <input type="checkbox"/> : 130 x 130 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 18.1 kg

**GCO 220**  
(0 601 B37 3L0)



Capacity	
Power Input	: 2,200 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Cutting Capacity	<input type="checkbox"/> Square Bar : 119 x 119 mm <input type="checkbox"/> Round Bar : 129 mm
Soft Start	: No
Weight	: 14 kg

## Mitre Saw

**GCM 10 MX**  
(0 601 B29 0L0)

**HEAVY DUTY**  
1 year warranty\*



1 607 014 171

Capacity	
Power Input	: 1,700 W
Blade Size	: 255 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 13.5 kg



## Slide Mitre Saw

**GCM 12 GDL**  
(0 601 B23 670)

**HEAVY DUTY**  
1 year warranty\*



2 610 021 311

Capacity	
Power Input	: 2,000 W
Blade Size	: 305 mm
Arbour Size	: 30 mm
No-load Speed	: 3,800 rpm
Max. Mitre	: 52° L / 60° R
Cutting Capacity	: 104 x 341 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 32.1 kg

## Slide Mitre Saw

**GCM 8 SJL**  
(0 601 B19 1L0)

**HEAVY DUTY**  
1 year warranty\*



1 609 B03 790

Capacity	
Power Input	: 1,600 W
Blade Size	: 216 mm
Bore Size	: 30 mm
No-load Speed	: 5,500 rpm
Max. Miter	: 52° L / 60° R
Cutting Capacity	: 70 x 312 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 17.3 kg

## Mitre Saw Stand

**T1B**  
(0 601 B12 310)



Capacity	
Length of Work Bench without Extension	: 1,220 mm
Length of Work Bench with extension	: 2,630 mm
Weight	: 15 kg / 19 kg

## Table Saw

**GTS 10 J**  
(0 601 B30 5L0)

**HEAVY DUTY**  
1 year warranty\*



2 610 018 332

Capacity	
Power Input	: 1,800 W
Saw Blade Diameter	: 254 mm
Bevel Setting	: 47° L / 2° R
Cutting Capacity (Right)	: 460 mm
(Left)	: 210 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 26 kg

## Table Saw Stand

**GTA 600**  
(0 601 B22 002)



Capacity	
Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

## Planer

**GHO 6500**  
(0 601 596 0L0)



Capacity	
Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	: 0 - 2.6 mm
Adjustable Rebating Depth	: 0 - 9 mm
Weight	: 2.8 kg

**GHO 10-82**  
(0 601 594 006)



Capacity	
Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 1.0 mm
No-load Speed	: 16,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

## Eccentric Sander

**GEX 125-1 A / GEX 125-1 AE**  
(0 601 387 0L0) / (0 601 387 5L0)



Capacity	
Power Input	: 250 W
No-load Speed	: 7,500 - 12,000 rpm
Oscillating Circuit	
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm
Sanding Plate	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

## Belt Sander

**GBS 75 A**  
(0 601 274 004)

**HEAVY DUTY**  
1 year warranty\*



1 607 031 222

Capacity	
Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.2 kg

## Polisher

**GPO 950**  
(0 601 3A2 0L0)



Capacity	
Power Input	: 950 W
Adaptor Size	: M14 / M16
Rubber Sanding Plate, Diameter	: 180 mm
Variable Speed	: 600 - 2,100 rpm
Weight	: 5.5 kg

**GPO 12 CE**  
(0 601 389 0L0)



1 607 014 176

Capacity	
Power Input	: 1,250 W
No-load Speed	: 750 - 3,000 rpm
Polishing Disc Diameter	: 180 mm
Thread of Polishing Spindle	: M14
Tool Length	: 450 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

## Router

**GOF 1600 CE**  
(0 601 624 0L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 1,600 W
Toolholder	: 8 - 12.7 mm
No-load Speed	: 10,000 - 25,000 rpm
Max. Router Cage Stroke	: 76 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.8 kg

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.



# GSS 140 Professional (0 601 2A8 0L0)

Sand anything, anyhow, anywhere.

NEW!

## WHY THIS

- 01 Flexible and fatigue-free for long hour work even for overhead operation**  
 Great ergonomic design with multiple grip options  
 Low vibration and low weight  
 Smooth start
- 02 High sanding efficiency**  
 High power of 220W and 14,000 rpm
- 03 Longer lifetime**  
 Dust resistant mechanical system and switch protection  
 High compatibility of carbon brush and commuter, carbon brush lifetime up to 300 hours

**Long lifetime**  
Dust resistant mechanical system and switch protection  
High compatibility of carbon brush and commuter, carbon brush lifetime up to 300 hours

**Flexible and fatigue-free for long hour work even for overhead operation**  
Optimized multiple grip options from top, neck and tail.  
Low vibration and weight  
Smooth start

**High sanding efficiency**  
High power of 220W and 14,000 rpm

**Perfect for wall sanding**  
Dust resistant mechanical design  
Strong and durable base material  
Optimized multiple grip options

**Robust and convenient clamping system**  
Optimized wire design assures strong clamping of sanding paper  
Easy to change sanding sheet with specially designed red button



## TARGET USERS

- Wall Painters
- Woodworking



Technical Data	GSS 140 Professional
Input power	220 W
No Load Speed	14,000 rpm
No-load Orbital Stroke Rate	28,000 min <sup>-1</sup>
Orbital Diameter	1.5 mm
Sanding Sheet Dimension	114 x 140 mm
Sanding Plate Dimension	101 x 112 mm
Weight	1.2 kg

# GSS 2300 Professional (0 601 298 0L0)

Tough but gentle for long hours of sanding

NEW!

## WHY THIS

- 01 Improved working efficiency**  
 Easy and robust clamping system, sanding pad and vibration foot
- 02 Comfortable working**  
 Ergonomic handle, optimized tool height, count-weight for less vibration
- 03 Even spread sanding result**  
 Due to metal sheet on foam pad

**More comfortable and less fatigue**  
With ergonomic handle and vibration dampening design

**Tough and durable**  
Robust vibration foot, bearing system and die cast sanding plate

**Better balance and control**  
With optimized tool height

**Robust and convenient sandpaper replacement**  
Due to well designed clamping mechanism

**Even spread sanding results**  
Metal sheet with foam pad that's easy to replace



## TARGET USERS

- Carpenters
- Parquet floor layers
- Decorators



Technical Data	GSS 2300 Professional
Input Power	190 W
No Load Speed	12,000 rpm
Weight	1.5 kg

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply. \*\* Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

12V Cordless

18V Cordless

Drill, Impact Drill, Multi-Cutter, Straight Grinder

Angle Grinder

Bench Grinder, Mixer Drill, Screwdriver, Sabre Saw

Jigsaw, Circular Saw

Diamond Cutter, Cut Off Machine

Mitre Saw, Table Saw, Planer, Sander

Polisher, Router

Hot Air Gun, Blower, Vacuum

Rotary Hammer

Demolition Hammer

## Trimming

**GKF 550**  
(0 601 6A0 0L0)



Capacity	
Power Input	: 550 W
No-load Speed	: 33,000 rpm
Bix Size	: 6 mm / 1/4"
Weight	: 1.4 kg

## Hot Air Gun

**GHG 18-60**  
(0 601 2A6 1L0)

**HEAVY DUTY**  
6 months warranty



Capacity	
Power Input	: 1,800 W
Temperature	: 50 / 400 / 600 °C
Air Flow Rate	: 250 / 350 / 600 l/min
Weight	: 0.52 kg

## Hot Air Gun

**GHG 20-63**  
(0 601 2A6 2L0)

**HEAVY DUTY**  
6 months warranty



Capacity	
Power Input	: 2,000 W
Temperature	: 50 - 630 °C
Air Flow Rate	: - 150 / 300 / 500 l/min
Weight	: 0.65 kg



## Glue Gun

**GKP 200 CE**  
(0 601 950 703)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Gluing Capacity	: 30 g/min
No. of Heating Elements	: 2
Warming Up Time	: 4 min
Glue Stick Length	: 200 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 0.4 kg

## Blower

**GBL 620**  
(0 601 980 5L0)



Capacity	
Power Input	: 620 W
No-load Speed	: 16,000 rpm
Air Flow Rate	: 3.5 m³/min
Weight	: 1.7 kg


## Blower

**GBL 82-270**  
(0 601 980 4L1)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 800 W
No-load Speed	: 0 - 16,000 rpm
Air Flow Rate	: 0 - 4.5 m³/min
Weight	: 1.8 kg

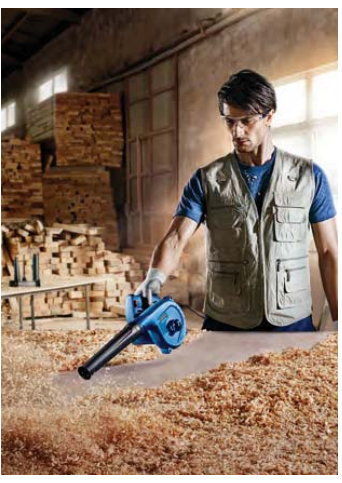

## Wet & Dry Vacuum Cleaner

**GAS 15**  
(0 601 9E5 0L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Air Flow Max.	: 33 l/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg

**GAS 15 PS**  
(0 601 9E5 1L0)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Air Flow Max.	: 33 l/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg
- Semi-automatic filter cleaning system, - 2 in 1: vacuuming and blowing	

## 2 kg Rotary Hammer

**GBH 2-23 REA**  
(0 611 250 570)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 710 W
Impact Energy	: 2.3 J
In Concrete	: 4 - 23 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,000 rpm
Impact Rate	: 0 - 4,400 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight With Dust Extraction	: 3.6 kg

**GBH 2-24 DRE**  
(0 611 272 1L4)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 920 rpm
Impact Rate	: 0 - 4,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

## Rotary Hammer

**GBH 2-26 DRE**  
(0 611 253 76C)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

## Rotary Hammer

**GBH 2-26 DFR**  
(0 611 254 76C)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.9 kg

## Rotary Hammer

**GBH 2-28 DFV**  
(0 611 267 2L1)

**HEAVY DUTY**  
1 year warranty\*



Capacity	
Power Input	: 820 W
Impact Energy	: 3.2 J
In Concrete	: 4 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.1 kg

## Rotary Hammer

**GDE 16 Plus**  
(1 600 A00 15Z )



Capacity	
SDS-Plus Drilling Diameter	: 4 - 16 mm
Max. Drilling Depth (in one go)	: 120 mm
Work Length of Drill Bits	: 50 - 150 mm
Max. Core Cutter Diameter	: 82 mm
Weight (w/o handle)	: 0.52 kg

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.



## 3 kg Rotary Hammer

**GBH 3-28 DFR**  
(0 611 24A 0L0)



Capacity	
Power Input	: 800 W
Impact Energy	: 3.1 - 3.5 J
In Concrete	: 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.6 kg

**GBH 4-32 DFR**  
(0 611 332 1L0)



Capacity	
Power Input	: 900 W
Impact Energy	: 4.2 J
In Concrete	: 32 mm
In Steel	: 13 mm
In Wood	: 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.7 kg

## Rotary Hammer with SDS-Max

**GBH 5-40 D**  
(0 611 269 0L0)



Capacity	
Power Input	: 1,100 W
Impact Energy (EPTA)	: 8.5 J
Max. App. in core cutter	: 90 mm
No-load Speed	: 170 - 340 rpm
Impact Rate	: 1,500 - 2,900 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg



12V Cordless  
18V Cordless  
Drill, Impact Drill, Multi Cutter, Straight Grinder

**GBH 5-40 DCE**  
(0 611 264 070)



Capacity	
Power Input	: 1,150 W
Impact Energy	: 2-11 J
Impact Rate	: 1,500 - 3,050 bpm
No-load Speed	: 170 - 340 rpm
Drilling Dia Concrete	: 12 - 40 mm
Vibration Values Drilling /Chiselling	: 10.5 / 7 / 5 m/s <sup>2</sup>
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

**GBH 8-45 D**  
(0 611 265 1L0)



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Rated Speed	: 150 - 305 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

**GBH 8-45 DV**  
(0 611 265 0L0)



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Vibration Values	
Drilling / Chiselling	: 8/7 m/s <sup>2</sup>
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

## Demolition Hammer

**GSH 500**  
(0 611 338 5L0)



Capacity	
Power Input	: 1,025 W
Impact Rate	: 2,750 bpm
Impact Energy	: 6.8 J
No-load Speed	: 2,800 rpm
Weight	: 5.5 kg

Angle Grinder  
Bench Grinder, Mixer Drill, Screwdriver, Sabre Saw  
Jigsaw, Circular Saw

**GSH 3 E**  
(0 611 320 703)



Capacity	
Power Input	: 650 W
Impact Rate	: 0-3,500 bpm
Impact Force	: 4.3 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.5 kg

**GSH 5 (MAX)**  
(0 611 337 0L0)



Capacity	
Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.6 kg

**GSH 5 CE**  
(0 611 321 0L0)



Capacity	
Power Input	: 1,150 W
Impact Rate	: 1,300 - 2,900 bpm
Impact Force	: 2 - 13 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.2 kg

**GSH 9 VC**  
(0 611 322 0L0)



Capacity	
Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s <sup>2</sup>
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

Diamond Cutter, Cut off machine  
Mitre Saw, Table Saw, Planer, Sander

**GSH 11 E**  
(0 611 316 8L0)



Capacity	
Power Input	: 1,500 W
Impact Energy	: 16.8 J
Impact Rate	: 900 - 1,890 bpm
Vibration Value	: 18.5 m/s <sup>2</sup>
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 10.2 kg

**GSH 11 VC**  
(0 611 336 0L0)



Capacity	
Power Input	: 1,700 W
Impact Rate	: 900 - 1,700 bpm
Impact Force	: 23 J
Vibration Values Chiselling	: 8 m/s <sup>2</sup>
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 11.4 kg

**GSH 16-30**  
(0 611 335 1L0)



Capacity	
Power Input	: 1,750 W
Impact Rate	: 1,300 bpm
Impact Force	: 45 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 16.5 kg

**GSH 27 VC**  
(0 611 30A 070)



Capacity	
Power Input	: 2,000 W
Impact Rate	: 1,000 bpm
Impact Force	: 69 J
Vibration Values Chiselling	: 8.5 m/s <sup>2</sup>
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 29.5 kg












Polisher, Router  
Hot Air Gun, Blower, Vacuum  
Rotary Hammer  
Demolition Hammer

\* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

# Rotary Hammers application overview

Masonry: ■ Optimal ■ Total range of all application

Concrete: ■ Optimal ■ Total range of all application














Products		Drilling diameter in concrete, masonry (mm)																												Drilling in wood (mm)				Drilling in steel (mm)	
		4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	up to 20	20-25	25-30	30-40	up to 10	10-13			
2 kg Hammers	 <b>GBH 2-24 DRE Professional</b>	[Masonry: Total range 20-24mm, Optimal 12-24mm; Concrete: Total range 20-24mm, Optimal 12-24mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
	 <b>GBH 2-26 DRE Professional</b>	[Masonry: Total range 20-26mm, Optimal 12-26mm; Concrete: Total range 20-26mm, Optimal 12-26mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
	 <b>GBH 2-26 DFR Professional</b>	[Masonry: Total range 20-26mm, Optimal 12-26mm; Concrete: Total range 20-26mm, Optimal 12-26mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
	 <b>GBH 2-28 DFV Professional</b>	[Masonry: Total range 20-28mm, Optimal 12-28mm; Concrete: Total range 20-28mm, Optimal 12-28mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
2 kg Cordless Hammers	 <b>GBH 18 V-26 Professional</b>	[Masonry: Total range 20-26mm, Optimal 12-26mm; Concrete: Total range 20-26mm, Optimal 12-26mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
	 <b>GBH 36 V-LI PLUS Professional</b>	[Masonry: Total range 20-26mm, Optimal 12-26mm; Concrete: Total range 20-26mm, Optimal 12-26mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
	 <b>GBH 36 V-LI Compact Professional</b>	[Masonry: Total range 18-20mm, Optimal 12-20mm; Concrete: Total range 18-20mm, Optimal 12-20mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
3 kg Hammer	 <b>GBH 3-28 DFR Professional</b>	[Masonry: Total range 20-28mm, Optimal 12-28mm; Concrete: Total range 20-28mm, Optimal 12-28mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
4 kg Hammer	 <b>GBH 4-32 DFR Professional</b>	[Masonry: Total range 20-32mm, Optimal 12-32mm; Concrete: Total range 20-32mm, Optimal 12-32mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
5 kg Hammer	 <b>GBH 5-40 DCE Professional</b>	[Masonry: Total range 20-40mm, Optimal 12-40mm; Concrete: Total range 20-40mm, Optimal 12-40mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					
8 kg Hammer	 <b>GBH 8-45 D / DV Professional</b>	[Masonry: Total range 20-45mm, Optimal 12-45mm; Concrete: Total range 20-45mm, Optimal 12-45mm]																								[Wood: Total range 20-30mm]				[Steel: Total range 10-13mm]					



■ Optimal ■ Possible

■ Optimal ■ Possible

● Drilling ● Chiselling

Drilling with hole saws in wood (mm)				Core cutting application in masonry, concrete (mm)				Material for drilling						Other characteristics		
up to 30	30-40	40-50	50-70	40-68	68-82	82-90	90-150	Reinforced concrete, granite, stone	Concrete	Bricks, hollow blocks	Hard wood	Soft wood	Metal	Drilling/ Chiselling ratio	Working direction	Special features
■	■			■				■	■	■	■	■	■	● 90% ● 10%	↕	
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	Quick change chuck
■	■	■		■	■			■	■	■	■	■	■	● 90% ● 10%	↕	Quick change chuck 
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	  
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	 
■	■	■		■				■	■	■	■	■	■	● 100%	↕	  
■	■	■		■	■			■	■	■	■	■	■	● 80% ● 20%	↕	Quick change chuck 
■	■	■		■	■	■		■	■	■	■	■	■	● 70% ● 30%	↕	Quick change chuck 
				■	■	■		■	■	■				● 60% ● 40%	↕	
				■	■	■		■	■	■				● 50% ● 50%	↕	 Anti Vibration for GBH 8-45 DV only

# Demolition Hammers application overview

■ Optimal ■ Possible

		Specification								
		Power	Weight	Impact energy	Tool holder	Working direction	Wall tile removal	Floor tile removal	Joint repair (removal of excess concrete)	De-plastering (removing cement plaster from the walls)
										
	<b>GSH 3 E Professional</b>	650 W	3.5 kg	4.3 J			■	■	■	■
	<b>GSH 5 Professional</b>	1100 W	5.6 kg	7.5 J			■	■	■	■
	<b>GSH 500 Professional</b>	1025 W	5.5 kg	6.8 J	17 mm Hex		■	■	■	■
	<b>GSH 5 CE Professional</b>	1150 W	6.2 kg	2-13 J			■	■	■	■
	<b>GSH 9 VC Professional</b>	1500 W	8.5 kg	13 J			■	■	■	■
	<b>GSH 11 E Professional</b>	1500 W	10.1 kg	6-25 J				■	■	■
	<b>GSH 11 VC Professional</b>	1700 W	11.4 kg	23 J				■	■	■
	<b>GSH 16-30 Professional</b>	1750 W	16.7 kg	45 J	30 mm Hex					
	<b>GSH 27 VC Professional</b>	2000 W	29.5 kg	69 J	28 mm Hex					
Accessories		Pointed chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Flat chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Tile chisel	SDS plus/SDS max				■	■		
		Spade chisel	SDS plus/SDS max/Hex 28/Hex 30				■	■	■	■
		Gouging chisel	SDS plus/SDS max							
		Bush hammer head	SDS max							
		Asphalt cutter	SDS max							
		Tamping plate	SDS max/Hex 28/Hex 30							
		Excavation chisel	SDS max/Hex 30							



Application

Roughing of concrete walls, columns	Wall chasing or groove cutting on masonry, cement blocks, concrete walls	Concrete wall corrections	Column & beam corrections (removing bulge, exposing reinforcements)	Making cut outs or breaches in masonry wall	Hacking of concrete & masonry walls (heavy duty)	Demolition of concrete floor, slabs	Foundation breaking, pavement breaking	Road works (Restoration of Asphalt coverings)	Digging in hard compacted soil	Compacting earth & gravel
	■									
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■			■	■	■	■	■	■		
■			■	■	■	■	■	■		
						■	■	■	■	■
							■	■	■	■
	■	■	■	■	■	■	■	■		
	■	■	■	■	■	■	■	■		
■	■									
■										
								■		
										■
								■		

# Dust Free Solution



**BOSCH**  
Invented for life

The Click & Clean System is not only perfectly thought through, it is also really easy to use: connect the dust extractor and start working! This overview offers you a helpful guide to the tools, part numbers and extras such as adapters and accessories. You will also find mobile solutions for individual systems.

\* Listed adapters need to work with vacuum cleaner unless special remarked

Product	Model / Application	Adapter No.	Adapter Picture	Application Picture
<b>GWS Series</b>  *T: Guard assembly Toolless *EA: Easy Adjust *FC: Full Covered	Disc 100 mm Disc 115 / 125 mm Keyless	2 608 000 629 2 605 510 224		
	Disc 115 / 125 mm Max. cutting depth 25 mm	GDE 125 EA-T 1 600 A00 3DJ		
	Disc 125 mm Max. cutting depth 25 mm Disc 230 mm Max. cutting depth 60 mm	GDE 125 FC-T 1 600 A00 3DK GDE 230 FC-T 1 600 A00 3DM		
<b>GSB Series</b> 	For all GSB & GBH Holes Ø4-36 mm	Dust Cup 1.600.A00.D6H *Work without vacuum	 Dust Cup	
	For all GSB & GBH & GBM Holes or core cutter Ø4-68 mm Holes or core cutter Ø24-162 mm	GDE 68 1 600 A00 1G7 GDE 162 1 600 A00 1G8	 GDE 68 GDE 162	
<b>GBH Series</b> 	For 50 mm collar tool Holes Ø4-16 mm Or max 82 mm core cutter (Interchangeable adapter included)	GDE 16 Plus 1 600 A00 15Z		
	Only for GBH 18V-26 Holes Ø4-16 mm	GDE 18V-16 1 600 A00 51M *Self vacuum		
<b>GSH Series</b> 	For chiseling Max length 600 mm	GDE Max 1 600 A00 1G9		
	For breaking	GDE HEX 1 600 A00 1GA		
<b>GST Series</b> 	GST 12 V-LI GST 700	1 619 P10 585 Dust adapter included		
<b>GKS Series</b> 	GKS 190	1 619 P06 204		
	GKS 7000	1 619 P09 780		
	GKS 12 V-Li	1 619 P13 276		
	GKS 66 X / GKS 18 V-57	1 619 P09 780		



# Measuring Tools Range



# Range and functionality

Bosch offers a range of different laser rangefinders for all applications. From the laser rangefinder with the longest range on the market, the GLM 250 VF Professional, through to the compact entry-level instrument.

							Explanations	
± 2.0 mm		± 1.5 mm	± 1.5 mm	± 1.5 mm	± 1.5 mm	± 1 mm	+ -	Typical measuring accuracy
—	10	—	30 + 1	20 + 1	50	30		Memory + constant
—	●	●	●	●	●	●		Distance, area and volume measurement
—	●	●	●	●	●	●		Continuous measurement
—	●	●	●	●	150 m ●	●	+/-	Addition/subtraction
—	—	—	●	●	150 m ●	●		Corner measuring pin
—	—	—	●	●	150 m ●	●		Wall area measurement
—	—	—	●	●	150 m ●	●		Timer function
—	—	—	●	●	150 m ●	●	min/max	Min./max. function
—	—	—	●	●	150 m ●	—		Incline measurement
—	—	—	●	●	150 m ●	—		Indirect distance measurement
—	●	●	●	80 m ●	●	●		Single indirect height measurement
—	—	—	●	80 m ●	●	●		Double indirect height measurement
—	—	50 m ●	50 m ●	—	●	●		Stake-out function
—	40 m ●	—	—	—	●	●		Trapezium measurement
30 m ●	—	—	—	—	—	●		Integrated viewfinder
—	—	—	●	—	●	—		Bluetooth data transfer
—	—	—	●	—	—	—		USB data transfer
<b>GLM 30 Professional</b>	<b>GLM 40 Professional</b>	<b>GLM 50 Professional</b>	<b>GLM 50 C Professional</b>	<b>GLM 80 Professional</b>	<b>NEW! GLM 150 C Professional</b>	<b>GLM 250 VF Professional</b>		



## Laser Rangefinder

**GLM 30**  
(0 601 072 5K0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 30 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

**GLM 40**  
(0 601 072 9K0)




Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 40 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

**GLM 500**  
(0 601 072 HK0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: 4 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

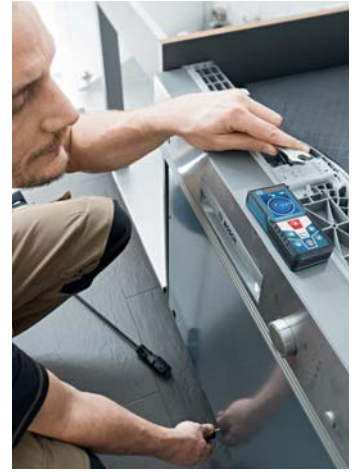

**GLM 50 C**  
(0 601 072 CK0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, ft, in
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

**GLM 80**  
(0 601 072 370)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 80 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: mm, cm, m, ft, in
Batteries	: Lithium-Ion
Weight	: 0.14 kg

**GLM 250 VF**  
(0 601 072 170)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 250 m
Measuring Accuracy	: ± 1 mm
Measuring Units	: m, cm, ft, in
Batteries	: 4 x 1.5 V LR03(AAA)
Weight	: 0.24 kg



## GLM 150 C Professional (0 601 072 FK0)

The smart solution for measuring and documenting in all surroundings - even outdoors

**NEW!**

### WHY THIS

- 01 Precise targeting**  
Thanks to the digital viewfinder with zoom function - also for outdoor applications and long distance
- 02 Optimal readability**  
Due to large 2.8" IPS colour display with extra robust cover glass
- 03 Fast collection and documentation**  
of measured values thanks to Measuring Master App



**Precise**  
Measuring range of up to 150 metres together with ISO certification



**Simply Connected**  
Bluetooth for data transfer to measuring Master Apps and convenient result documentation



**Robust**  
IP 54 rated for maximum protection against splash water and dust



**Easy and Fun**  
5MP camera with integrated zoom function enable easy seeing the target in every surrounding



**User Friendly**  
New HMI with large 2.8" IPS colour display intuition and enhance user experience



### TARGET USERS

- Architects
- Electricians
- Carpenters
- Floor layers & painters
- Drywall Constructions



Specification	GLM 150 C Professional
Measurement Range	0.08 - 150 m
Measurement Accuracy, Typical	± 1.5 mm
Digital Viewfinder	5 MP
Inclinometer / Tilt Sensor Range	360 (4 x 90°) degree
Angle Measurement Accuracy, Typical	± 0.2 degree
Lowest Indication Number	0.5 mm
Units	m, cm, ft, fractional inch, Taiwan foot
TrackMy Tools	Module integrated
Memory Storage	50 (measurements)
Laser Class & Type	Class 2, 650nm, <1mW
Working Temperature / Storage Temperature	-10°C to +45°C / -20°C to +70°C
Size / Weight	142 (176 with pin) x 64 x 28 mm/0.21 kg

\* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Laser Rangefinder, GLM 150 C  
Inspection Camera, Detector, GTC 400 C  
Thermo Detector, Laser, GLL 3-80 CG  
Electronic Line Laser, Conbi Laser,  
Rotation Laser, Tile Laser, Optical Level  
Angle Measurer, Digital Inclinometer  
Laser Receiver, Tripod,  
Optical Level Measuring Rod  
Measuring Rail, Universal Holder  
Bracket, Accessories

## Cordless Inspection Camera

**GIC 120**  
(0 601 241 100)



Capacity	
Batteries	: 4 x 1.5 V (AA)
Display size	: 2.7"
Display Resolution	: 320 x 240 px
Dia. of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.5 kg

**GIC 120 C**  
(0 601 241 2K0)




Capacity	
Batteries	: 4 x 1.5 V (AA) or 10.8 V-LI
Display size	: 3.5"
Display resolution	: 320 x 240 px
SD card storage	: Yes
Photo & video mode	: Yes
Dia. of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.6 kg

## Detector

**GMS 120**  
(0 601 081 000)



Capacity	
Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9 V 6LR61
Weight	: 0.27 kg

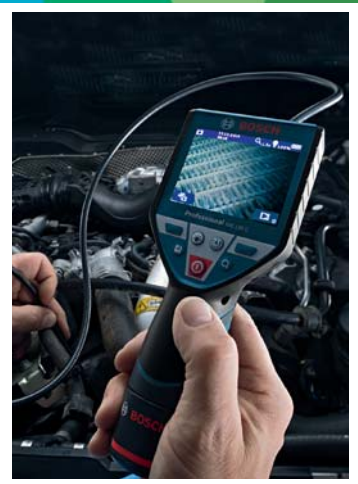

## D-TECT

**D-tect 120**  
(0 601 081 3K0)



Capacity	
Detection Mode	: Universal, Concrete, Drywall
Detection Object	: Ferrous metals, non-ferrous metals, live cables, wooden objects and water-filled plastic pipes
Max. Detection Depth	: 120 mm
Accuracy	: ± 10 mm
Batteries	: 4 x 1.5 V LR6(AA) or 10.8 V
Weight, approx	: 0.5 kg

**D-tect 150 SV**  
(0 601 010 008)



Capacity	
Max. Measuring Depth	: 150 mm
Accuracy	: ± 5 mm
Batteries	: 4 x 1.5V LR6(AA)
Detectable Materials	: Plastic pipes, cables of all kinds, ferrous/non-ferrous metals, wood, cavities.
Weight	: 0.7 kg

## Thermo Detector

**GIS 1000 C**  
(0 601 083 340)



Capacity	
Laser Diode	: 635 nm, <1mW
Working Range*	: 0.1 - 5 m
Measuring Range*	: - 40°C to + 1000°C
Measuring accuracy	: ± 1.0°C (0°C - 100°C)
Batteries	: 4 x 1.5 V LR6(AA) / 10.8 V
Relative Humidity	: 0 - 100 %
Accuracy	: ± 2 %
Storage Medium	: 200 images
Weight	: 0.6 kg



# GTC 400 C Professional (0 601 083 150)

Visualise temperature differences within seconds and document the results ease



## WHY THIS

- 01 Visualise temperature with ease**  
160 x 120 infrared sensor resolution on big 3.5" colour display with detailed thermal image
- 02 Document the results with ease**  
Easy data / picture transfer to smart devices via GTO transfer software and Bosch Measuring Master App
- 03 Robust with maximum tools protection**  
IP 53 rated against dust and sprays of water



- Simply Connected**  
Integrated WiFi hotspot for fast and easy transfer
- High visibility**  
Detailed thermal image on big 3.5" colour display
- Dual power source**  
Compatible with 10.8V / 12V or AA batteries with great flexibility
- Robust**  
IP 53 rated against dust and sprays of water for maximum tool protection

## TARGET USERS

- HVAC
- Electrician
- Construction Managers
- Painter & Floor Layers



Specification	GTC 400 C Professional
Resolution of infrared sensor	160 x 120
Thermal Sensitivity	< 50 mK
Field of View	53° x 43°
Focus Distance	≥ 0.3 m
Temperature Range	-10 ~ +400°C
Measurement Accuracy	± 3°C
Internal Memory Storage	500 Pictures (Typical)
App Support	Yes, via Measuring Master (GTC provides WIFI Hotspot, MM connects to it)
Dimensions	233 x 95 x 63 mm
Weight	0.54 kg

\* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).



## Line Laser

**GLL 1 P**  
(0 601 066 CB0)



Capacity	
Laser Diode	: 635-650nm, 1mW
Working Range*	: 5 m
Mount Thread Size	: 1/4"
Leveling Accuracy*	: ± 0.5 mm/m (at 0°)
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

**GLL 3-80**  
(0 601 063 S00)



Capacity	
Laser Diode	: 640 nm, <1mW
Working Range*	: 30 m
Working Range	
With Receiver*	: 5 - 120 m (diameter)
Leveling Accuracy*	: ± 0.2 mm / m
Plane	: 3
Tripod Mount	: 1/4", 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.76 kg

**GLL 3-80 CG**  
(0 601 063 U80)



Capacity	
Laser Class and Type:	Class 2 (500 - 540 nm, <10mW)
Working Range*	: 5 - 120 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4 & 5/8"
Batteries	: 4 x 1.5 V LR6(AA) or 10.8 V / 12 V Li-Ion Battery
Weight	: 0.5 kg



Laser Rangefinder, GLM 150 C  
Inspection Camera, Laser, GTC 400 C

Thermo Detector, Laser, GLL 3-80 CG

**GLL 3-15 X (Bare)**  
(0 601 063 M80)



Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

**GLL 5-50 X (Bare)**  
(0 601 063 N80)



Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Working Range	
With Receiver*	: 5 - 50 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

## Surface Laser

**GLS 2**  
(0 601 064 002)



Capacity	
Working Range*	: 10 m
Working Range	
With Target Plate*	: 20 m
Leveling Accuracy*	: 0.3 mm/m
Self-levelling Range	: ± 4°
Batteries	: 10,8 V Li-Ion / 4 x 1.5 V LR6 (AA)
Weight	: 5.77 kg



Electronic Line Laser, Conbi Laser,

Rotation Laser, Tile Laser, Optical Level

# GLL 30 G Professional

Simple and compact for bright environment

**NEW!**

## WHY THIS

- Greater Visibility**  
Up to 4 times more line visibility thanks to green laser technology compare with red laser line
- Compact**  
With the innovative T-lens technology, contributing to a very compact design for easy handling
- Simple**  
Ease-of-use by means of one sliding switch operation

### Palm size

With the innovative T-lens technology, contributing to a very compact design in palm size for easy handling



### Green Laser Technology

Thanks to the green laser technology with up to 4 times more visible versus red beam line

### Simple

Ease-of-use by means of one sliding switch for switching on and off

### Optimised handling

Stable placement thanks to the soft-grip & transportation lock for the pendulum during switch off



Specification	GLL 30 G Professional
Line Projection	1 Vertical + 1 Horizontal
Laser Class and Type	Class 2 (500 - 540 nm, <5mW)
Working range	10 m
Leveling accuracy	±4°
Self-levelling range, typical	6 s
Tripod thread size	1/4"
Power supply	2 x 1.5V LR6 (AA)
Scope of delivery	2 x AA battery, pouch
Dimensions	71 x 55 x 72
EPTA weight	0.25 kg

## TARGET USERS

- General Construction (Dry-walling)
- Floor & Tile Layers
- Carpenters
- Plumbers
- Glaziers
- Electricians



\* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Angle Measurer, Digital Inclinometer

Laser Receiver, Tripod,

Optical Level Measuring Rod

Measuring Rail, Universal Holder

Bracket, Accessories

Laser Rangefinder, GLM 150 C  
 Inspection Camera, Detector, GTC 400 C  
 Thermo Detector, Laser, GLL 3-80 CG  
 Electronic Line Laser, Combi Laser  
 Rotation Laser, Tile Laser, Optical Level  
 Angle Measurer, Digital Inclinator  
 Laser Receiver, Tripod  
 Optical Level Measuring Rod  
 Measuring Rail, Universal Holder  
 Bracket, Accessories

## Electronic Line Laser

**GLL 5-40 E**  
(0 601 063 GB1)



Capacity	
Laser Diode	: 635 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 40 m
Leveling Accuracy	: ± 0.1 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.1 kg

**GLL 8-40 E**  
(0 601 063 HB1)



Capacity	
Laser Diode	: 635 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 40 m
Leveling Accuracy	: ± 0.1 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.1 kg

## Combi Laser

**GCL 2-15 G**  
(0 601 066 J00)



Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 15 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4", 5/8"
Batteries	: 3 x 1.5 V LR6 (AA)
Weight	: 0.49 kg



**GCL 2-50 CG**  
(0 601 066 H80)



Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 50 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4"
Batteries	: 4 x 1.5 V (AA) or Bosch Li-Ion 10.8 V / 12 V Li-Ion Battery
Weight	: 0.58 kg

## Rotation Laser

**GRL 240 HV**  
(0 601 061 C40)



Capacity	
Laser Diode	: 635 nm, <1mW
Working Range*	: 30 m
Working Range With Receiver*	: 240 m (diameter)
Leveling Accuracy*	: ± 0.2 mm/m
Self-levelling Range	: ± 5°
Batteries	: 2 x 1.5 V LR20(D)
Receiver	: LR 24
Weight	: 1.8 kg

**GRL 300 HVG**  
(0 601 061 703)



Capacity	
Laser Diode	: 532 nm, <5mW
Working Range*	: 50 m
Working Range With Receiver*	: 300 m (diameter)
Leveling Accuracy*	: ± 0.1 mm / m
Batteries	: 2 x 1.5 V LR20(D)
Receiver	: LR 1G
Weight	: 1.8 kg



## Tile Laser

**GTL 3**  
(0 601 015 200)



Capacity	
Laser Diode	: 635 nm, <1mW
Laser Class	: 2
Accuracy	: ± 0.2 mm / m
Accuracy between 45° and 90° - Line	: ± 0.4 mm / m
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

## Optical Level

**GOL 26 D**  
(0 601 068 000)




Capacity	
Magnification	: 26x
Levelling Accuracy	: 1.6 mm / 30 m
Working Range	: 100 m
Deviation for 1 km double run leveling	: 1.5 mm
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg

**GOL 32 D**  
(0 601 068 500)



Capacity	
Magnification	: 32x
Levelling Accuracy	: 1 mm / 30 m
Working Range	: 120 m
Deviation for 1 km double run leveling	: 1.0 mm
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg

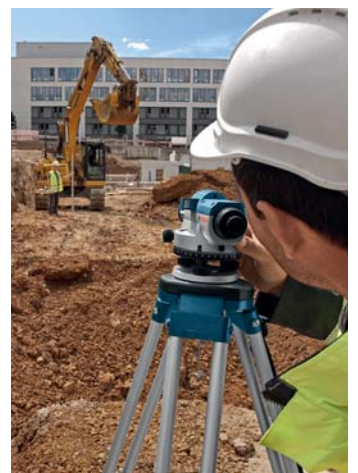

## Angle Measurer

**GAM 220**  
(0 601 076 500)



Capacity	
Measurement Range	: 0 - 220°
Accuracy, Angles	: ± 0.1°
Leg Length	: 40 cm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.3 kg

## Digital Inclinator

**GIM 60 L**  
(0 601 076 900)



Capacity	
Measurement Range	: 0 - 360° (4 x 90°)
Laser working range	: 30 m
Electronics Measurement Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement Accuracy at 1° - 89°	: ± 0.2°
Batteries (Grade measurement)	: 1 x 9V 6LR61 (Laser Operation) 2 x AAA LR03
Weight	: 0.9 kg

**GIM 120**  
(0 601 076 800)



Capacity	
Measurement Range	: 0 - 360° (4 x 90°)
Electronics Measurement Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement Accuracy at 1° - 89°	: ± 0.2°
Length	: 1250 mm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.4 kg



\* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).



## Laser Receiver

**LR 1G (for GRL 300 HVG)**  
(0 601 069 700)



Capacity	
Working Range	: 0 - 150 m
Measuring Accuracy (fine/rough)	: ± 1 mm / ± 3 mm
Dust and Splash Protection	: IP 65
Batteries	: 1 x 9 V 6LR61
Weight	: 250 g

**LR 5 (for GLL 5-40 E / GLL 8-40 E)**  
(0 601 069 G80)




Capacity	
Working Range	: 5 - 40 m
Batteries	: 1 x 9 V 6LR61
Dust & Splash Protection	: IP 54

**LR 6 (for GLL 5-50 X / GLL 3-80)**  
(0 601 069 H00)



Capacity	
Working Range	: 5 - 50 m
Dust & Splash Protection	: IP 54
Measurement Accuracy (fine/Rough)	: ± 1 mm / ± 3 mm
Batteries	: 2 x 1.5 V LR03 (AAA)
Weight	: 0.2 kg

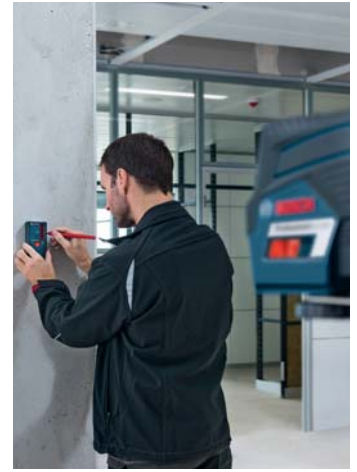

Laser Rangefinder,  
GLM 150 C

Inspection Camera,  
Detector, GTC- 400 C

Thermo Detector,  
Laser, GLL 3-80 CG

**LR 7 (for GCL 2-50 CG / GLL 3-80)**  
(0 601 069 J00)



Capacity	
Working Range	: 5 - 50 m
Dust & Splash Protection	: IP 54
Measurement Accuracy (fine/Rough)	: ± 1 mm / ± 3 mm
Batteries	: 2 x 1.5 V LR6 (AA)
Weight	: 0.15 kg

**LR 24 / LR 30 (for GRL 240 HV)**  
(0 601 069 213)



Capacity	
Receivable Wavelength	: 630 nm
Measuring Accuracy (fine/medium)	: ± 1.5 mm / ± 3 mm
Dust and Splash Protection	: IP 54
Batteries	: 1 x 9 V 6LR61
Weight	: 0.15 kg

## Tripod

**BT 150 (1/4")**  
(0 601 096 B00)



Capacity	
Work Height	: 55 - 157 cm
Tripod Thread	: 1/4"
Weight	: 1.3 kg



Electronic Line Laser,  
Conbi Laser,

Rotation Laser, Tile  
Laser, Optical Level

**BT 150 (5/8")**  
(0 601 096 C80)



Capacity	
Work Height	: 52 - 154 cm
Tripod Thread	: 5/8"
Weight	: 1.1 kg

**BT 160**  
(0 601 091 200)



Capacity	
Work Height	: 97 - 160 cm
Tripod Thread	: 5/8"
Weight	: 4.1 kg

**BT 170 HD**  
(0 601 091 300)



Capacity	
Work Height	: 107 - 165 cm
Tripod Thread	: 5/8" x 11
Weight	: 5.5 kg



Angle Measurer,  
Digital Inclinator

Laser Receiver,  
Tripod,

## Optical Level Measuring Rod

**GR 240**  
(0 601 094 100)



Capacity	
Length	: 2.4 m
Unit Of Measure	: m / cm
Weight	: 1.3 kg

**GR 500**  
(0 601 094 300)



Capacity	
Length	: 5.0 m
Unit Of Measure	: m / cm
Weight	: 1.98 kg

**BT 350 (c/w bracket & holder)**  
(0 601 015 B00)



Capacity	
Max Height	: 140 - 350 cm
Weight	: 2.5 kg



Optical Level  
Measuring Rod

Measuring Rail,  
Universal Holder

Bracket, Accessories

\* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Laser Rangefinder, LLM 150 C  
 Inspection Camera, Detector, GTC 400 C  
 Thermo Detector, Laser, GLL 3-80 CG  
 Electronic Line Laser, Conbi Laser  
 Rotation Laser, Tile Laser, Optical Level  
 Angle Measurer, Digital Inclinator  
 Laser Receiver, Tripod  
 Optical Level Measuring Rod  
 Measuring Rail, Universal Holder

### Accessories

RM 3 (for GCL 2-50 CG)  
 (0 601 092 800)



Capacity	
Height	: 120 mm
Length	: 135 mm
Weight	: 0.500 kg

### Universal Holder

BM 1  
 (0 601 015 A01)



Capacity	
Mount Thread	: 1/4"
Weight	: 0.5 kg

### Bracket

Bracket (for LR 1, LR 1 G, LR 5)  
 (1 608 M00 70F)



Bracket (for LR 6)  
 (1 608 M00 C1L)



\* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).



# Home & Cleaning Range





## High Pressure Cleaner

**EasyAquatak 100**  
(0 600 8A7 ELO)

**Easy**

**NEW!**




Capacity	
Motor Output	: 1,200 W
Max. Pressure	: 100 bar
Max. Flow Rate	: 300 l/h
Max. Temp	: 40°C
Hose Length	: 3 m PVC
Voltage	: 230/ 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.0 kg

**EasyAquatak 110**  
(0 600 8A7 FLO)

**Easy**



Capacity	
Motor Output	: 1,300 W
Pressure	: 110 bar
Flow Rate	: 330 l/h
Max. Temp	: 40°C
Hose Length	: 3 m PVC
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.8 kg

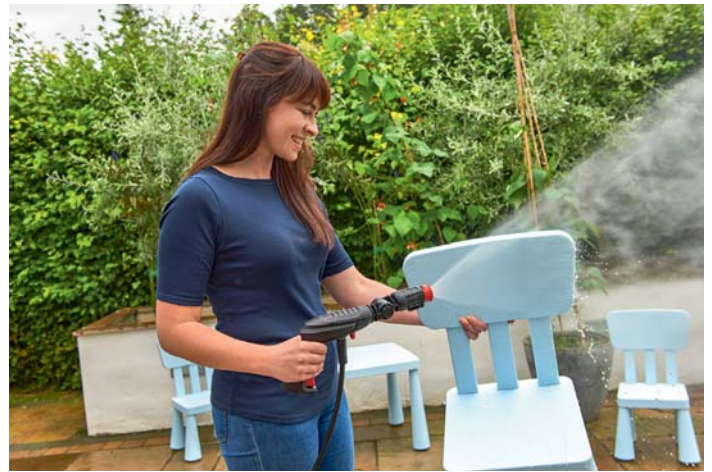

**EasyAquatak 120**  
(0 600 8A7 9L0) / (0 600 8A7 9L1)

**Easy**



Capacity	
Motor Output	: 1,500 W
Pressure	: 120 bar
Flow Rate	: 350 l/h
Max. Temp	: 40°C
Hose Length	: 5 m PVC
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5 kg

**UniversalAquatak 125**  
(0 600 8A7 AL0)

**Universal**



Capacity	
Motor Output	: 1,500 W
Pressure	: 125 bar
Flow Rate	: 360 l/h
Max. Temp	: 40°C
Hose Length	: 5 m
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg



**UniversalAquatak 130**  
(0 600 8A7 BL0)

**Universal**



Capacity	
Motor Output	: 1,700 W
Pressure	: 130 bar
Flow Rate	: 380 l/h
Max. Temp	: 40°C
Hose Length	: 6 m
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.8 kg



**AdvancedAquatak 150**  
(0 600 8A7 7L0)

**Advanced**



Capacity	
Motor Output	: 2,200 W
Pressure	: 150 bar
Flow Rate	: 490 l/h
Max. Temp	: 40°C
Hose Length	: 8 m
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 22.45 kg







## Warranty

This serves to inform you that all **Bosch** Power Tools are guaranteed against manufacturing defects for a period of **6 months** from the registered date of purchase (**Bosch Measuring Tools, GHP Range High Pressure Washer, HEAVY DUTY Range Power Tools and DREMEL Products are entitled to 1 Year Warranty, Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 Year Warranty only applicable for purchases made from 1st June 2016 onwards. Term and Conditions apply**). For the same defect repair within warranty period, a maximum **3 times** warranty repair are allowed for **Bosch** Power Tools, **2 times** for **Bosch** Measuring Tools and **Bosch** Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorised repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. **tax invoice or receipt stated with tool's serial no.**, to **Bosch Power Tools Authorised Service Centre**.


































## Jaminan

Dimaklumkan bahawa tempoh jaminan untuk Alat-alat Kuasa **Bosch** akibat kecacatan produk semasa pengilangan adalah terhad kepada **6 bulan sahaja** bermula dari tarikh pembelian (**Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch, Siri HEAVY DUTY Alat-alat Kuasa Bosch dan DREMEL Produk tempoh jaminannya 1 Tahun. Hanya Alat Pengereng Bosch, Bateri Bosch dan Pengecas Bateri Bosch Tempoh Jaminannya 6 bulan. Tempoh Jaminan 1 Tahun hanya untuk pembelian bermula dari 1hb Jun 2016. Tertakluk kepada Terma dan Syarat**). Jumlah maksimum pembaikan dalam tempoh jaminan adalah terhad kepada **3 kali** sahaja untuk Alat-alat Kuasa **Bosch**, **2 kali** sahaja untuk Alat-alat Pengukur **Bosch** dan Alat-alat Kuasa Halaman **Bosch**. Tempoh jaminan ini tidak tertakluk kepada kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut. Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan **tax invoice rasmi** atau resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke **Pusat Servis Alat-alat Kuasa Bosch Yang Sah**.

## 保证

谨此通知阁下有关所有**博世**电功工具享有为期六个月之生产损坏保证, 有效期从购买登记日算起 (**博世测量仪器, 博世 GHP 高压清洗机系列, 博世 HEAVY DUTY 系列及 DREMEL 产品享有1年保证, 除了博世热风机, 博世电池和博世充电器享有6个月保证. 1年保证有效期从 1-6-2016 选购开始. 附带条款**). 在维修保证期间, **博世**电动工具享有高达三次维修, **博世**测量仪器及**博世**家园电动工具享有**两次**维修. 无论如何, 上述保证并不包括有关电功工具因意外、错误使用、非授权维修、正常的磨损、附加及修换或其他方式所造成的损坏及故障. 若有任何投诉, 请将阁下完整的电功工具和**购买税务发票**或付款收据及具备电功工具编号交到您的**博世电动工具授权维修中心**.

## Key To Symbols

 Electronic Control	 Rotation Stop	 Constant Electronic	 Forward / Reverse Rotation	 Overload Clutch	 Slim Grip	 INOX For a perfect finish on stainless steel
 Spindle Lock	 Saw Blade Pendulum Action	 Dust Extraction	 Bosch SDS System	 SDS-Plus Tool Holder	 Fine Depth Adjustment	 Distortion-resistant protective guard
 SDS-Max Tool Holder	 SDS-Plus Quick Exchange System	 SDS-Max Quick Exchange System	 SDS-Clic Quick Clamping System	 Velcro Fastening	 EASY-FIT Easy Fit	 KICK BACK STOP Kick Back Stop
 Turbo Blower	 Removable Cable	 Torque Control	 Restart Protection	 Direct Cooling and Additional Air Inlets	 EC brushless motor Brushless EC Motor	 Vibration Control
 AUTO LOCK Auto-Lock	 WOOD RAZOR Woodrazor	 TURBO POWER Turbo Power	 LASER Class 2	 LASER Class 3R		

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

**BOSCH**

# Authorised Service Centres

**TK JAYA AUTO TRADING**57, Rumah Kedai Perumahan Awam Mergong,  
Jalan Sepat 1, 05150 Alor Star, Kedah.  
Tel: 04 - 734 4550 Fax: 04 - 734 4550**SYARIKAT CHANG TRADING**3566-H&I, Jalan Sultanah Zainab,  
15050 Kota Bharu, Kelantan.  
Tel: 09-748 4237 Fax: 09-744 9671

ALOR STAR

KOTA BHARU

**CHAN YEE AUTO ELECTRIC SERVICE**6323, Jalan Kampung Paya,  
12200 Butterworth, Pulau Pinang.  
Tel: 04 - 332 8496 Fax: 04 - 323 7760

BUTTERWORTH

**HINES SOLUTION**83, Jalan C. Y. Choy,  
10300 Georgetown, Pulau Pinang.  
Tel: 04 - 263 2136 Fax: 04 - 262 1909

PENANG

**KIM HENG MOTOR ELECTRICAL SERVICE**30, Kawasan Perindustrian Batu 3,  
Jalan Gambang, 25150 Kuantan, Pahang.  
Tel: 09-513 5662 Fax: 09-514 2430

KUANTAN

**ENG SOON ELECTRIC TRADING CO.**No. 235, Jalan Bercham, Taman Desa Kencana,  
31400 Ipoh, Perak.  
Tel: 05-546 9487 Fax: 05-546 6181

IPOH

KUALA LUMPUR  
(North)**FOREVER TOOLS SERVICES**24, Jalan Chenderuh 2, Off Jalan Ipoh Batu 4 1/4,  
51200 Kuala Lumpur.  
Tel: 03 - 6252 9918 Fax: 03 - 6252 8918

KLANG

PUCHONG

**TOOLS HAUS SDN BHD**G22, Jalan Puteri 4/8, Bandar Puteri Puchong,  
47100, Selangor.  
Tel: 03 - 8066 2635 Fax: 03 - 8051 2632**MENG TAT MACHINERY SERVICE**181, Batu 1 1/4, Off Jalan Kapar,  
41400 Klang, Selangor.  
Tel: 03 - 3343 0951 Fax: 03 - 3344 4419

SEGAMAT

**SIN SONG SDN BHD**No. 5, Jalan Melur 1, Taman Melur,  
85000 Segamat, Johor.  
Tel: 07 - 943 4380 Fax: 07 - 943 4195

MELAKA

KLUANG

**ANN TAT TRADING**367-C, Jalan Melor 2, Taman Peringgit Jaya,  
75400 Melaka.  
Tel: 06 - 284 1878**HENG LEE POWER TOOLS SERVICES**2, Jalan Dato Suleiman Mohd Noor,  
Kluang Baru, 86000 Kluang, Johor.  
Tel: 019 - 722 8446 Fax: 07 - 772 2712

JOHOR BAHRU

**VINCO POWER TOOLS SERVICES**7, Jalan Teratai 10, Taman Johor Jaya,  
81100 Johor Bahru, Johor.  
Tel: 07 - 353 2433 Fax: 07 - 357 7621KOTA  
KINABALU**CMW ENGINEERING (SABAH) SDN BHD**Lot No. 9, Likas Realty, Mile 5 1/2,  
Tuaran Road, Likas Industrial Centre,  
88450 Likas, Kota Kinabalu, Sabah.  
Tel: 088 - 389 922 Fax: 088 - 426 109**CMW ENGINEERING CORPORATION SDN BHD**10, Lot 1549, Block 10 KYLD,  
2 1/2 Miles Rock Road, 93250 Kuching, Sarawak.  
Tel: 082 - 420 141/151 Fax: 082 413 335

KUCHING

**BOSCH**

Invented for life

## Visit the selected Authorised Service Centres when your tools breakdown.

Bosch Service Concept Stores

**Robert Bosch Sdn Bhd** (220975-V)

No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia.

Tel: +603 - 7966 3000 Fax: +603 - 7958 3838

[www.bosch-pt.com.my](http://www.bosch-pt.com.my)Scan to download the  
Bosch Toolbox App

Bosch Professional Power Tools and Accessories

For further enquiries, please contact

**1 800 880 188**

Mon - Fri 9am - 6pm