

(Real time printing and application of labels - an indispensable equipment for product distribution control solutions.)




PA6000 Print and Apply System

- ▶ The PA6000 prints packaging information, related product and packaging codes, logistics information, and distribution channel information etc. in the form of texts, barcodes, encrypted codes on labels and applies the labels immediately on product packages. The labeling information then facilitates the subsequent tracking of the products in the distribution process. The PA6000 Printer/Applicator is an effective equipment enabling distribution control solutions in many industries.
- ▶ Zebra PAX thermal transfer print engine, PLC control, industrial computer and dedicated label design software - ensure easy, smooth and reliable operations.

Features

- Choice of different label adaptors: Tamp-on, blow-on, brush-on, corner-wrap etc. to cater for the different needs in different production environments.
- Alert function: Error messages and warning signal output when problem occurs. Different instructions are available on errors such as "open/close", "stop/continue" etc.
- Versatile Label Editing: Compatible with most label editing software in the market - allow maximum flexibility in formatting labels.
- Highly user friendly interactive touch-screen interface in both Chinese and English, makes operation easy and convenient.
- Simple installation: Specially designed mounting stand with wide adjustment range for simple installation and easy adjustment.

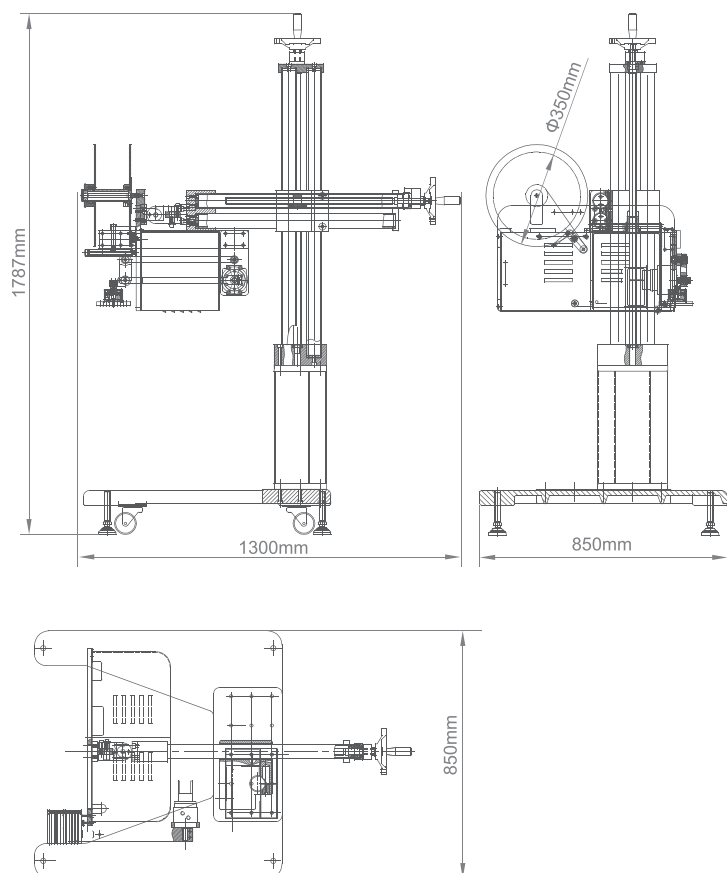

Machine Model

PA6000

Labeling Speed	Max. 80 pcs./min (depends on object & label sizes and labeling pattern)
Labeling Precision	± 2.0mm (other than errors from goods or labels)
Labeling Orientations	Top, Side, Corner
Air Pressure	0.5-0.7MPa, 300L/min
Printing Resolutions	Choices of 203, 300dpi
Printing Speed	305mm/sec.(203dpi), 203mm/sec.(300dpi)
Label Sizes(Printing)	standard : Width<104mm, Length13-104mm(203/300dpi) standard plus: Width<168mm Length76-168mm
Label Sizes(Applicator)	standard : (W)104mm x (L)110mm standard plus : (W)168mm x (L)170mm
Labels Requirements	Glassin liner is required.Face stock thickness> 5u and stiffness complied with Colamark requirements. External diameter of label roll<350mm, internal diameter of label roll 76.5mm
Communication / I/O Ports	Standard RS232 or RS485 / Reserved
Machine Dimensions	(L)850mm × (W)850mm × (H)1,787mm
Power Consumption	220VAC±10% 46-62Hz 0.45KW

For continuous improvement on design and product innovations, all specification data are subject to change without prior notice

Colamark (Guangzhou) Labeling Equipment Limited

No. 3, Ming Hua 3rd Street, Jin Xiu Road, GETDD, Guangzhou 510730, China.

Tel: +86 20 8221 6718 Fax: +86 20 8221 5799

Colamark Technologies Limited

820 Topsail Plaza, 11 On Sum Street, Shatin, Hong Kong
Tel: +852 2634 8011 Fax: +852 8161 3311 Email: info@colamark.hk Web: www.colamark.hk

| Hong Kong | Guangzhou | Shanghai | Beijing | Shenyang | Qingdao | Wuhan | Chengdu | Kunming |